



FCC 47 CFR PART 15 SUBPART B

of

Equipment Under Test	:	Memory module
Model Number	:	DT32G5DU64
Series Model Number	:	DT32G5DU60,DT32G5DU56,DT32G5DU52, DT32G5DU48,DT16G5DU64, DT16G5DU60,DT16G5DU56, DT16G5DU52, DT16G5DU48, DT8GB5DU64, DT8GB5DU60,DT8GB5DU56, DT8GB5DU52, DT8GB5DU48, DT32G5DS64, DT32G5DS60,DT32G5DS56, DT32G5DS52, DT32G5DS48, DT16G5DS64, DT16G5DS60, DT16G5DS56, DT16G5DS52, DT16G5DS48, DT8GB5DS64, DT8GB5DS60, DT8GB5DS56, DT8GB5DS52, DT8GB5DS48, DT32G4DU32, DT32G4DU26, DT32G4DU24,DT16G4DU36, DT16G4DU32, DT16G4DU26, DT16G4DU24, DT16G4DU21, DT8GB4DU36, DT8GB4DU32,DT8GB4DU26, DT8GB4DU24, DT8GB4DU21, DT4GB4DU32, DT4GB4DU26, DT4GB4DU24, DT4GB4DU21, DT32G4DS32, DT32G4DS26, DT32G4DS24, DT16G4DS36,DT16G4DS32,DT16G4DS26, DT16G4DS24,DT16G4DS21, DT8GB4DS36, DT8GB4DS32, DT8GB4DS26, DT8GB4DS24, DT8GB4DS21, DT4GB4DS32, DT4GB4DS26, DT4GB4DS24, DT4GB4DS21,DT8GB3DU16, DT8GB3DU13,DT4GB3DU13, DT8GB3DS16, DT8GB3DS13, DT4GB3DS16,DT4GB3DS13,EA32G5DU56, EA16G5DU56, EA8GB5DU56, EA32G4DU32, EA16G4DU32,EA8GB4DU36,EA8GB4DU32, EA8GB4DU26, EA8GB3DU16, MRGB8GX216G32K,AMRGB8GX216G32W, AMRGB8GX216G32R,AMRGB8GX216G36K,AMRGB8GX216G36W, AMRGB8GX216G36R,AMRGB8GX216G40K,AMRGB8GX216G40W, AMRGB8GX216G40R,AMRGB16GX232G32K,AMRGB16GX232G32W, AMRGB16GX232G36K, AMRGB16GX232G36W,AMRGB32GX264G32K, AMRGB32GX264G32W, AMRGB32GX264G36K, AMRGB32GX264G36W, AMRGB1G88G32K,AMRGB1G88G32W,AMRGB1G88G36K, AMRGB1G88G36W, AMRGB1G88G36R, AMRGB16G32K, AMRGB16G32W, AMRGB16G32R, AMRGB2G816G36K,AMRGB2G816G36W, AMRGB2G816G36R, AMRGB32G32K, AMRGB32G32W, AMRGB32G32R, ARB8GB4K32, ARB8GB4R32,ARB8GB4G32, ARB8GB4K36, ARB8GB4R36, ARB8GB4G36,ARB16GB5K60, ARB16GB5R60, ARB16GB5G60, ARB16GB5K64,ARB16GB5R64,ARB16GB5G64,ARB16GB5K70, ARB16GB5R70, ARB16GB5G70, ARB16GB5K72,ARB16GB5R72, ARB16GB5G72,ARB32GB5K60,ARB32GB5R60, ARB32GB5G60, ARB32GB5K70,ARB32GB5R70,ARB32GB5G70, ARB32GB5K72, ARB32GB5R72, ARB32GB5G72



Issue to

Applicant	:	Datotek International Co., Ltd.
Address	:	3F, No. 34, Alley 18, Lane 478, Rueiguang Rd., Taipei City, Taiwan (R.O.C)
Trade Name	:	DATO

Test Performed by

WEISHANG Certification Co., Ltd. 12F-3, No. 27-1, Ln. 169, Kangning St., Xizhi Dist., New Taipei City 221, Taiwan Tel: (02)7708-0159 Fax:(02)7708-0282
<i>This report shall not be reproduced except in full, without the written approval of WEISHANG Certification Co., Ltd. This document may be altered or revised by WEISHANG Certification Co., Ltd. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by any government agencies. The test results in the report only apply to the tested sample.</i> <i>WEISHANG Certification Co., Ltd. conducts tests according to the test standards. When performing conformity analysis, because U_{lab} is less than or equal to U_{cispn}, the impact of measurement uncertainty is not considered, and a test report is issued according to the determination rules.</i>



EDITION HISTORY

Rev.	Issue Date	Revisions
1.0	JAN. 15, 2025	First Issue



TABLE OF CONTENT

Page

1. GENERAL INFORMATION	5
1.1 EUT Description	5
1.2 Summary of test result	7
1.3 Decision of Test Mode	8
1.4 Configuration and Peripheral	9
1.5 Test Instruments	10
1.6 Measurement Uncertainty	10
1.7 Temperature 、 Humidity and Pressure at Test Environment	11
2. EMISSION TEST	12
2.1 Conducted Emission Measurement	12
2.2 Radiated Interference Measurement	18
2.3 Warning Labels FCC Labels	27
3. EUT PHOTOGRAPHS.....	29



1. GENERAL INFORMATION

1.1 EUT Description

Equipment Under Test	Memory module
Model Number	DT32G5DU64
Series Model Number	DT32G5DU60,DT32G5DU56,DT32G5DU52, DT32G5DU48,DT16G5DU64, DT16G5DU60,DT16G5DU56, DT16G5DU52, DT16G5DU48, DT8GB5DU64, DT8GB5DU60,DT8GB5DU56, DT8GB5DU52, DT8GB5DU48, DT32G5DS64, DT32G5DS60,DT32G5DS56, DT32G5DS52, DT32G5DS48, DT16G5DS64, DT16G5DS60, DT16G5DS56, DT16G5DS52, DT16G5DS48, DT8GB5DS64, DT8GB5DS60, DT8GB5DS56, DT8GB5DS52, DT8GB5DS48, DT32G4DU32, DT32G4DU26, DT32G4DU24,DT16G4DU36, DT16G4DU32, DT16G4DU26, DT16G4DU24, DT16G4DU21, DT8GB4DU36, DT8GB4DU32,DT8GB4DU26, DT8GB4DU24, DT8GB4DU21, DT4GB4DU32, DT4GB4DU26, DT4GB4DU24, DT4GB4DU21, DT32G4DS32, DT32G4DS26, DT32G4DS24, DT16G4DS36, DT16G4DS32,DT16G4DS26, DT16G4DS24,DT16G4DS21, DT8GB4DS36, DT8GB4DS32, DT8GB4DS26, DT8GB4DS24, DT8GB4DS21, DT4GB4DS32, DT4GB4DS26, DT4GB4DS24, DT4GB4DS21,DT8GB3DU16, DT8GB3DU13, DT4GB3DU13, DT8GB3DS16, DT8GB3DS13, DT4GB3DS16,DT4GB3DS13, EA32G5DU56, EA16G5DU56, EA8GB5DU56, EA32G4DU32, EA16G4DU32, EA8GB4DU36,EA8GB4DU32, EA8GB4DU26, EA8GB3DU16, MRGB8GX216G32K, AMRGB8GX216G32W, AMRGB8GX216G32R, AMRGB8GX216G36K, AMRGB8GX216G36W,AMRGB8GX216G36R,AMRGB8GX216G40K, AMRGB8GX216G40W, AMRGB8GX216G40R,AMRGB16GX232G32K, AMRGB16GX232G32W, AMRGB16GX232G36K, AMRGB16GX232G36W, AMRGB32GX264G32K, AMRGB32GX264G32W, AMRGB32GX264G36K, AMRGB32GX264G36W,AMRGB1G88G32K, AMRGB1G88G32W, AMRGB1G88G36K, AMRGB1G88G36W, AMRGB1G88G36R, AMRGB16G32K, AMRGB16G32W, AMRGB16G32R, AMRGB2G816G36K,AMRGB2G816G36W, AMRGB2G816G36R, AMRGB32G32K, AMRGB32G32W, AMRGB32G32R, ARB8GB4K32, ARB8GB4R32,ARB8GB4G32, ARB8GB4K36, ARB8GB4R36, ARB8GB4G36,ARB16GB5K60, ARB16GB5R60, ARB16GB5G60, ARB16GB5K64, ARB16GB5R64,ARB16GB5G64,ARB16GB5K70,ARB16GB5R70, ARB16GB5G70, ARB16GB5K72,ARB16GB5R72,ARB16GB5G72,ARB32GB5K60,ARB32GB5R60, ARB32GB5G60,ARB32GB5K70,ARB32GB5R70,ARB32GB5G70,ARB32GB5K72, ARB32GB5R72, ARB32GB5G72 All covered models have electrically identical on the circuitry to each other, within the model designations for sales purposes only.
Applicant	Datotek International Co., Ltd.
Manufacture	Datotek International Co., Ltd.



I/O Port Types	Q'TY	Test Description
N/A		

EUT Power Rating	DC 3.3V
EUT Working Frequency	200 MHz

Receipt Date	OCT. 18, 2024
Completion Date:	JAN. 13, 2025

※ Detailed information, please refer to the EUT's specification or user's manual provided by Manufacturer.



1.2 Summary of test Result

Emission			
Item	Standard	Limit	Result
Conducted Emission	15.107	Meet Class B limit	■Pass □N/A
Radiated Emission	15.109	Meet Class B limit	■Pass □N/A

※The test results of this report relate only to the tested sample(s) identified in this report.
Manufacturer or whom it may concern should recognize the pass or fail of the test result.

Approved by

Reviewed by:

JAN. 15, 2025

Bon In

JAN. 15, 2025

Jeff

Date

Engineering Supervisor

Date

Test Engineer



1.3 Decision of Test Mode

- The following test mode(s) were scanned maximum emission level during the preliminary test:

Test Mode	
Mode 1	Working

- Then, the above highest emission mode of the configuration of the EUT and cable was chosen for all final test items.

Final Test Model			
Emission	Conducted Emission		Mode 1
	Radiated Emission	Below 1GHz	Mode 1
		Above 1GHz	Mode 1



1.4 Configuration and Peripheral

- Configuration

By the test photographs at each test station for the actual connections between EUT and support equipment.

- Peripheral

Peripheral	Manufacture	Model	Serial No.	Data Cable	Power Cord
PC	MSI	Z790 CARBON	N/A	N/A	Unshielded 1.8m
MONITOR	SONY	SDM-HS74	1356906	Shielded 1.6m	Unshielded 1.8m
PRINTER	HP	Q5765A	N/A	Shielded 1.8m	Unshielded 1.8m
MOUSE	Dell	MOC5UO	HOYO2HZ4	Shielded 1.8m / USB	N/A
KEYBOARD	Dell	SK-8115	N/A	Shielded 1.8m / USB	N/A
USB Flash	Transcend	16G	N/A	N/A	N/A

**1.5 Test Instruments**

- Instrument meet of CISPR 16-1, ANSI C63.2 and Other required standards.
- Calibration period 1 year and the calibrations are traceable to NML/ROC and NIST/USA.
- N.C.R mean Not Calibration request.

● Conducted Emission Instrument					
Item	Manufacture	Model No.	Serial No.	Cal. Due Day	Remark
EMC Test Receiver	Agilent	N9038A	MY53290065	Apr. 09, 2025	
LISN #1	PMM	PMM L2-16B	000WT50628	Apr. 18, 2025	For EUT
LISN #2	PMM	PMM L2-16B	000WT50627	Apr. 18, 2025	For Support Unit
RF Cable	Raison	CFD300NL(3m)	Cable-001	Apr. 11, 2025	
Impedance Stabilization	Schwarzbeck Mess	NTFM 8158	103	Apr. 18, 2025	
ABSORBING CLAMP	COM-POWER	AB-050	421915	Apr. 19, 2025	
RF CABLE	Huber+Suhner	5D-FB	CABLE-007	Apr. 21, 2025	
EMC Test Software	AUDIX	E3 (Ver. 9)	RK-001077	N.C.R	

Radiated Emission Instrument					
Item	Manufacture	Model No.	Serial No.	Cal. Due Day	Remark
Bilog Antenna	SUNOL	JB1	A052104	Sep. 13, 2025	
EMC Test Receiver	LIG	ISA-80	L0809K001	Sep. 29, 2025	
RF Cable	JYE BAO	RG214/U	Cable-002	Nov. 20, 2025	
Pre-Amplifier	WIRELESS	FPA-6592G	60021	Nov. 12, 2025	
EMC Test Software	AUDIX	E3 (Ver. 9)	RK-001077	N.C.R	



1.6 Measurement Uncertainty

Conducted Emission

The measurement uncertainty is evaluated as 3.82 dB.

Radiated Emission

The Horizontal measurement uncertainty of 30MHz - 1GHz is evaluated as 3.96 dB.

The Vertical measurement uncertainty of 30MHz - 1GHz is evaluated as 3.96 dB.

The Vertical and Horizontal measurement uncertainty of 1GHz to 6GHz is evaluated and choose which polarity is worst value as 3.74 dB.

TAF NO.: 1288

1.7 Temperature 、 Humidity and Pressure at Test Environment

Monitor Item	Test Site	Require (IEC60068-1)	Actual Reading
Temperature (°C)	FCC part 15: 15.107 Conducted Emission	15-35	24
Humidity (%RH)		25-75	65
Barometric pressure (mbar)		860-1060	1006
Temperature (°C)	FCC part 15: 15.109 Radiated Emission	15-35	21
Humidity (%RH)		25-75	70
Barometric pressure (mbar)		860-1060	1005



2. Emission Test

2.1 Conducted Emission Measurement


2.1.1 Conducted Emission Limit

Frequency(MHz)	Class A (dB μ V)		Class B (dB μ V)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	79	66	66 - 56	56 - 46
0.5 - 5.0	73	60	56	46
5.0 - 30.0	73	60	60	50


- ※ The lower limit shall apply at the transition frequencies.
- ※ The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.



2.1.2 Test Setup

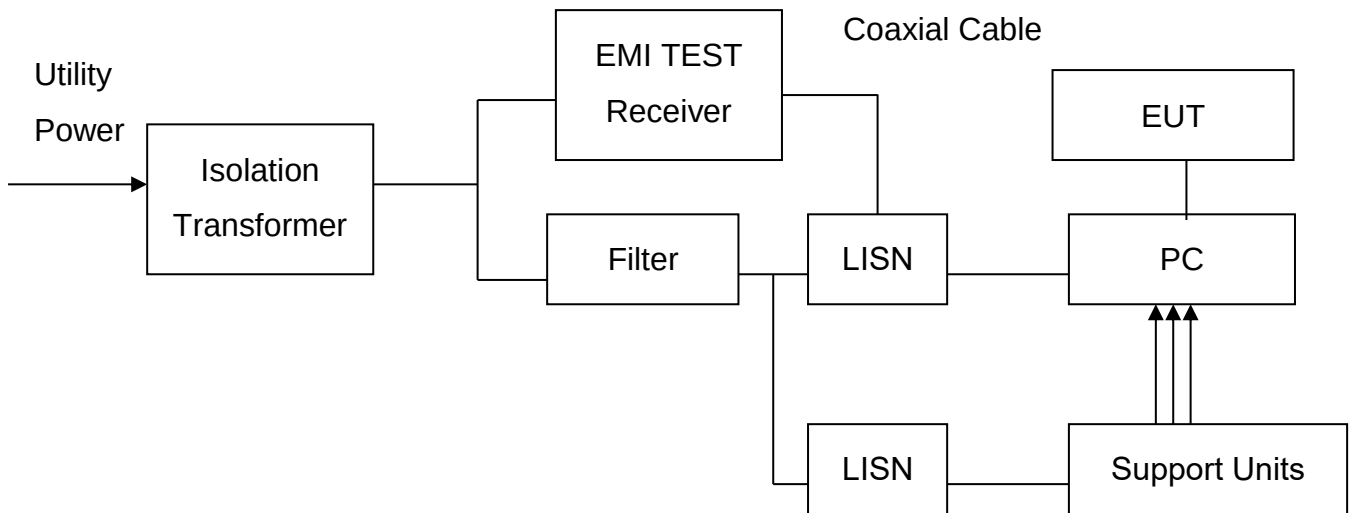

2.1.3 Block Diagram of Test Setup

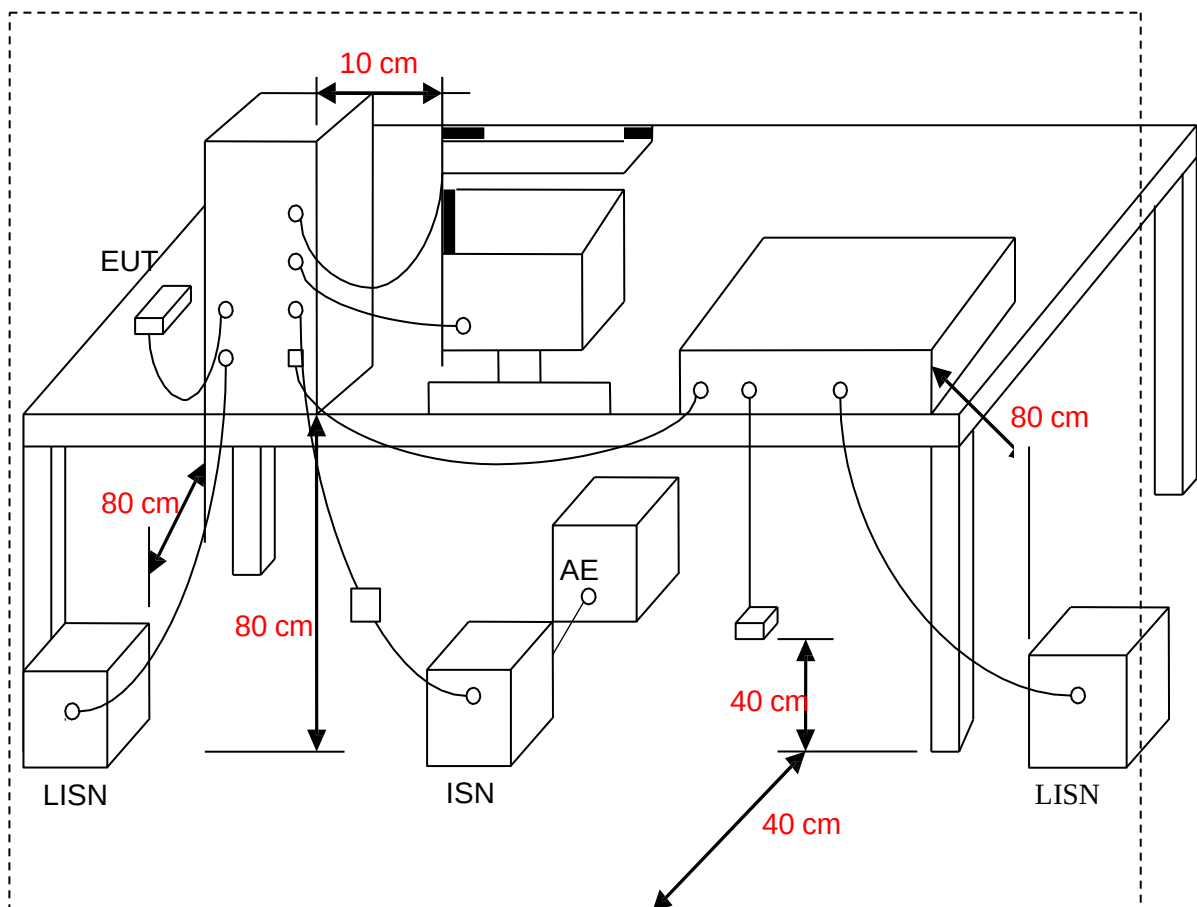



2.1.4 Test Procedure

The EUT was tested according to the requirement of ANSI C63.4. The frequency spectrum from 0.15 MHz to 30 MHz was investigated. The line impedance stabilization network (L.I.S.N) used was 50 ohm/50μH as specified. All readings were quasi-peak and average values of maximum conducted interference with 10 kHz resolution bandwidth of the test receiver. The EUT system was operated in all typical methods by users. Both lines (Line & Neutral) of the power mains of EUT were measured and the cables connected to EUT and support units were moved to find the maximum emission levels for each frequency.


First, Find the margin or higher points at least 6 points by software, then use manual to find the maximum data.

- The EUT was placed on a desk 0.8 meters height from the metal ground plane and 0.4 meter from the conducting wall of the shielding room and it was kept at least 0.8 meters from any other grounded conducting surface.
- Connect EUT to the power mains through a line impedance stabilization network (LISN).All the support units are connecting to the other LISN.
- The LISN provides 50 ohm coupling impedance for the measuring instrument.
- The ANSI C63.4 states that a 50 ohm, 50 micro-Henry LISN should be used.
- Both sides of AC line were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched
- Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- The mains voltage shall be supplied to the EUT via the LISN when the measurement of telecommunication port is performed. The common mode disturbances at the telecommunication port shall be connected to the ISN.
- For telecommunication port interference measurement, using ISNs with suitable longitudinal conversion losses (LCL) as defined in the port of specification from manufacture, and the LCL shall be meet the related standard equirement. Measured the line and carried out using quasi-peak and average detector receivers of maximum conducted interference.
- If the reading of the measuring receiver shows fluctuations close to the limit, the reading shall be observed for at least 15 s at each measurement frequency; the higher reading shall be recorded with the exception of any brief isolated high reading which shall be ignored.



2.1.5 Test Result


(LISN-Line)

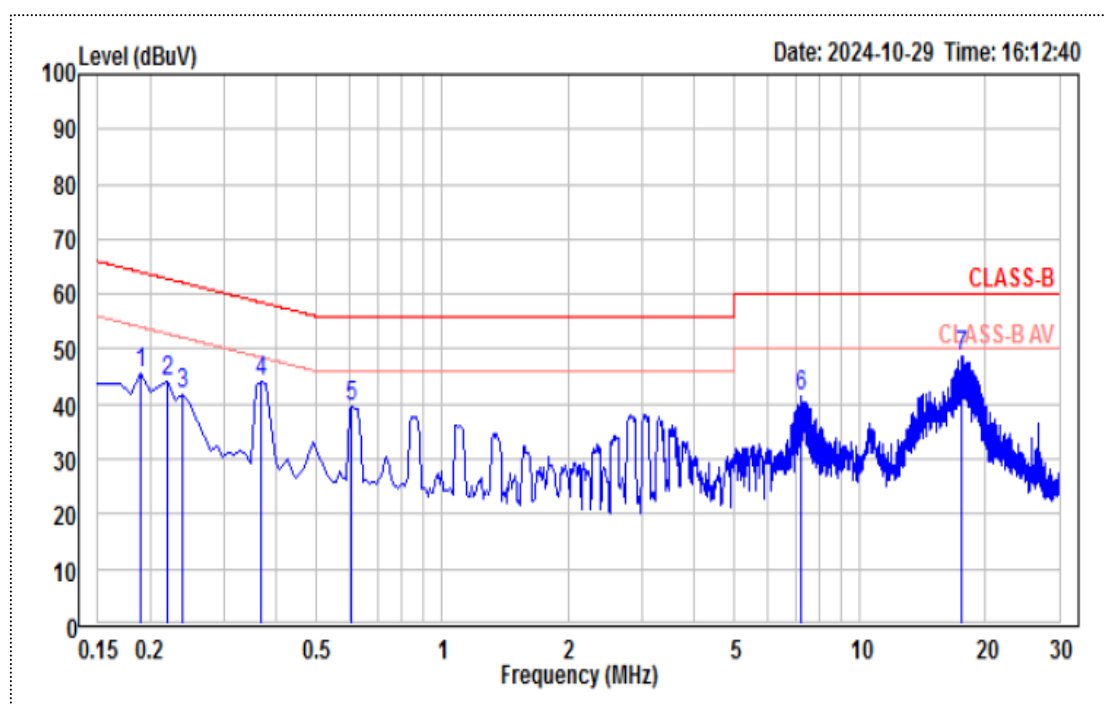

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark	LISN Factor	Cable Loss
	MHz	dBuV	dB	dBuV	dBuV	dB		dB	dB
1	0.190	45.35	0.17	45.52	64.05	-18.53	Peak	0.13	0.04
2	0.220	43.97	0.17	44.14	62.83	-18.69	Peak	0.13	0.04
3	0.240	41.48	0.16	41.64	62.11	-20.47	Peak	0.12	0.04
4	0.369	43.93	0.14	44.07	58.53	-14.46	Peak	0.10	0.04
5	0.608	39.41	0.14	39.55	56.00	-16.45	Peak	0.10	0.04
6	7.234	41.16	0.23	41.39	60.00	-18.61	Peak	0.14	0.09
7	17.453	48.25	0.32	48.57	60.00	-11.43	Peak	0.18	0.14



(LISN-Neutral)

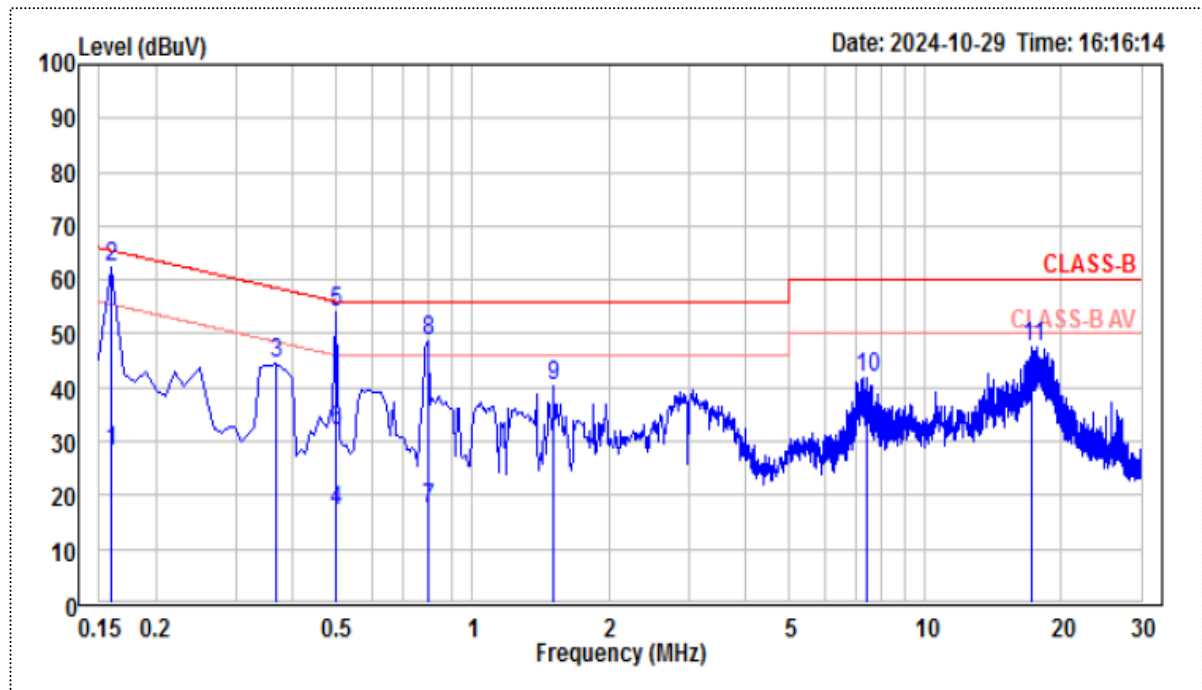

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark	LISN Factor	Cable Loss
	MHz	dBuV	dB	dBuV	dBuV	dB		dB	dB
1	0.160	28.00	0.13	28.13	55.47	-27.34	Average	0.09	0.04
2	0.160	62.17	0.13	62.30	65.47	-3.17	Peak	0.09	0.04
3	0.369	44.19	0.13	44.32	58.53	-14.21	Peak	0.09	0.04
4	0.498	17.00	0.13	17.13	46.03	-28.90	Average	0.09	0.04
5	0.498	53.92	0.13	54.05	56.03	-1.98	Peak	0.09	0.04
6	0.498	31.63	0.13	31.76	56.03	-24.27	QP	0.09	0.04
7	0.797	17.39	0.15	17.54	46.00	-28.46	Average	0.10	0.05
8	0.797	48.59	0.15	48.74	56.00	-7.26	Peak	0.10	0.05
9	1.513	39.95	0.17	40.12	56.00	-15.88	Peak	0.11	0.06
10	7.433	41.68	0.24	41.92	60.00	-18.08	Peak	0.15	0.09
11	17.254	47.36	0.24	47.60	60.00	-12.40	Peak	0.10	0.14



2.1.6 Test Photograph

< CE Front View -- LISN >



< CE Rear View -- LISN >





2.2 Radiated Interference Measurement

2.2.1 Radiated Emission Limit

Frequency (MHz)	Class A (at 10m)	Class B (at 10m)
	$\text{dB}\mu\text{V/m}$	$\text{dB}\mu\text{V/m}$
30 - 230	40	30
230 - 1000	47	37

Frequency (MHz)	Class A (at 3m)		Class B (at 3m)	
	$\text{dB}\mu\text{V/m}$		$\text{dB}\mu\text{V/m}$	
	Average	Peak	Average	Peak
1000 - 3000	60	80	54	74
3000 - 6000	60	80	54	74


※ The lower limit shall apply at the transition frequencies.

※ Emission level ($\text{dB}\mu\text{V/m}$) = $20 \log$ Emission level ($\mu\text{V/m}$).




2.2.2 Block Diagram of Test Setup in Chamber

Below 1G

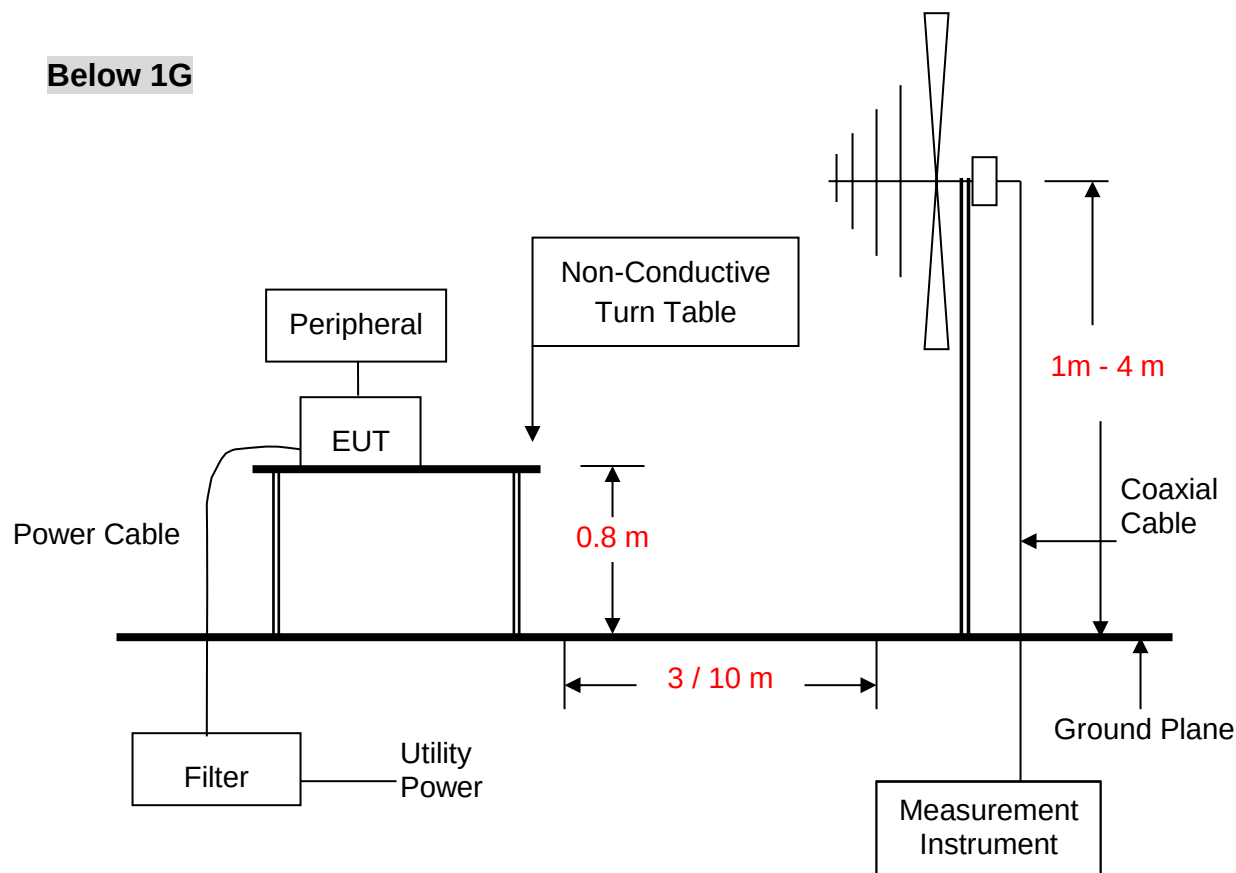

Above 1G

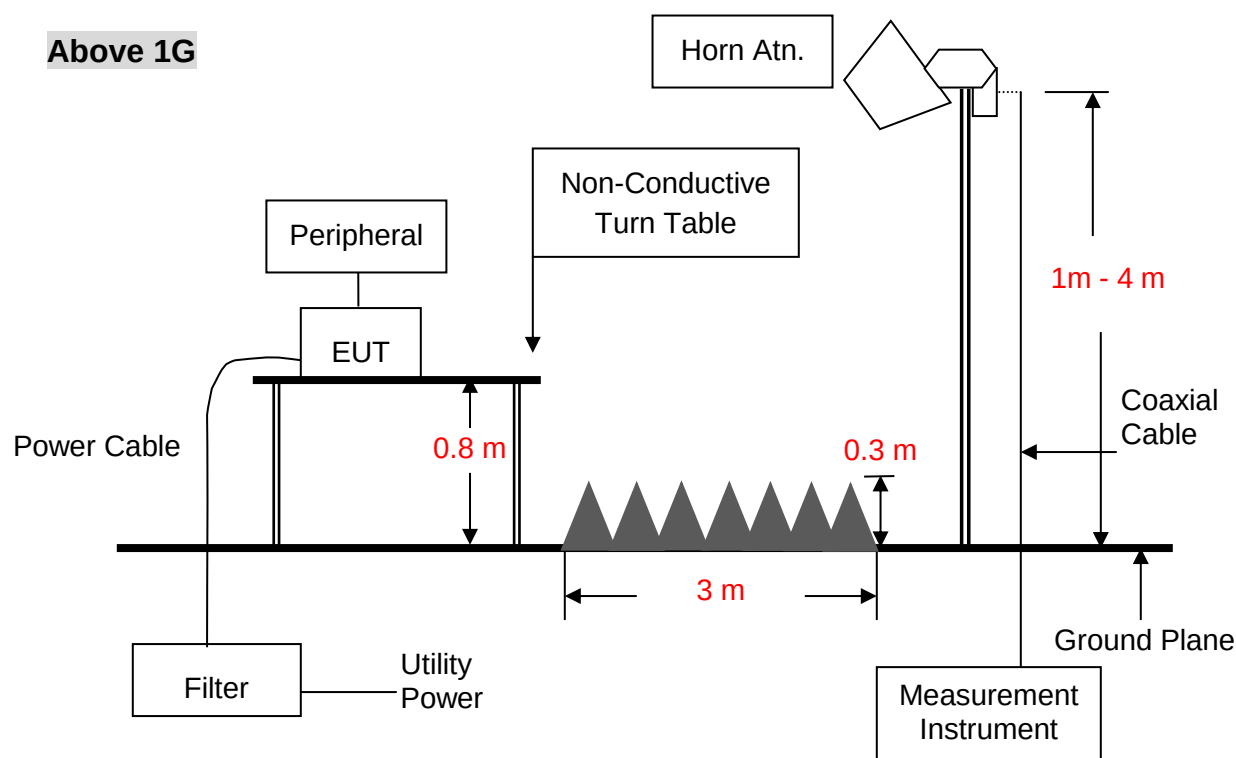



2.2.3 Test Procedure

The EUT was placed on a turntable just above ground. The turntable rotates 360 degrees to determine the position of the maximum emission level. EUT was set 10 meters away from the receiving antenna, which were mounted on an antenna tower. The antenna can move up and down between 1 meter and 4 meter to find out the maximum emission level. Broadband antenna was used as receiving antenna. Both horizontal and vertical polarization of the antenna was set on measurement. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.4 on radiated measurement.

Radiated emissions were investigated over the frequency range from 30MHz to 1GHz using a receiver bandwidth of 120 kHz. Radiated was performed at an antenna to EUT distance of 10 meters.

The EUT was positioned such that the distance from antenna to the EUT was 10 meters for under 1GHz, and 3 meter for above 1GHz, the highest frequency performed according to internal source frequency of the EUT, the specification was below:


Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705 30	30
1.705 - 108	1000
108 - 500	2000
500 - 1000	5000
Above 1000	5th harmonic of the highest frequency or 40 GHz whichever is lower

- The EUT was placed on a relatable table top 0.8 meter above ground.
- The EUT was set 10 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- The table was rotated 360 degrees to determine the position of the highest radiation.
- The antenna is a half wave dipole and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.



2.2.4 Test Result


(Below 1G - Horizontal)

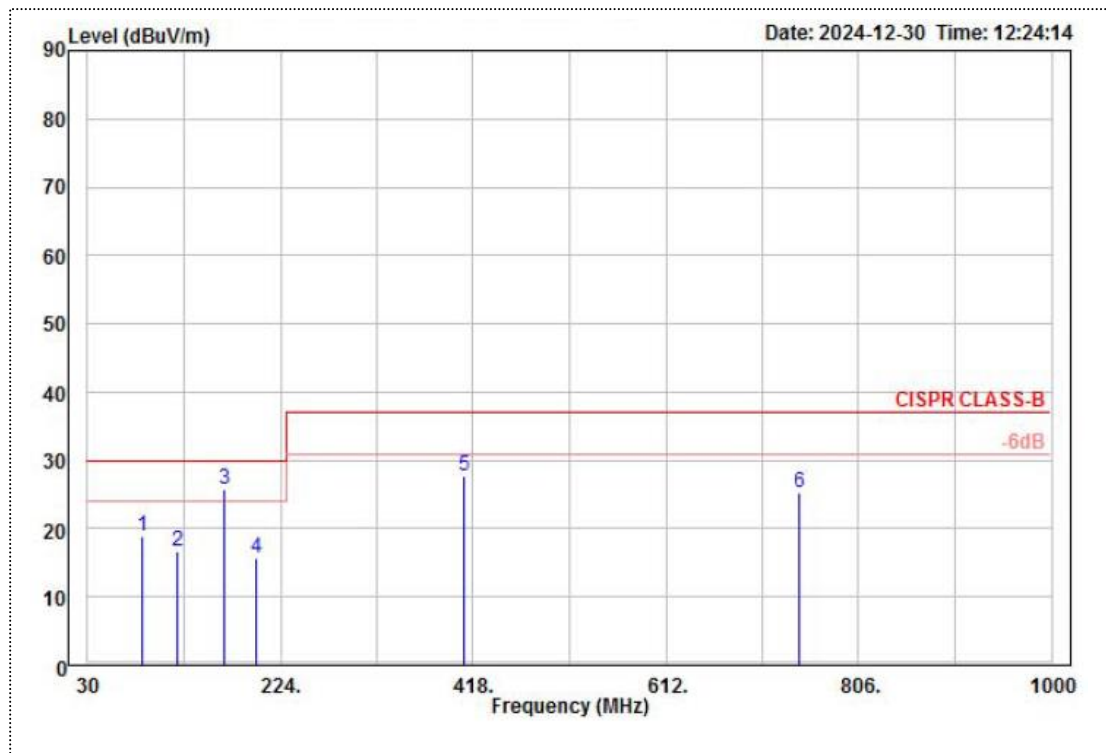

		Over		Limit	Read		APos	TPos	Cable	Preamp	Ant	
	Freq	Level	Limit	Line	Level	Factor			Loss	Factor	Factor	Remar
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	cm	deg	dB	dB	dB/m	
1	84.400	18.94	-11.06	30.00	42.77	-23.83	100	0	2.53	39.36	13.00	QP
2	120.005	16.76	-13.24	30.00	39.64	-22.88	100	279	3.02	39.90	14.00	QP
3 !	168.010	25.86	-4.14	30.00	45.88	-20.02	100	95	3.62	40.14	16.50	QP
4	199.430	15.64	-14.36	30.00	35.41	-19.77	100	360	3.97	40.30	16.56	QP
5	407.995	27.69	-9.31	37.00	39.42	-11.73	100	22	6.30	40.23	22.20	QP
6	746.205	25.28	-11.72	37.00	26.83	-1.55	100	190	9.79	39.76	28.42	QP




(Below 1G – Vertical)

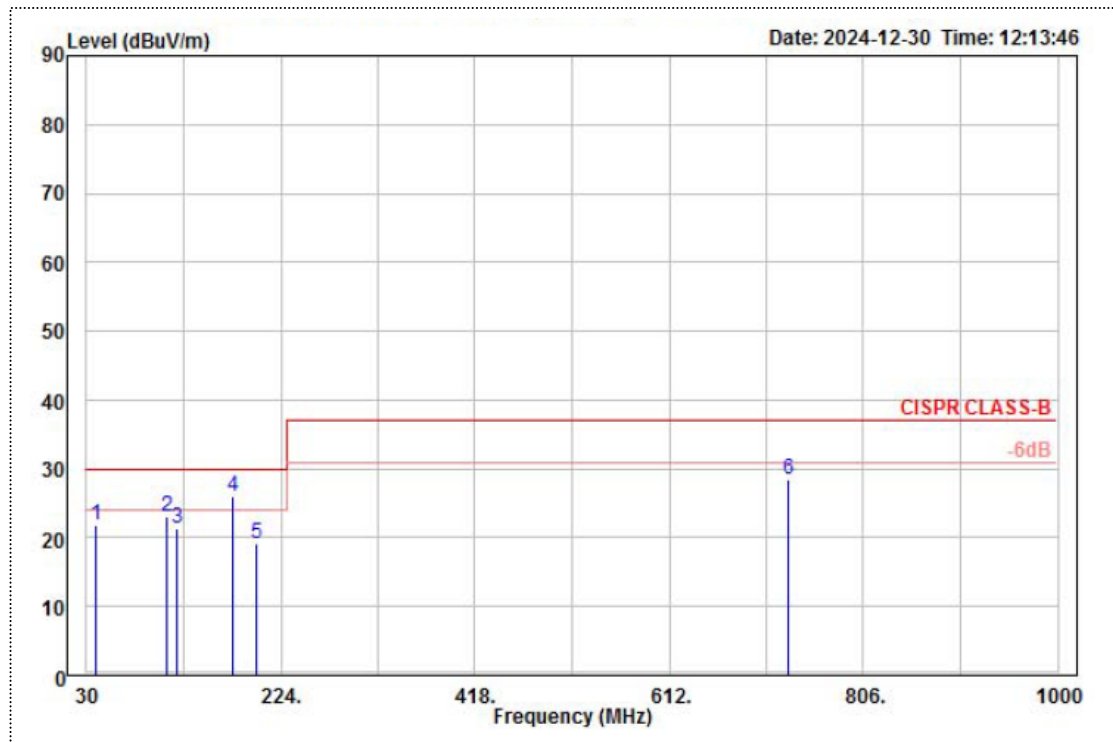

	Freq	Level	Over Limit	Limit Line	Read Level	Factor	APos	TPos	Cable Loss	Preamp Factor	Ant Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	cm	deg	dB	dB	dB/m	
1	39.545	21.76	-8.24	30.00	38.75	-16.99	100	298	1.92	37.63	18.72	QP
2	109.730	23.00	-7.00	30.00	46.40	-23.40	100	323	2.95	39.85	13.50	QP
3	119.970	21.27	-8.73	30.00	44.15	-22.88	100	55	3.02	39.90	14.00	QP
4 !	175.270	25.92	-4.08	30.00	45.14	-19.22	100	44	3.69	40.18	17.27	QP
5	199.970	19.13	-10.87	30.00	38.96	-19.83	100	360	3.97	40.30	16.50	QP
6	730.485	28.38	-8.62	37.00	30.29	-1.91	100	203	9.69	39.79	28.19	QP




(Above 1G - Horizontal)

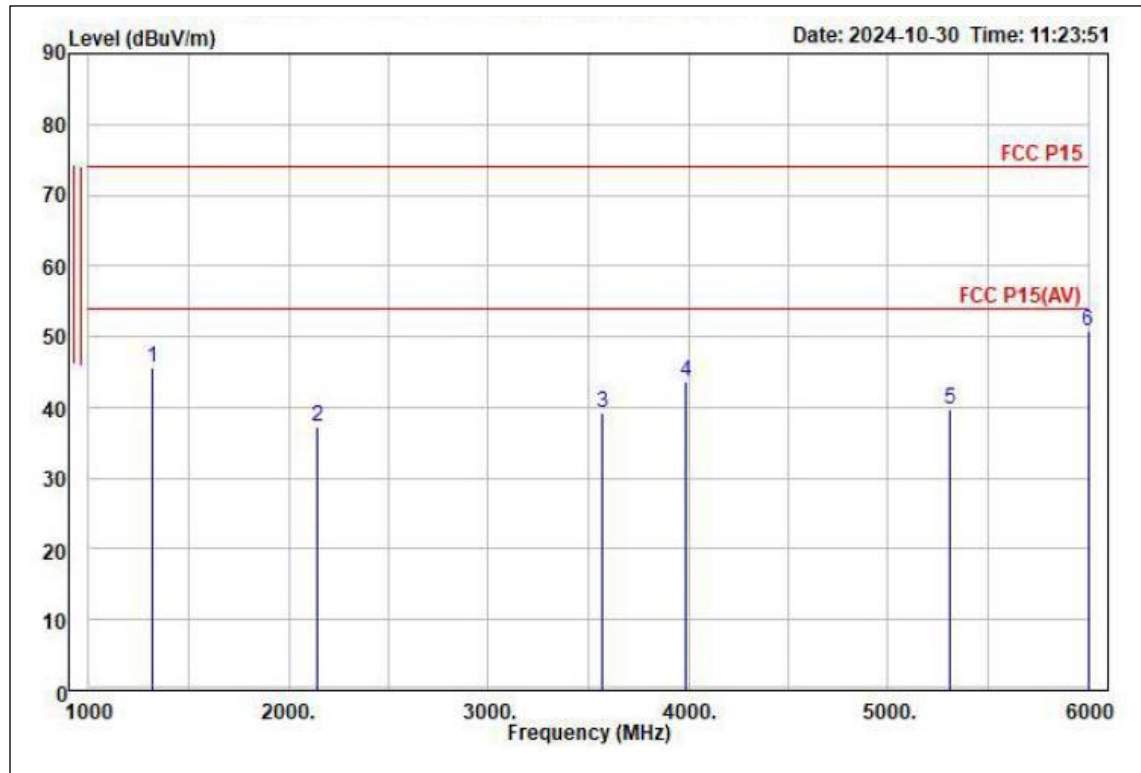

	Freq	Level	Over Limit	Read Level	Limit	Line Factor	Remark	Cable Loss	Preamp Factor	Ant Factor
	MHz	dBuV/m	dB	dBuV	dBuV/m	dB/m		dB	dB	dB/m
1	1320.000	45.71	-28.29	71.42	74.00	-25.71		4.86	60.89	25.32
2	2140.000	37.25	-36.75	60.88	74.00	-23.63		6.47	62.56	27.46
3	3570.000	39.32	-34.68	60.32	74.00	-21.00		8.83	63.79	28.96
4	3990.000	43.55	-30.45	63.82	74.00	-20.27		9.02	63.91	29.62
5	5310.000	39.76	-34.24	58.12	74.00	-18.36		10.23	64.97	31.38
6	6000.000	50.64	-23.36	66.68	74.00	-16.04		11.00	64.74	32.70



(Above 1G – Vertical)

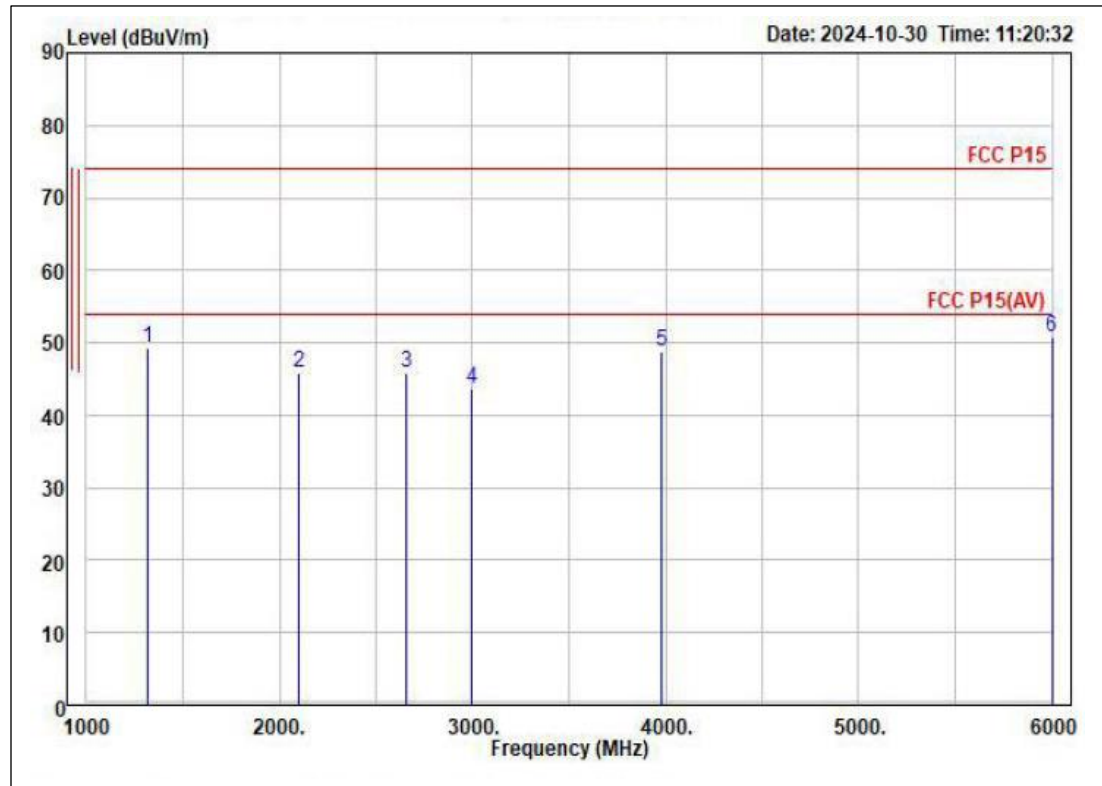

	Freq	Level	Over Limit	Read Level	Limit	Line Factor	Remark	Cable Loss	Preamp Factor	Ant Factor
	MHz	dBuV/m	dB	dBuV	dBuV/m	dB/m		dB	dB	dB/m
1	1320.000	49.31	-24.69	75.02	74.00	-25.71		4.86	60.89	25.32
2	2100.000	45.83	-28.17	70.01	74.00	-24.18		6.43	62.51	26.90
3	2660.000	45.89	-28.11	68.55	74.00	-22.66		7.52	63.20	28.02
4	3000.000	43.68	-30.32	66.12	74.00	-22.44		7.68	63.62	28.50
5	3980.000	48.69	-25.31	68.87	74.00	-20.18		9.08	63.90	29.64
6	6000.000	50.82	-23.18	66.86	74.00	-16.04		11.00	64.74	32.70



2.2.5 Test Photograph

< RE Front View -- Below 1G >



< RE Rear View -- Below 1G >






< RE Front View -- Above 1G >



< RE Rear View -- Above 1G >

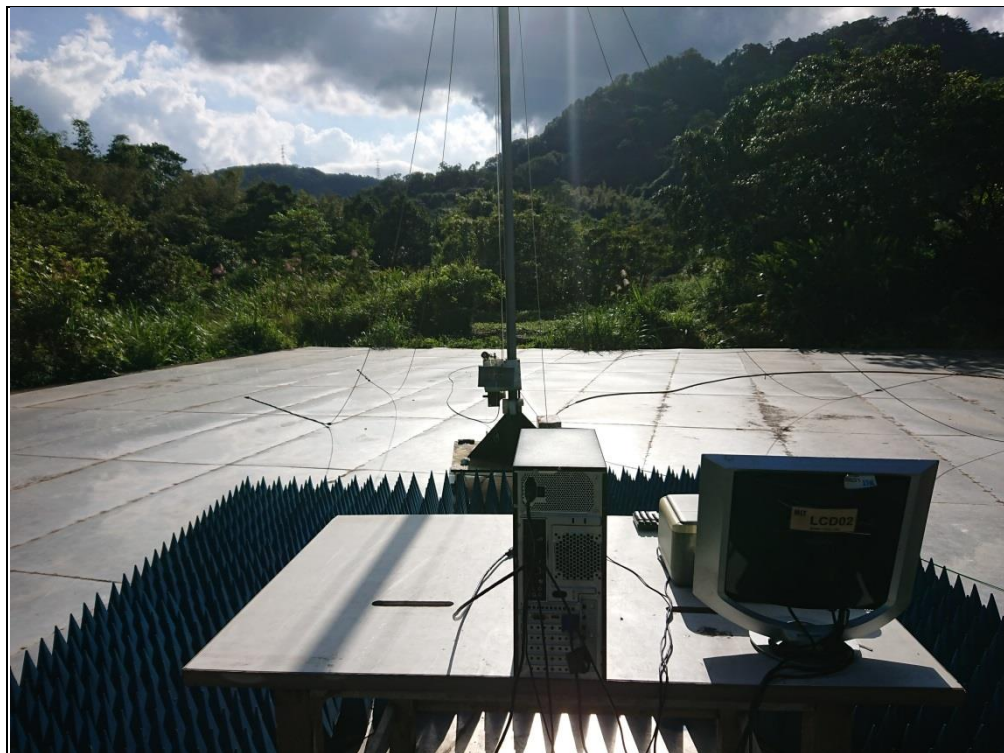



2.3 Warning Labels FCC Labels

2.3.1 Warning and Statement

- **Label Requirements**

A Class B digital device subject to certification by the FCC shall carry a warning label which includes the following statement:

- W A R N I N G -

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

- **Statement Requirements**

The operator's manual for a Class A digital device shall contain the following statements or their equivalent:

- W A R N I N G -

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

Notice: The changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

* * * * *

If the EUT was tested with special shielded cables the operator's manual for such product shall also contain the following statements or their equivalent:

Shielded interface cables and/or AC power cord, if any, must be used in order to comply with the emission limits.



2.3.2 Label of sample

SAMPLE OF FCC VERIFICATION LABEL 1

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference. And (2) this device must accept any interference received, including interference that may cause undesired operation.

SAMPLE OF FCC DoC LABEL 2




Trade Name
Model Number



3. EUT PHOTOGRAPHS

< Front view of EUT >

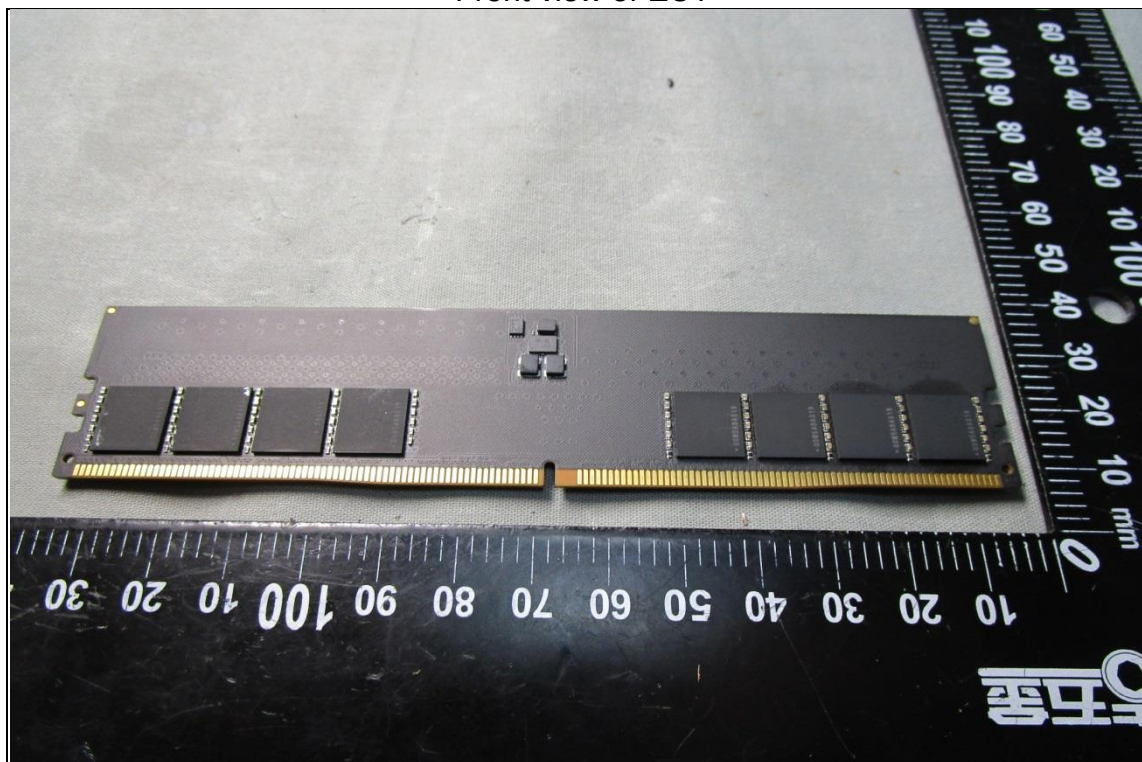

< Rear view of EUT >

