


Notes:


- 1. Assemble to meet inspection criteria of IPC-A-610, class 2, current revision.
- 2. All parts and materials shall be compliant to Directive 2011/65/EU (EU RoHS 2) and its amendment Directive (EU) 2015/863 (EU RoHS 3).
- 3. Affix serial number label to the specified location on the top of the PCB.
- 4. Each module length and width process performance shall demonstrate a Cpk > 1.33 [Cpk > 1.67 for Automotive grade]. Tolerance is nominal value +/-0.2mm; when cutting tab -0.2/+0.35mm.
- 5. Each module bottom surface flatness tolerance is max 0.08mm.
- 6. See also manufacturing requirements amended in contractual quality agreements.
- 7. Always suggest to u-blox the depanelization concept before ordering first PCB, u-blox recommends following same concept within a product family/form factor.

Schematic/Assembly Revision			
Rev.	Description	Date	By
A	First release	2025-09-15	mtil
B	Added reset button	2026-01-19	mtil
C	Moved battery connector	2026-06-15	mwej

View from Top side (Scale 8:1) SMT Locations

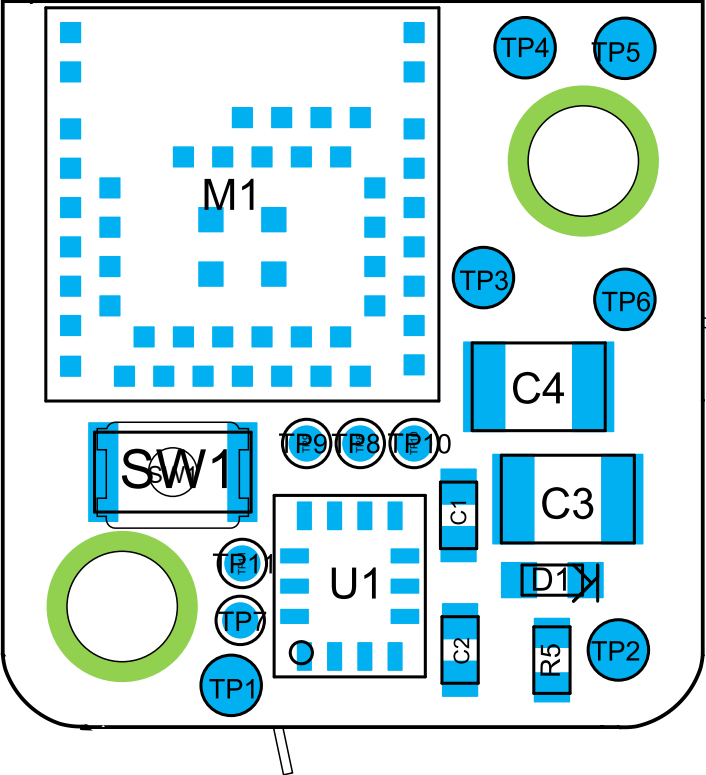

View from Bottom side (Scale 8:1)

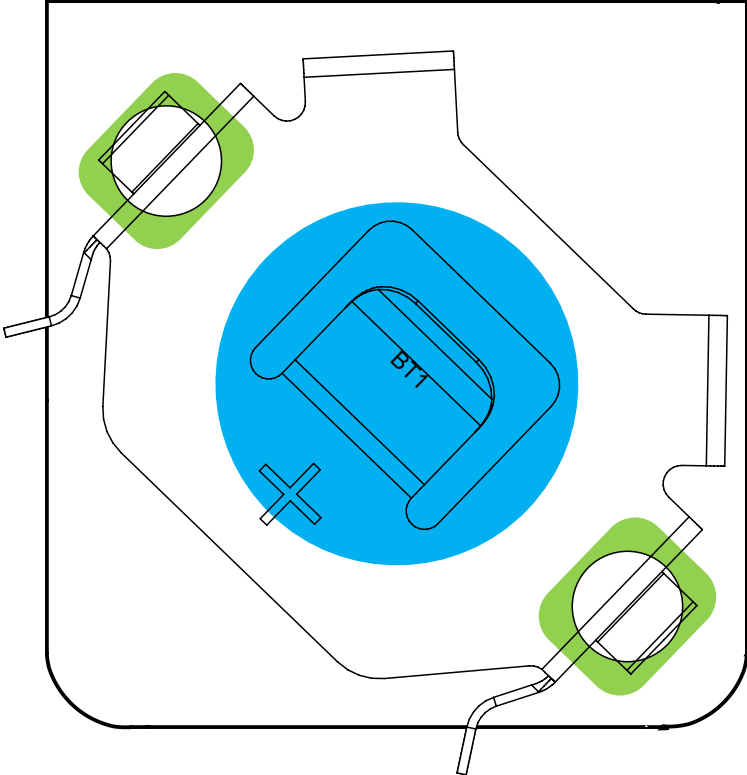

1:1 Scale Views

