Linear High Bay

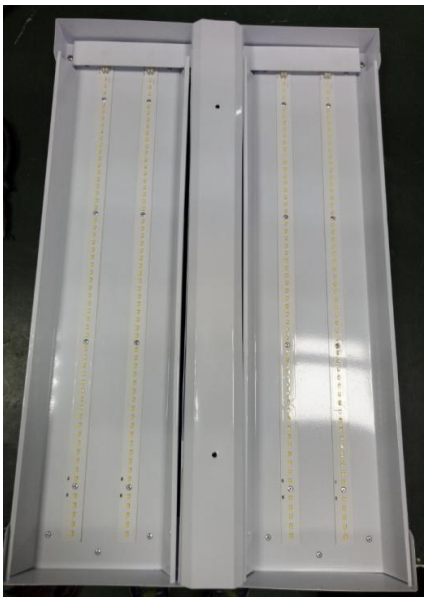

Accessories Optional	
Diffuser	Cage
	

Description

The CL-LH2F/CL-LH4F Highbay light is a design based on the idea of green energy. It saves about 70% energy compared with the fluorescent tubes The CL-LH2F/CL-LH4F accepts 120-347VAC 50/60Hz, and have the high lumen efficiency up to 170lm/W. With well-distributed and soft light, high stability, long life, elegant and extremely professional design, this Luminaries is regarded as the leading of green Lighting for commercial and residential uses.

Dimension

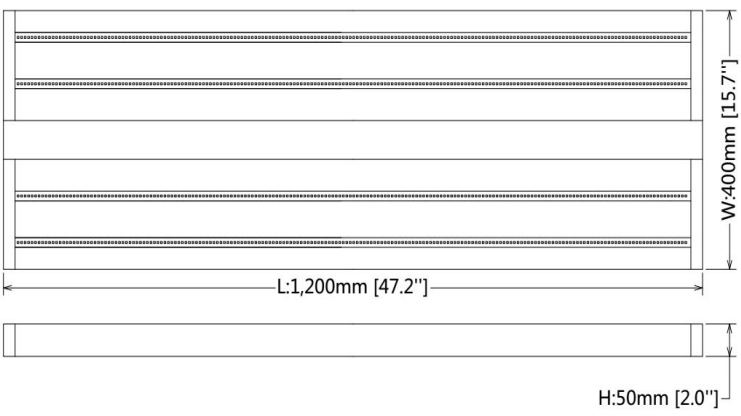

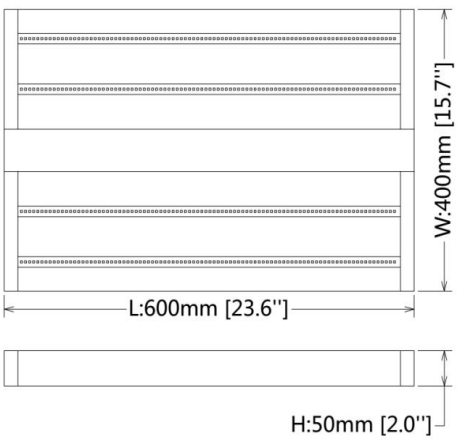

Performance Summary

Input Voltage:120-347VAC,50/60Hz

Input Watts: 24*16in.(80W/100W/160W) 48*16in.(200W/300W)

Efficacy: 170 LPW

Delivered Lumens: 80W@13,600lm/ 100W@17,000lm / 160W@27,200lm / 200W@34,000lm / 300W@51,000lm

CCT: 27K,30K,35K,40K,45K,50K,55K,57K,60K,67K

CRI:>80 with SDCM<6

LED Type: SMD2835

Power Factor:>0.9

Operating Temp.:-20℃ to +55℃

Housing material : painted stamping steel

Munting: hanging

Warranty: 10-year

In-door(IP20)

Product Specifications

- Available for installing with the lens
- Input voltage: AC120-347V, suitable for majority countries
- External Driver, cULus approval, PF>0.9
- Non-flickering, no glare
- flush mounted, easy installation
- Application: Warehouse, workshop, factory, train station,

Order Information

eg. CL-LH2F100HV-40

FAMILY	SIZE	WATT	Input Vallage	Power Factor	Dimmable	CCT
CL-LH2F80HV-XX CL-LH2F100HV-XX CL-LH2F160HV-XX	2FT	80 80W 100 100W 160 160W	120-347VAC	>0.9	D Dimmable blank None Dimmable	27 27K 30 30K 35 35K 40 40K 45 45K 50 50K 57 57K 60 60K 67 67K
CL-LH4F200HV-XX CL-LH4F300HV-XX	4FT	200 200W 300 300W				

** Occupancy & Daylight sensors are available as options

Cello Lighting Inc.
2570 N. First Street, 2nd Floor San Jose, CA 95131, U.S.A
Call us at 888-588-8849
Mail us: customer_service@cellolighting.com
www.CelloLighting.com