

Special precaution (Very important):

1. All IO ports used need a series resistance of $100\ \Omega$ to $1K\ \Omega$
The resistance value should be as large as possible without affecting the signal function
2. All IO ports and power ports used shall be protected by ESD diodes
3. The rated voltage of RST and bank6 / 7 is 1.8V. These pins cannot bear a voltage greater than 1.8V

K210_sys



File: K210_sys.kicad_sch
power



File: power.kicad_sch
wifi






File: wifi.kicad_sch

Sheet: /
File: M1w_4.27_KICAD.kicad_sch

Title:

Size: A4	Date:	Rev:
KiCad E.D.A. kicad (5.99.0-12719-gf9c83dbc44)		Id: 1/4

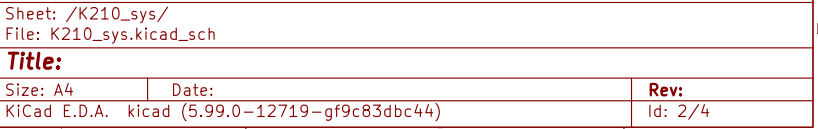

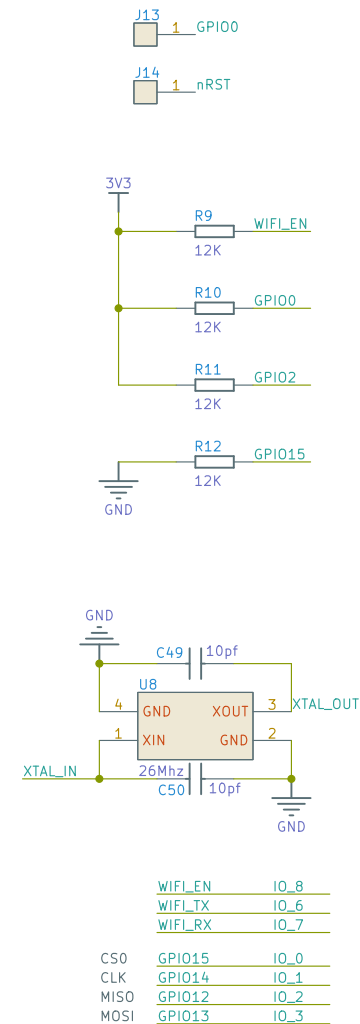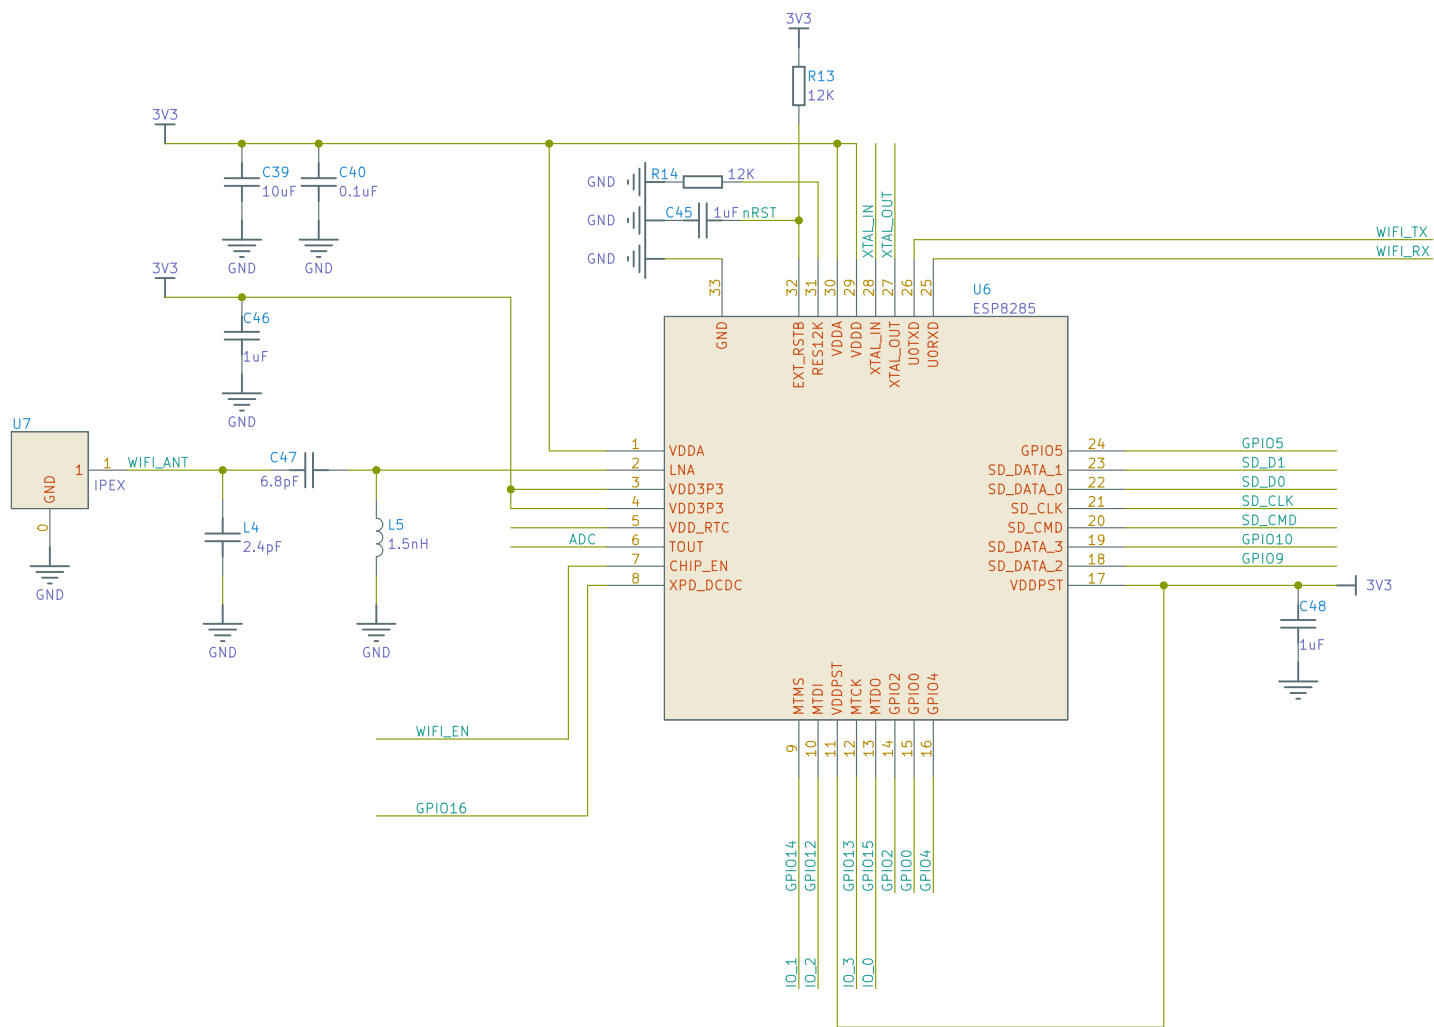

Sheet: /wifi/
File: wifi.kicad_sch

Title:

Size: A4

Date:

KiCad E.D.A. kicad (5.99.0-12719-gf9c83dbc44)

Rev:

Id: 4/4