








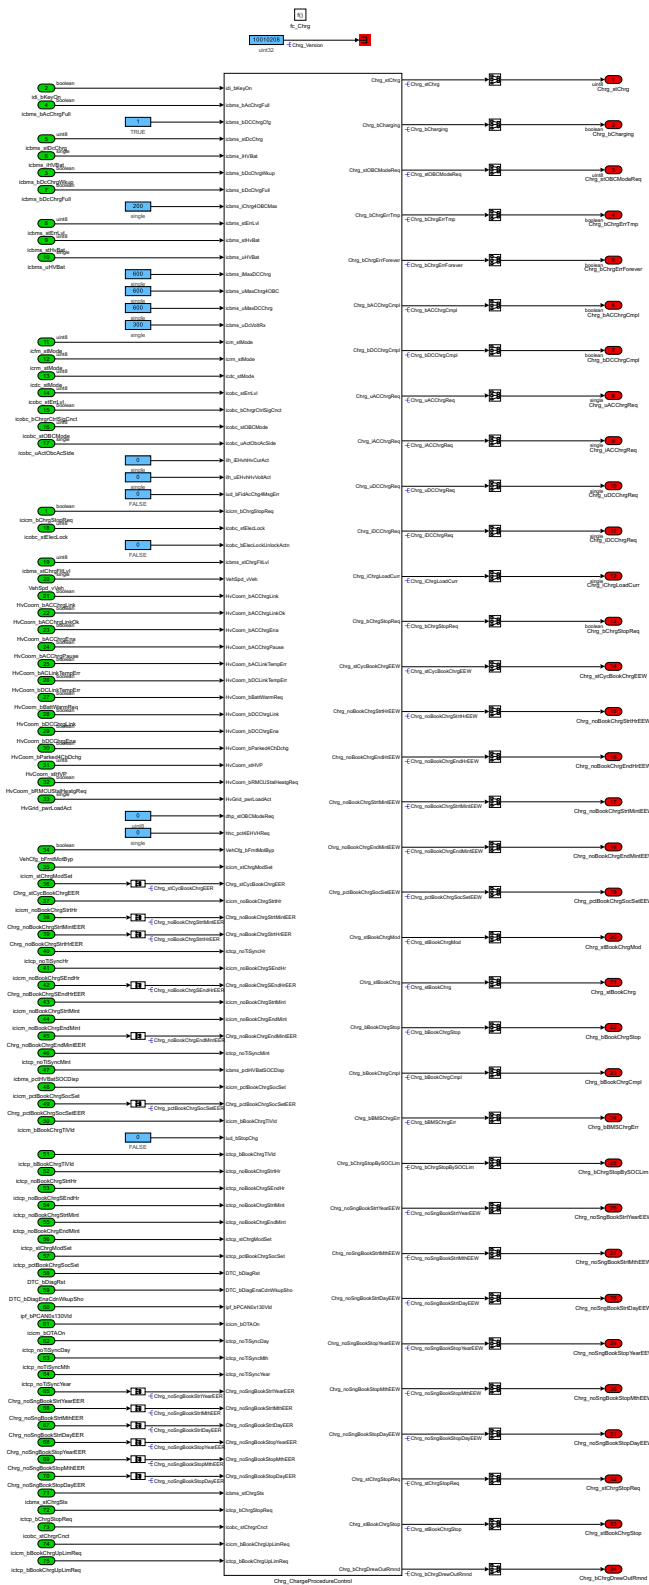


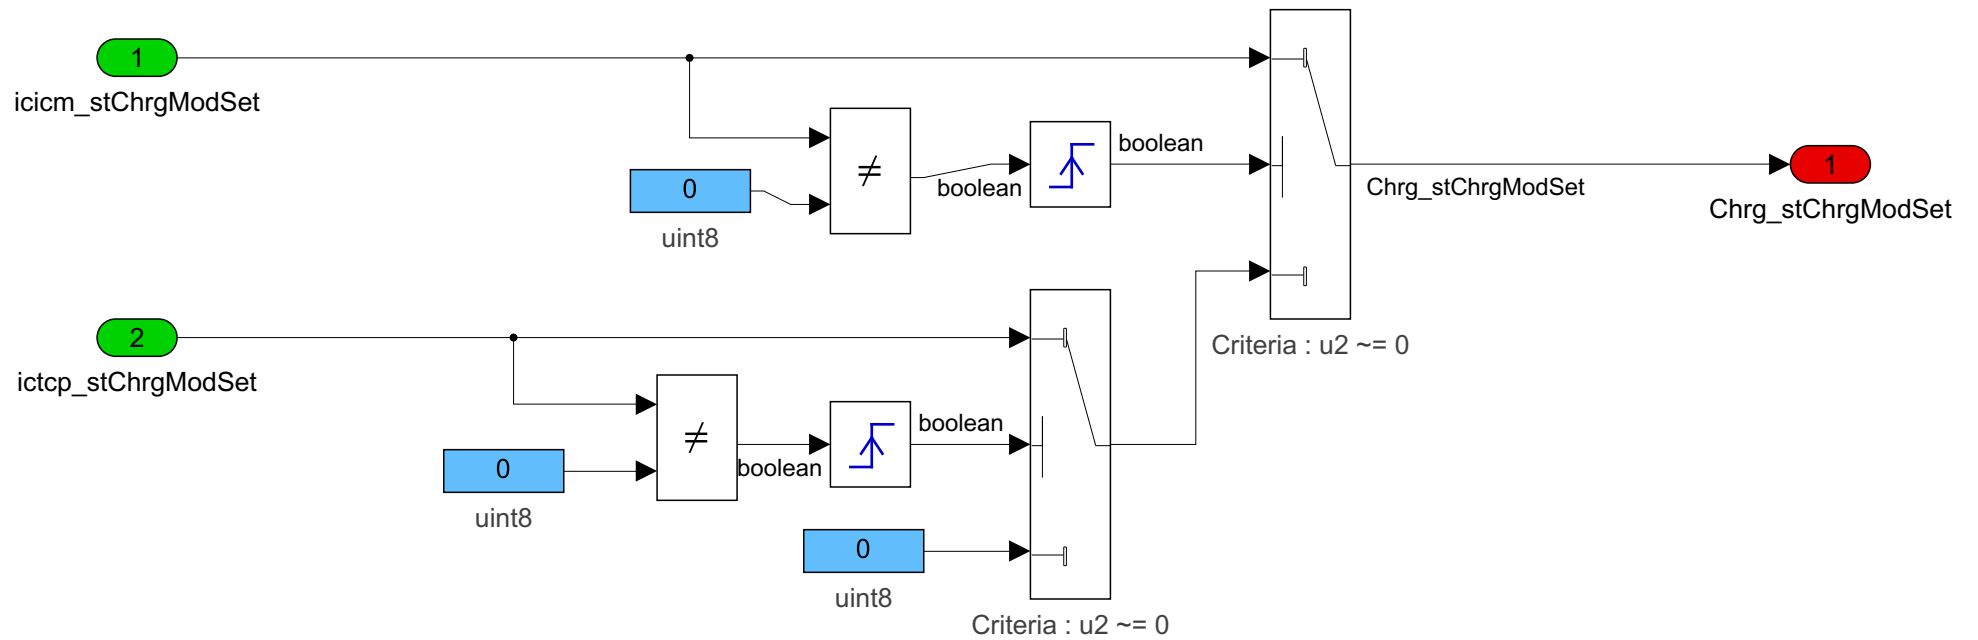


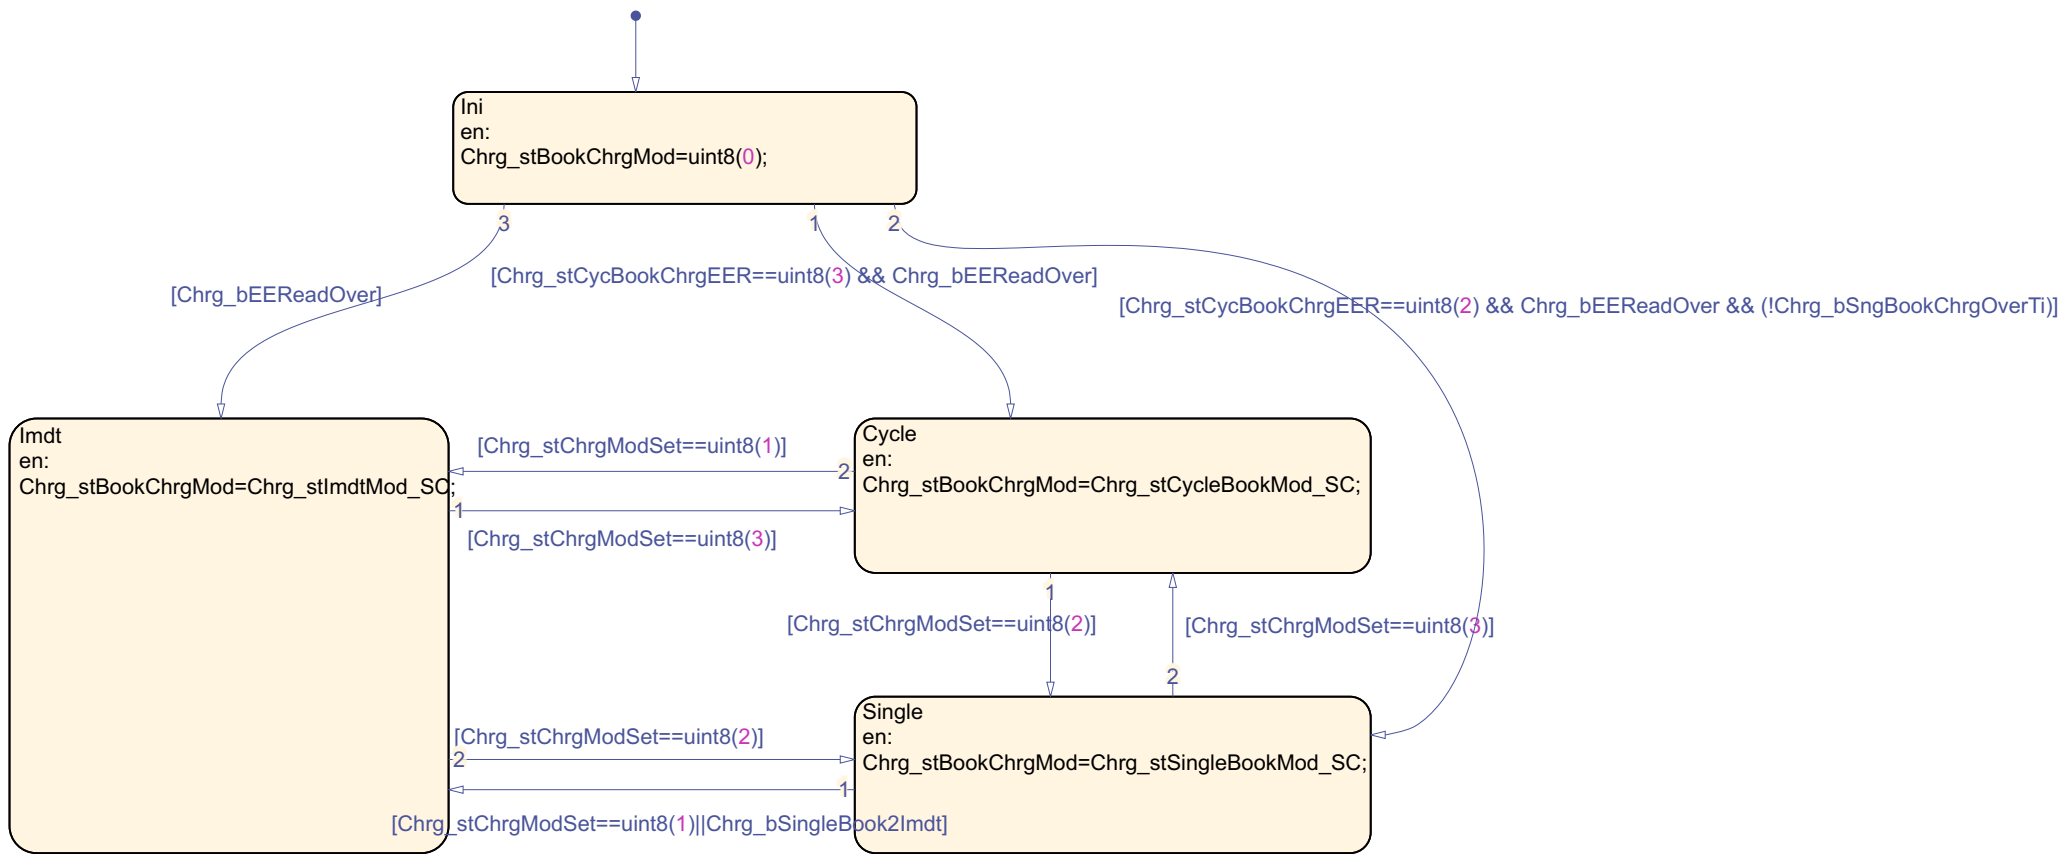


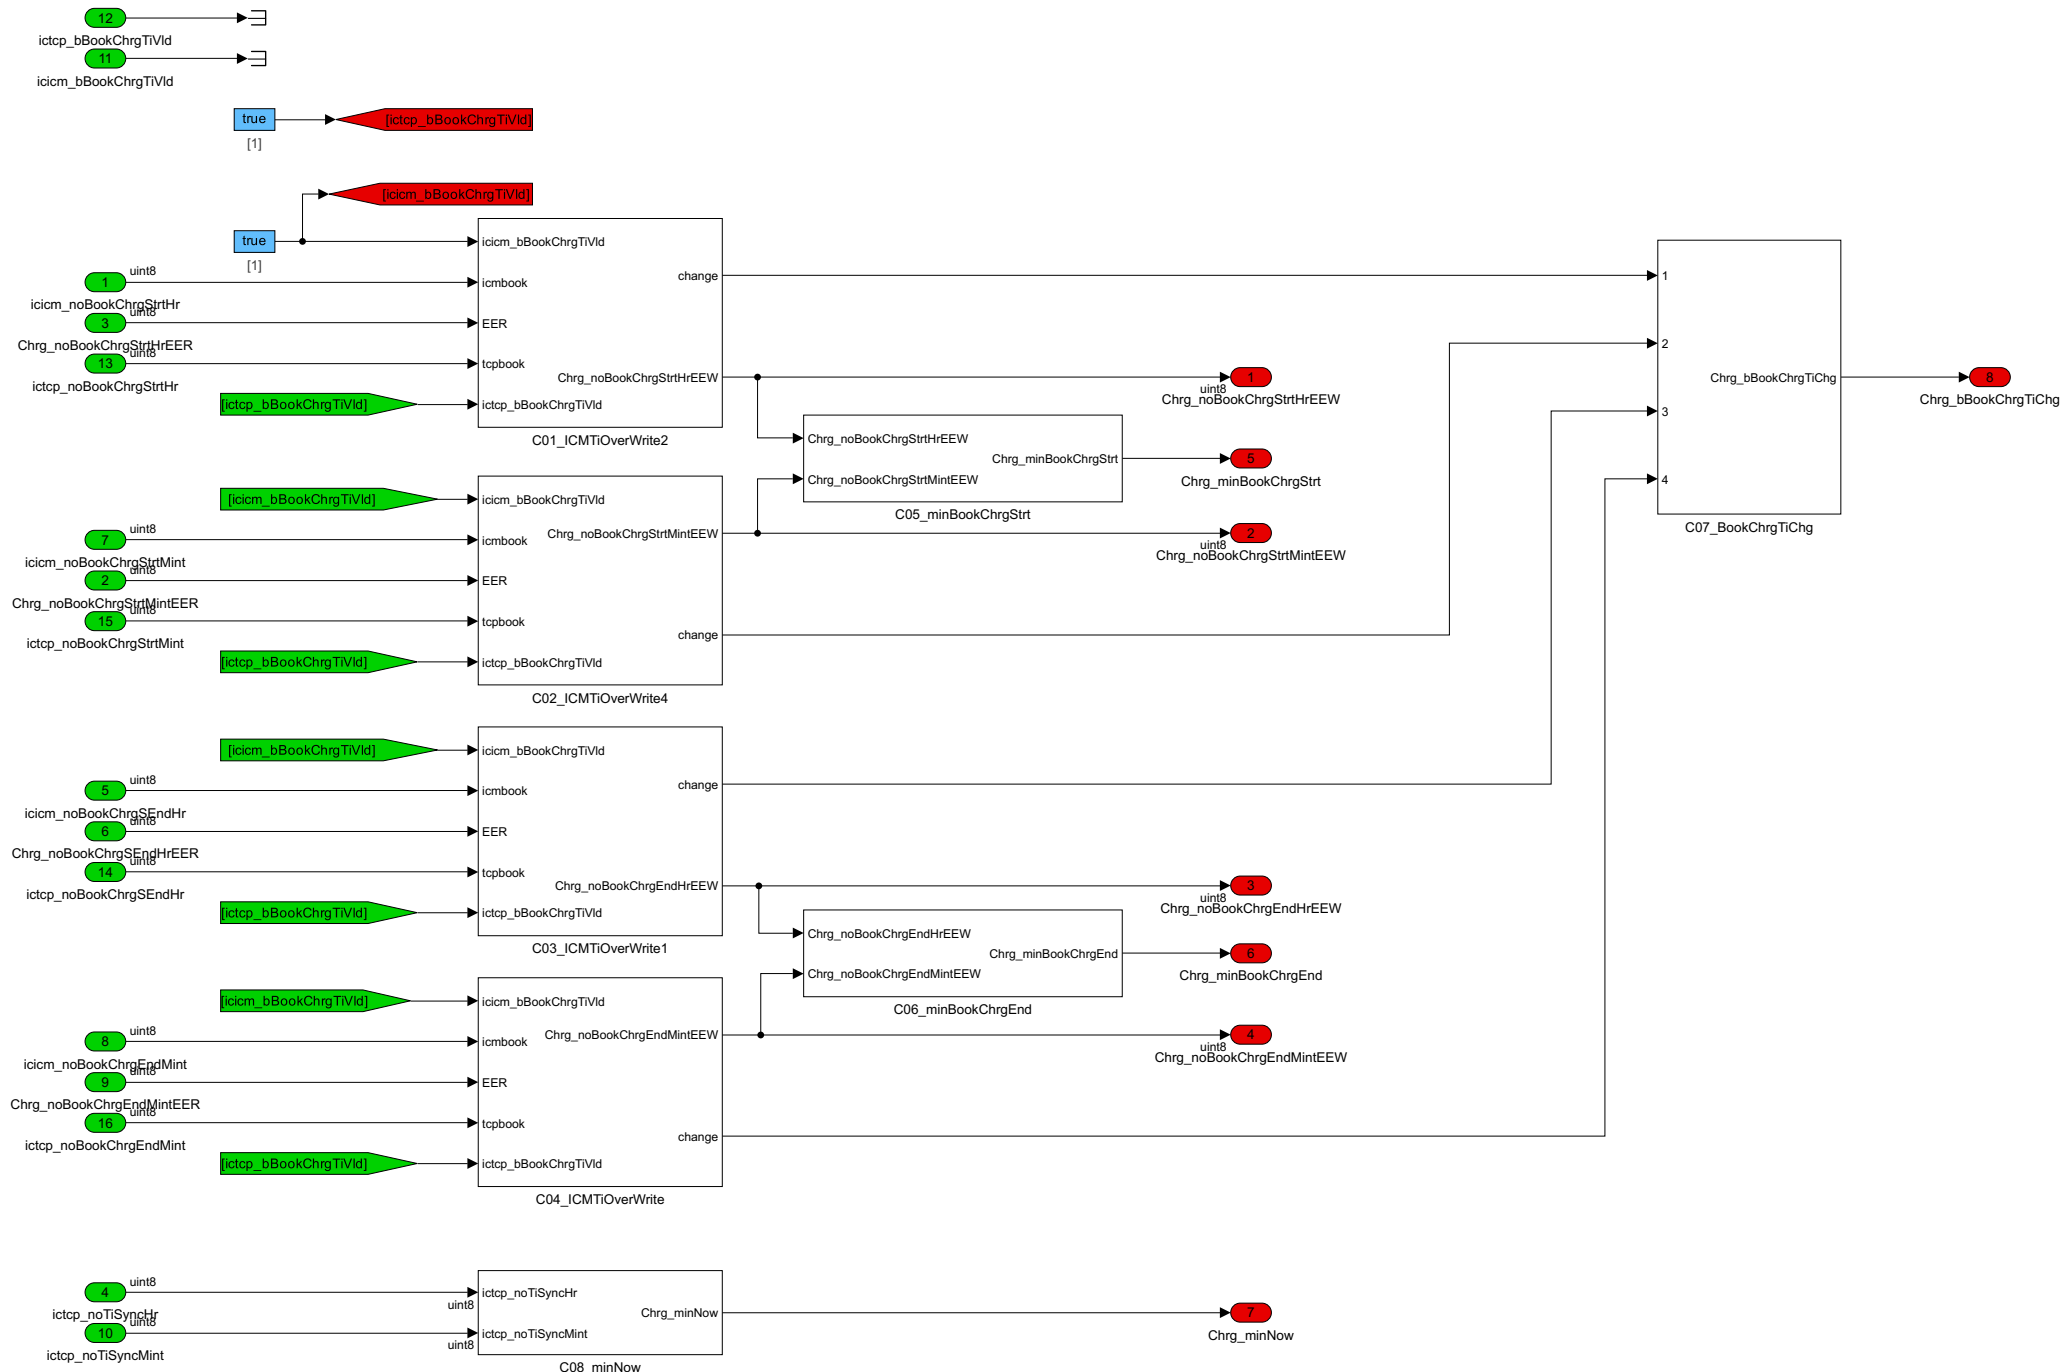


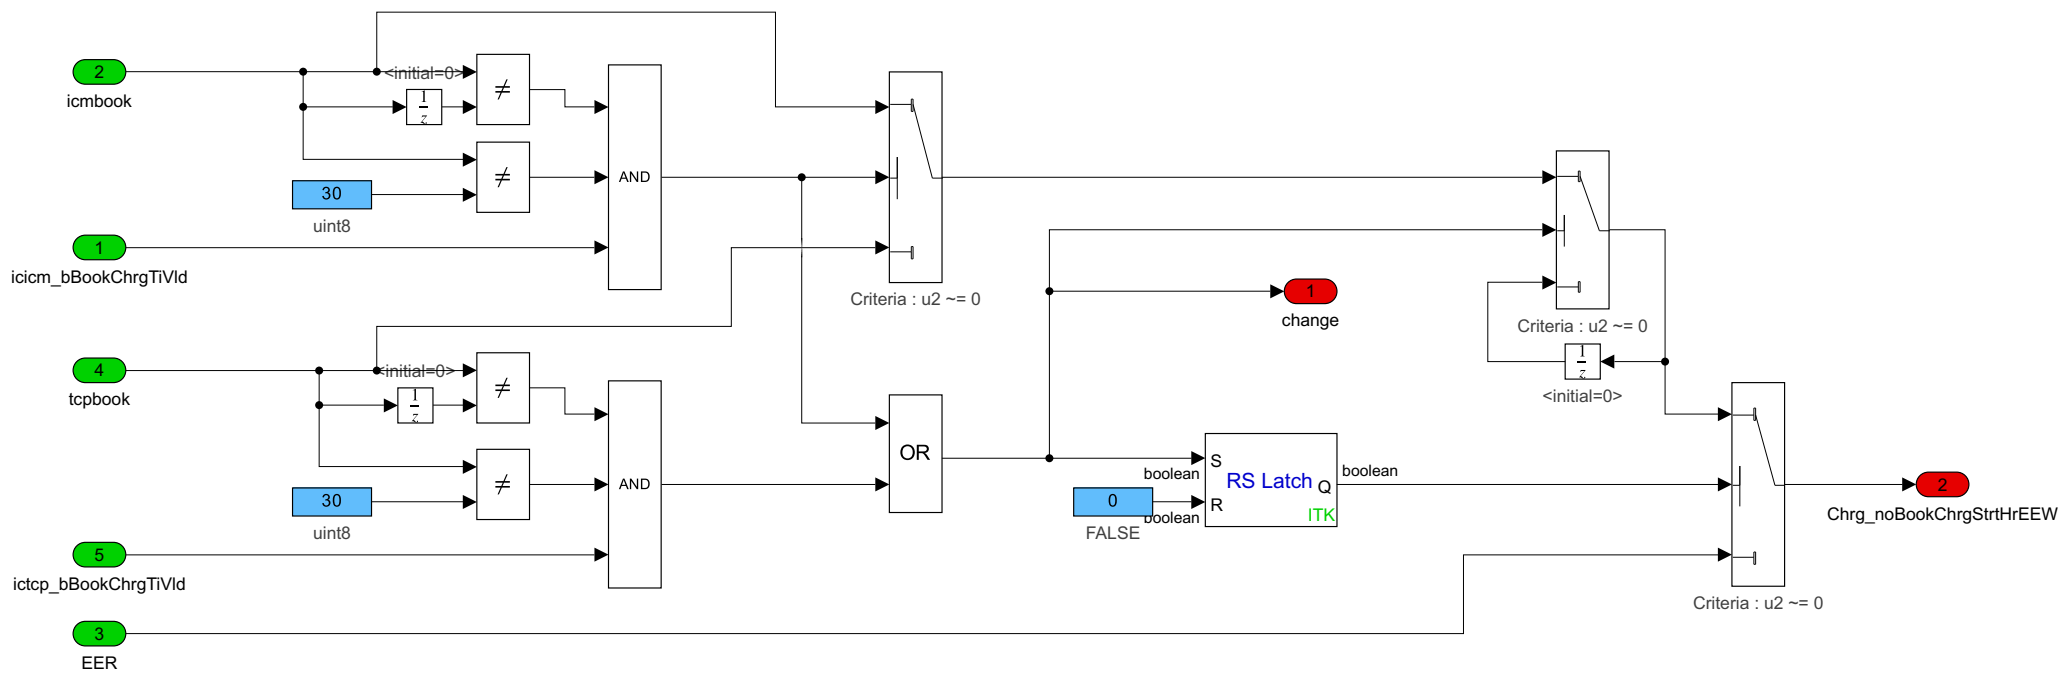


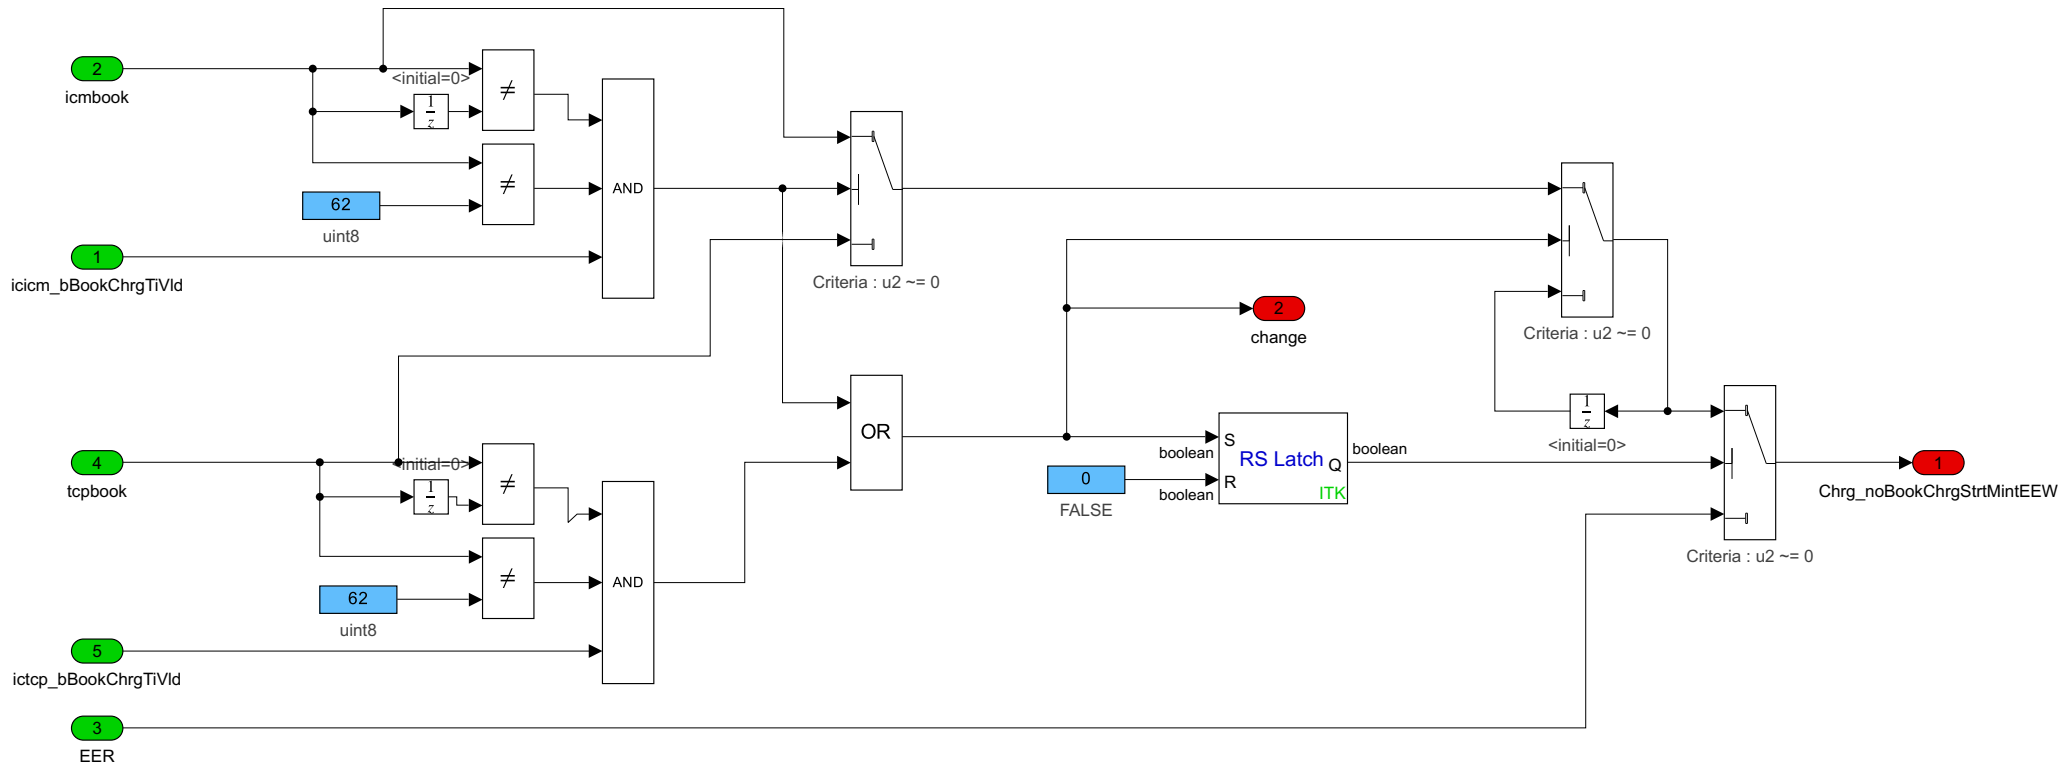

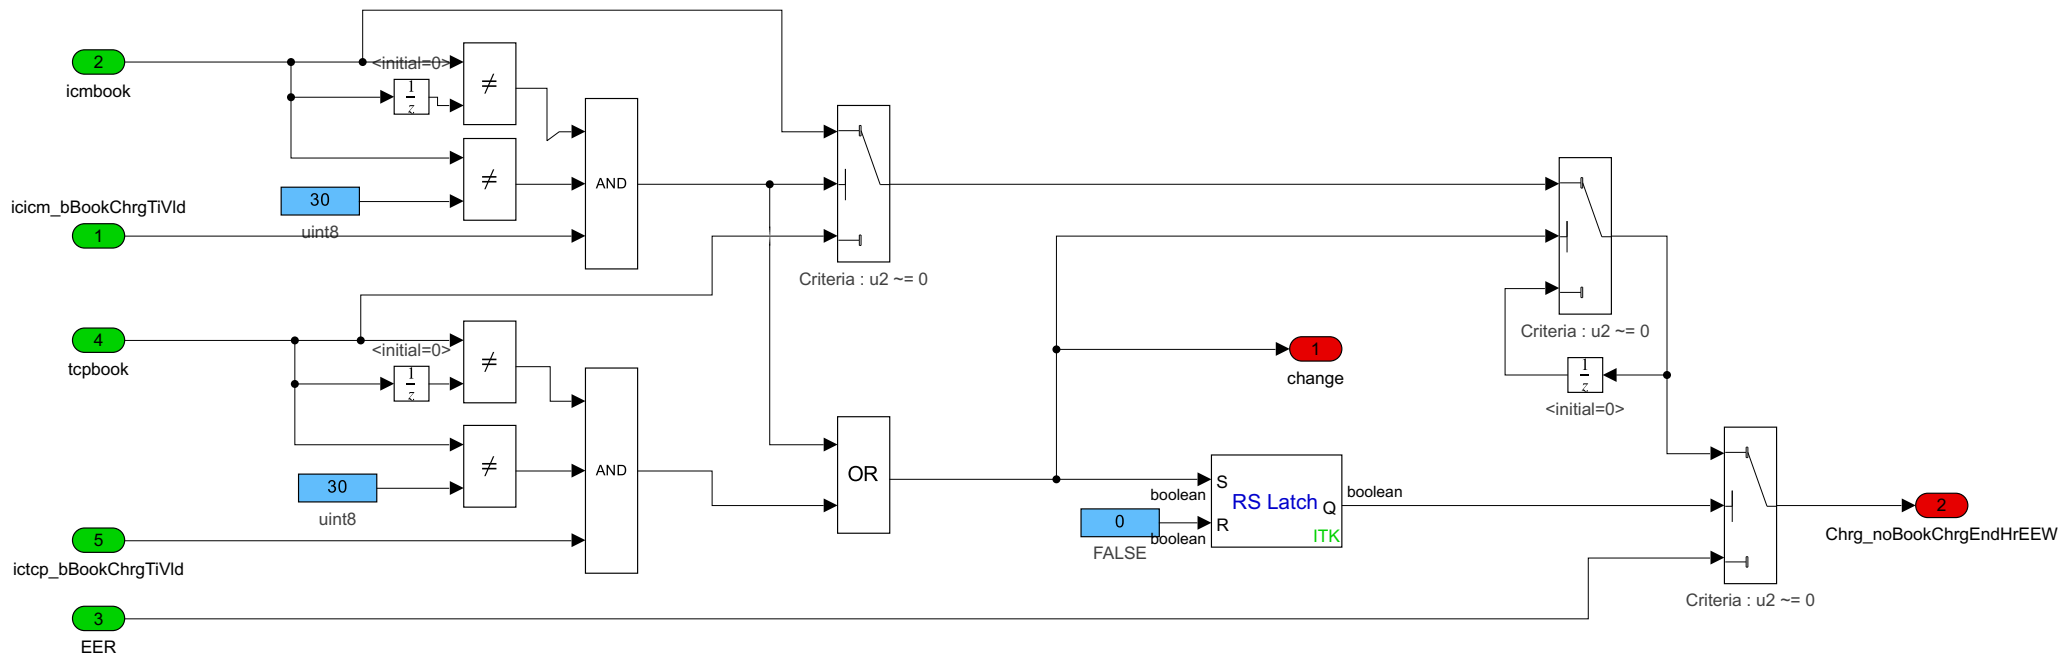


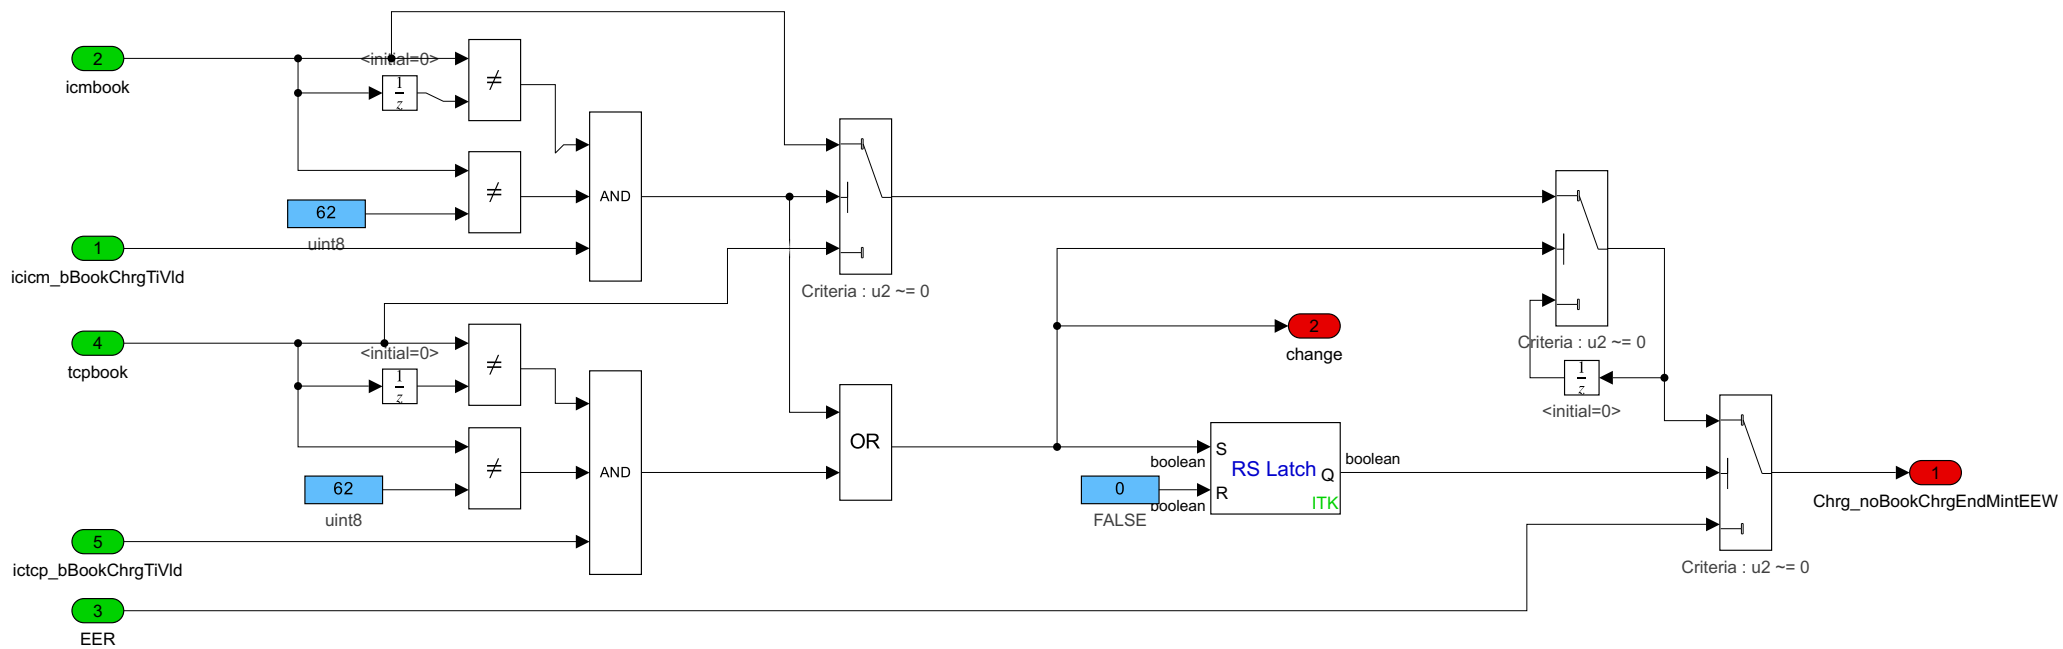


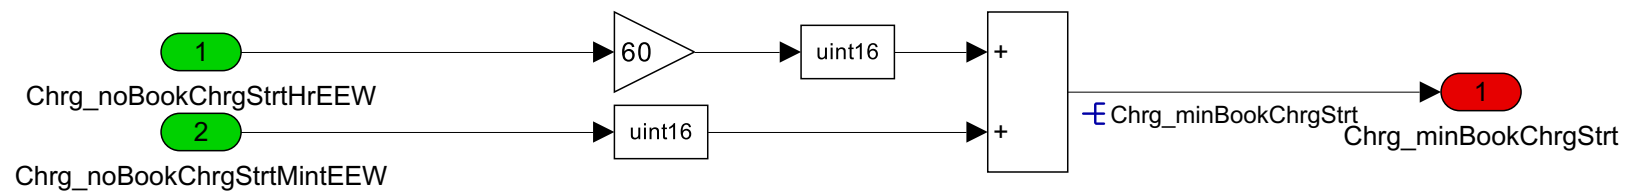


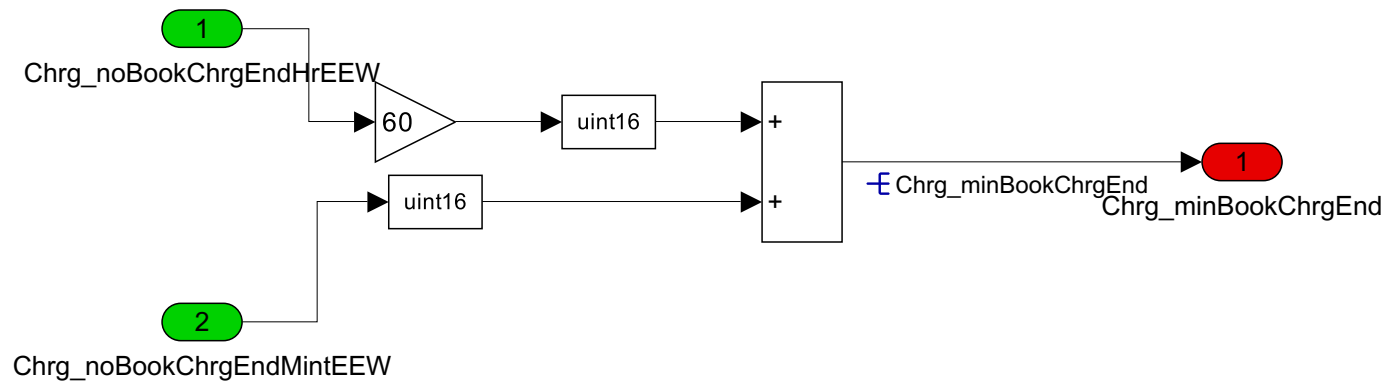





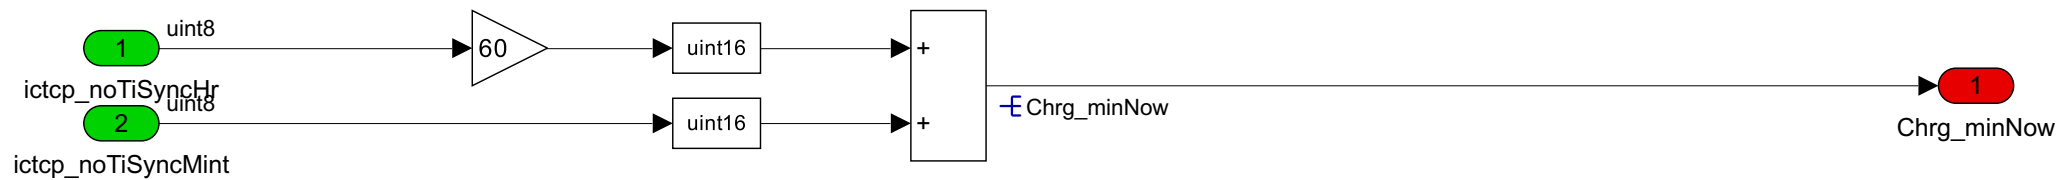


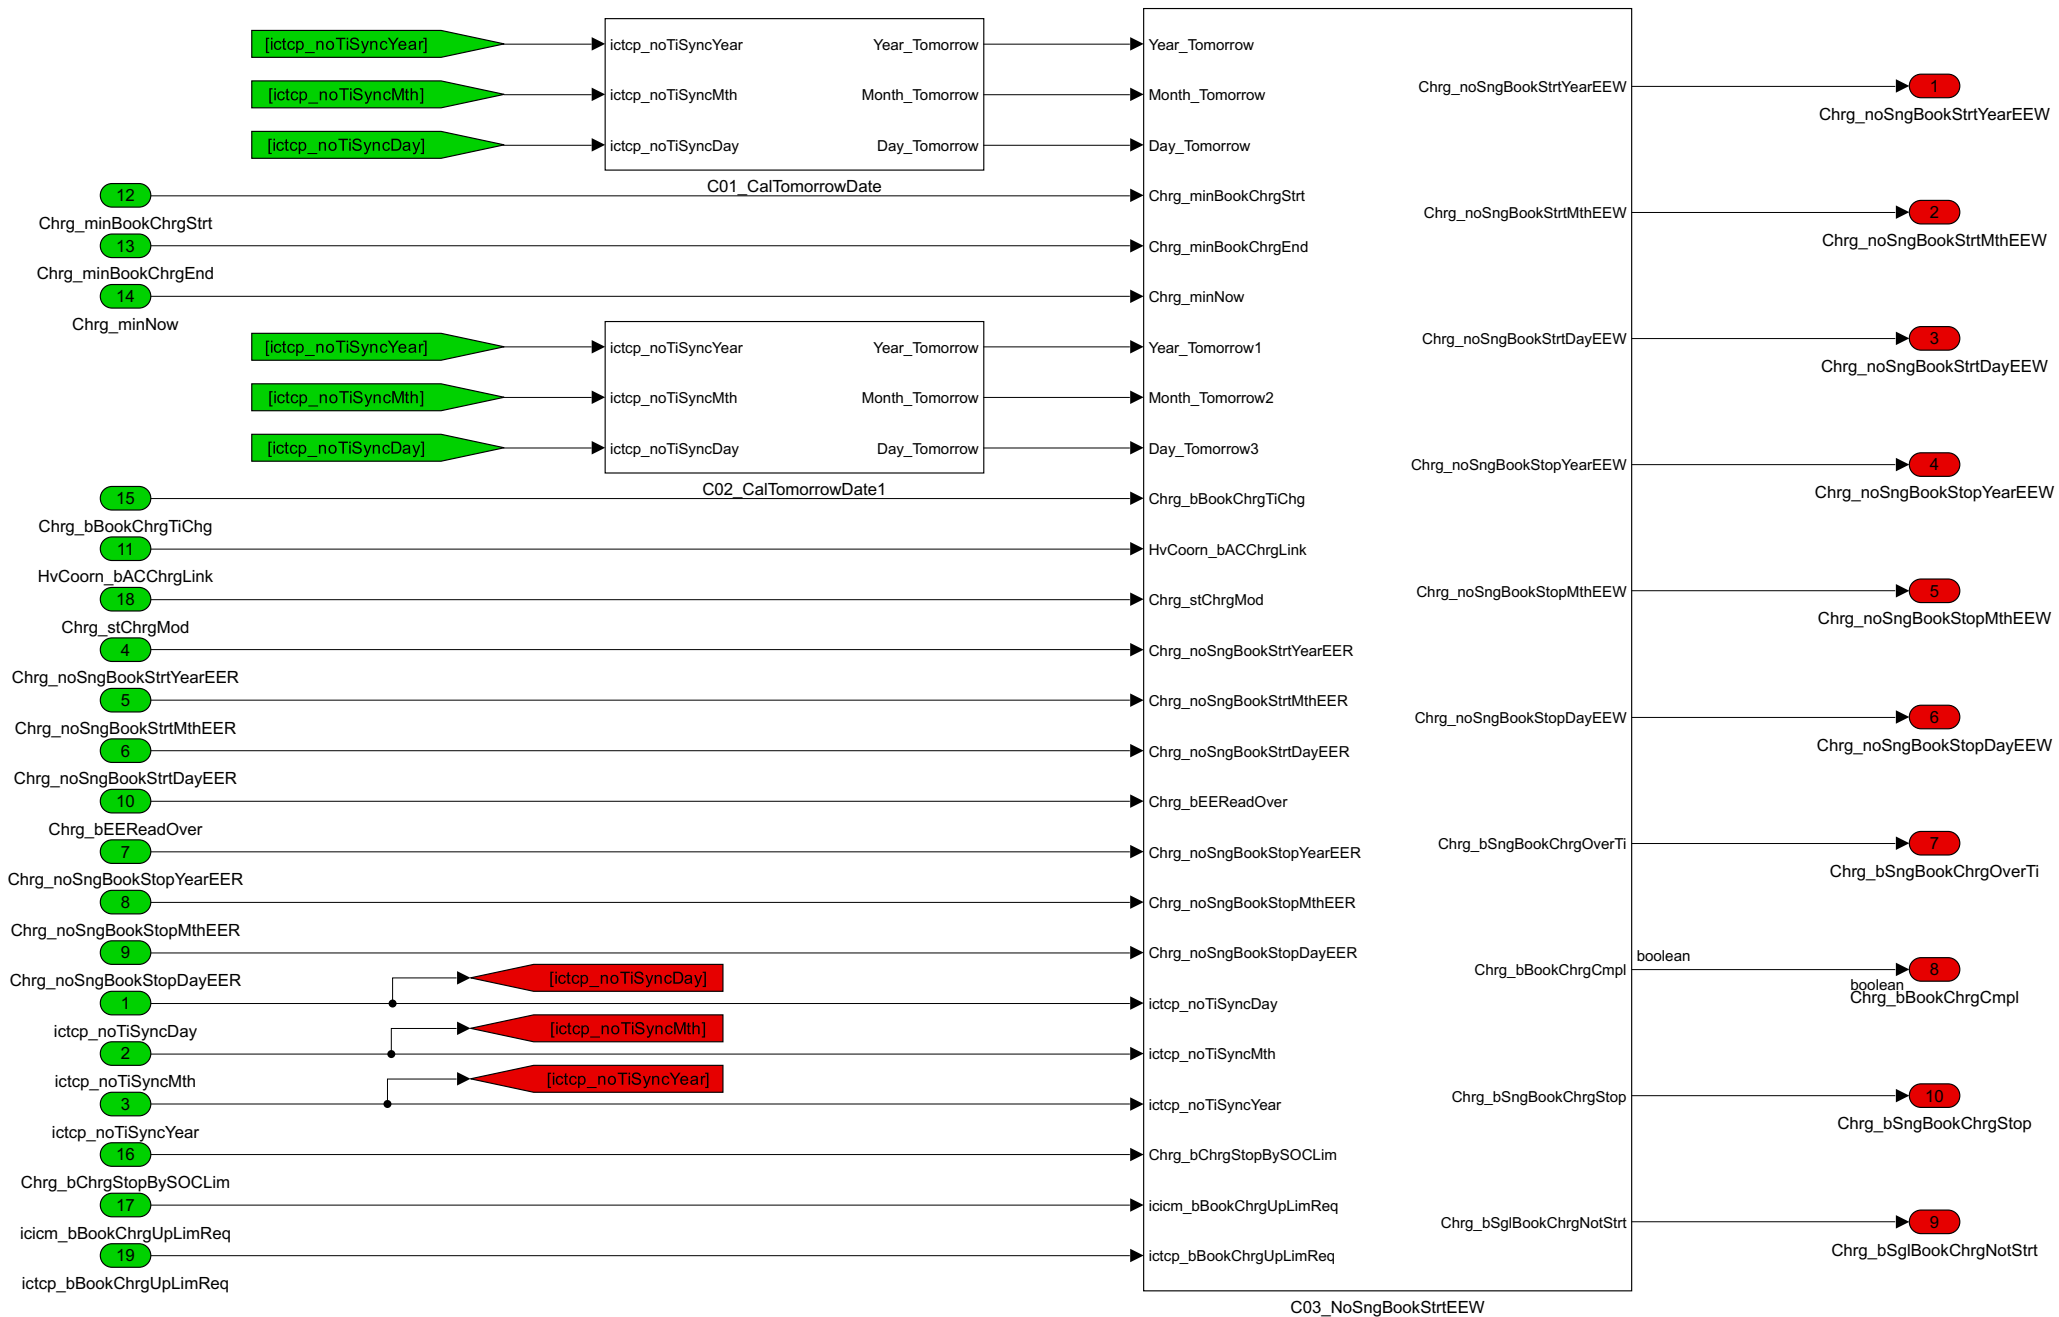


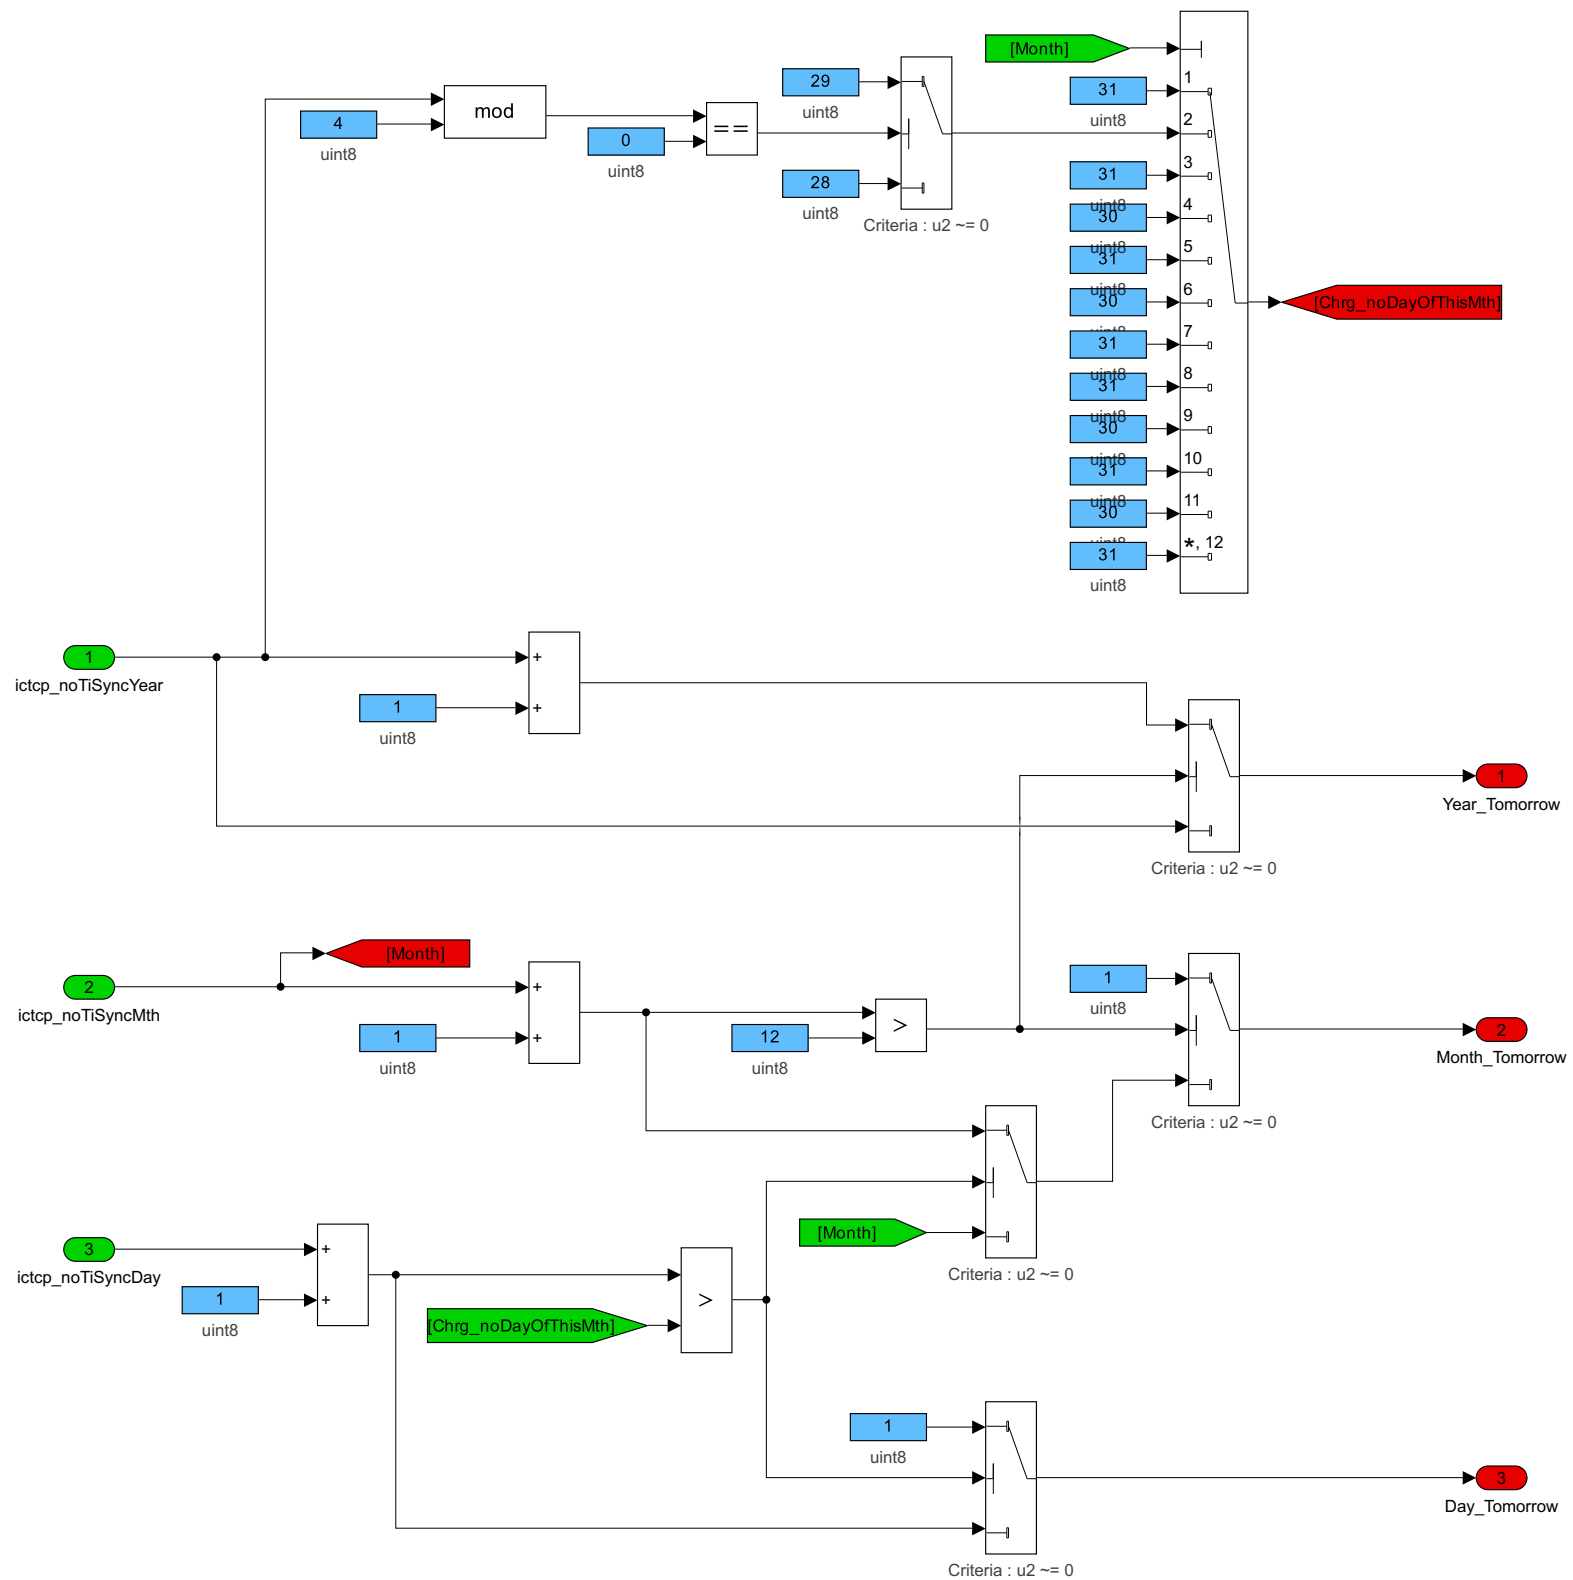


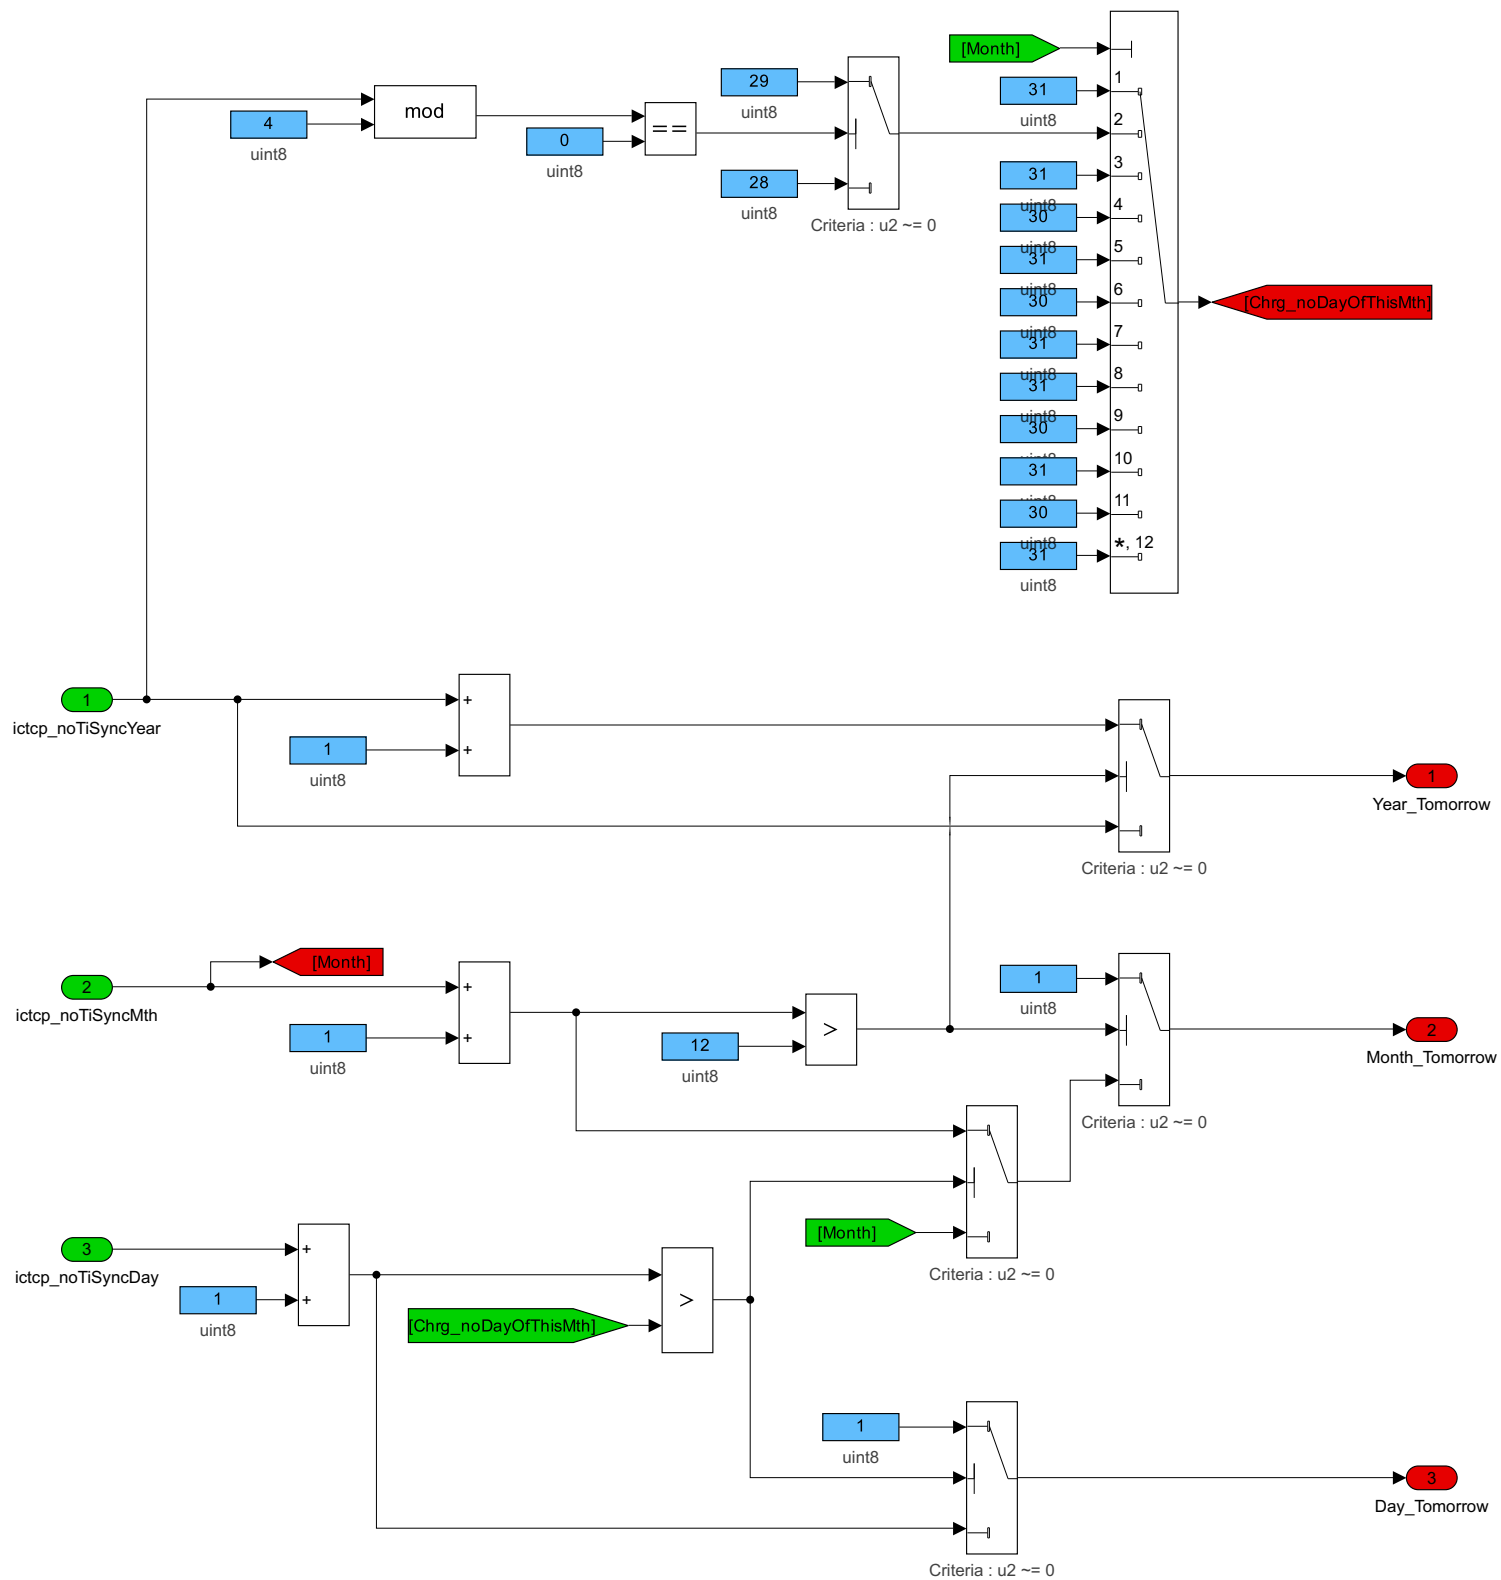


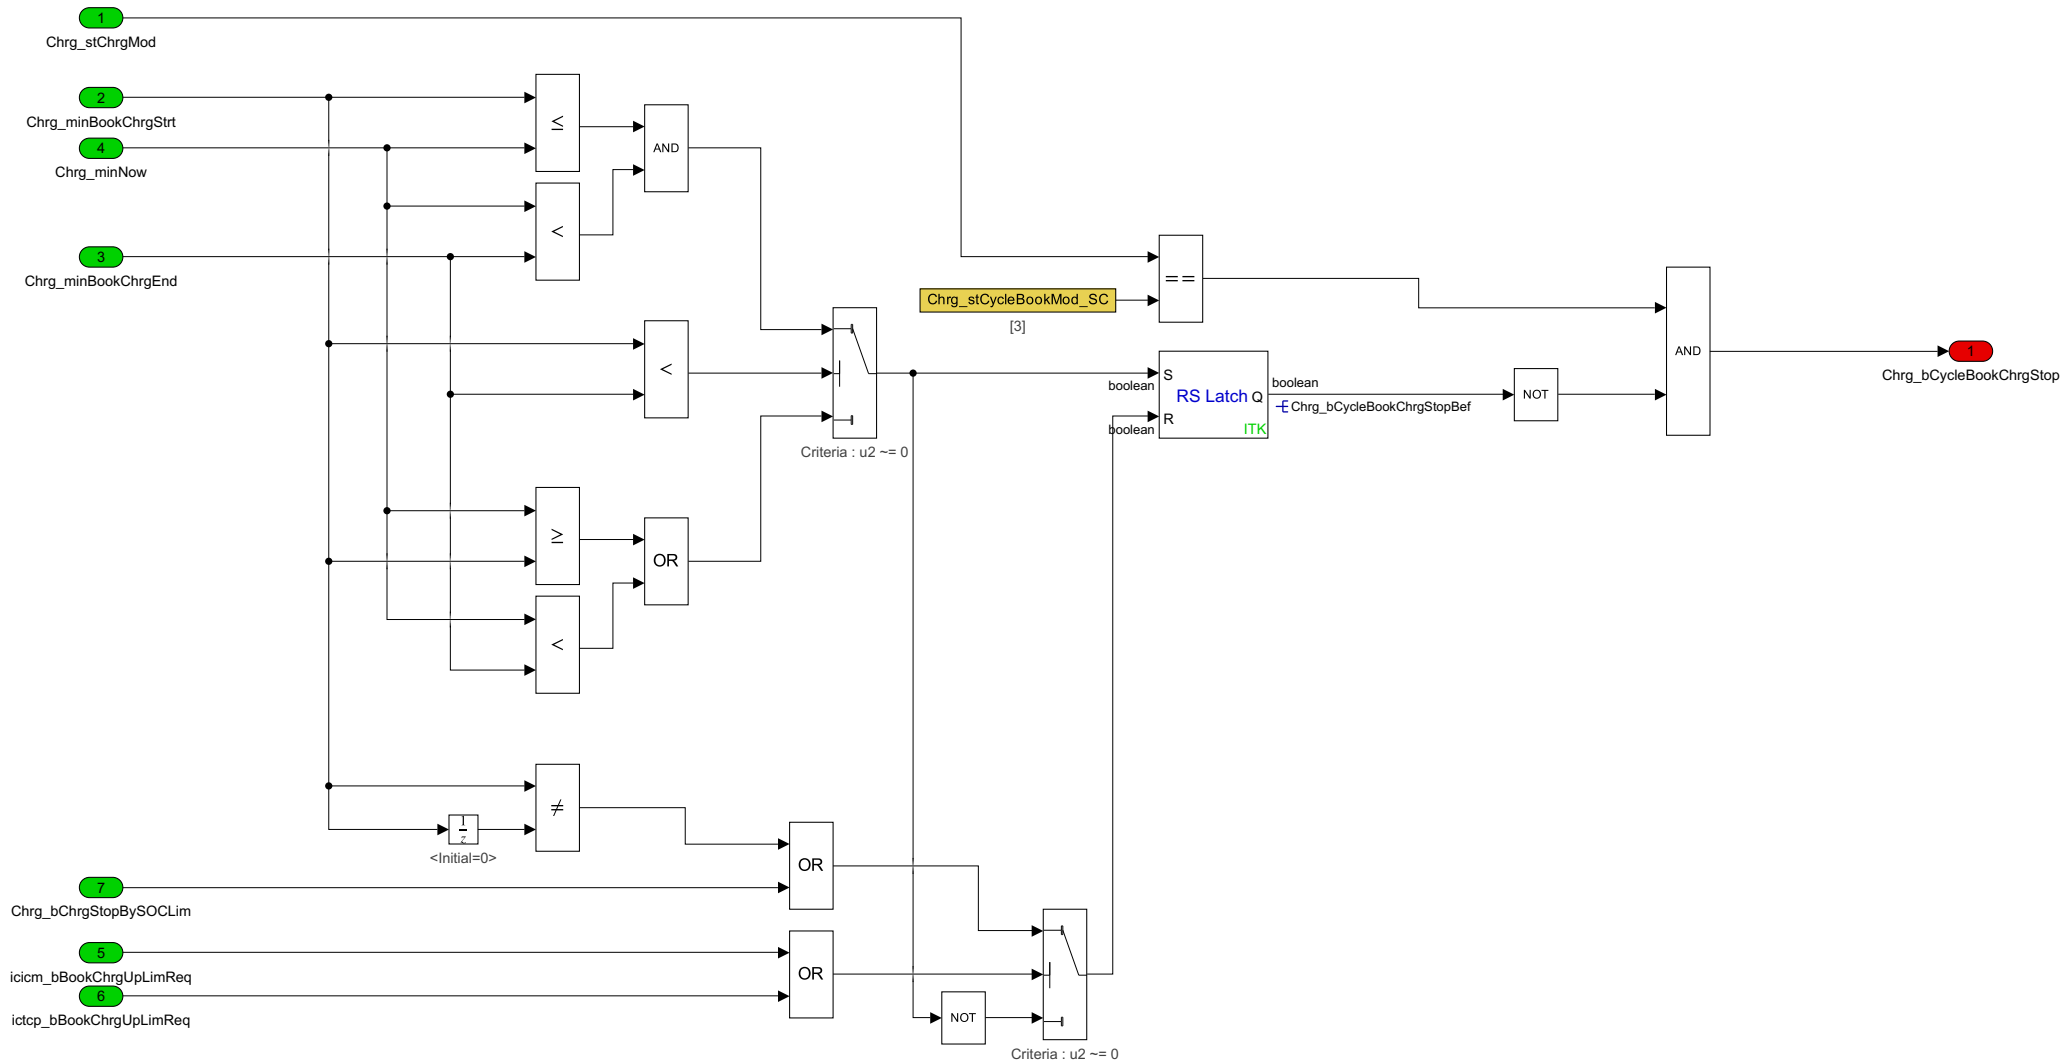


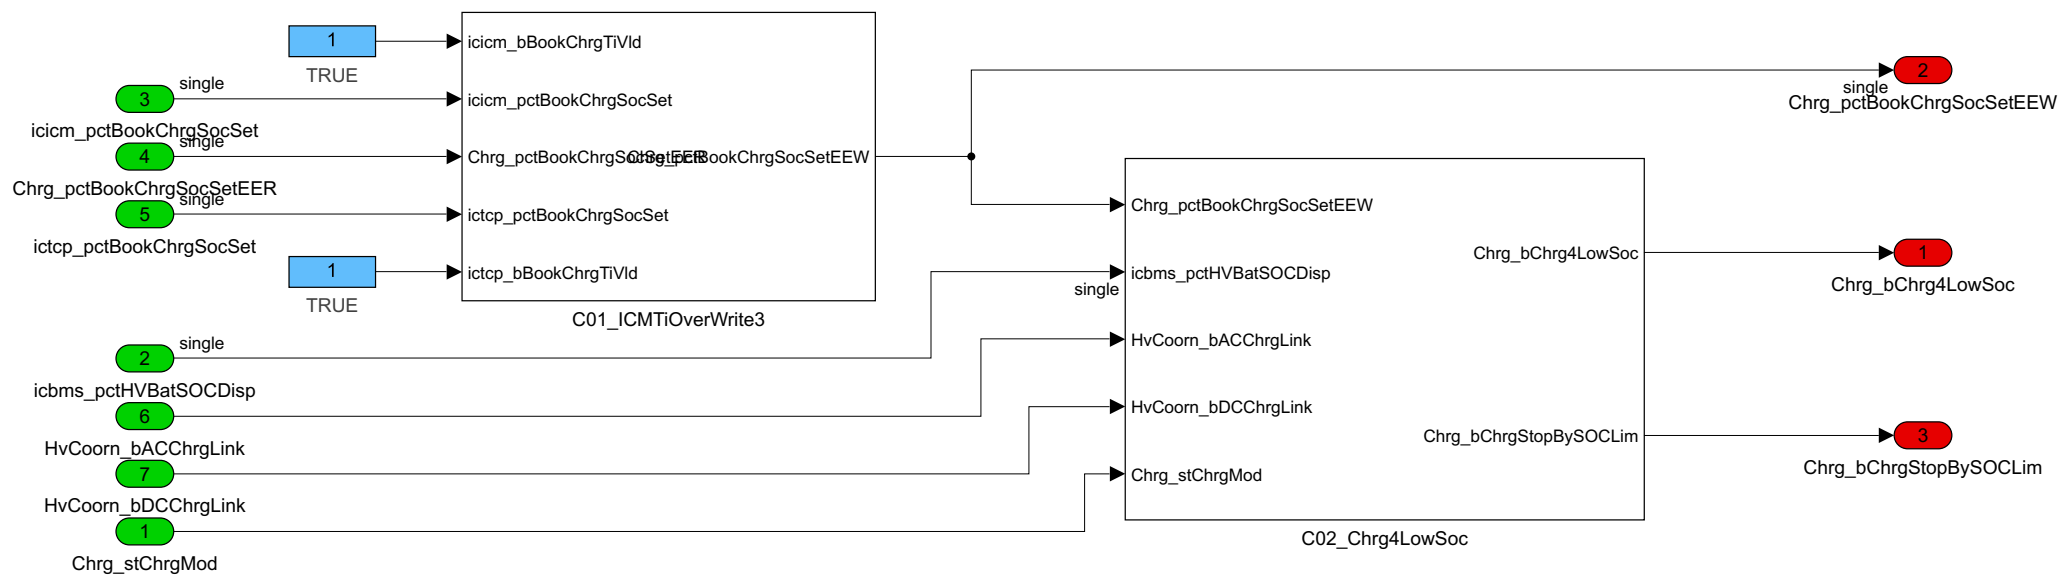

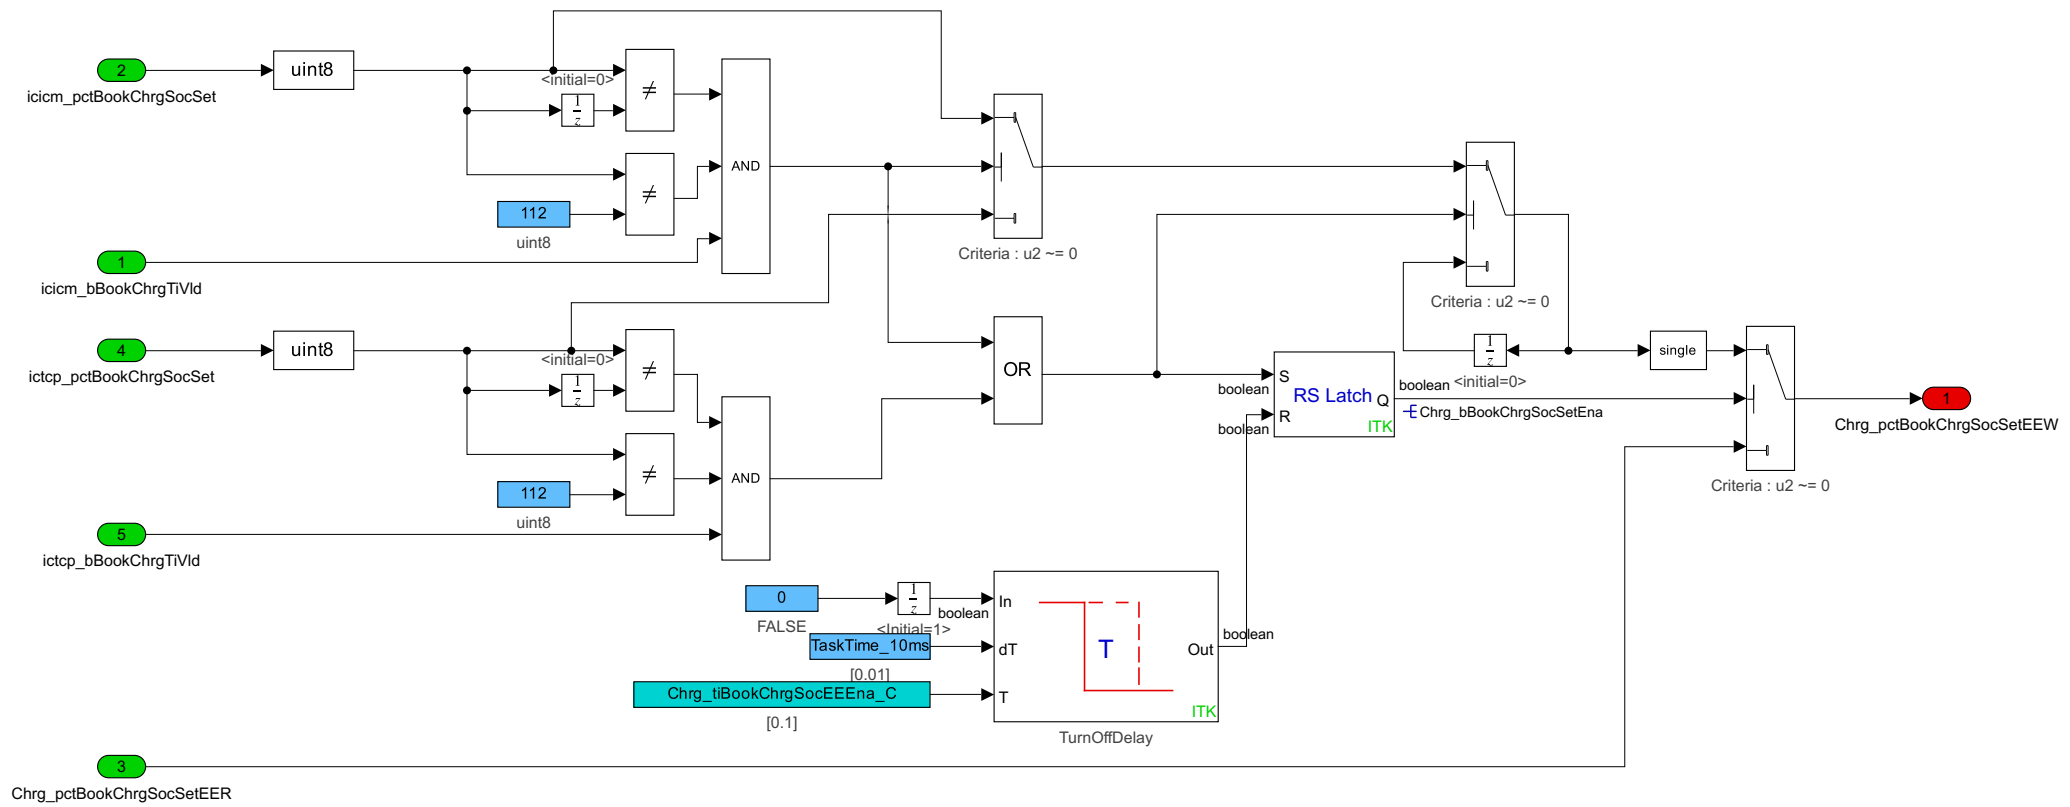

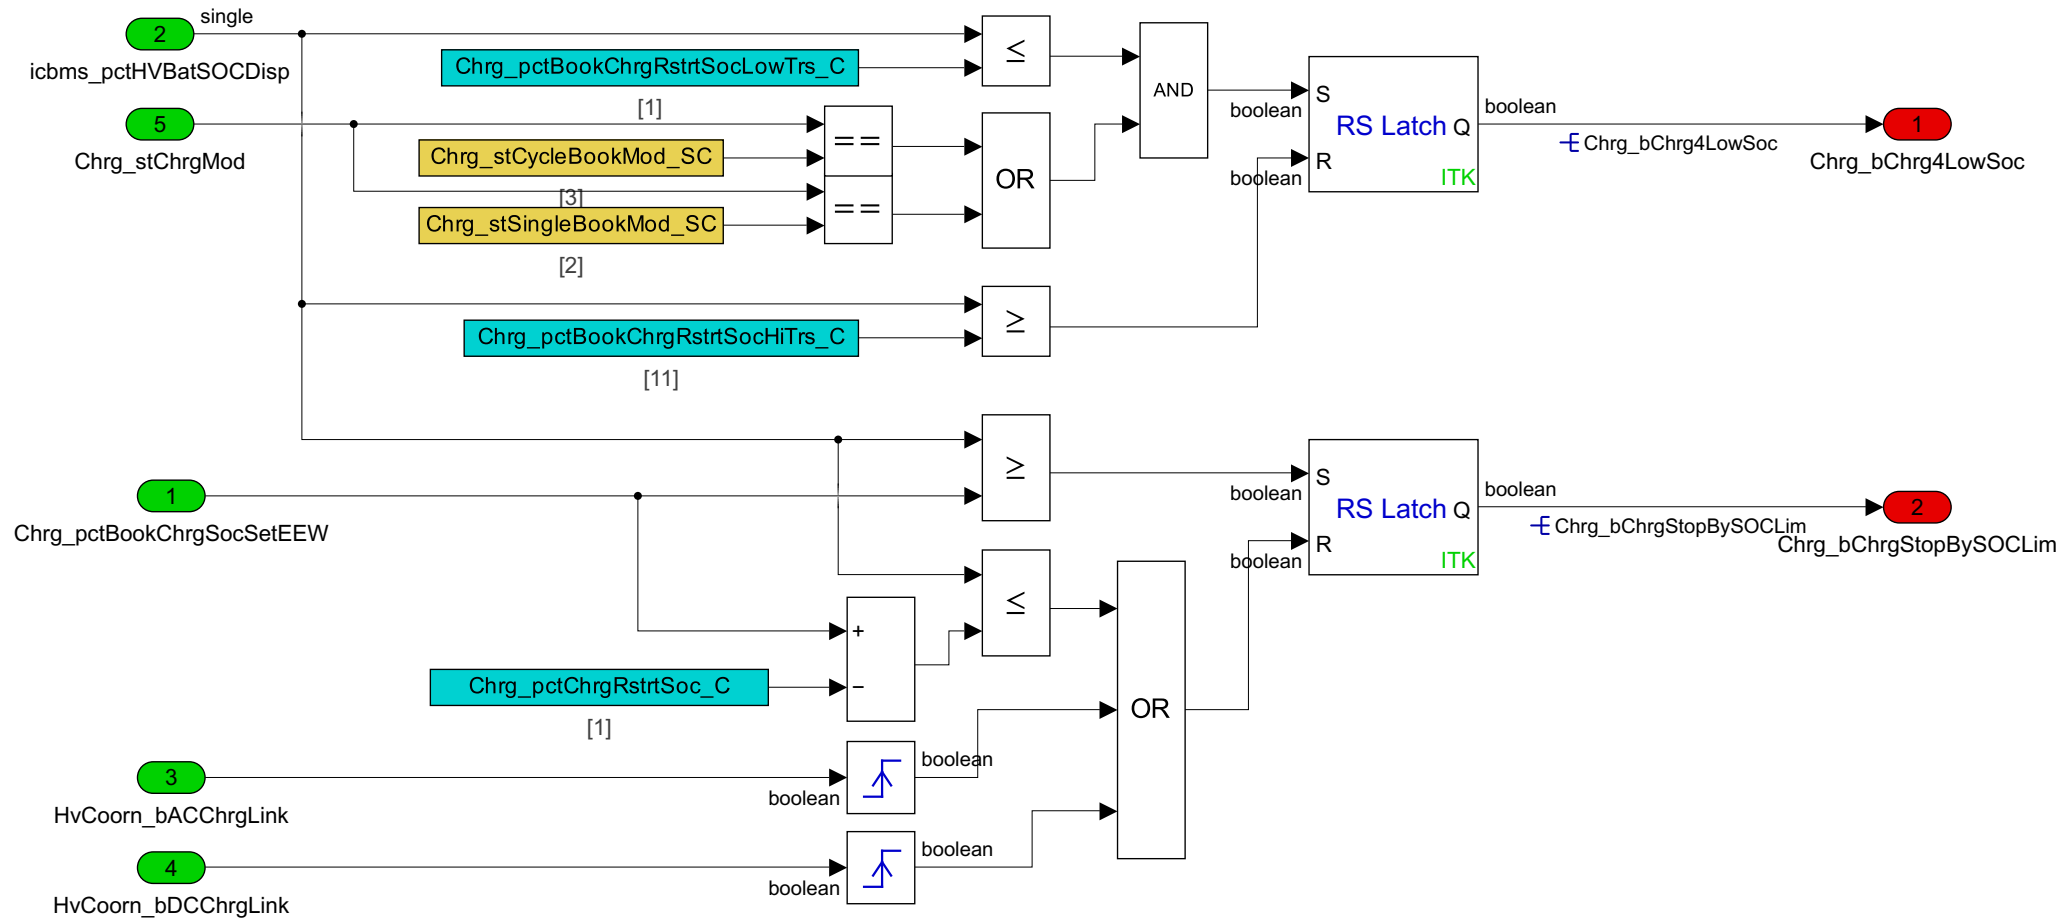

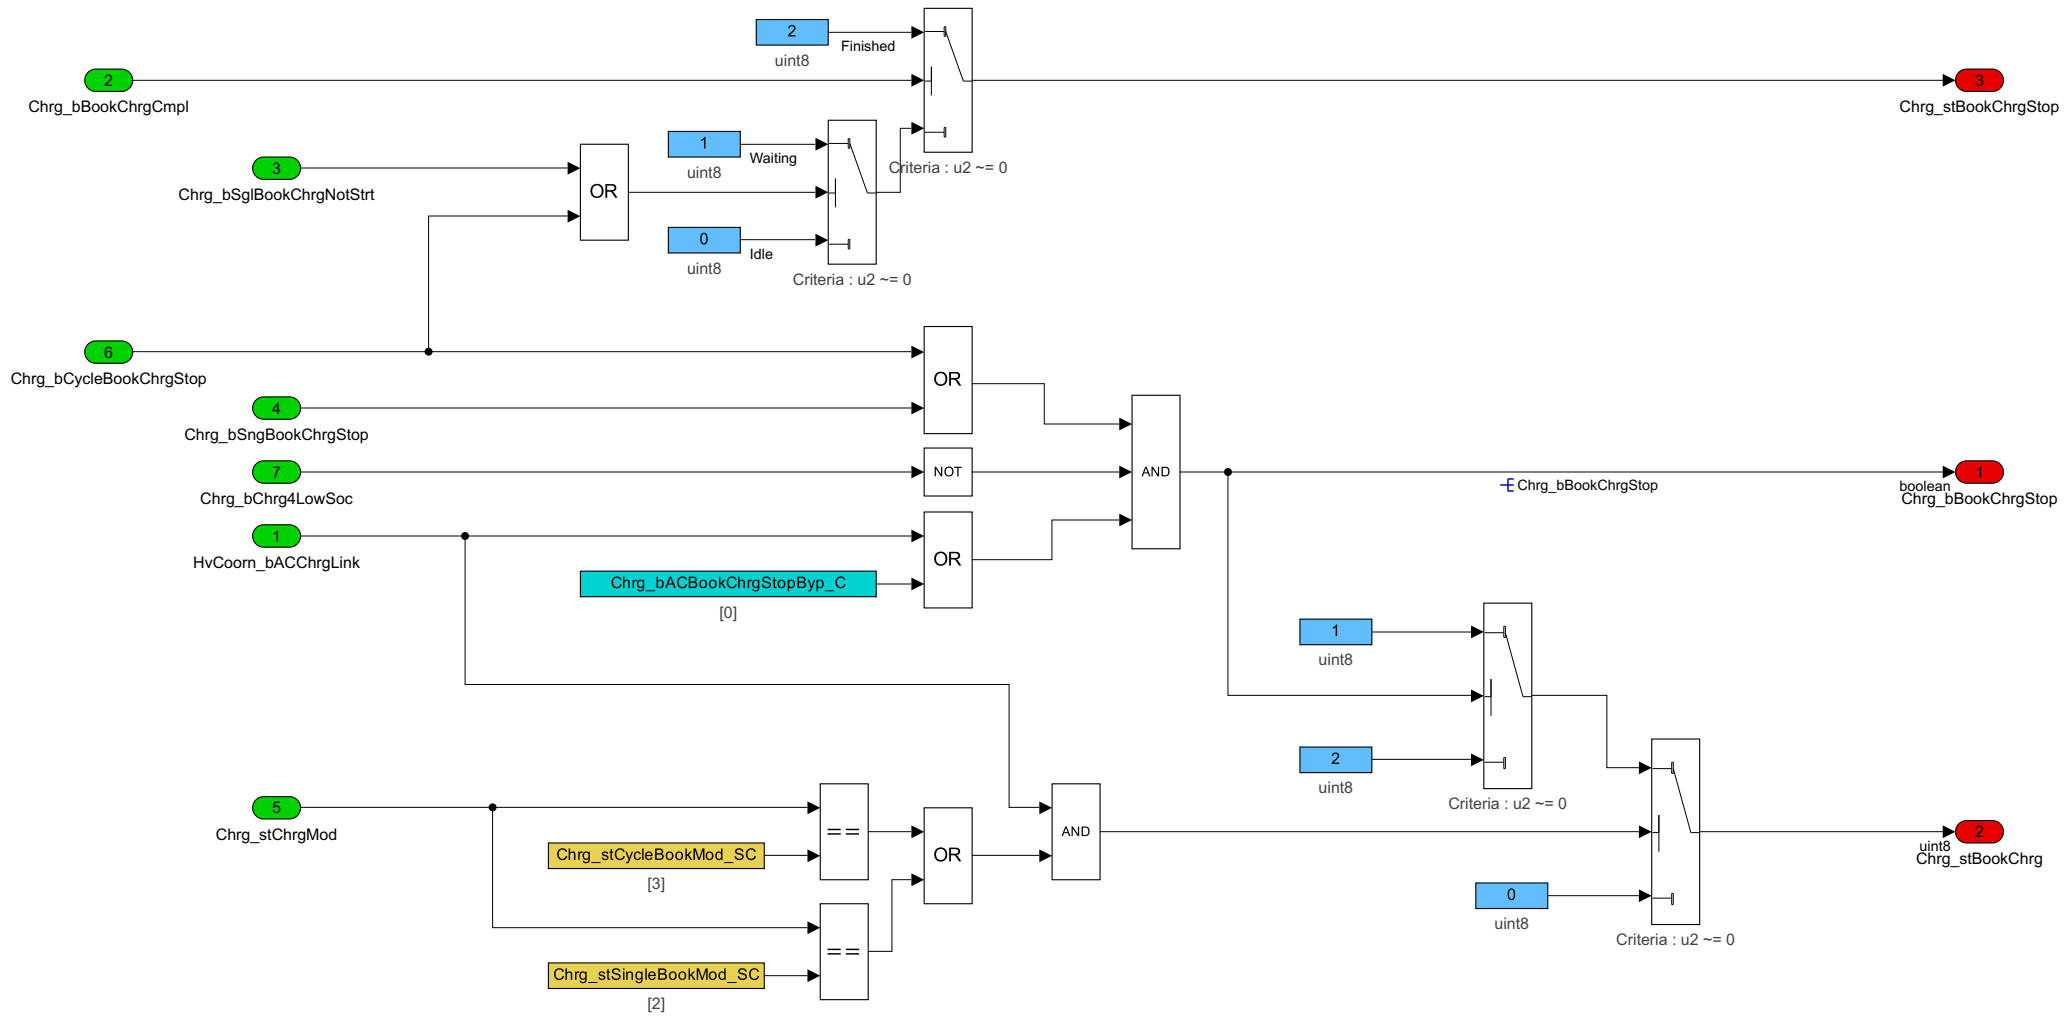

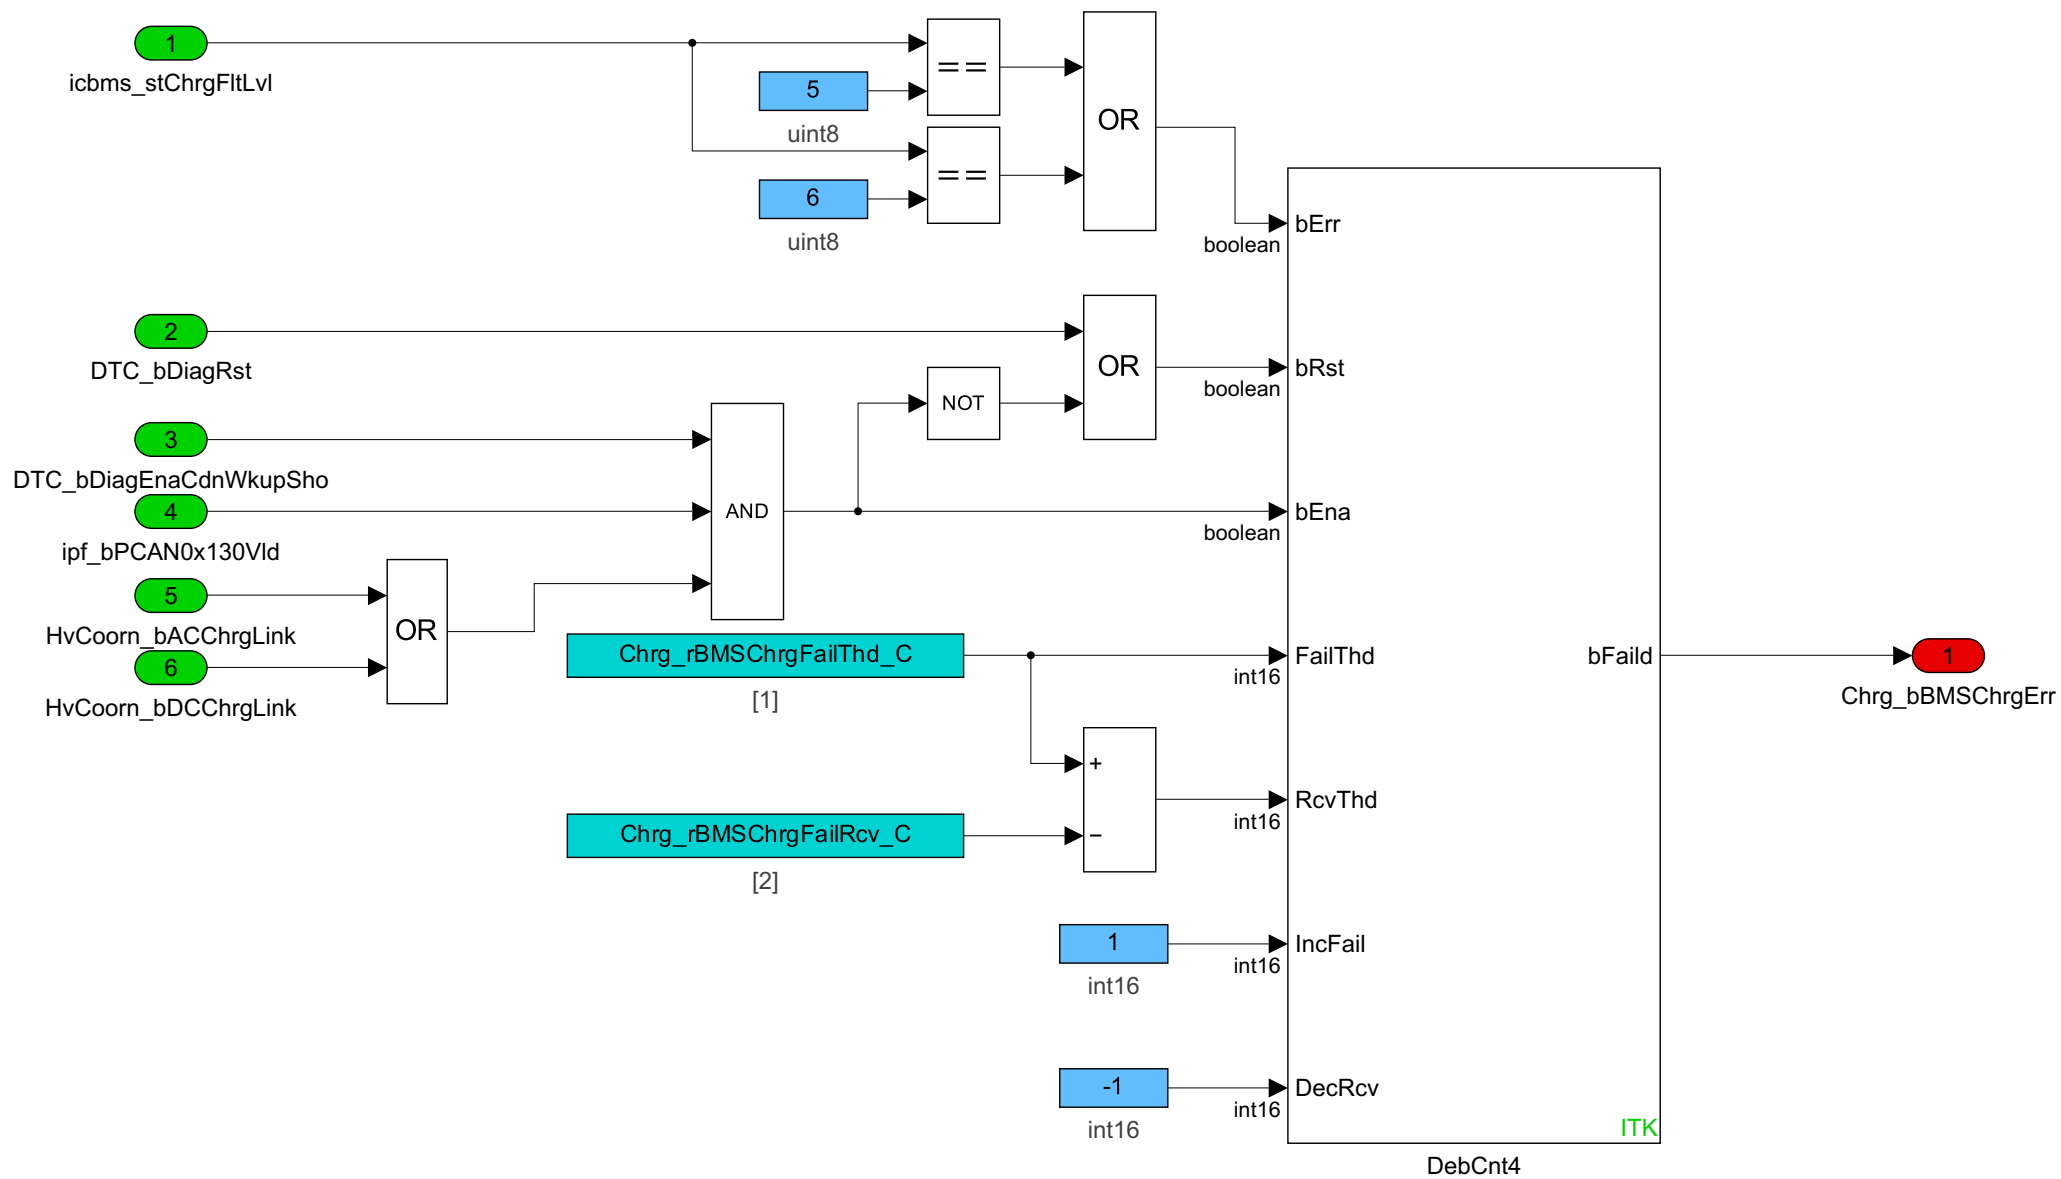


© ITK Engineering Technology (Wu Xi) Co., Ltd. (ITKC)

Model Version: 4.245
Date: Mon Dec 22 16:13:22 2025

DOC
Tex

This subsystem mainly calculates AC charge request flag and DC charge request flag, based on the AC/DC charge enable flag, vehicle error level, etc.

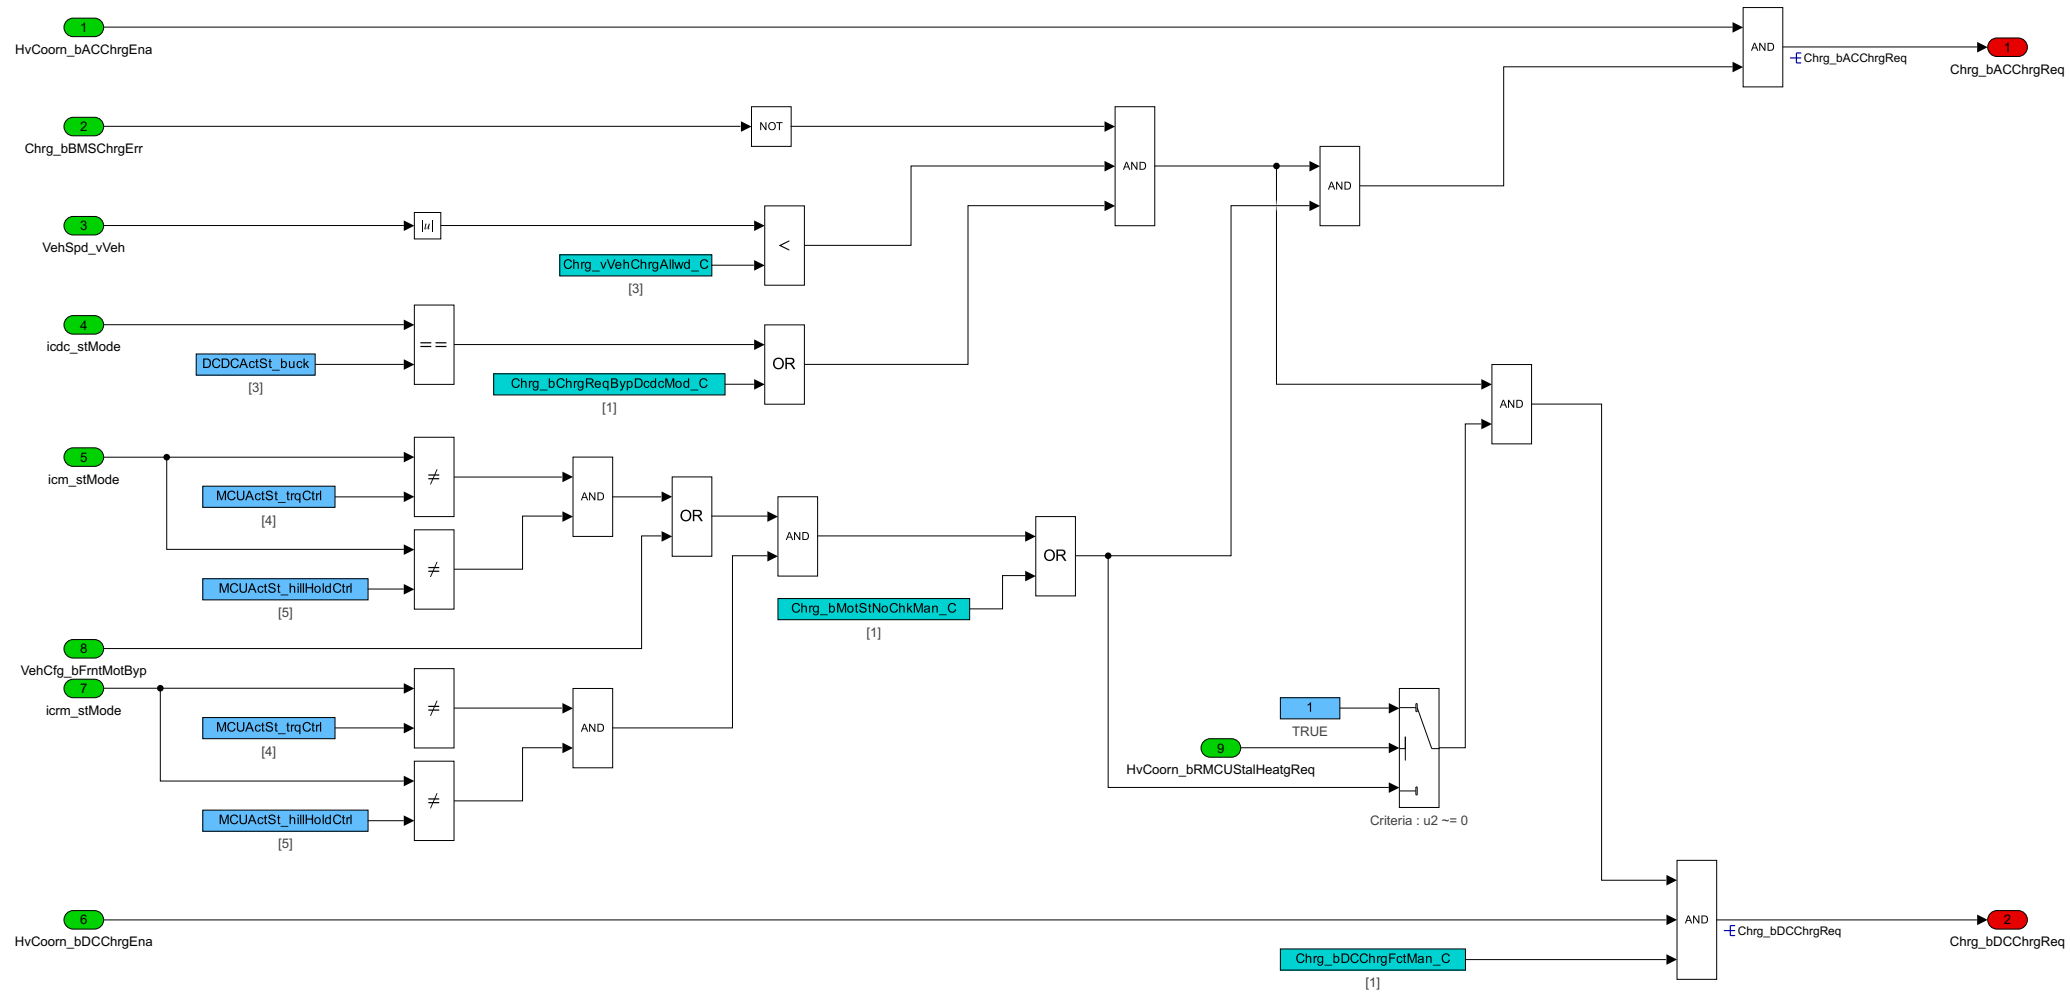

Documentation

© ITK Engineering Technology (Wu Xi) Co., Ltd. (ITKC)

Model Version: 4.245

Date: Mon Dec 22 16:13:22 2025


This subsystem mainly calculates AC charge completed flag and DC charge completed flag, based on the AC/DC charger link flag, AC/DC charge configuration, etc.

充电完成标志位计算

DOC

Text

Unit detailed design

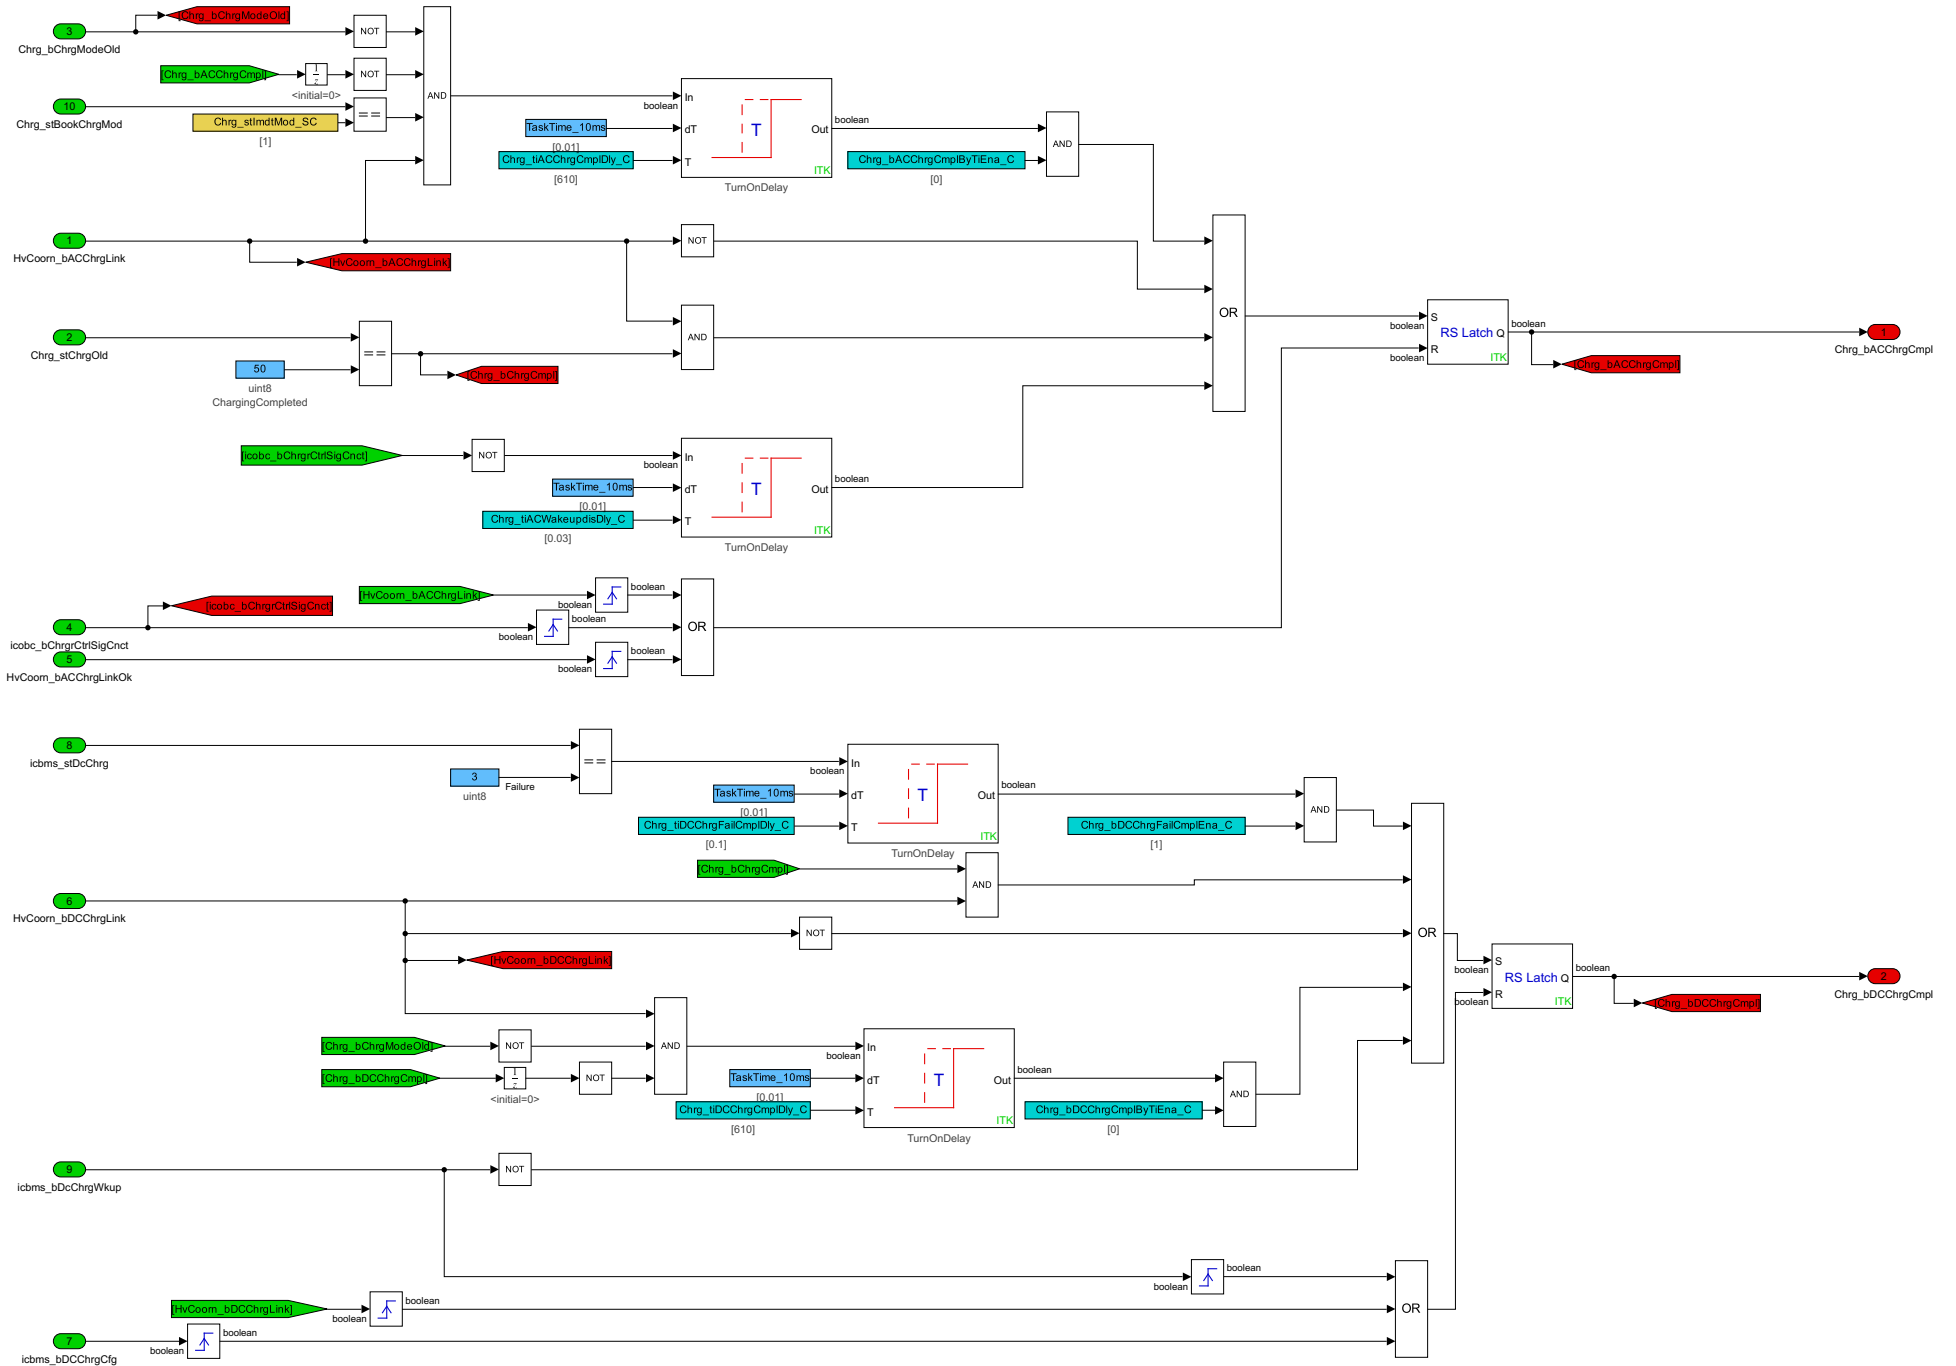

Documentation


© ITK Engineering Technology (Wu Xi) Co., Ltd. (ITKC)
Model Version: 4.245
Date: Mon Dec 22 16:13:22 2025

充电开始条件判断


DOC
Text

Unit detailed design

This subsystem mainly calculates charge status transition flag from watchdog to charge status and from charge to watchdog status, based on the AC/DC charge request flag, hvp status, AC/DC charge completed flag and charge forever error flag,etc.

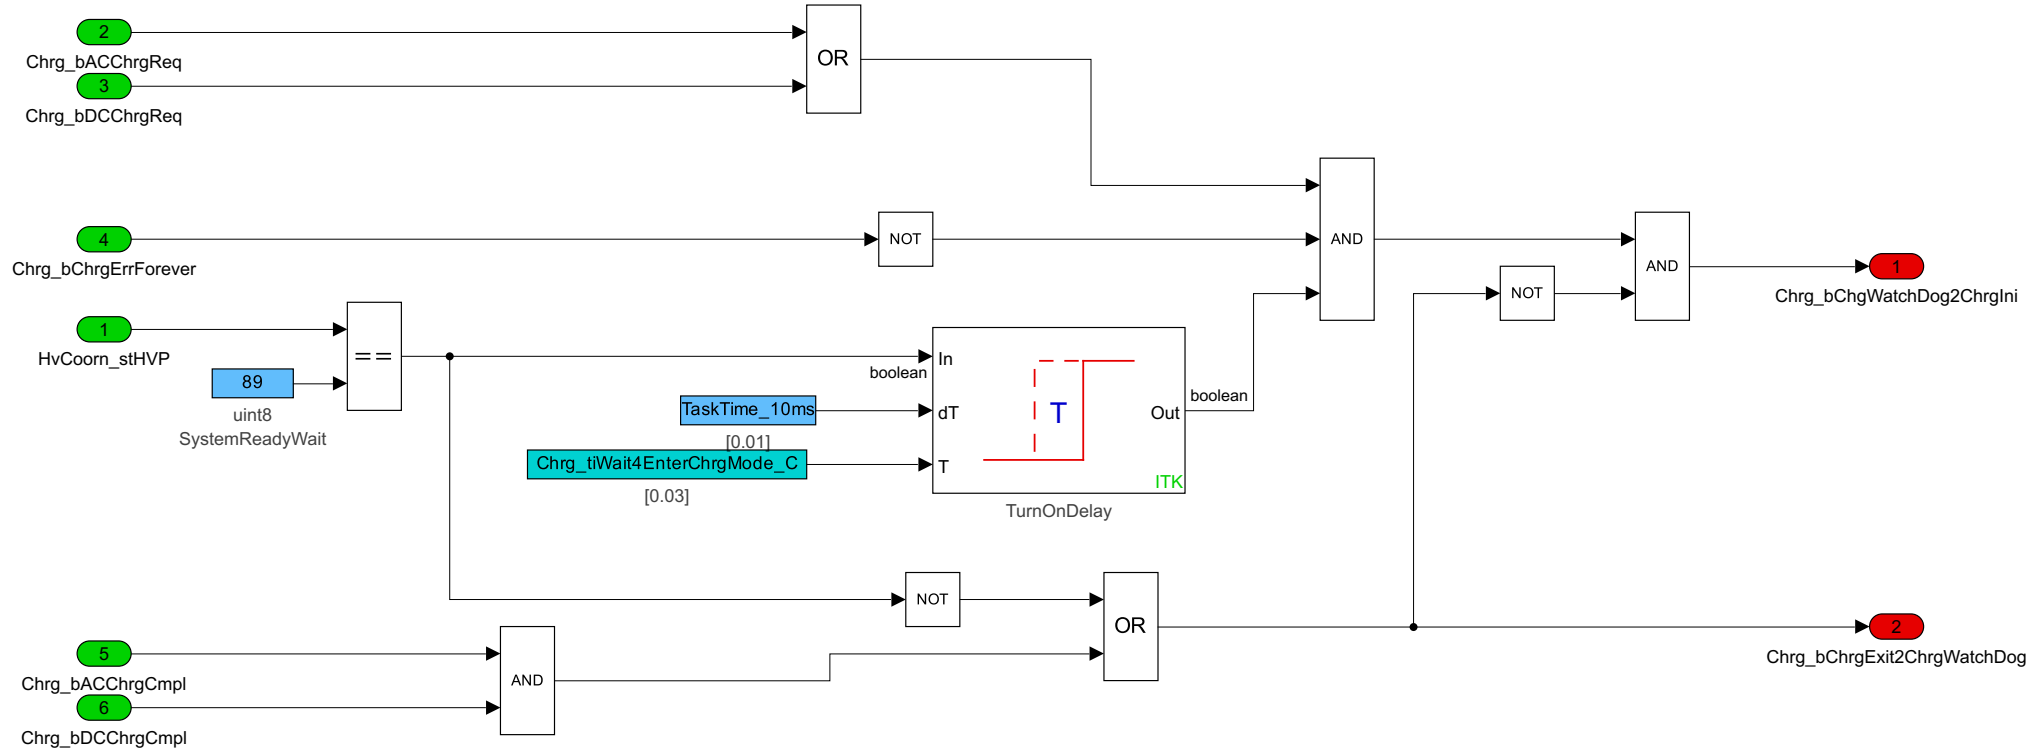

This subsystem mainly calculates charge status transition flag from charge initial to AC/DC charge status, based on the AC/DC charge request flag. The priority of DC charging is higher than that of AC charging.

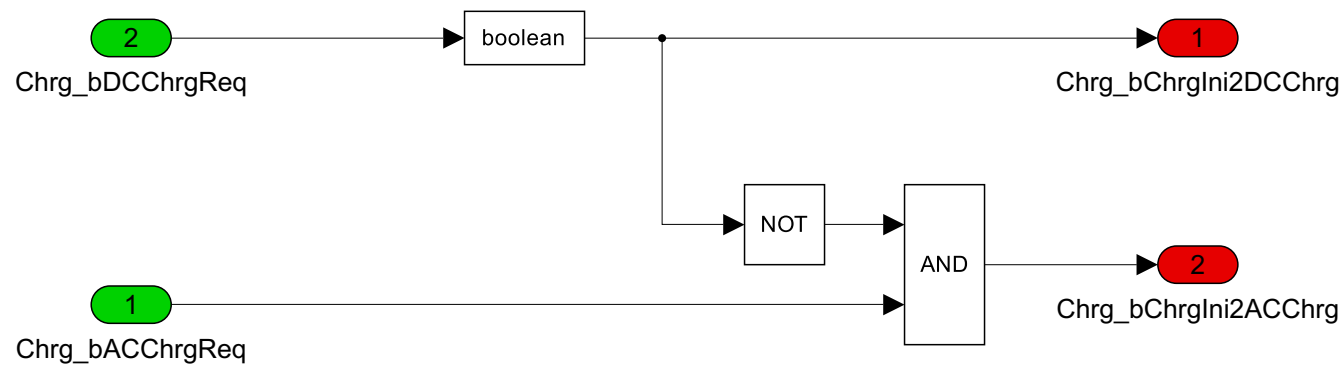

Documentation

© ITK Engineering Technology (Wu Xi) Co., Ltd. (ITKC)

Model Version: 4.245


Date: Mon Dec 22 16:13:22 2025

AC充电模式跳转计算

DOC
Text

This subsystem mainly calculates AC charge status transition flag, based on the charge forever/temporary error flag, AC charger link flag, OBC actual status and OBC L1 actual voltage,etc.

Unit detailed design

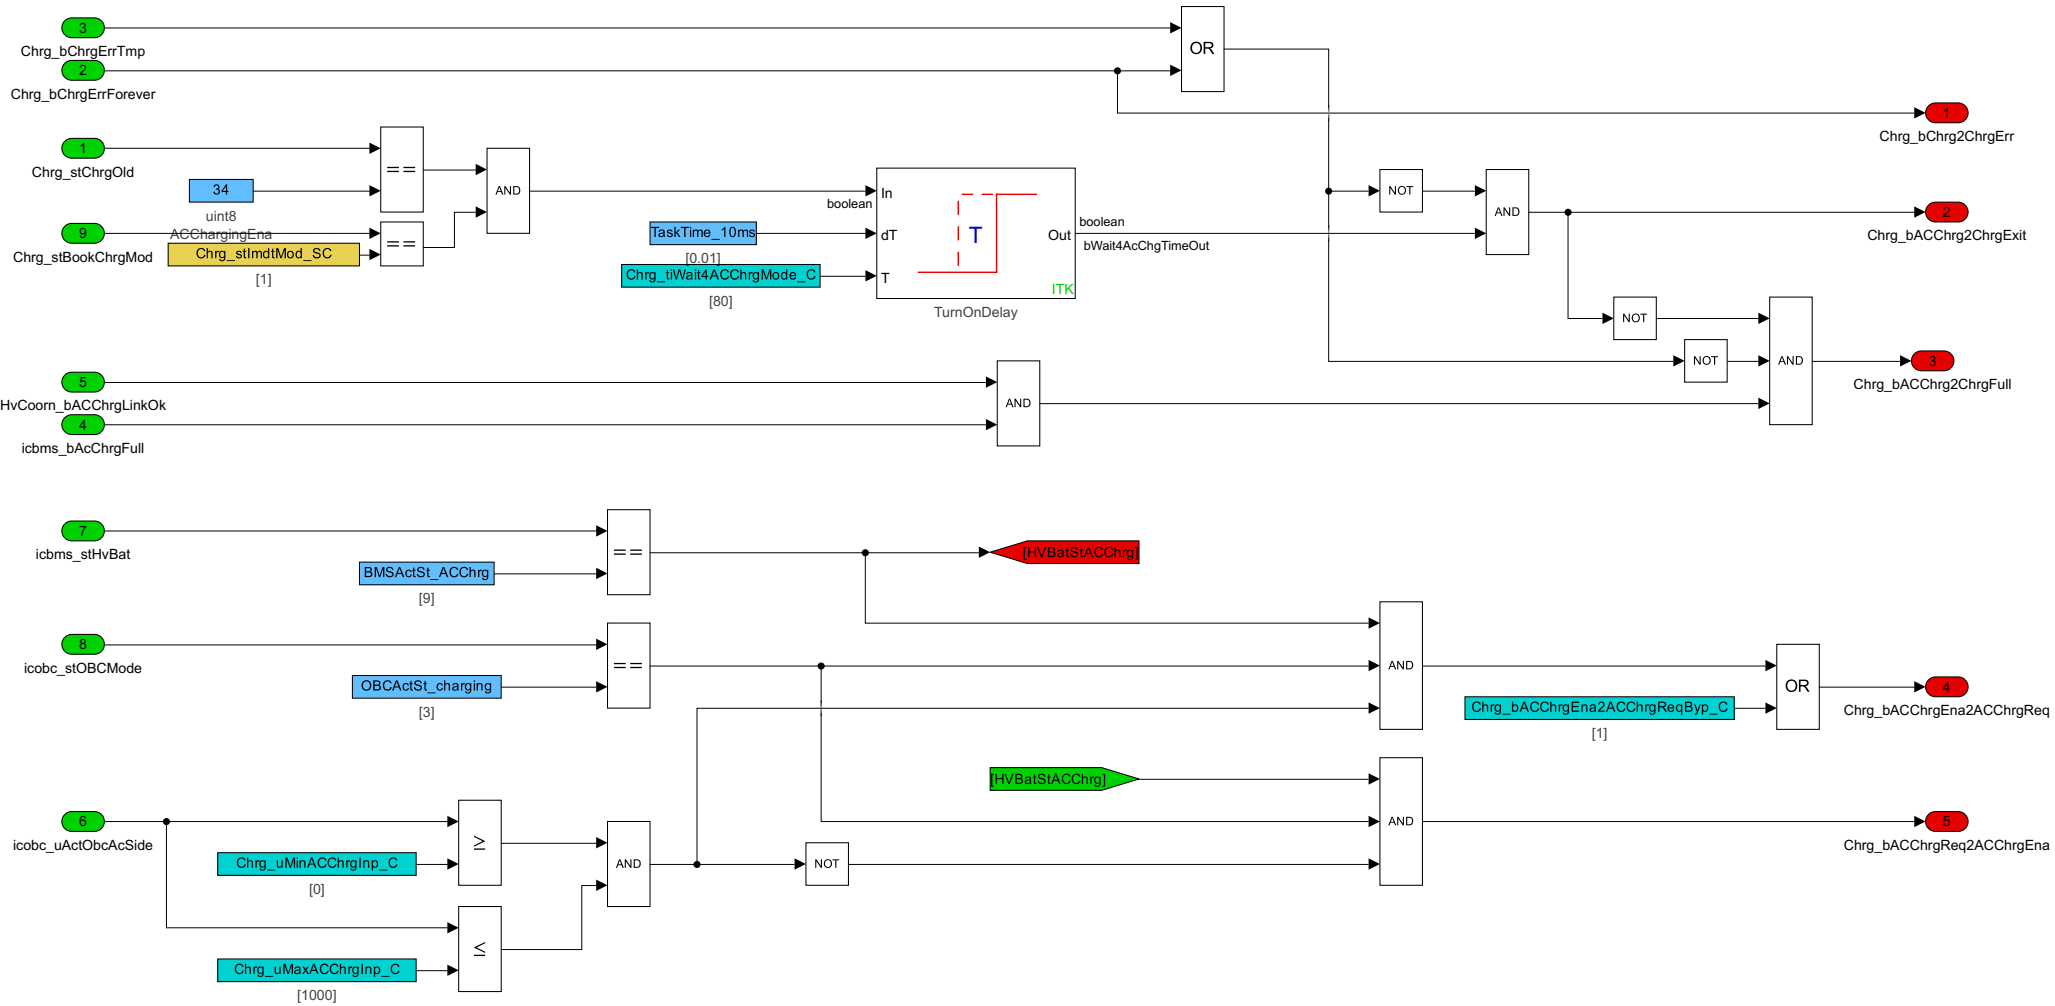

Documentation

© ITK Engineering Technology (Wu Xi) Co., Ltd. (ITKC)

Model Version: 4.245


Date: Mon Dec 22 16:13:22 2025

DC充电模式跳转计算

DOC
Text

Unit detailed design

This subsystem mainly calculates DC charge status transition flag, based on the charge forever/temporary error flag, DC charge request flag, DC charger link flag, BMS actual status and the received DC charge voltage of BMS,etc.

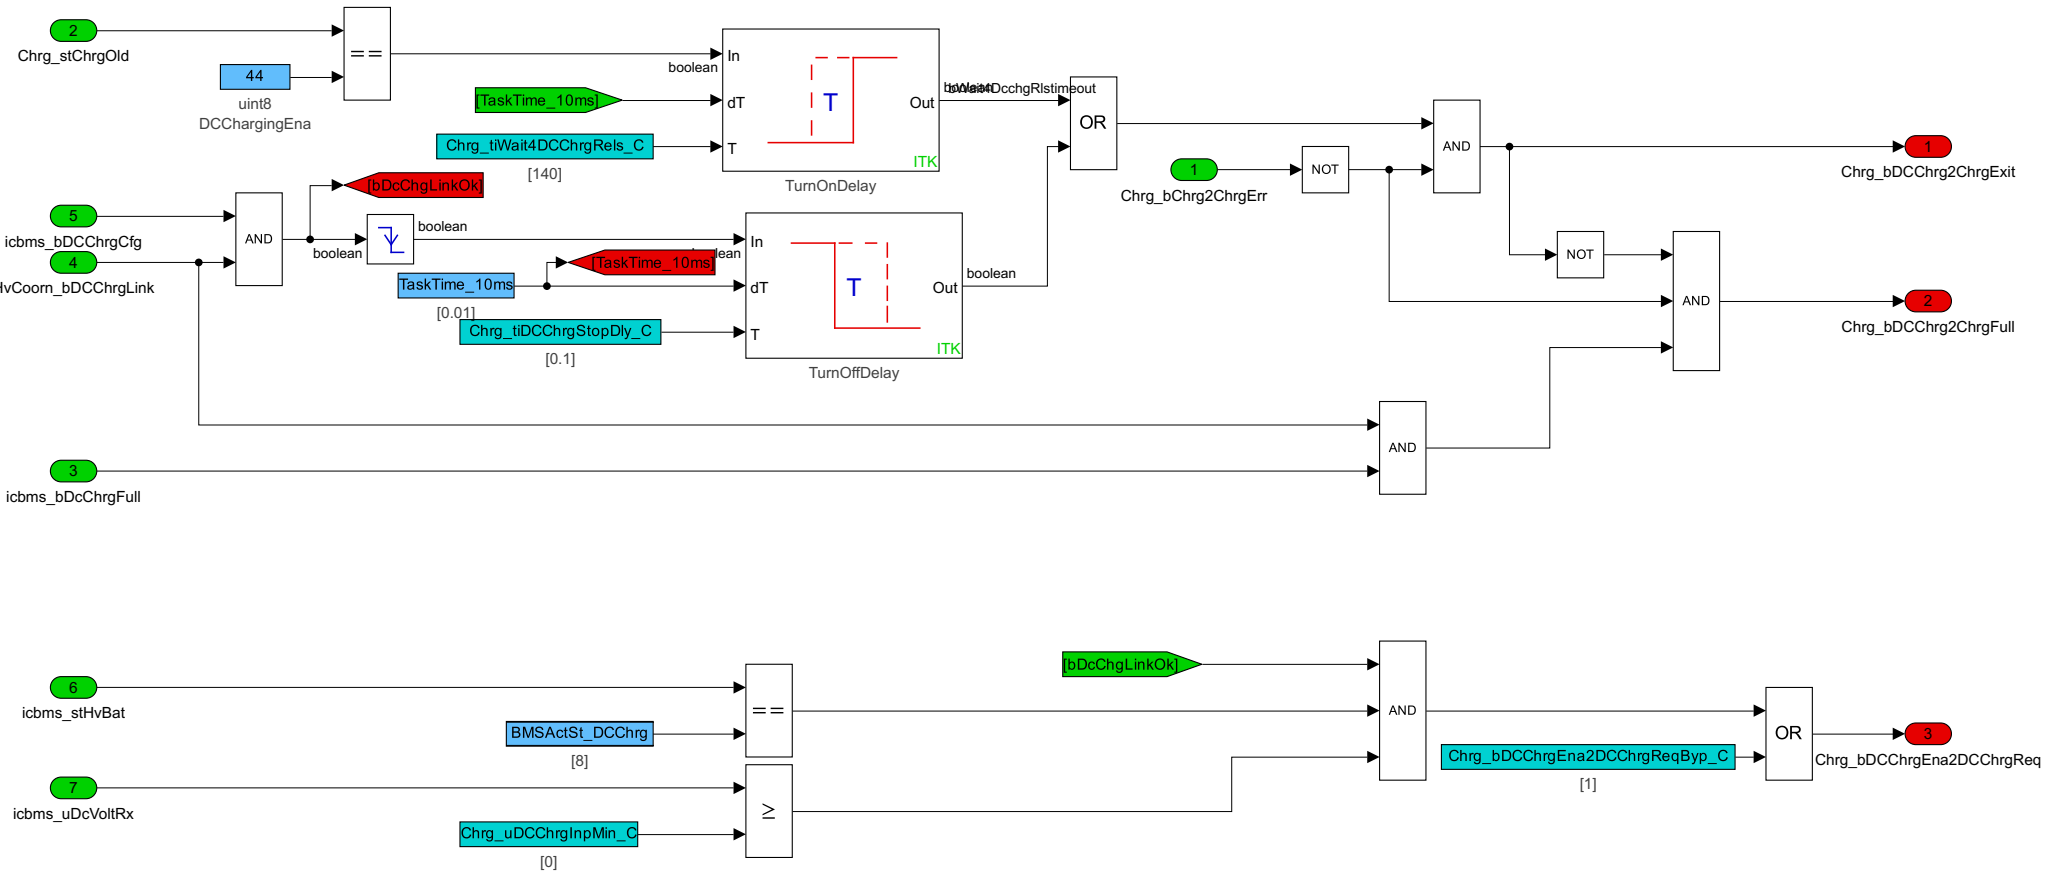

© ITK Engineering Technology (Wu Xi) Co., Ltd. (ITKC)

Model Version: 4.245

Date: Mon Dec 22 16:13:22 2025

充满模式跳转计算

Unit detailed design


Documentation

© ITK Engineering Technology (Wu Xi) Co., Ltd. (ITKC)
Model Version: 4.245
Date: Mon Dec 22 16:13:22 2025

充电故障判断

DOC
Text
Unit detailed design

This subsystem mainly calculates charge forever error flag and charge temporary error flag, based on the AC/DC charger temperature error flag, OBC error status, BMS error status and vehicle error level, etc.

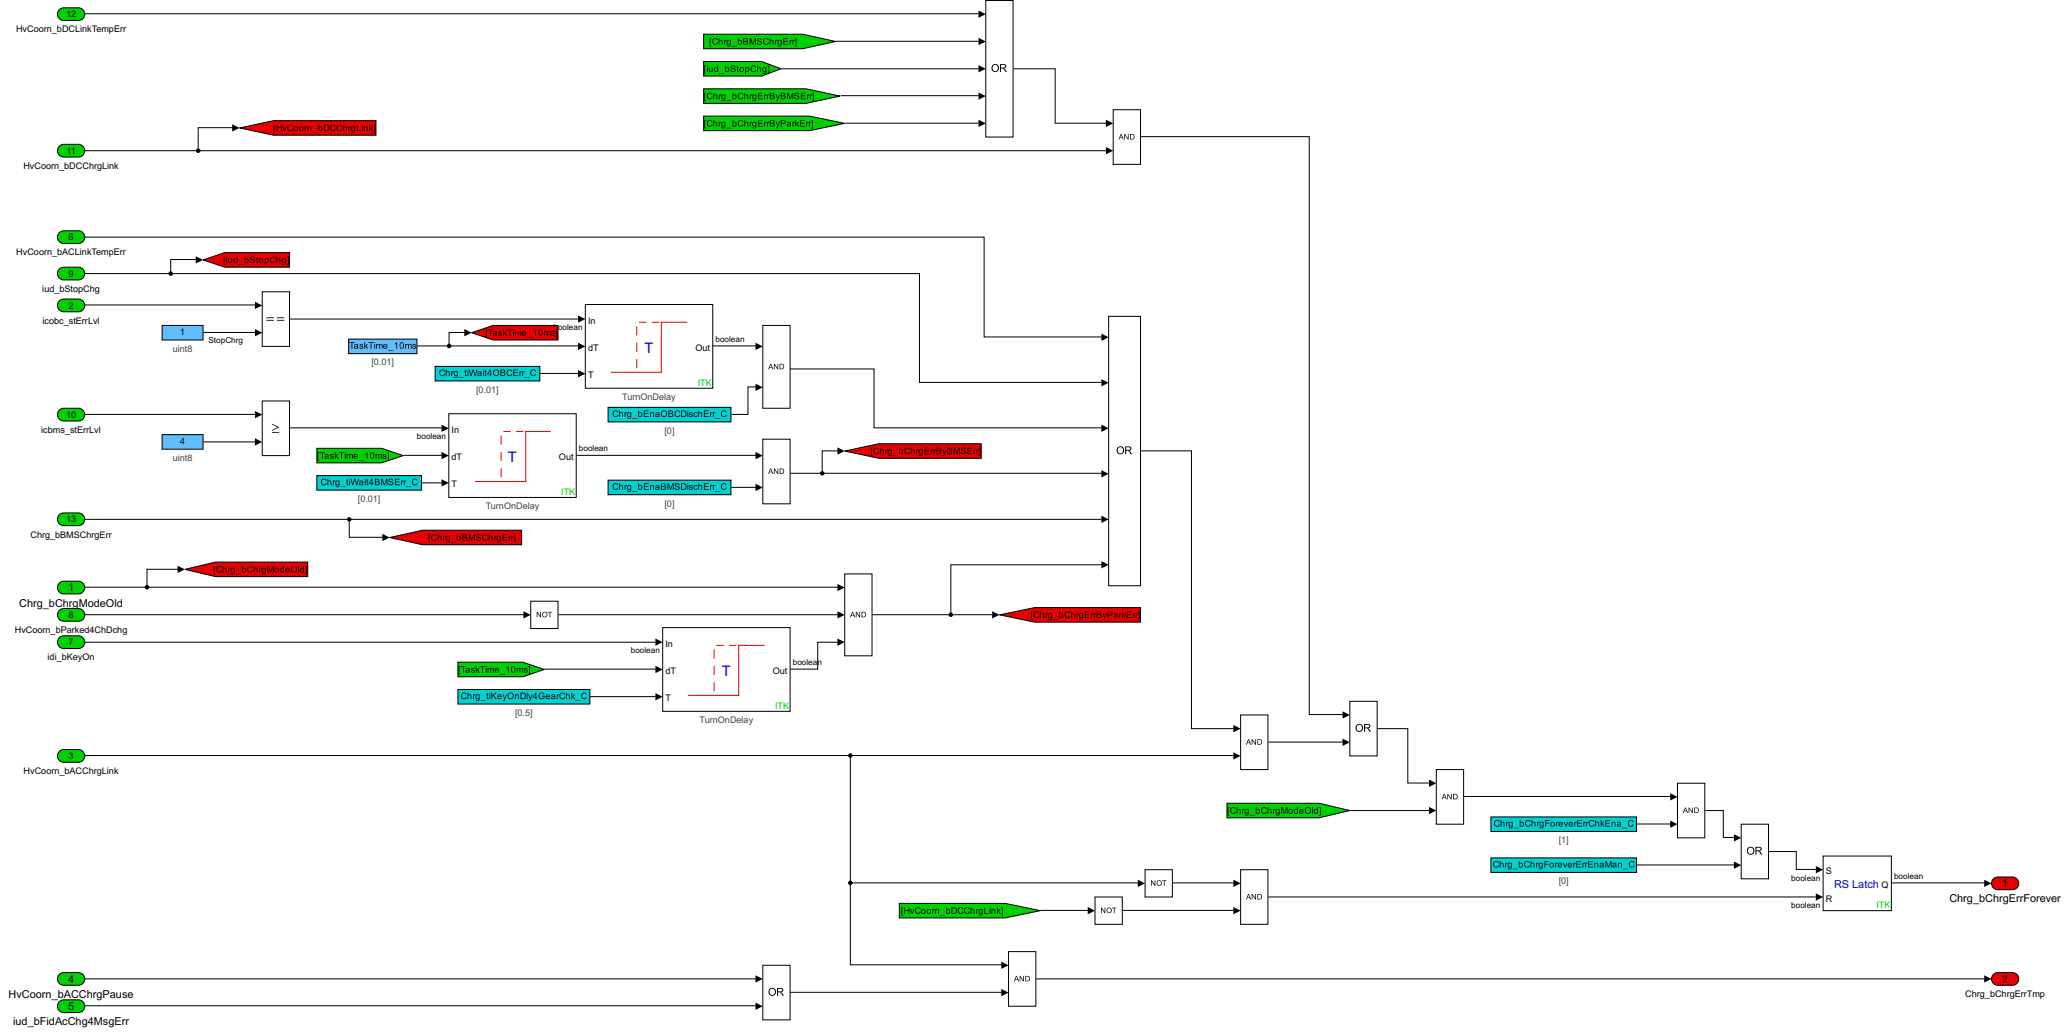

Documentation

© ITK Engineering Technology (Wu Xi) Co., Ltd. (ITKC)

Model Version: 4.245

Date: Mon Dec 22 16:13:22 2025


故障模式跳转计算

DOC

Text

This subsystem mainly calculates charge error status transition flag, based on the charge forever/temporary error flag, AC charger link flag,etc.

Unit detailed design

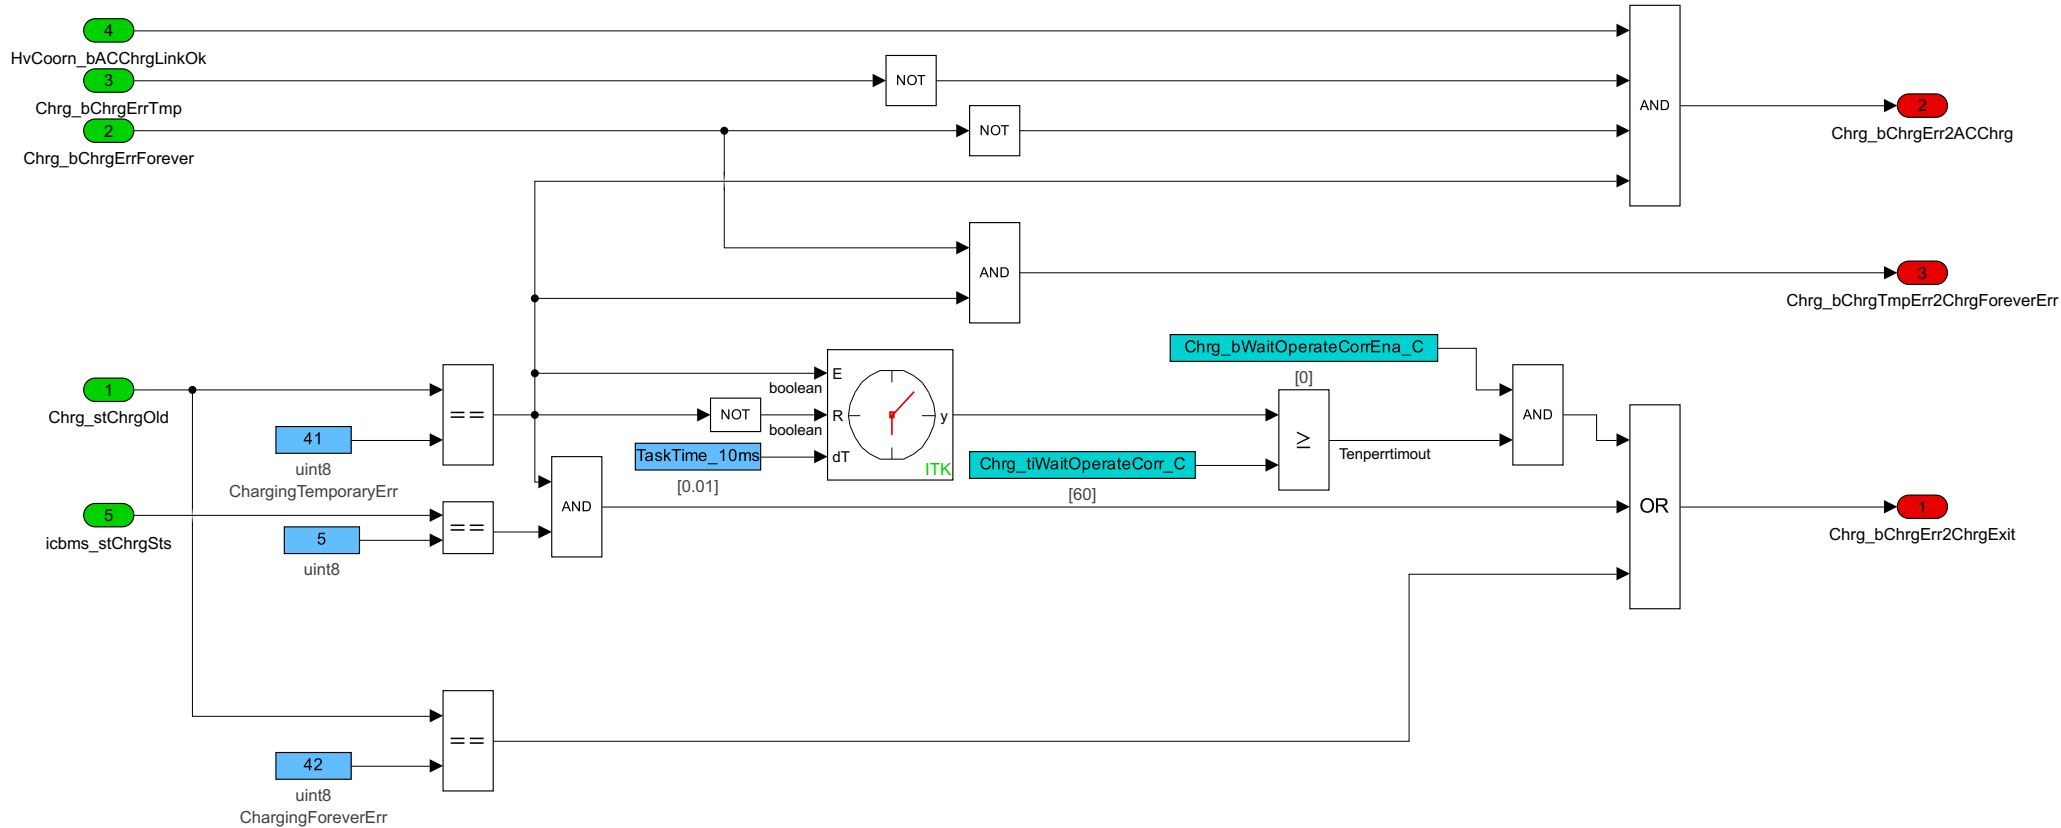

Documentation

© ITK Engineering Technology (Wu Xi) Co., Ltd. (ITKC)

Model Version: 4.245

Date: Mon Dec 22 16:13:22 2025


充电退出模式计算


DOC

Text

Unit detailed design

This subsystem mainly calculates charge exit status transition flag, based on BMS actual status and OBC actual status.

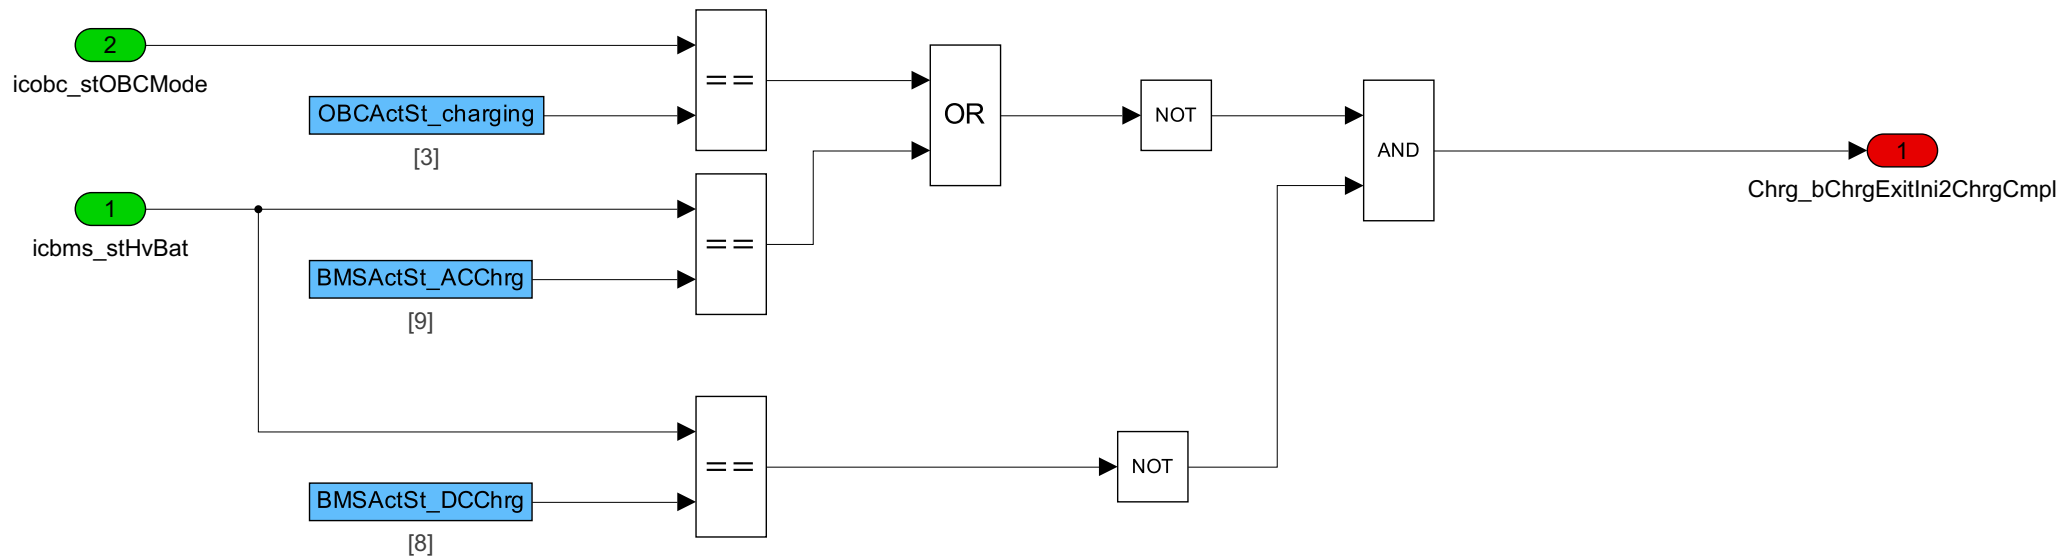

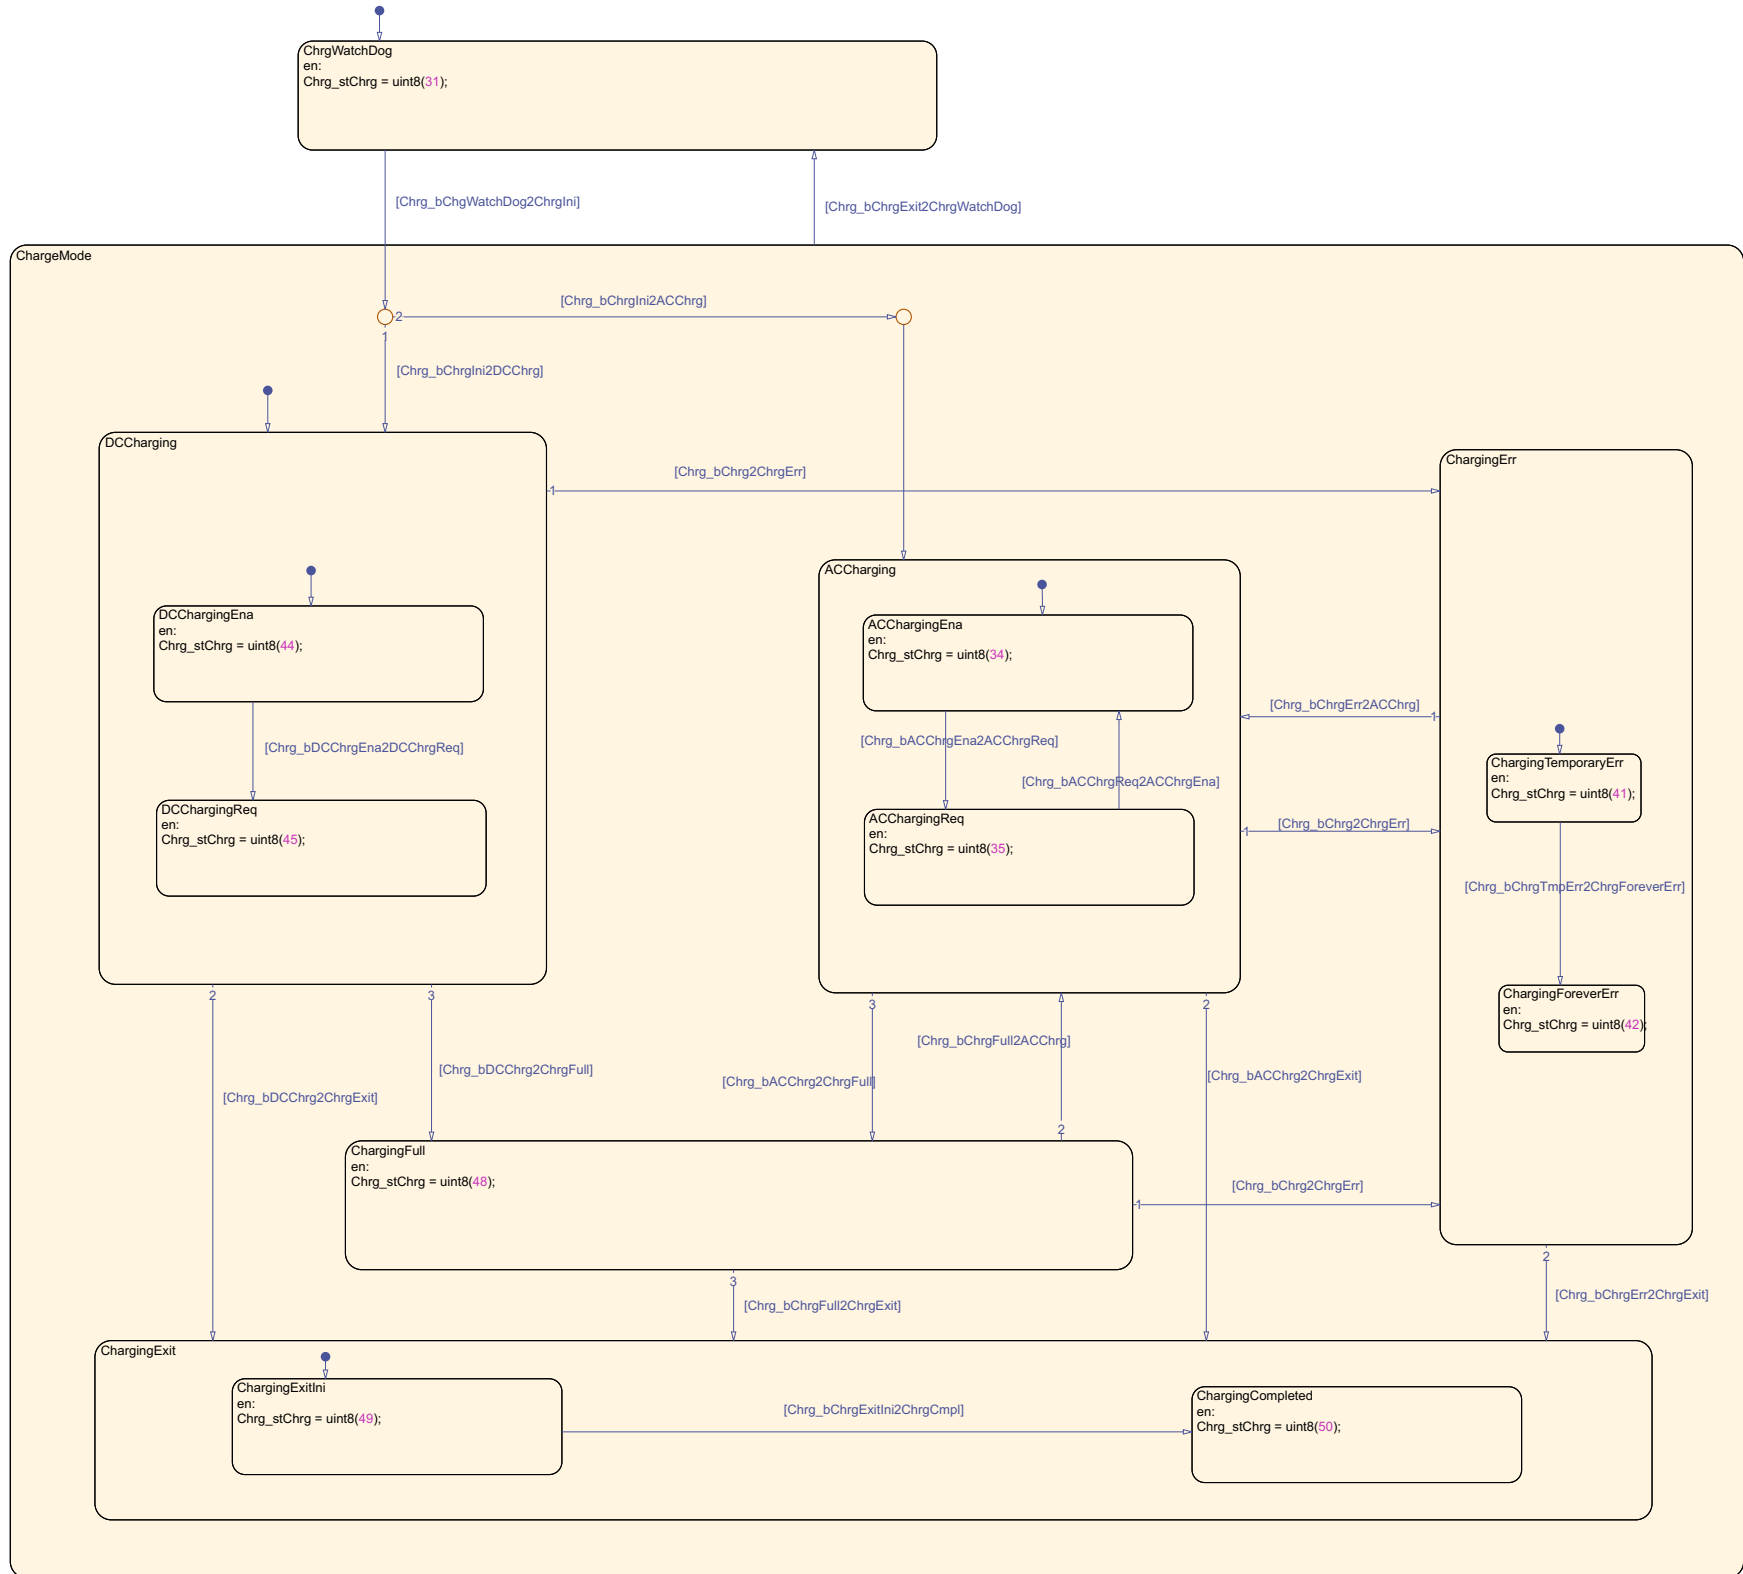

Documentation

© ITK Engineering Technology (Wu Xi) Co., Ltd. (ITKC)

Model Version: 4.245


Date: Mon Dec 22 16:13:22 2025

充电状态计算

DOC
Text

This subsystem mainly calculates charging flag and charging mode flag, based on CHP control status.

Unit detailed design

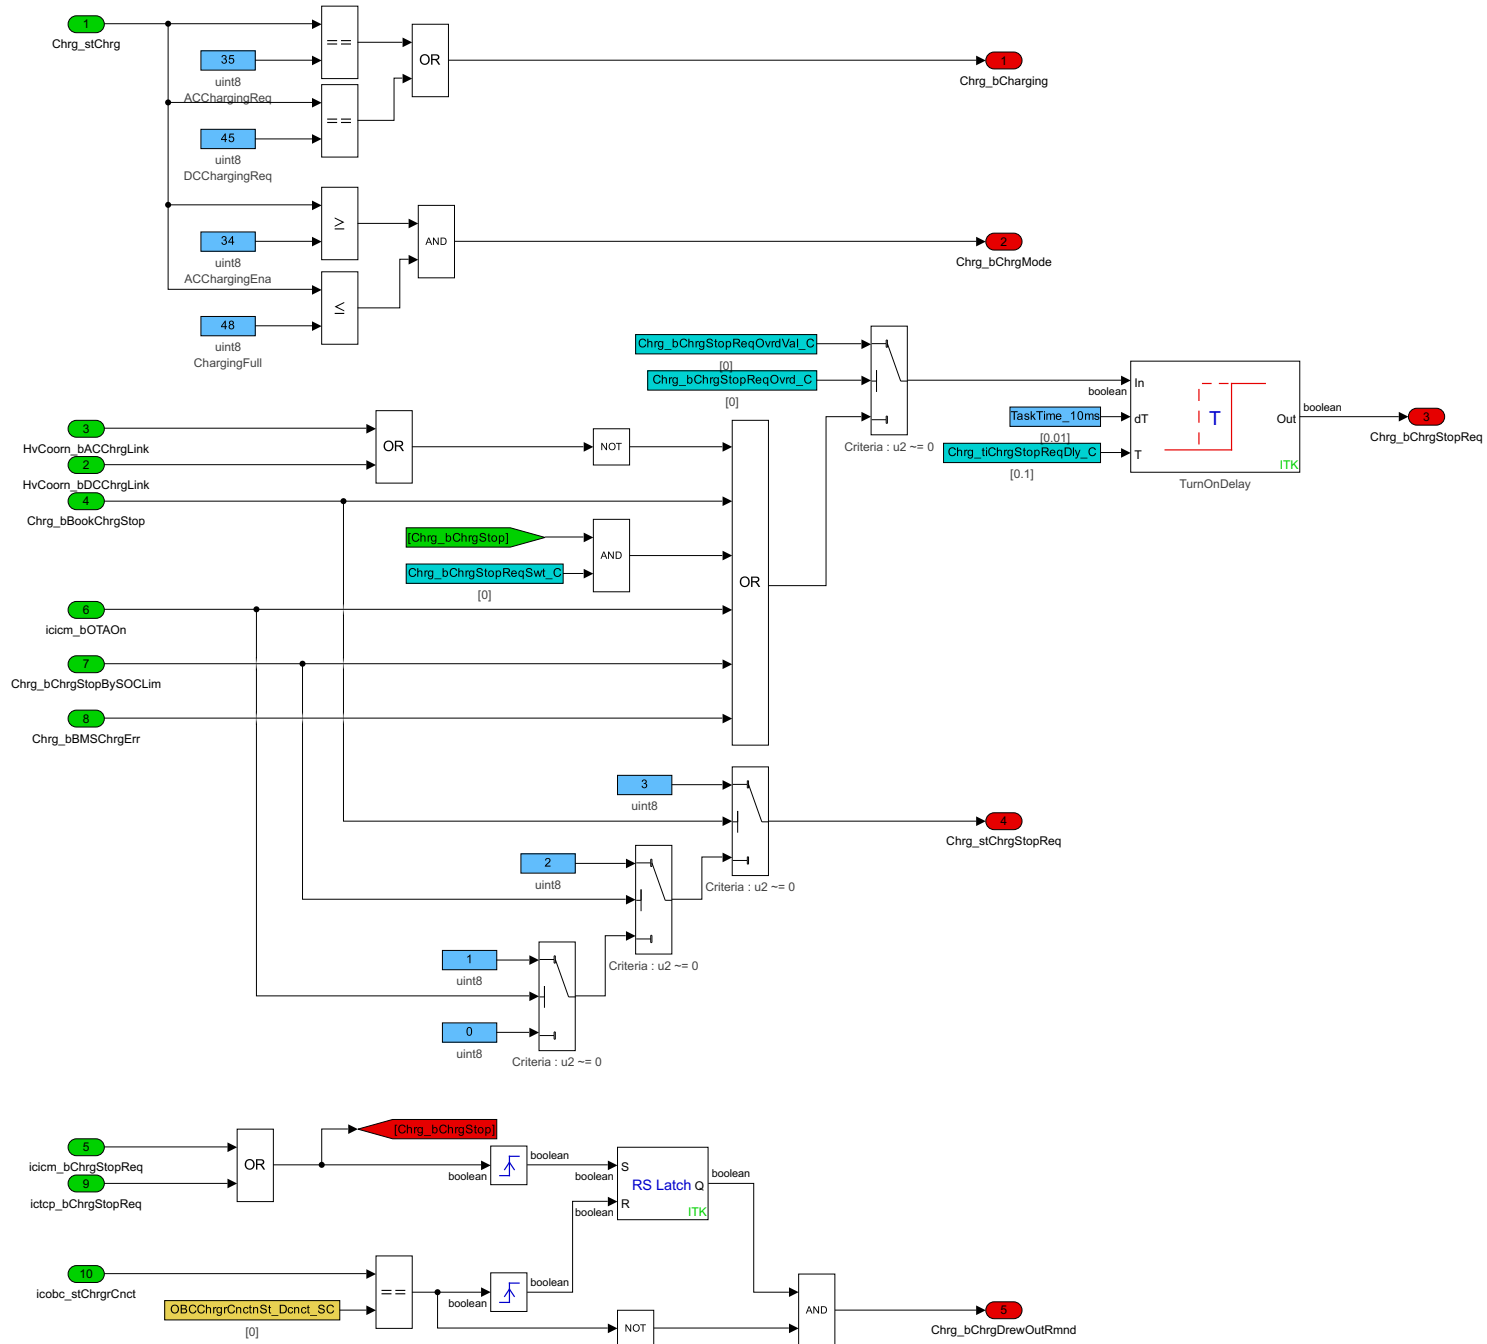

Documentation


© ITK Engineering Technology (Wu Xi) Co., Ltd. (ITKC)
Model Version: 4.245
Date: Mon Dec 22 16:13:22 2025

OBC模式请求计算




Unit detailed design


This subsystem mainly calculates the request status of OBC, based on CHP control status, AC charger link flag,etc.

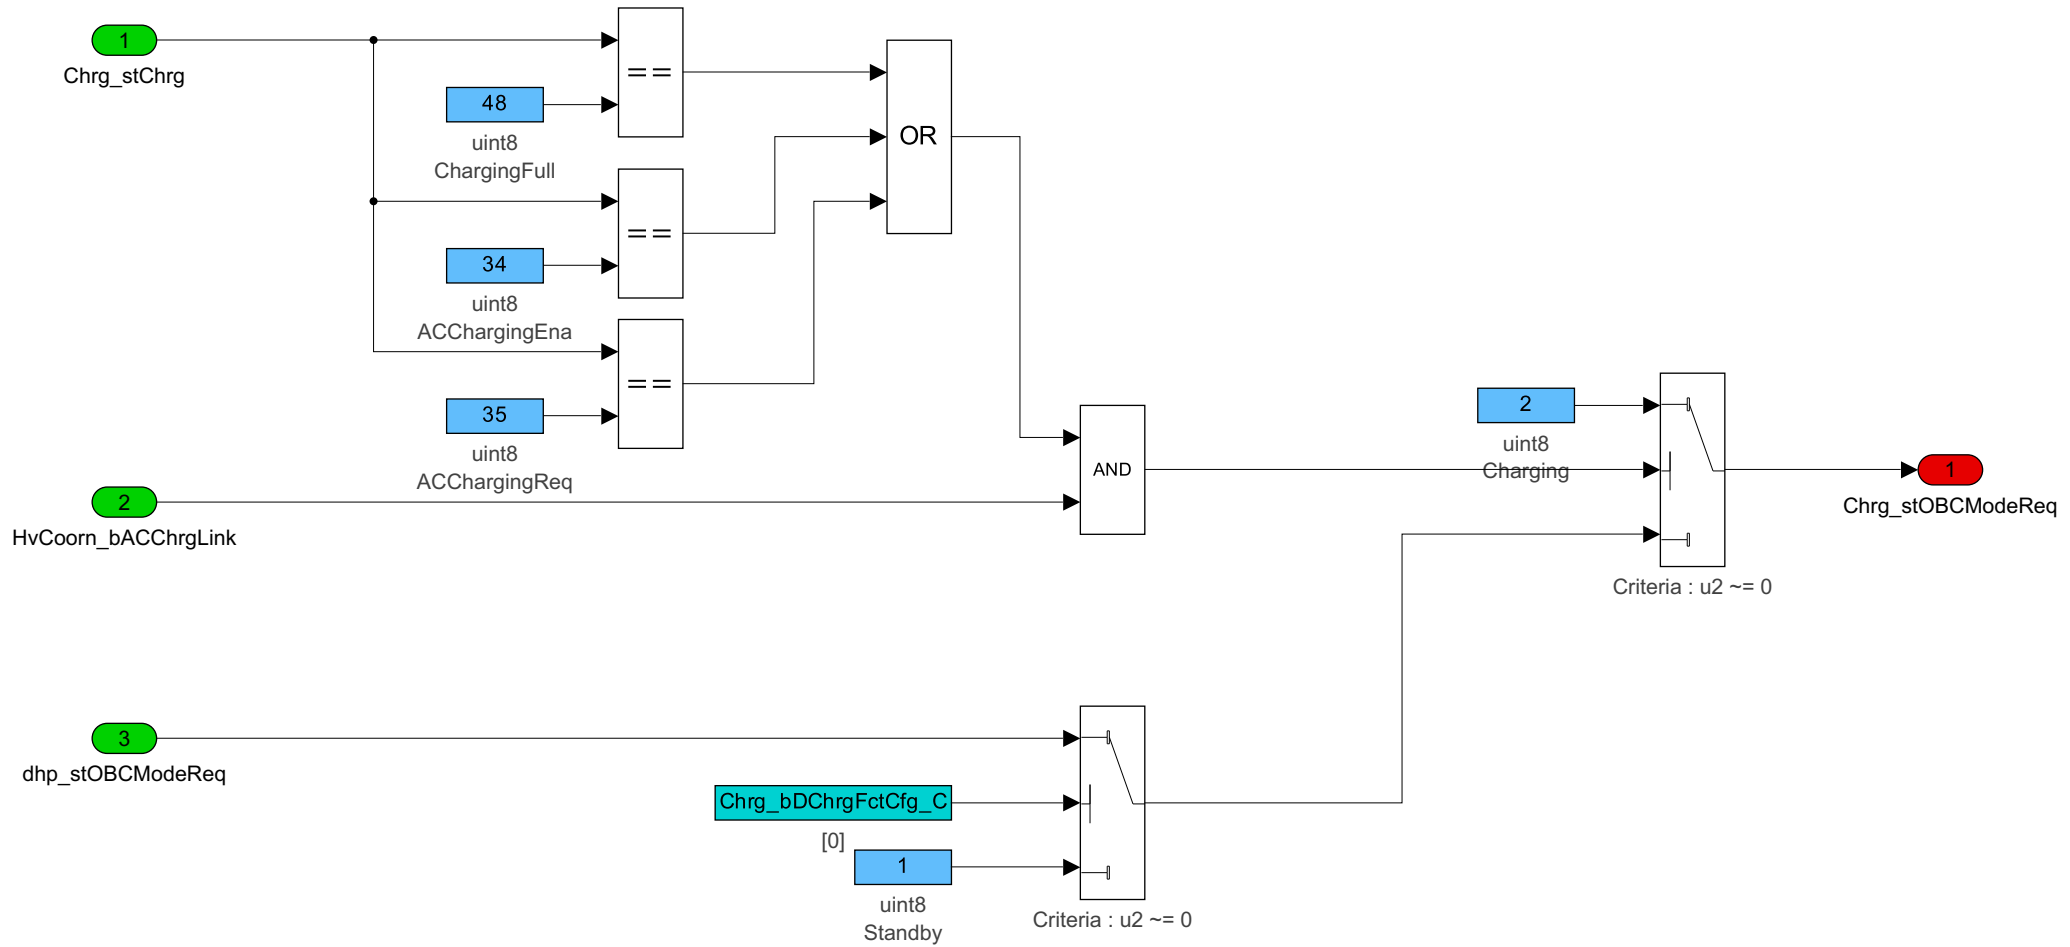


This subsystem mainly calculates AC/DC charge voltage and current.

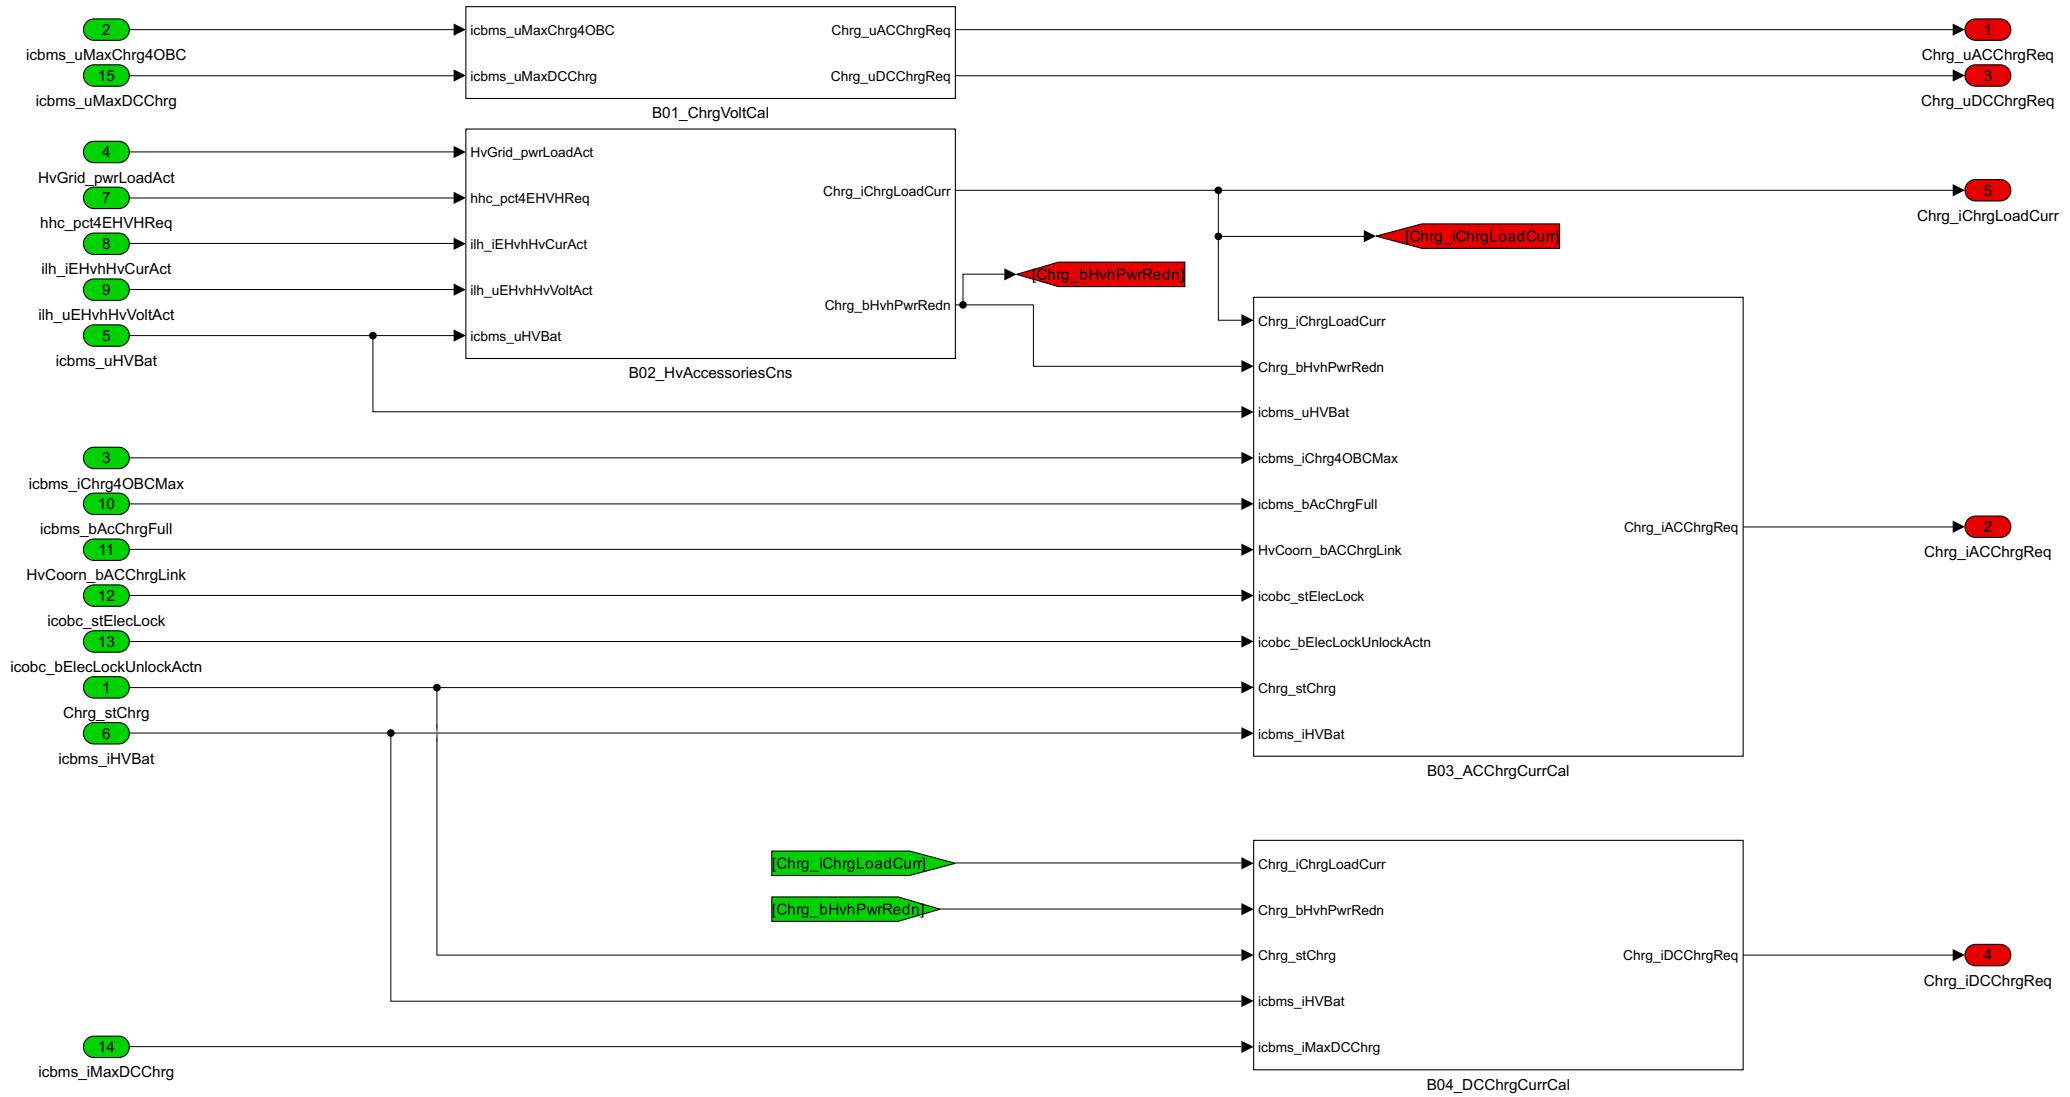

This subsystem mainly calculates AC/DC charge voltage, based on the maximum AC/DC charge voltage of BMS and related calibration data,etc.

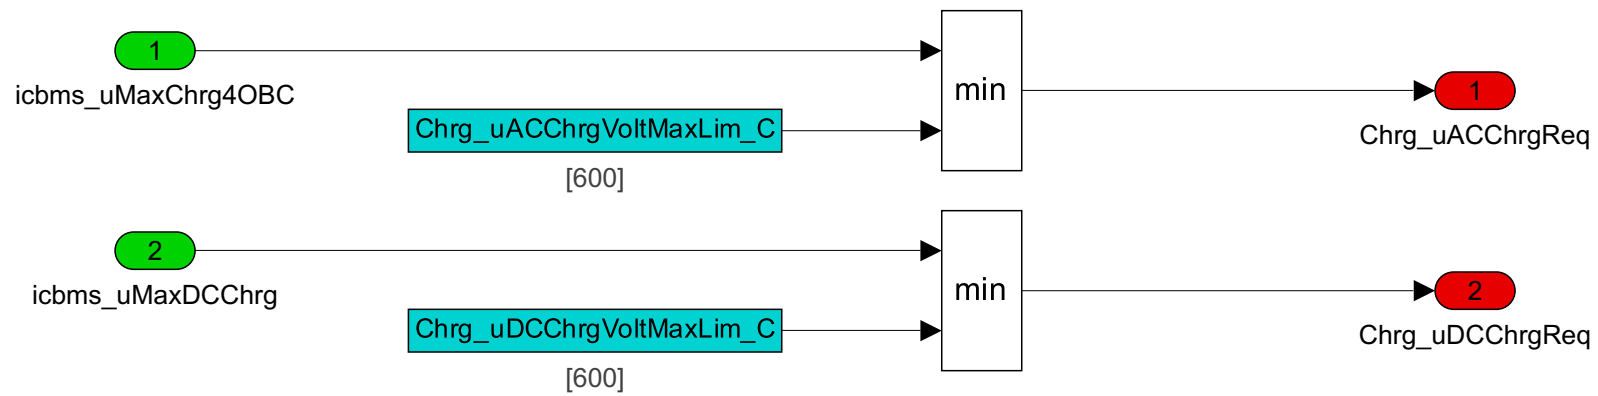


This subsystem mainly calculates Hv load charge current, based on Hv load actual curren, HVH actual current, HVH actual voltage, HVH request PWM duty cycle,etc.

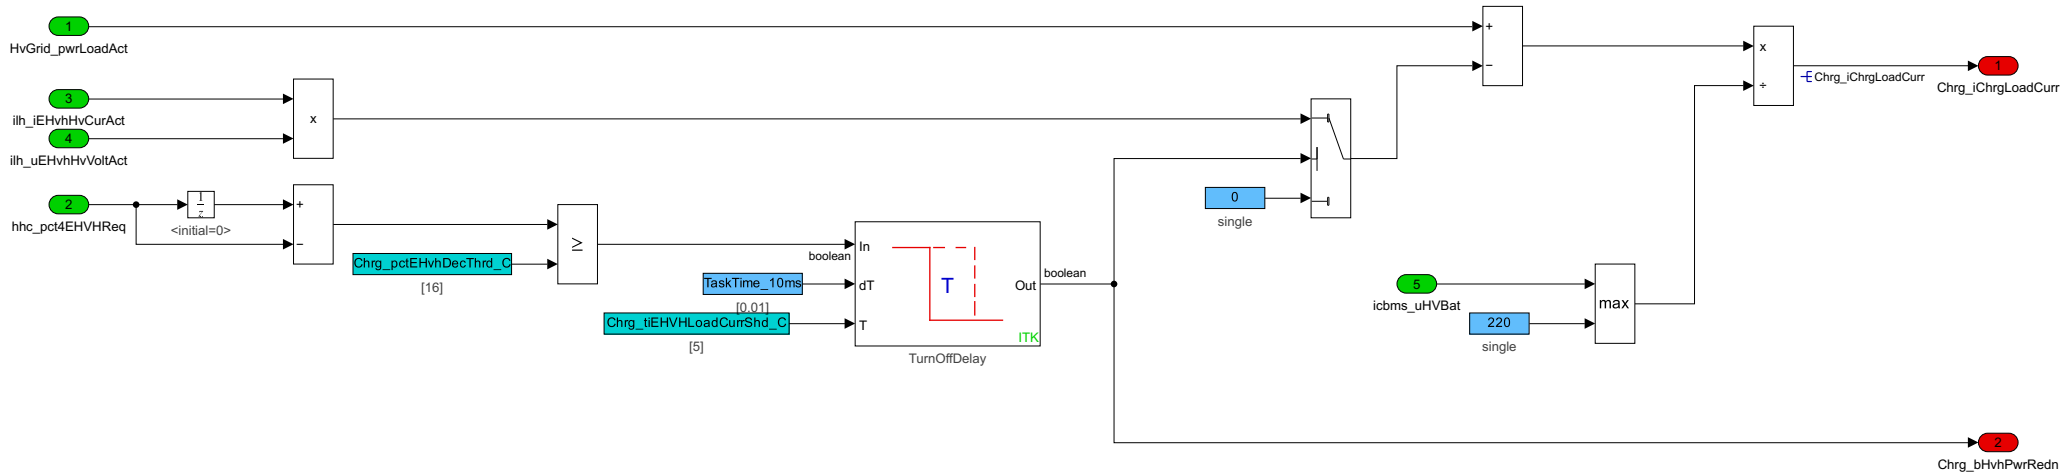

This subsystem mainly calculates AC charge request current, based on HV load charge current, OBC maximum charge current of BMS, the compensation charge current, etc.

$$\text{chp_iACChrgReq} = \text{icb_iChrg4OBCMax} + \text{chp_iChrgLoadCurr} + \text{chp_iACChrgCompCurr}$$

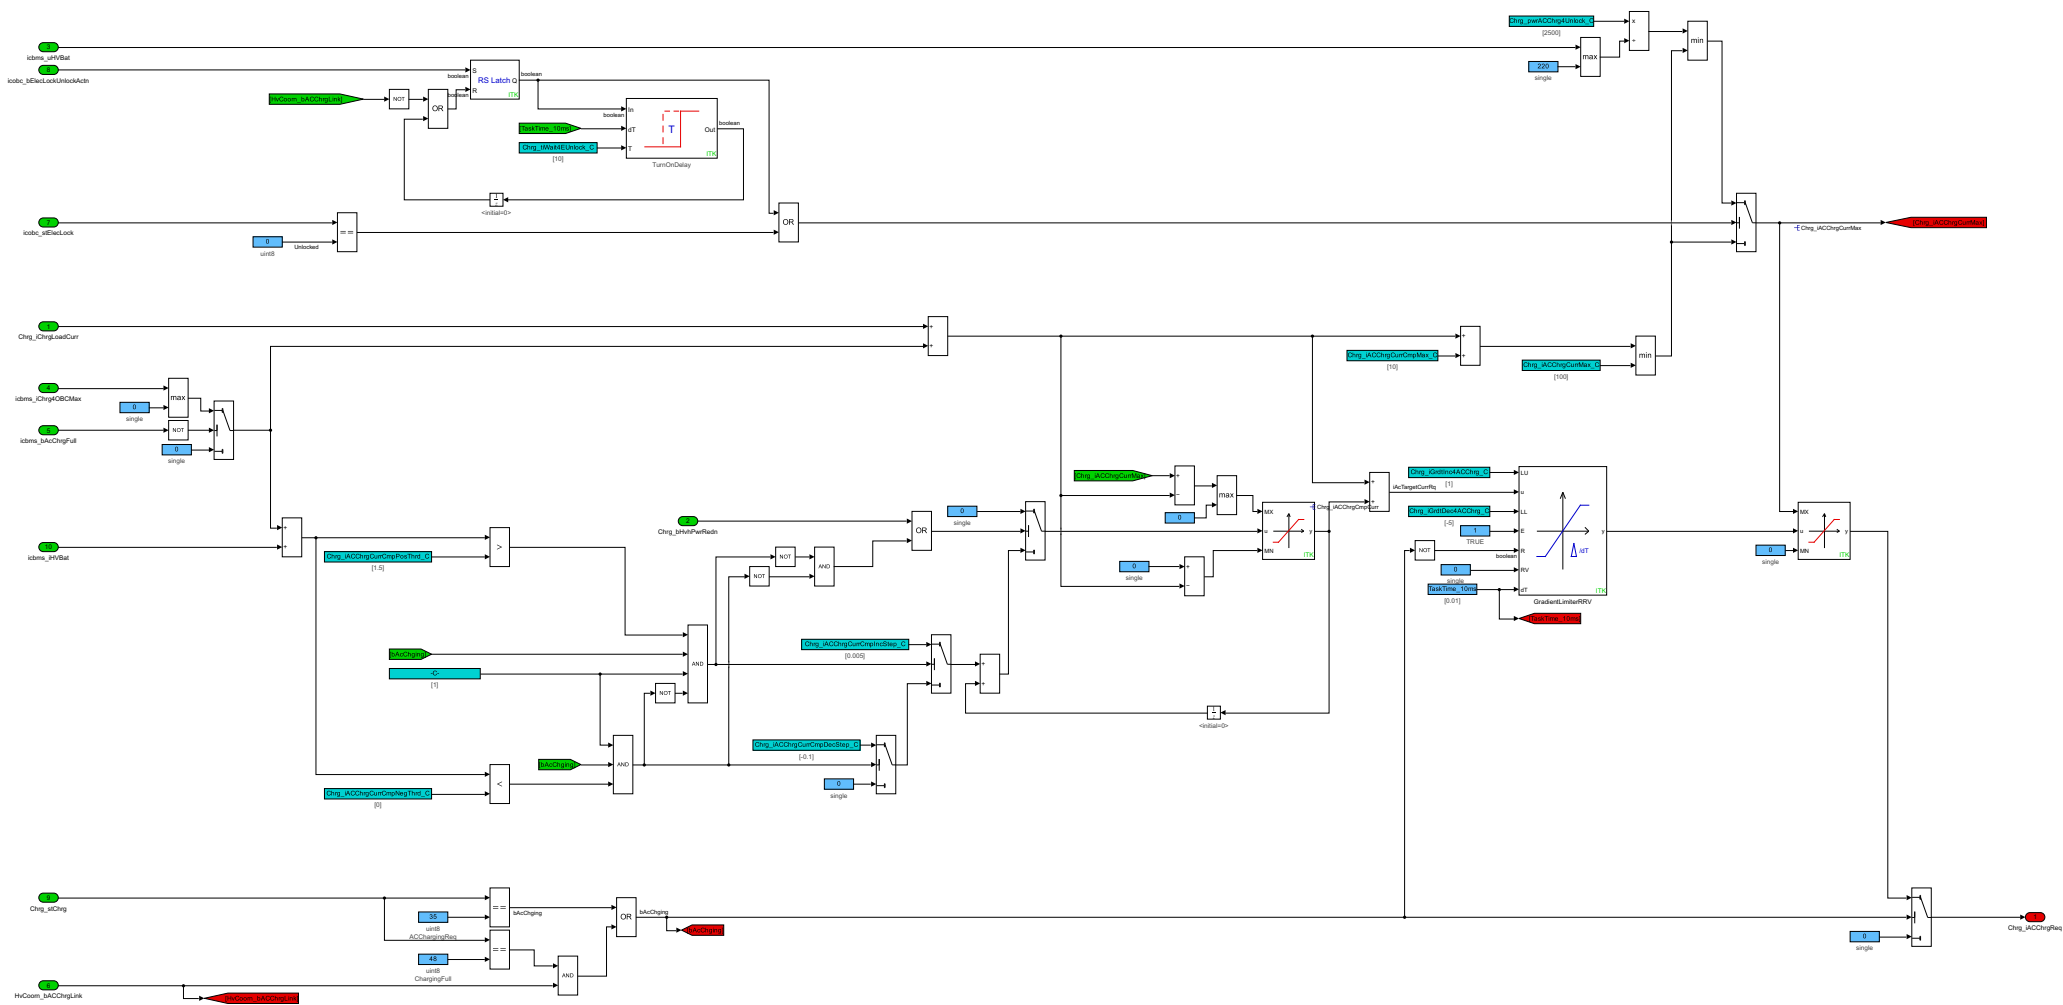

This subsystem mainly calculates DC charge request current, based on HV load charge current, DC maximum charge current of BMS, the compensation charge current, etc.
$$\text{chg_DCCchgReq} = \text{iso_MaxDCCchg} + \text{chg_ICngLoadCur} + \text{chg_DCCchgCur}$$

