




fc_ESCWhlTq


DOC
Text


10010306
uint32


ESCWhlTq_Version

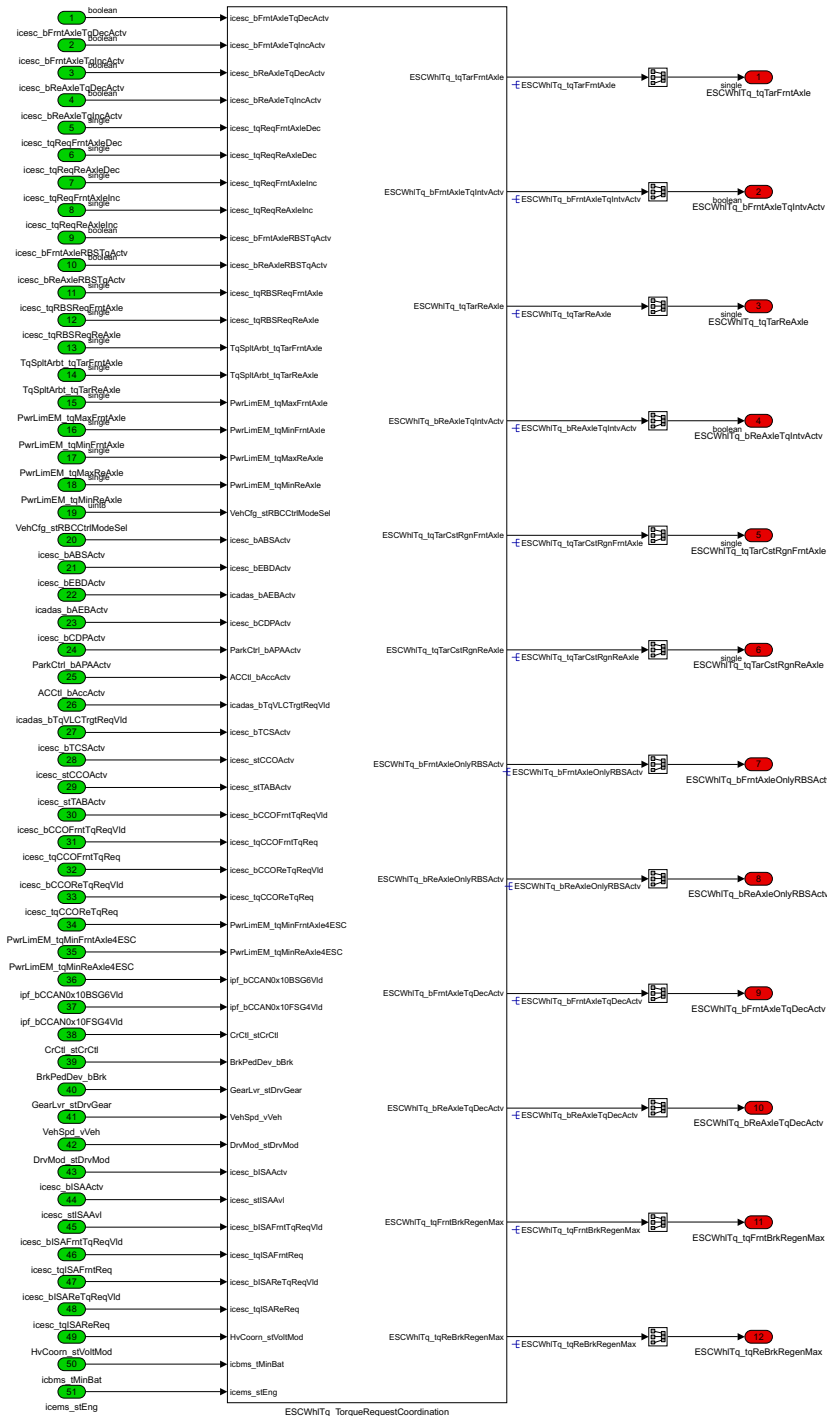

This subsystem is mainly used to calculate wheel target torque after ESP intervention and fast torque active flag, based on wheel target torque before ESP intervention, ESP decrease torque active flag, ESP increase torque active flag, the decrease torque value of ESP, the increase torque value of ESP, etc.

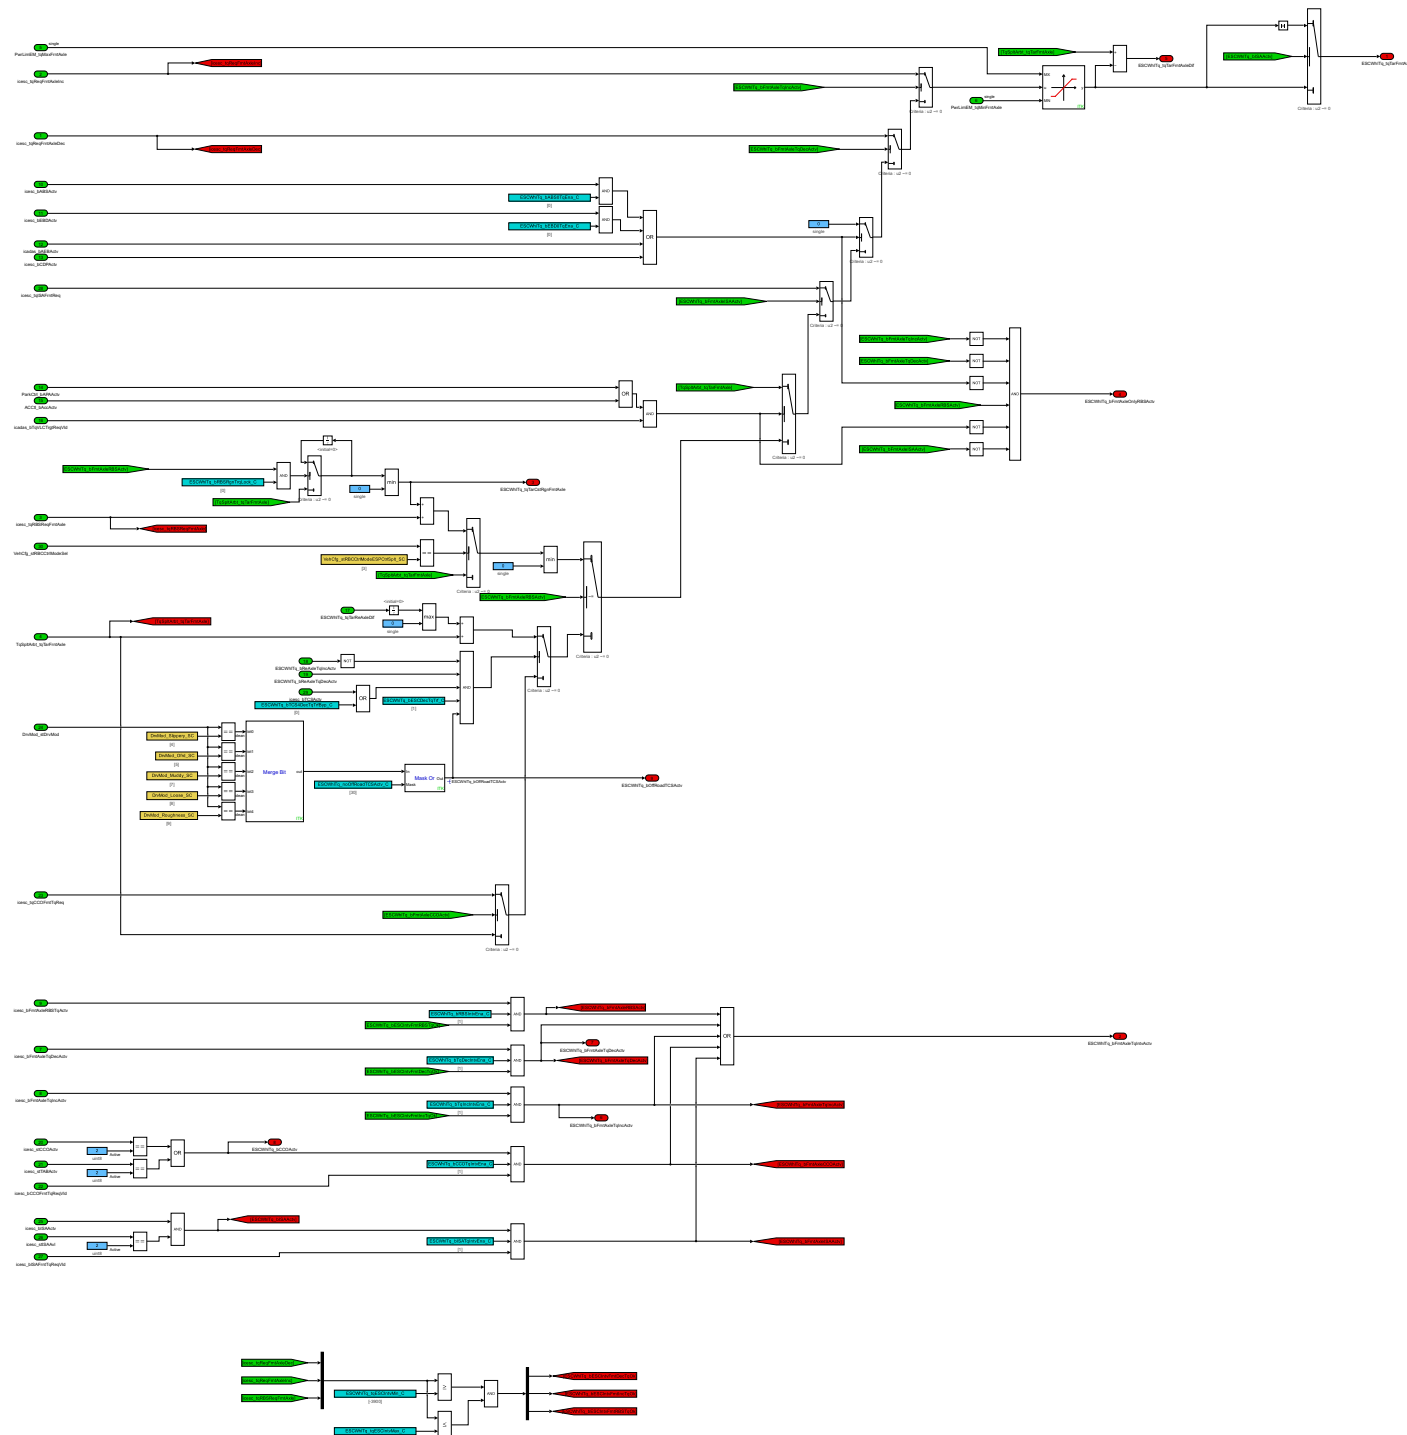

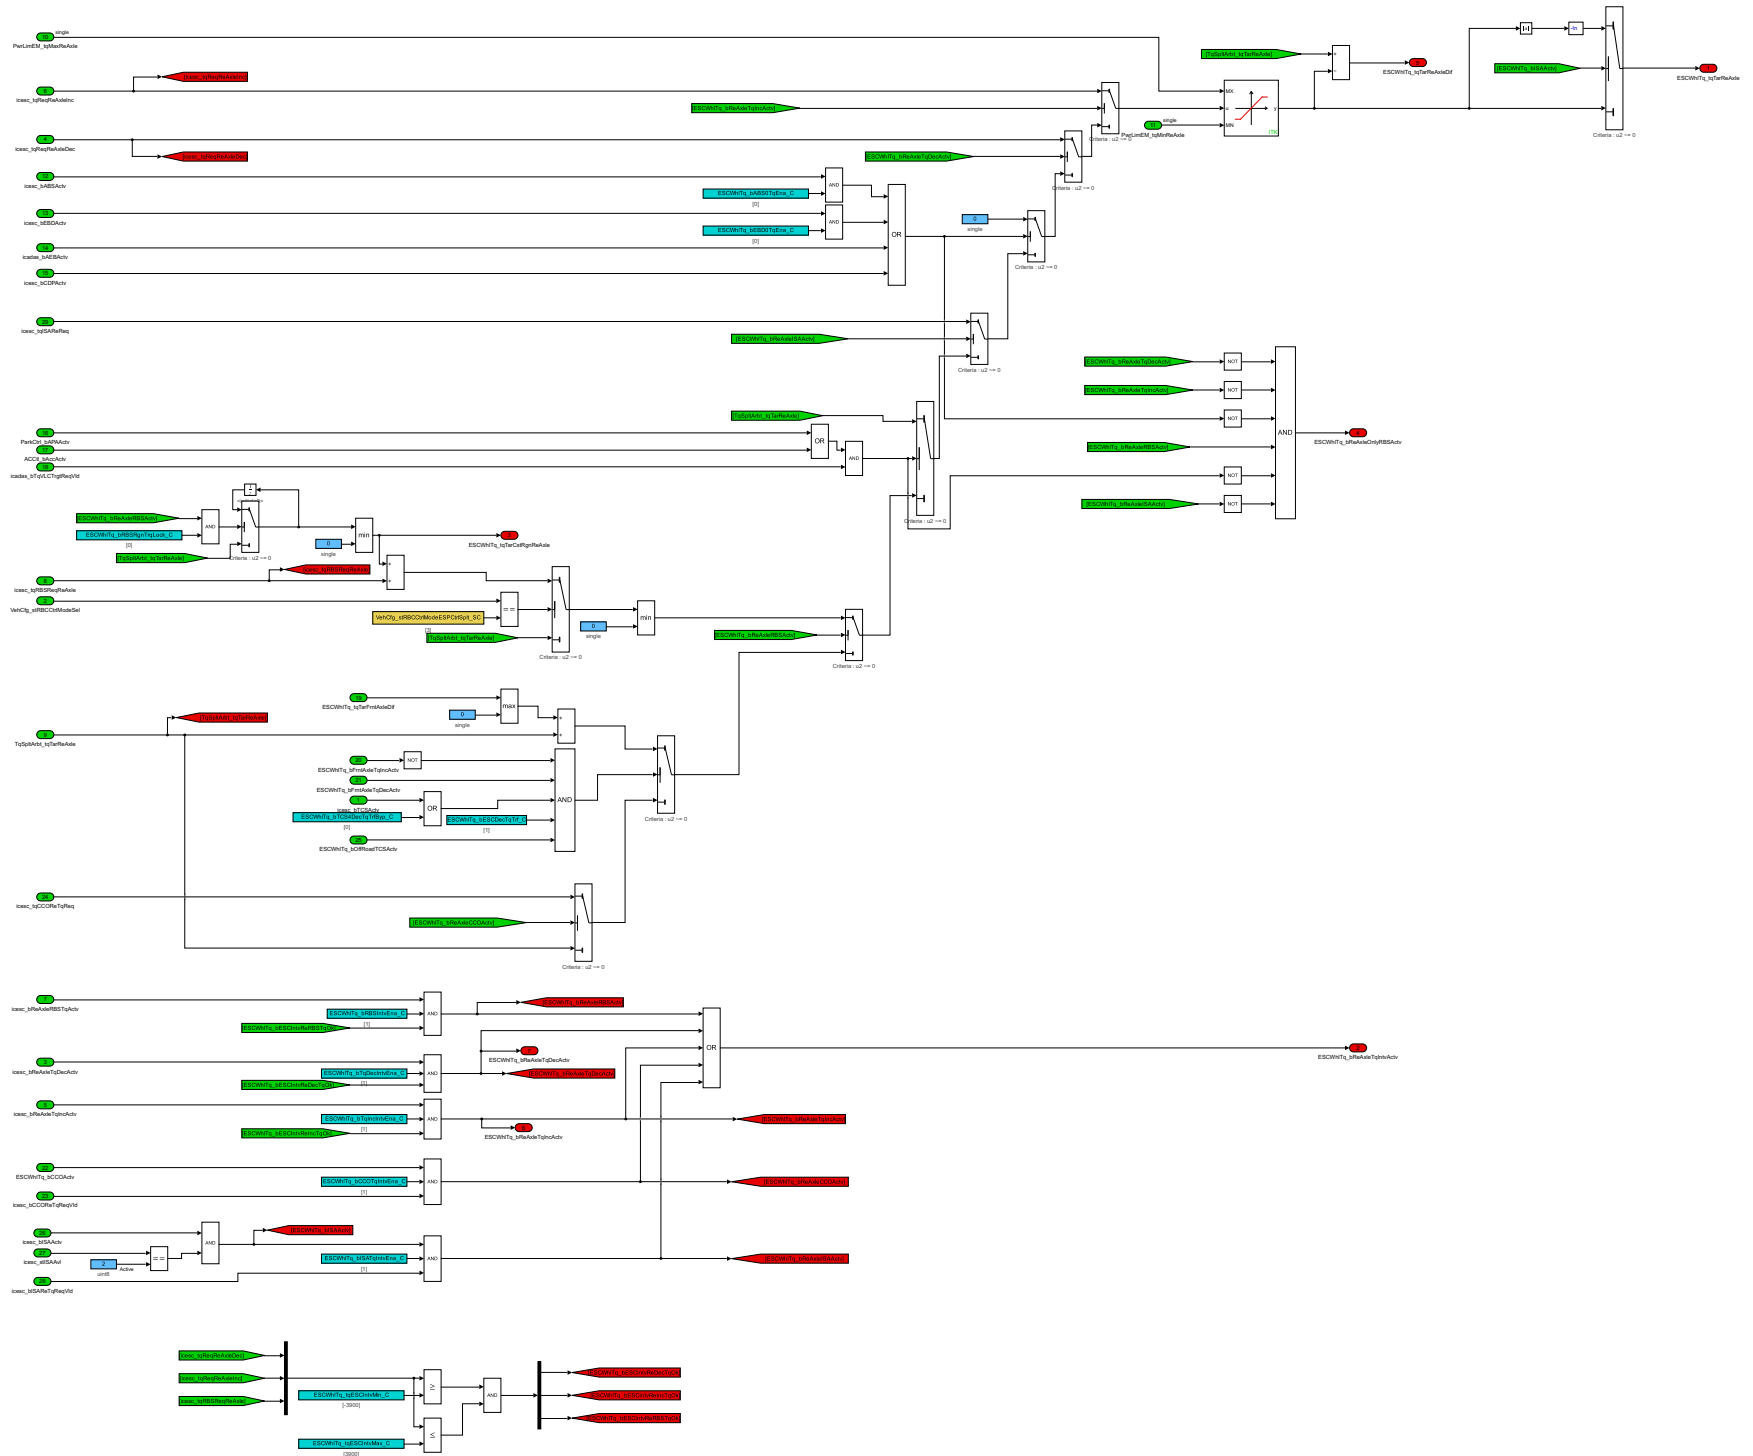

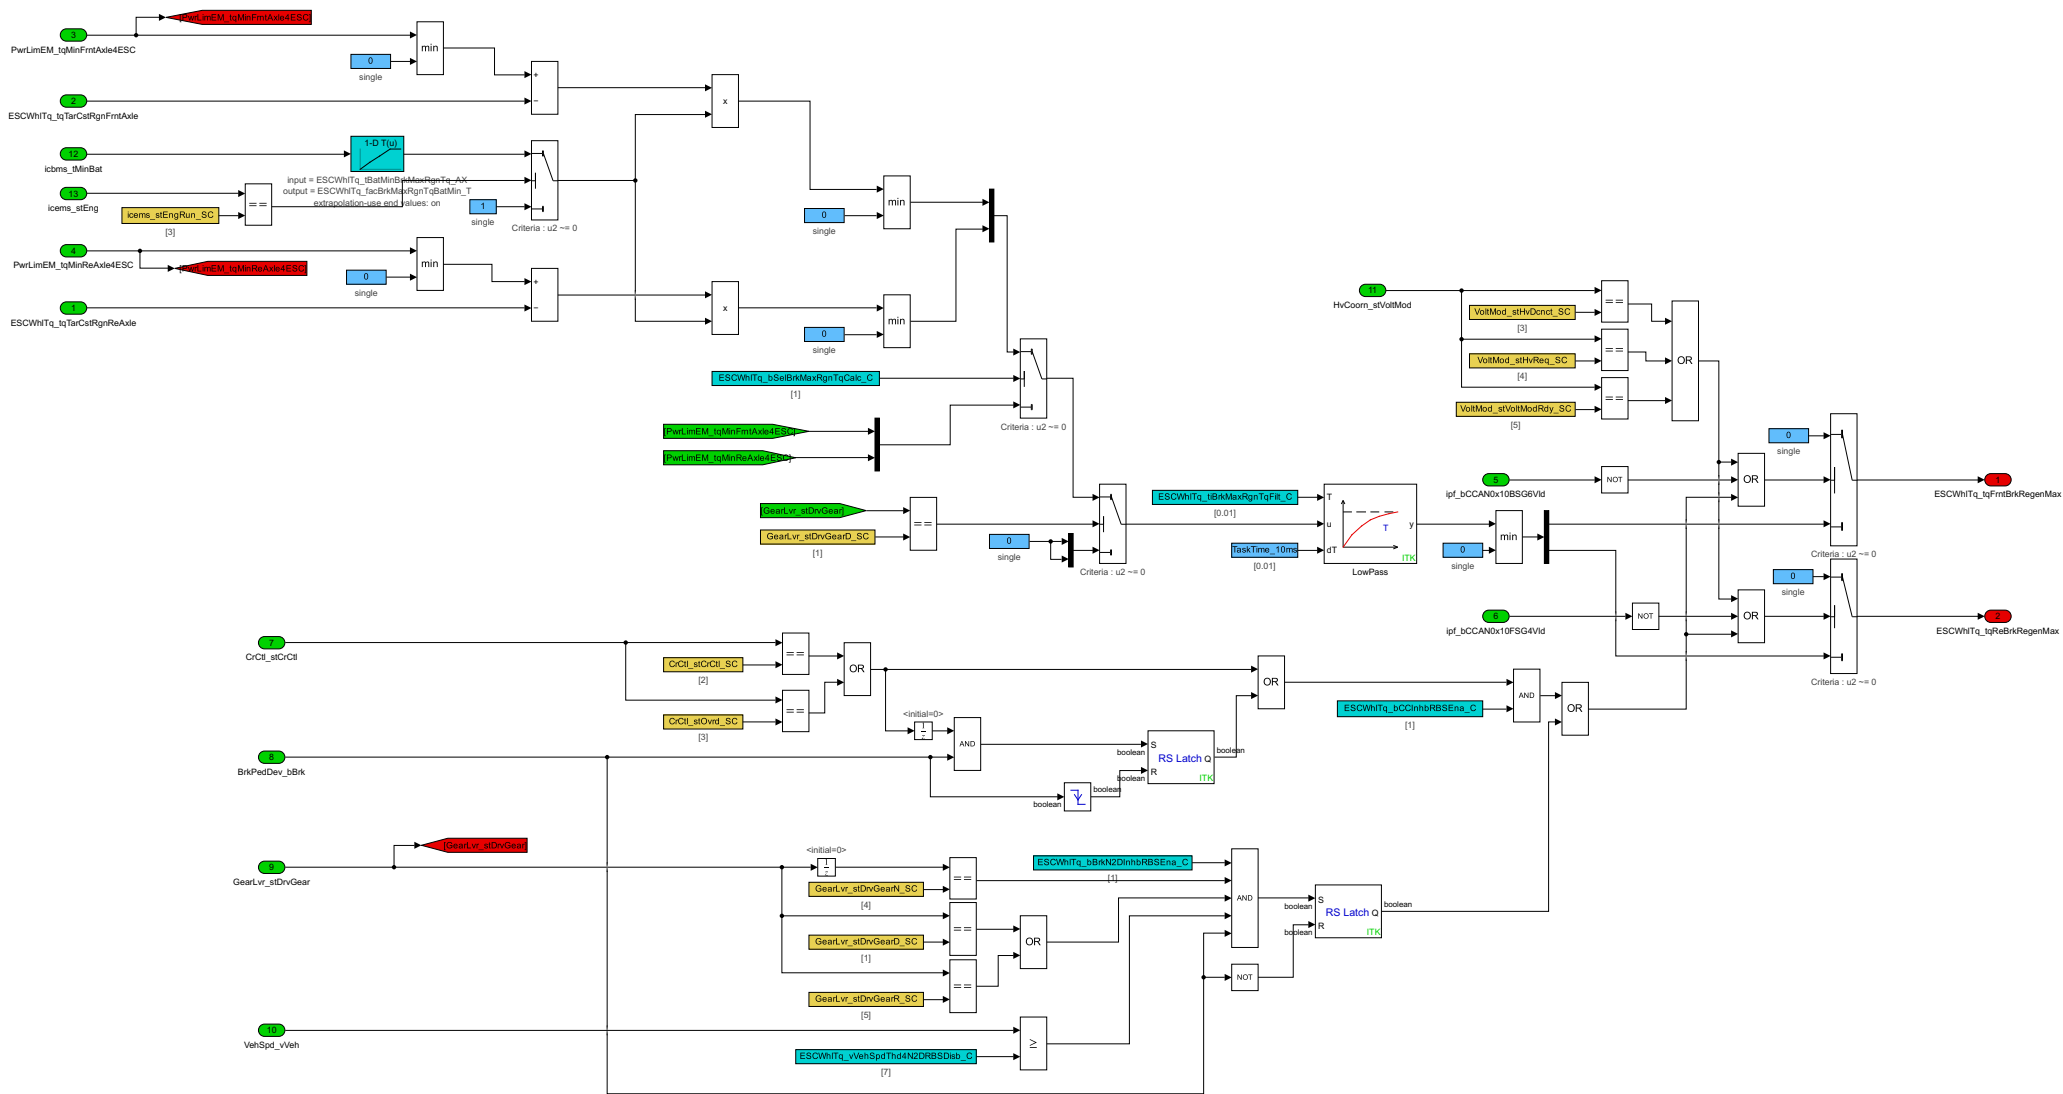






EmptySubsystem






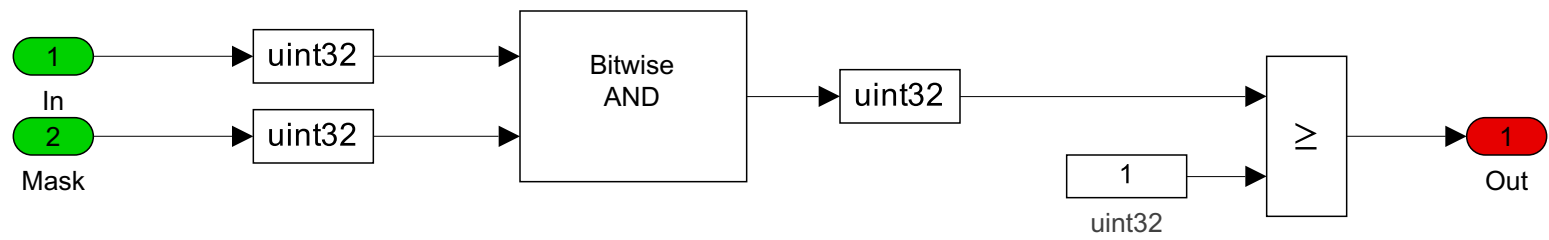

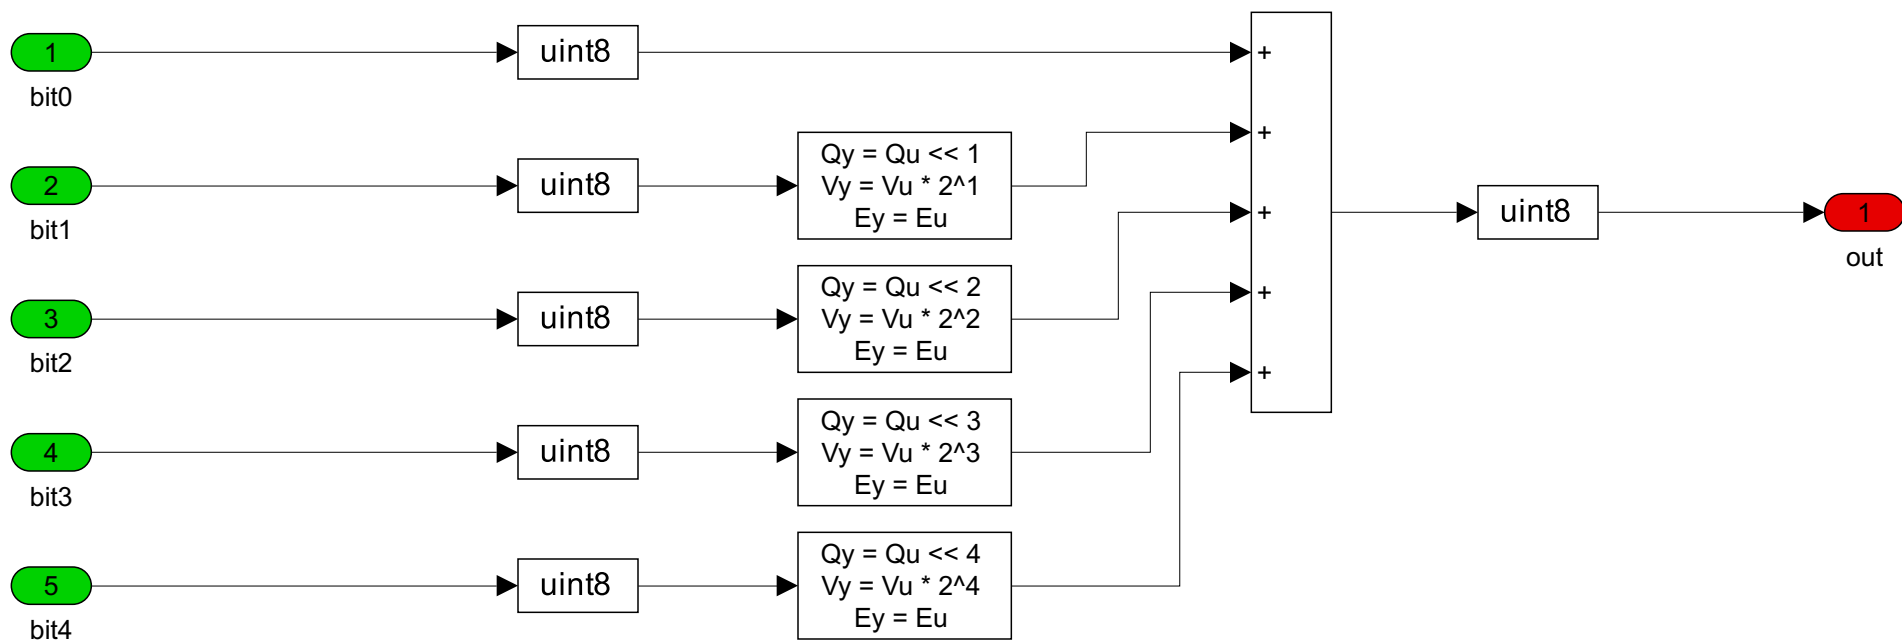

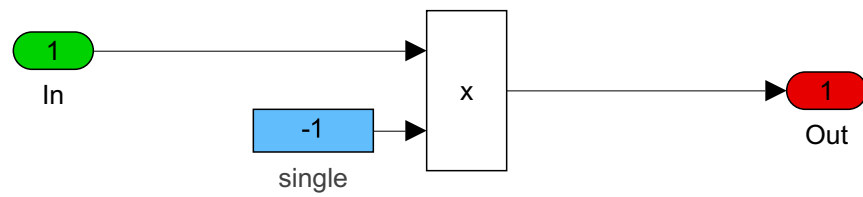

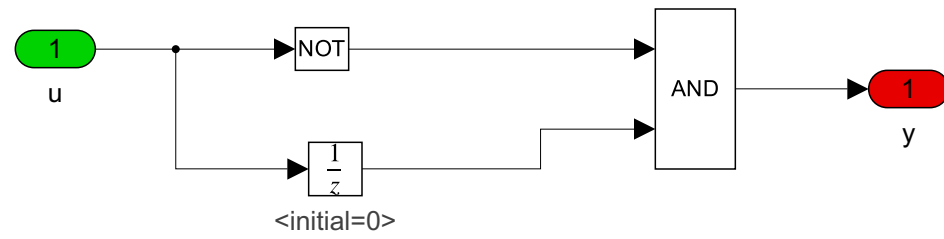

LP Filter $y(n) = K*u(n) + (1-K)*y(n-1)$
stability
 $0 \leq K=Ts/\tau \leq 1$

