

Esta es la versión en caché de [http://www.greensaver.cn/p26\\_en.html](http://www.greensaver.cn/p26_en.html) de Google. Se trata de una captura de pantalla de la página tal como esta se mostraba el 9 Feb 2014 02:24:54 GMT. Es posible que la [página](#) haya sufrido modificaciones durante este tiempo. [Más información](#)  
 Sugerencia: para encontrar rápidamente tu término de búsqueda en esta página, pulsa **Ctrl+F** o **⌘-F** (Mac) y utiliza la barra de búsqueda.

[Versión de solo texto](#)



Service online: 4008-804-1899

Service online: 0574-26889988

Language English | 中文

[Home Page](#) [About Us](#) [Products](#) [R&D](#) [News](#) [Sales Network](#) [Customer Service](#) [Join Us](#)

Home > Products

## Silicone Power Battery Products

Electric vehicle

Silicone power battery for scooter (SP)

Silicone power battery for starter (SS)

Silicone power battery for solar & wind (SSW)

Silicone power battery for UPS (SU)

**Silicone power battery for electric vehicle (SP)**

Silicone power battery for boat (SB)

Silicone power battery for communication (SC)

Silicone power battery for electric tool (ST)

Silicone power battery for LED lighting (SL)

Silicone power battery for railway (SR)

### Features of Silicone power battery for electric vehicle

#### Product features:

- 1、National invented patent silicone compound electrolyte: Conforms to national policy requirements, eco—friendly.
- 2、Under the same volume, the capacity is higher, and our battery possesses higher power and long duration.
- 3、Technical patent battery possesses superior cycling performance and long working life.
- 4、Cold endurance: it can start the electric vehicle easily under -20 °C
- 5、With unique grid structure and design, the battery provides stronger power.
- 6、Powerful, durable, high performance




## 5-Stage IC Controlled Charger




Product Recommendations : SP60-12 SP100-12 SP150-8 SP210-6


Technical characteristic curve :

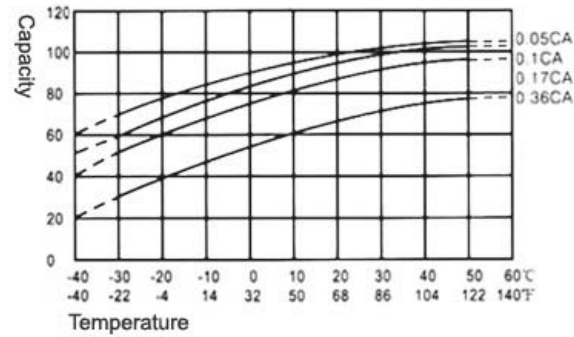


Effect of temperature on capacity

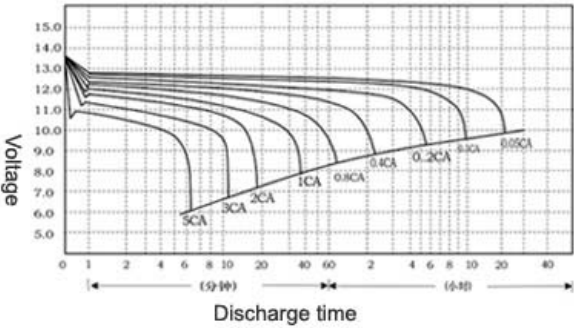

Discharge characteristic curves

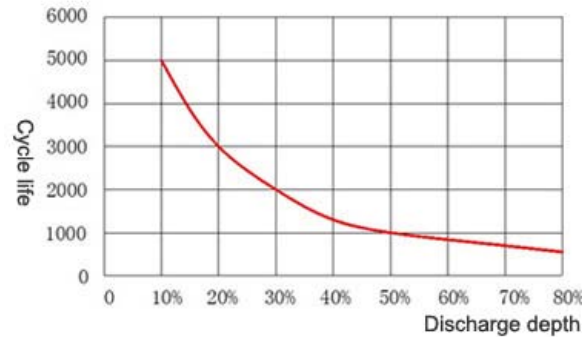

Discharge depth and the cycle life

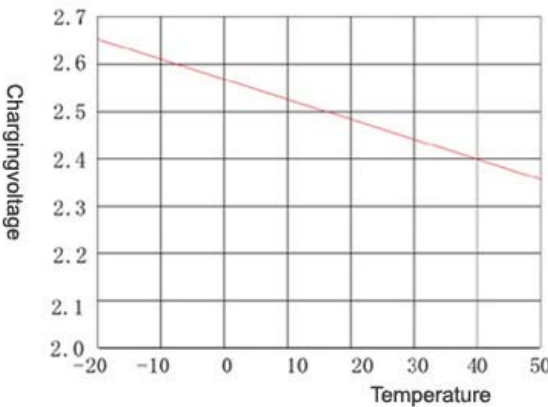

Effect of temperature on charging voltage

Products Specifications (according to GB):

NO.	Model	Voltage	Capacity	Dimension(mm)				Weight Detail
		( V )	(AH)	L	W	H	TH	
1	SP60-12	12	60(5HR)	259	168	210	217	24
2	SP68-12	12	68(5HR)	259	168	210	217	27.5
3	SP100-12	12	100(5HR)	328	171	242	252	38.4
4	SP150-8	8	150(5HR)	260	182	295	300	37.5
5	SP170-8	8	170(5HR)	260	182	295	300	41
6	SP210-6	6	210(5HR)	262	179	255	276	32.5

News Center

Industry Insight  
Company News  
Media Coverage

About Us

Company Profile  
Operation Philosophy  
Vision and Mission  
Qualifications and Patents  
HR  
Contract Us

Products

Silicone power battery for scooter  
Silicone power battery for starter  
Silicone power battery for solar & wind  
Silicone power battery for UPS  
Silicone power battery for electric vehicle  
5-Stage IC Controlled Charger

Join In

Suppliers  
Domestic Distributors  
Overseas Distributors

COPYRIGHT © 2013 GREENSAVER LIMITED.ALL RIGHTS RESERVED.  
Tel: 0574-26889988 Fax: 0574-26886688 E-mail: ningbo@greensaver.cn