
REDLIGHT THERAPY CO.

Wholesale Range

Red light therapy products

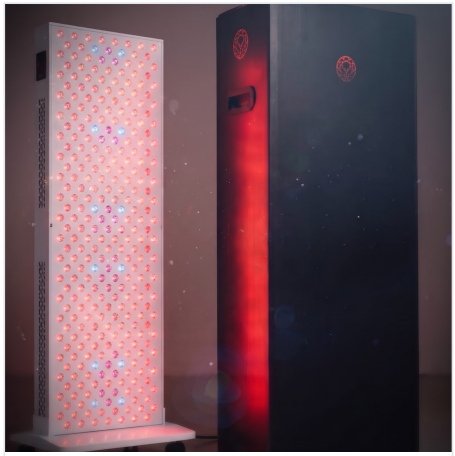

300 LED Red Light Panel

WHOLESALE PRICE **POA**



100 LED Red Light Panel

WHOLESALE PRICE **POA**



Red Light Therapy Hair Cap

WHOLESALE PRICE **POA**



Red Light Therapy Knee Strap

WHOLESALE PRICE **POA**



Red Light Therapy Face Mask

WHOLESALE PRICE **POA**



Starter LED Face Mask

WHOLESALE PRICE **POA**

POA = price on application. Test and certification summaries for each product follow. Product images are for illustration.

REDLIGHT THERAPY CO.

Testing and Documentation

Every product in this range comes with supporting documents. The pages that follow are one-page summaries, prepared by Redlight Therapy Co. from third-party test reports, certificates and instrument measurements, with manufacturer details removed.

Product	Pages in this pack	Model named on the documents
300 LED Red Light Panel	EMC test summary, compliance certificate summary, light output measurement, LED measurement	RT1500S+
Red Light Therapy Hair Cap	EMC and electrical safety certificate summary	QZ022, QZ036
Red Light Therapy Knee Strap	EMC test summary, declaration of conformity summary	K8 (K6 and K9 also named)
Red Light Therapy Face Mask	EMC test summary, certificate of conformity summary	V-F2509 (V-F239 and V-F239Pro also listed)
Starter LED Face Mask	EMC test summary, certificate of compliance summary	SA-P02M01 (tested); SA-P02M01 to M09 covered

How to read these pages

- **EMC** (electromagnetic compatibility) tests check that a device does not disturb other electronics, and keeps working normally when exposed to interference.
- **Electrical safety** is covered by the low voltage certificate for the hair cap.
- **Light measurements** for the panel show the colours of light it gives out (660 nm red and near-infrared) and how steady the output is.
- **“Not applicable”** on a page means the lab recorded that test as not relevant to the product, for example mains tests on a battery-powered device.

Please note

- These pages are summaries, not certificates. Each is based on a single tested sample and does not assess every unit produced.
- The documents cover EMC, electrical safety and light measurements. They do not make or support any medical or health claim.
- Product images are for illustration.

EMC Test Summary

Red Light Panel | Summary of Test Report No. ZKT-250722L16910E

Product	Red Light Panel	**Overall result**	**PASS**
Model	RT1500S+	**Date of issue**	Jul. 22, 2025
Rating	AC 85-265V, 50/60Hz, 24W	**Test dates**	Jul. 8 - 22, 2025
Tested at	AC 230V, 50Hz, working mode	**Model note**	Per report: this model has the same function, software and circuit as the sample tested; differs only in colour and model name
Test lab	Shenzhen ZKT Technology Co., Ltd.	**Directive**	EMC Directive 2014/30/EU

Standards Tested Against

EN IEC 55015:2019/A11:2020 (emissions) • EN IEC 61547:2023 (immunity) • EN IEC 61000-3-2:2019+A1:2021+A2:2024 • EN 61000-3-3:2013+A1:2019+A2:2021 • EN 61000-4-2, -4-3, -4-4, -4-5, -4-6, -4-8, -4-11

Emissions (EN IEC 55015)

Test	Range	Result	Worst-case margin below limit
Conducted emission, AC mains	150 kHz - 30 MHz	**Pass**	3.8 dB (neutral, 0.15 MHz, QP)
Magnetic emission (loop antenna)	9 kHz - 30 MHz	**Pass**	8.3 dB (14.95 MHz, QP)
Radiated emission	30 MHz - 1 GHz	**Pass**	18.6 dB (vertical, 979 MHz, QP)
Harmonic current emissions	EN IEC 61000-3-2	Not applicable	-
Voltage fluctuations and flicker	EN 61000-3-3	**Pass**	Pst 0.064 (limit 1.0); dc 0%; dmax 0%

Immunity (EN IEC 61547:2023)

Test	Standard	Level applied	Criterion	Result
Electrostatic discharge	EN 61000-4-2	Contact ±2, ±4 kV; Air ±2, ±4, ±8 kV	B	**Pass**
Radiated RF field*	EN IEC 61000-4-3	3 V/m, 80-1000 MHz, 80% AM	A	**Pass**
Electrical fast transient / burst	EN 61000-4-4	L, N, L-N, L+N-PE; ±0.5 and ±1 kV	B	**Pass**
Surge	EN 61000-4-5	1 kV (L-N, L-PE, N-PE), 5 pulses each polarity	B	**Pass**
Conducted RF disturbances*	EN IEC 61000-4-6	3 V, 150 kHz - 80 MHz, AC line	A	**Pass**
Power-frequency magnetic field	EN 61000-4-8	3 A/m, X / Y / Z (per test data)	A	**Pass**
Voltage dips and interruptions	EN IEC 61000-4-11	70% / 10 periods; 0% / 0.5 period	C and B	**Pass**

**Tests marked with an asterisk were carried out by a subcontracted laboratory, as stated in the original report. "Not applicable" is as recorded by the lab. Criterion shown is as recorded in the report. Criterion A: normal operation continues during the test. Criterion B: normal operation continues after the test. Criterion C: temporary loss of function allowed if it self-recovers.*

About this document

This page is a summary prepared by the seller from test report ZKT-250722L16910E, issued by Shenzhen ZKT Technology Co., Ltd. It is not the laboratory's report and is not a certificate. Test results apply only to the sample tested; the report lists RT1500S+ as covered by those results. The full original report is available on request.

Compliance Certificate Summary

Red Light Panel, model RT1500S+ | Certificate of Compliance

Document	Certificate of Compliance
Certificate No.	ZKT-250722L16910C
Date of issue	Jul. 22, 2025
Issued by	Shenzhen ZKT Technology Co., Ltd., Shenzhen, China
Product	Red Light Panel
Model	RT1500S+
Test report No.	ZKT-250722L16910E

Standards Listed

EN IEC 55015:2019/A11:2020 • EN IEC 61547:2023 • EN IEC 61000-3-2:2019/A1:2021/A2:2024 • EN 61000-3-3:2013/A1:2019/A2:2021 • EN 61000-4-2:2009 • EN IEC 61000-4-3:2020 • EN 61000-4-4:2012 • EN 61000-4-5:2014+A1:2017 • EN IEC 61000-4-6:2023 • EN 61000-4-8:2010 • EN IEC 61000-4-11:2020

What the certificate states

• The certificate describes itself as an Attestation of Compliance issued on a voluntary basis, stating that the essential requirements are fulfilled based on the technical specifications applicable at the time of issuance.

• Valid only in connection with test report ZKT-250722L16910E.

• Based on a single evaluation of the submitted sample(s). It does not imply an assessment of the whole production.

• The certificate refers to notes overleaf, which were not part of the file provided.

About this document

This page is a summary prepared by the seller from a certificate of compliance issued by Shenzhen ZKT Technology Co., Ltd. The certificate covers a family of models; this page shows RT1500S+ only. It is not a certificate and does not itself contain test results. The test report named above holds the measured results.

What Light Does This Panel Give Out?

Red Light Panel (RT1500S) | Light output measurement

660.8 nm	66.0 mW/cm^2	0 Hz
Main red peak. The colour where the panel gives out the most light	Total light power on each square centimetre of the measured area	Flicker. The light is steady, with 0% flicker depth


How the light is split



Red *45%* ***Near-infrared*** *47%* *Other 8%*

About 92% of the measured light is red or near-infrared.

The light spectrum

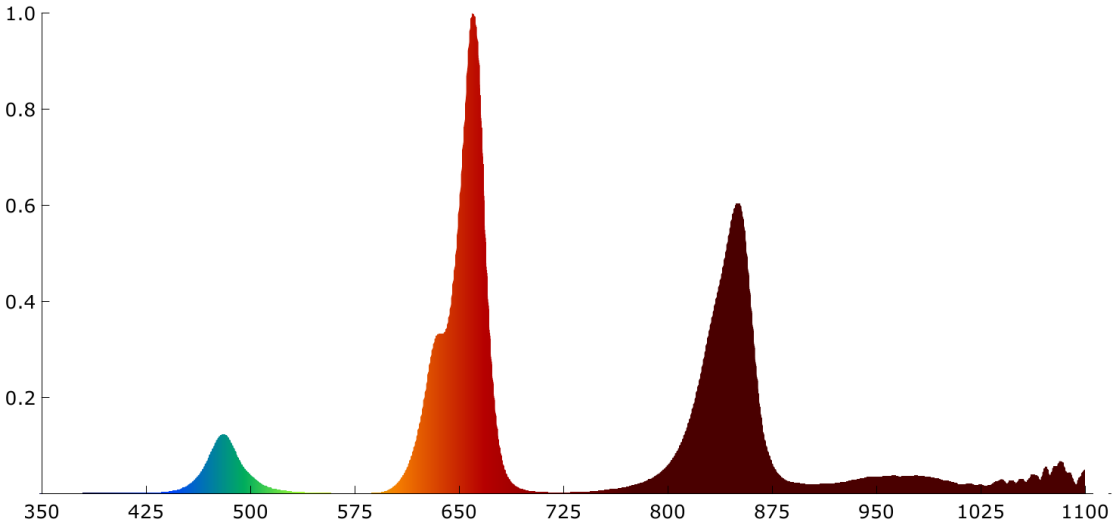

Wavelength in nanometres (nm) along the bottom; taller means more light at that colour. Chart taken from the instrument printout.

In plain English

- **Two main colours.** Nearly all the light sits in two bands: red, peaking at about 660 nm, and near-infrared, peaking at about 850 nm. These are the two wavelength ranges commonly used in red light therapy devices. Near-infrared is invisible to the eye.
- **Only small amounts of anything else.** There is a small bump of blue-green light (about 5% of the total) and a trace of UV (about 0.1%).
- **Steady output.** No flicker was measured.

Test details

Instrument: OHSP-350SF spectroradiometer (350 - 1100 nm) • Date: Sep. 14, 2026 • Room: 20 °C, 65% humidity. The instrument printout does not record the model name or the measuring distance, and the power figure changes with distance.

This page is a summary prepared by the seller from an instrument printout. It is a measurement record, not a certificate, safety approval or medical claim.

Are the LEDs the Right Colours?

Individual LED test | 660 nm red and 850 nm near-infrared

659.9-660.8 nm	852.9-853.8 nm	6 of 6
Red LEDs (3 tested). Target colour: 660 nm	**Near-infrared LEDs** (3 tested). Target colour: 850 nm	LEDs measured at about 20 mA, the same drive current

Results for each LED

LED no.	Type	Peak colour (nm)	Light output (mW)	Power used (mW)	Power turned into light
16	**Near-infrared 850**	853.8	11.74	32.5	36%
17	**Red 660**	659.9	18.65	42.3	44%
18	**Near-infrared 850**	853.2	11.14	31.9	35%
19	**Red 660**	660.3	18.61	39.4	47%
20	**Near-infrared 850**	852.9	11.38	31.8	36%
21	**Red 660**	660.8	18.94	39.2	48%

What the numbers mean

- **Peak colour (wavelength).** The colour at which the LED gives out the most light. All three red LEDs peak within 1 nm of 660 nm, and all three near-infrared LEDs within 1 nm of 853 nm.
- **Light output.** How much light energy the LED gives out every second. The red LEDs agree within about 2% of each other (18.61 - 18.94 mW), the near-infrared LEDs within about 5% (11.14 - 11.74 mW).
- **Power turned into light.** The share of the electricity used that comes out as light, rather than heat. About 44 - 48% for the red LEDs and 35 - 36% for the near-infrared LEDs.

Test details

Instrument: Everfine LED300 with HAAS2000 spectrometer • Date: Nov. 3, 2026 • LED sample numbers 16 - 21, one reading each. This tests the LEDs on their own, not a finished product, so it does not show how bright a finished device is. The printout does not record the LED model or supplier.

This page is a summary prepared by the seller from an instrument printout. It is a measurement record, not a certificate, safety approval or medical claim.

Conformity Certificate Summary

Red Light Therapy Cap | EMC and Low Voltage Directive certificates

Product	Red Light Therapy Cap	**Models**	QZ022, QZ036
Issued by	East Notice Certification Service Co., Ltd., Guangzhou, China	**Date of issue**	Oct. 20, 2025 (both certificates)

1. Electromagnetic Compatibility (EMC)

Directive	Applied standards	Certificate No.	Test report No.
EMC Directive 2014/30/EU	EN IEC 55014-1:2021 (emissions) EN IEC 55014-2:2021 (immunity)	ENC2510105GZ18-1	ENC2510105GZ18E1

2. Low Voltage (electrical safety)

Directive	Applied standards	Certificate No.	Test report No.
Low Voltage Directive 2014/35/EU	EN IEC 60335-1:2023+A11:2023 EN 60335-2-27:2013+A2:2020 EN 62233:2008	ENC2510105GZ18-2	ENC2510105GZ18L1

What the certificates state

Both certificates state that the submitted product was tested against the listed standards and found in compliance. Each is based on an evaluation of a sample of the product, and neither implies assessment of series production. Each certificate also notes that the CE marking can be affixed after the necessary technical documentation is prepared.

About this document

This page is a summary prepared by the seller from two certificates of conformity issued by East Notice Certification Service Co., Ltd. It is not a certificate and does not itself contain test results. Measured results are in the test reports named above, which are not reproduced here.

EMC Test Summary

Heated Knee Pad | Summary of Test Report No. SAIL260112045E055

Product	Heated Knee Pad	**Result**	**PASS** on all tests applicable to this product
Model tested	K8 (prototype production sample)	**Date of issue**	Jan. 16, 2026
Models on cover	K8, K6, K9	**Test dates**	Jan. 12 - 14, 2026
Test voltage	DC 5V, battery supplied	**Operating mode**	Working
Test lab	Shenzhen SAIL Testing Technology Co., Ltd.	**Class**	Class B limits (EN IEC 55014-1)

Standards Tested Against

EN IEC 55014-1:2021 (emissions) • EN IEC 55014-2:2021 (immunity) • EN IEC 61000-3-2:2019+A1:2021+A2:2024 • EN 61000-3-3:2013+A1:2019+A2:2021 • EN 61000-4-2:2009

Emissions (EN IEC 55014-1)

Test	Range / standard	Result	Worst-case margin below limit
Radiated disturbance	30 MHz - 1 GHz, 3 m	**Pass**	7.5 dB (vertical, 744.9 MHz, peak)
Conducted disturbance, mains terminals	150 kHz - 30 MHz	Not applicable	Battery supplied
Disturbance power	30 - 300 MHz	Not applicable	No cable out
Harmonic current emissions	EN IEC 61000-3-2	Not applicable	Battery supplied
Voltage fluctuations and flicker	EN 61000-3-3	Not applicable	Battery supplied
Clicks	EN IEC 55014-1, section 4.2	Not applicable	Listed as N/A in the report summary

Immunity (EN IEC 55014-2:2021)

Test	Standard	Level applied	Criterion	Result
Electrostatic discharge	EN 61000-4-2	Air ±8 kV; coupling planes (HCP / VCP) ±2 and ±4 kV	B required; A observed	**Pass**
Radiated RF electromagnetic field	EN IEC 61000-4-3	3 V/m, 80 - 1000 MHz, 80% AM, all four sides, both polarisations	A required; A observed	**Pass**
Electrical fast transient / burst	EN IEC 61000-4-4	-	-	Not applicable
Surge	EN IEC 61000-4-5	-	-	Not applicable
Injected currents (conducted RF)	EN IEC 61000-4-6	-	-	Not applicable
Voltage dips and interruptions	EN IEC 61000-4-11	-	-	Not applicable

“Not applicable” is as recorded by the lab: the product is battery supplied (no mains input), so mains-port emission and immunity tests do not apply. Criterion A: normal operation continues during the test. Criterion B: normal operation continues after the test.

About this document

This page is a summary prepared by the seller from test report SAIL260112045E055, issued by Shenzhen SAIL Testing Technology Co., Ltd. It is not the laboratory's report and is not a certificate. Test results apply only to the sample tested (model K8). The full original report is available on request.

Conformity Certificate Summary

Heated Knee Pad | Declaration of Conformity, EMC Directive 2014/30/EU

Document	Declaration of Conformity
Certificate No.	SAIL260112045E055C
Date of issue	Jan. 16, 2026
Issued by	Shenzhen SAIL Testing Technology Co., Ltd., Shenzhen, China
Product	Heated Knee Pad
Models	K8, K6, K9
Directive	EMC Directive 2014/30/EU
Test report No.	SAIL260112045E055

Standards Listed

EN IEC 55014-1:2021 • EN IEC 55014-2:2021 • EN IEC 61000-3-2:2019+A1:2021+A2:2024 • EN 61000-3-3:2013+A1:2019+A2:2021

What the certificate states

• The submitted products were tested against the listed standards and found in compliance with the EMC Directive.

• The laboratory acknowledges that the manufacturer may issue a declaration of conformity and apply the CE marking in accordance with European Union rules.

• Valid only in connection with test report SAIL260112045E055.

• Based on a single evaluation of the submitted sample(s). It does not imply an assessment of the whole production, and other relevant directives have to be observed.

About this document

This page is a summary prepared by the seller from a declaration of conformity issued by Shenzhen SAIL Testing Technology Co., Ltd. It is not a certificate and does not itself contain test results. The test report named above holds the measured results.

EMC Test Summary

Light Therapy Mask | Summary of Test Report No. HX251230E001

Product	Light Therapy Mask	**Overall result**	**PASS**
Model tested	V-F2509	**Date of issue**	Dec. 24, 2025
Also listed	V-F239, V-F239Pro	**Test dates**	Dec. 22 - 24, 2025
Power supply	5V / 1A (DC)	**Operating mode**	Working, high speed
Test lab	Shenzhen Huaxin Information Technology Service Co., Ltd	**Lab accreditation**	A2LA Cert. No. 6855.01 (ISO/IEC 17025:2017)

Standards Tested Against

EN IEC 55014-1:2021 (emissions) • EN IEC 55014-2:2021 (immunity) • EN IEC 61000-3-2:2019+A1:2021 • EN 61000-3-3:2013+A1:2019+A2:2021

Emissions

Test	Standard	Result	Worst-case margin below limit
Radiated emission (30 MHz - 1 GHz)	EN IEC 55014-1	**Pass**	5.5 dB (horizontal, 208.8 MHz, QP)
Conducted emission, AC mains (150 kHz - 30 MHz)	EN IEC 55014-1	**Pass**	18.5 dB (average detector, 11.8 MHz)
Disturbance power	EN IEC 55014-1	Not applicable	-
Harmonic current emissions	EN IEC 61000-3-2	Not applicable	-
Voltage fluctuations and flicker	EN 61000-3-3	Not applicable	-

Immunity (EN IEC 55014-2:2021)

Test	Standard	Level applied	Criterion required / achieved	Result
Electrostatic discharge	EN 61000-4-2	Contact ±4 kV; Air ±8 kV	B / A	**Pass**
Radiated RF electromagnetic field	EN IEC 61000-4-3	3 V/m, 80-1000 MHz plus 1800, 2600, 3500, 5000 MHz; 80% AM	A / A	**Pass**
Electrical fast transient / burst	EN 61000-4-4	-	-	Not applicable
Surge	EN 61000-4-5	-	-	Not applicable
Conducted RF disturbances	EN 61000-4-6	-	-	Not applicable
Voltage dips and interruptions	EN IEC 61000-4-11	-	-	Not applicable

“Not applicable” means the lab recorded the test as not applicable for this product as tested (DC-powered, 5V/1A supply). Criterion A: normal operation continues during the test. Criterion B: normal operation continues after the test.

About this document

This page is a summary prepared by the seller from test report HX251230E001, issued by Shenzhen Huaxin Information Technology Service Co., Ltd. It is not the laboratory's report and is not a certificate. Test results apply only to the sample tested. The full original report is available on request.

Conformity Certificate Summary

Light Therapy Mask | Certificate of Conformity, EMC Directive 2014/30/EU

Document	Certificate of Conformity
Registration No.	HX251230E001C
Date of issue	Dec. 30, 2025
Issued by	Shenzhen Huaxin Information Technology Service Co., Ltd., Shenzhen, China
Product	Light Therapy Mask
Models	V-F2509, V-F239 / V-F239Pro
Directive	EMC Directive 2014/30/EU
Test report No.	HX251230E001

Standards Listed

EN IEC 55014-1:2021 • EN IEC 55014-2:2021 • EN IEC 61000-3-2:2019+A1:2021 • EN 61000-3-3:2013+A1:2019+A2:2021

What the certificate states

- The submitted products were tested against the listed standards and found in compliance with the EMC Directive.
- The applicant is authorised to use the certificate in connection with the EU declaration of conformity to the Directive; it applies only to the equipment described.
- The CE marking can be affixed after the necessary technical documentation is prepared.

About this document

This page is a summary prepared by the seller from a certificate of conformity issued by Shenzhen Huaxin Information Technology Service Co., Ltd. It is not a certificate and does not itself contain test results. The test report named above holds the measured results.

EMC Test Summary

Starter LED Face Mask | Summary of Test Report No. PRMS2607302-01ER

Product	Starter LED Face Mask; named “LED Facial Beauty Device” on the report	**Overall result**	**PASS**
Model tested	SA-P02M01	**Date of issue**	Aug. 7, 2026
Models covered	SA-P02M01 to SA-P02M09; report says models differ in name only	**Test dates**	Aug. 3 - 5, 2026
Power	DC 5V input; battery DC 3.7V, 3000mAh (7.4Wh)	**Tested in**	Charging mode (via AC 230V/50Hz adapter) and working mode
Test lab	Shenzhen Promise Test Technology Co., Ltd.	**Directive**	EMC Directive 2014/30/EU

Standards Tested Against

EN IEC 55014-1:2021 (emissions) • EN IEC 55014-2:2021 (immunity) • EN IEC 61000-3-2:2019+A1:2021+A2:2024 • EN 61000-3-3:2013+A1:2019+A2:2021

Emissions (EN IEC 55014-1)

Test	Range / standard	Result	Worst-case margin below limit
Conducted emission, AC mains (charging)	150 kHz - 30 MHz	**Pass**	8.1 dB (line, 0.154 MHz, QP)
Radiated emission (working, on battery)	30 MHz - 1 GHz, 3 m	**Pass**	8.4 dB (horizontal, 177.5 MHz, QP)
Disturbance power	30 - 300 MHz	Not applicable	-
Harmonic current emissions	EN IEC 61000-3-2	Not applicable	Rated power under 75 W
Voltage fluctuations and flicker	EN 61000-3-3	Not applicable	Not tested: input power about 5 W

Immunity (EN IEC 55014-2:2021)

Test	Standard	Level applied	Criterion	Result
Electrostatic discharge	EN 61000-4-2	Air ±2, ±4, ±8 kV; contact ±2, ±4 kV; coupling planes ±4 kV	B required; A observed	**Pass**
Radiated RF electromagnetic field*	EN IEC 61000-4-3	3 V/m, 80 - 1000 MHz, 80% AM, four sides, both polarisations	A required; A observed	**Pass**
Electrical fast transient / burst	EN 61000-4-4	AC line L, N, L+N; ±1 kV, 5 kHz	B required; A observed	**Pass**
Surge	EN 61000-4-5	L-N, ±1 kV	B required; A observed	**Pass**
Conducted RF disturbances	EN 61000-4-6	3 V, 0.15 - 230 MHz, 80% AM, AC power port	A required; A observed	**Pass**
Voltage dips and interruptions	EN IEC 61000-4-11	100% / 0.5 cycle; 60% / 10 cycles; 30% / 25 cycles	C required; B observed	**Pass**

**The report states this test was carried out at a different test site. “Not applicable” is as recorded by the lab; the report gives the reasons shown. Criterion A: normal operation continues during the test. Criterion B: normal operation continues after the test. Criterion C: temporary loss of function allowed if it recovers.*

About this document

This page is a summary prepared by the seller from test report PRMS2607302-01ER, issued by Shenzhen Promise Test Technology Co., Ltd. It is not the laboratory's report and is not a certificate. Test results apply only to the sample tested (model SA-P02M01).

Compliance Certificate Summary

Starter LED Face Mask | Certificate of Compliance, EMC Directive 2014/30/EU

Document	Certificate of Compliance
Certificate No.	PRMS2607302-01EC
Date of issue	Aug. 7, 2026
Issued by	Shenzhen Promise Test Technology Co., Ltd., Shenzhen, China
Product	Starter LED Face Mask; named “LED Facial Beauty Device” on the certificate
Models	SA-P02M01 to SA-P02M09
Directive	EMC Directive 2014/30/EU
Test report No.	PRMS2607302-01ER

Standards Listed

EN IEC 55014-1:2021 • EN IEC 55014-2:2021 • EN IEC 61000-3-2:2019+A1:2021+A2:2024 • EN 61000-3-3:2013+A1:2019+A2:2021

What the certificate states

- The product described was tested against the listed standards and found in compliance with the EMC Directive 2014/30/EU.
- Valid only in connection with test report PRMS2607302-01ER.
- The CE marking may be used if all relevant and effective European Commission Directives and Regulations are complied with.
- Based on a single evaluation of the submitted sample(s). It does not imply an assessment of the whole product, and other relevant directives have to be observed.

About this document

This page is a summary prepared by the seller from a certificate of compliance issued by Shenzhen Promise Test Technology Co., Ltd. It is not a certificate and does not itself contain test results. The test report named above holds the measured results.