


A member carrying a load is supported by a pin at point *A* and a cable *BC*. Using the FBD below, indicate which of the drawn reaction components need to be considered given the supports used.

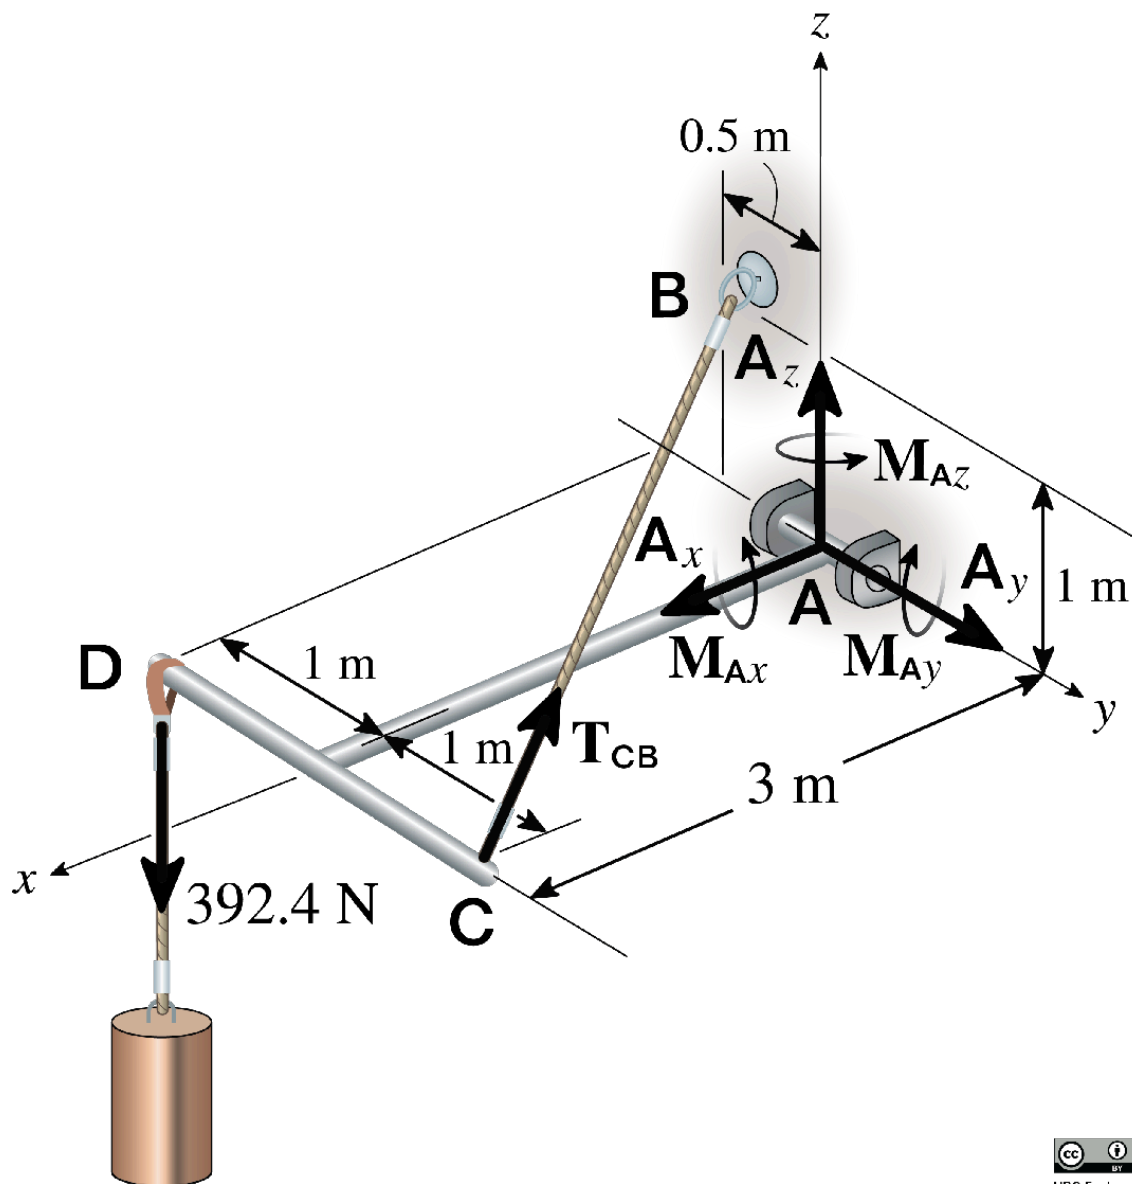

$A_x$

$A_y$

$A_z$

$M_{Ax}$

$M_{Az}$

$T_{CB}$