

NOTES

1: DIMENSIONS AS ANODIZED
ANODIZING: TYPE II, CLASS II, MIL-A8625F COMPLIANCE

2: QTY OF PARTS


1X LEFT HAND M45 X 1.5 - 6H THREAD

1X RIGHT HAND M45 X 1.5 - 6H THREAD

3: ALL UNDIMENSIONED FEATURES: +/- 0.13MM or 0.5 A B C

4: HUB AND TRIPOD SLEEVE TOLERANCE RANGE: 0.001" - 0.002" CLEARANCE

5: TRIPOD SLEEVE CUT - CHAMFER INBOARD EDGE AS YOU SEE FIT
- LEAD IN ON TRIPOD SLEEVE CUT AS YOU SEE FIT

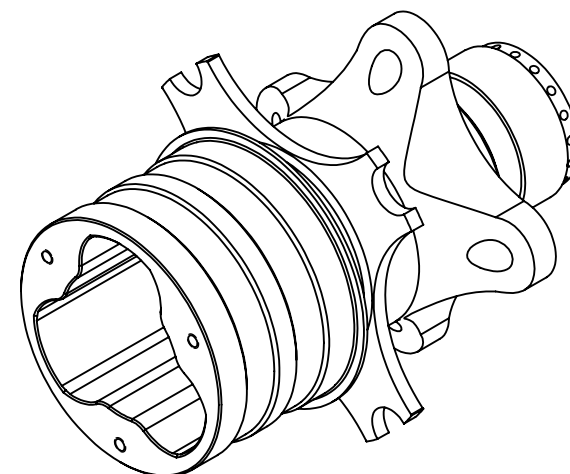

ISOMETRIC
SCALE 1 : 2

A