

Bluetooth Low Energy

1st Muhammad Umer Bin Yaqoob

Hochschule Hamm-Lippstadt

Industrial Communication Standard

Hamm, Germany

muhammad-umer-bin.yaqoob@stud.hshl.de

2nd Ukamaka Akumili Anaedu

Hochschule Hamm-Lippstadt

Industrial Communication Standard

Hamm, Germany

Ukamaka-akumili.anaedu@stud.hshl.de

3rd Muhammad Umer Bin Yaqoob

Hochschule Hamm-Lippstadt

Industrial Communication Standard

Hamm, Germany

muhammad-umer-bin.yaqoob@stud.hshl.de

Abstract—This paper presents a comprehensive analysis of the BLE technology, delving into its key features, performance characteristics, and security aspects. We first provide an overview of the BLE protocol stack, focusing on its low power consumption and adaptive frequency hopping mechanisms.

Index Terms—

I. INTRODUCTION

Bluetooth Low Energy (BLE) is a low-power variant of the classic Bluetooth technology that was developed for wireless communication over short distances by the Bluetooth Special Interest Group (SIG) [1]. Since its introduction, it is gaining popularity in various applications because of its low power consumption, secure connectivity and compatibility with many devices [2]. This paper aims to provide a comprehensive study of BLE, its advantages, disadvantages and real-world applicability.

II. MOTIVATION

The advent of the Internet of Things (IoT), where everyday devices are increasingly connected, has ushered in a new era of digitisation. Bluetooth Low Energy (BLE), with its low-power and short-range communication capabilities, has become the linchpin of this transformation [1]. The importance of BLE is underscored by its rapid adoption in a wide range of applications and devices, and it is predicted to be a fundamental component of billions of devices in the near future [1].

BLE is not just another wireless communication technology. It is distinguished by its extremely low power consumption, secure connectivity and broad compatibility with a wide range of devices [2]. In addition, BLE's hardware affordability, freely available specification documents, and ubiquitous presence in smartphones make it an attractive and practical choice for various IoT applications, from personal fitness trackers and advanced medical devices to home automation systems. BLE's advanced features extend beyond its low power consumption. Its adaptive frequency hopping mechanism allows devices to dynamically move within a congested 2.4GHz spectrum and avoid interference and collisions, a feature that is essential to keeping IoT systems robust [3].

There is an urgent need for a comprehensive investigation of this technology, its strengths, weaknesses and real-world applicability, given the growing importance of BLE in the IoT space. In addition to enhancing our understanding of BLE, this

investigation paves the way for the development of innovative solutions that leverage the unique strengths of this technology.

The study is motivated by a desire to further that understanding and to provide a reference point for researchers and practitioners in the area, allowing them to exploit the potential of BLE in the development of efficient, secure and effective wireless communication solutions for an increasingly connected world.

III. COMMUNICATION PROTOCOL

A communication protocol is a system of rules that allows more than one device to communicate and transmit information via any kind of variation of a physical quantity. The communication that is used in this project is BLE (Bluetooth low energy). BLE was first released in 2010 and has evolved through time. Bluetooth Low Energy (BLE) is an emerging wireless technology developed by the Bluetooth Special Interest Group (SIG) for short-range communication. In contrast with previous Bluetooth versions, BLE has been designed as a low-power solution for control and monitoring applications. BLE is the distinctive feature of the Bluetooth 4.0 specification [2]. SIG (Special Interest Group) contain five worldwide known companies; Ericsson, Nokia, IBM, Intel and Toshiba.

BLE is gaining momentum ever since it was released. The widespread use of Bluetooth technology (e.g., in mobile phones, laptops, automobiles, etc.) may fuel the adoption of BLE since the implementation of the latter can leverage similarities with classic Bluetooth. According to published forecasts [3], BLE is expected to be used in billions of devices in the near future. In fact, the IETF 6LoWPAN Working Group (WG) [4] has already recognized the importance of BLE for the Internet of Things. As of the writing of this article, the 6LoWPAN WG is developing a specification for the transmission of IPv6 packets over BLE [5].

A. Properties of BLE

BLE provide range from few meters to over 1 km. The range of 1 Km can be achieved through a process called Forward Error Correction (FEC). The main reason BLE is preferred for IOT implementation is its low power consumption which is achieved by turning off the radio as much as possible. It sends packet of data by turning on the radio to send and receive data and then going to sleep as fast as possible. This makes it possible to achieve a battery life of months or even

years. Data throughput of maximum of 2 mega bit per second can be expected but due to overhead and some other aspect, it can be lower. Another great feature of BLE is Adaptive Frequency Hopping, this allows the device to dynamically avoid collision and interference with other devices' signal in a 2.4 GHZ spectrum. The technology works by sending signals by the peripheral device which publishes the data and a central device which scan for this data and initiate the connection. The major Advantages of Bluetooth Low Energy is its ubiquitous smartphone support, open and free access to the specification documents and it's low hardware cost.

B. Comparison between Classic Bluetooth and BLE

Bluetooth can handle a lot of data, but it quickly uses up battery life and costs more. Bluetooth Low Energy is a type of wireless technology that is used for applications that don't need to exchange a lot of data, and which can run on battery power for a longer period of time at a cheaper cost. The following figure describes the different properties of Bluetooth and BLE.

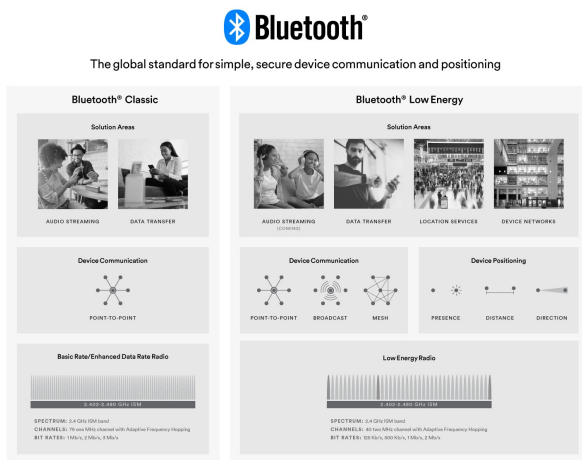


Fig.1 Comparison between classic Bluetooth and BLE

IV. BLUETOOTH LOW ENERGY COMPONENT ARCHITECTURE

The Bluetooth Low Energy Component consists of the BLE Stack, BLE Profile, BLE Component Hardware, Abstraction Layer (HAL), and the Link Layer. The following figure shows a high-level architecture of the BLE Component, illustrating the relationship between each of the layers and the route in which the application interacts with the Component. More over the application is informed of the BLE events through the use of callback functions. This functions which are used in build the state machine are refers to as Callback Functions. As seen in fig 2 section.

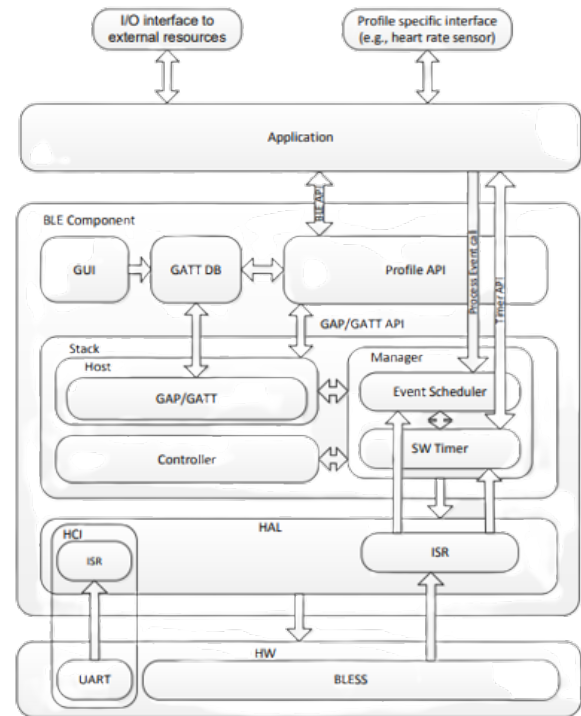


Fig.2 STATE MACHINE DIAGRAM FOR BLE

A. BLOCK DIAGRAM

A block diagram OF BLE mostly shows the various components or blocks that are use in a BLE system and how they are connected. For instants, a block diagram of a BLE system might include components such as the BLE controller, the host processor, the radio, the antenna, and the power management unit, and show how these components are connected. The purpose of a block diagram is to provide a high-level overview of a system and its components, as show below.

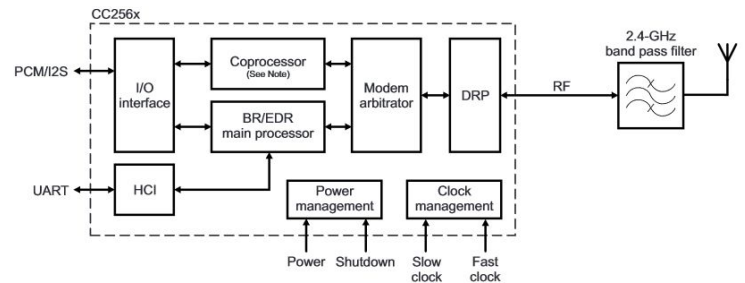


Fig. 3. Block DIAGRAM FOR BLE

V. SPECIFICATION DIAGRAM

The specification diagram in BLE is a more detailed diagram that shows the specific requirements or specifications of a BLE system or component. For example, a specification diagram for a BLE device might show the required RF output power, the maximum current consumption, the supported BLE profiles and services, and other technical specifications. The main purpose of a specification diagram is to provide a detailed understanding of the technical requirements of a system or component, which can be useful for design and development.

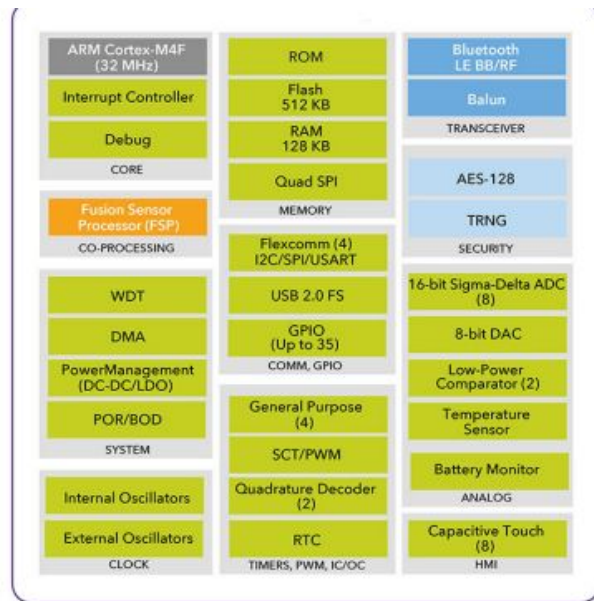


Fig. 4. SPECIFICATION DIAGRAM FOR BLE

A. FUNCTIONAL DESCRIPTION

Because Bluetooth Low Energy (BLE) is a wireless communication technology, and its designed to enable low-power devices to communicate with each other over short distances. The functional description of BLE can be broken down into four main components: Physical Layer: The physical layer of BLE is used for transmitting and receiving radio signals. BLE uses a frequencyhopping spread spectrum (FHSS) technique to minimize interference and upgrade reliability. The physical layer operates in the 2.4 GHz ISM band and also supports data rates of up to 2 Mbps. Link Layer: The link layer of BLE is designed to establish and maintain the connections between devices. The link layer functions with a protocol called the Link Layer Protocol (LL) to oversee the exchange of data packets between devices. The link layer also provides features such as encryption and error correction to maximize the security and reliability. Host Layer: The host layer of BLE is responsible for managing the higher-level functions of the BLE system. The host layer includes the Generic Attribute Profile (GATT) and the Generic Access Profile (GAP). The GATT defines the structure and content of data exchanged between devices, while the GAP defines the roles and responsibilities of devices in the BLE network. Application Layer: The application layer of BLE is responsible for implementing the specific functionality of the BLE system. This layer includes the various profiles and services that define the functions of the system, such as heart rate monitoring, temperature sensing, and proximity detection.

REFERENCES

- [1] Gomez, C., Oller, J., Paradells, J. (2012). Overview and Evaluation of Bluetooth Low Energy: An Emerging Low-Power Wireless Technology. *Sensors*, 12(9), 11734-11753. <https://doi.org/10.3390/s120911734>

- [2] M. Siekkinen, M. Hienkari, J. K. Nurminen and J. Nieminen, "How low energy is bluetooth low energy? Comparative measurements with Zig-Bee/802.15.4," 2012 IEEE Wireless Communications and Networking Conference Workshops (WCNCW), Paris, France, 2012, pp. 232-237, doi: 10.1109/WCNCW.2012.6215496.
- [3] G. Patti, L. Leonardi and L. Lo Bello, "A Bluetooth Low Energy real-time protocol for Industrial Wireless mesh Networks," IECON 2016 - 42nd Annual Conference of the IEEE Industrial Electronics Society, Florence, Italy, 2016, pp. 4627-4632, doi: 10.1109/IECON.2016.7793093.
- [4] Specification of the Bluetooth System, Covered Core Package, Version: 4.0; The Bluetooth Special Interest Group: Kirkland, WA, USA, 2010
- [5] West, A. Smartphone, the key for Bluetooth low energy technology. Available online: <http://www.bluetooth.com/Pages/Smartphones.aspx> (accessed on 24 June 2012).
- [6] Hui, J.W.; Culler, D.E. Extending IP to low-power, wireless personal area networks. *IEEE Internet Comput.* 2008, 12, 37-45. [Google Scholar]
- [7] Nieminen, J.; Patil, B.; Savolainen, T.; Isomaki, M.; Shelby, Z.; Gomez, C. Transmission of IPv6 packets over Bluetooth low energy draft-ietf-6lowpan-btle-08. 2012. in preparation. [Google Scholar]