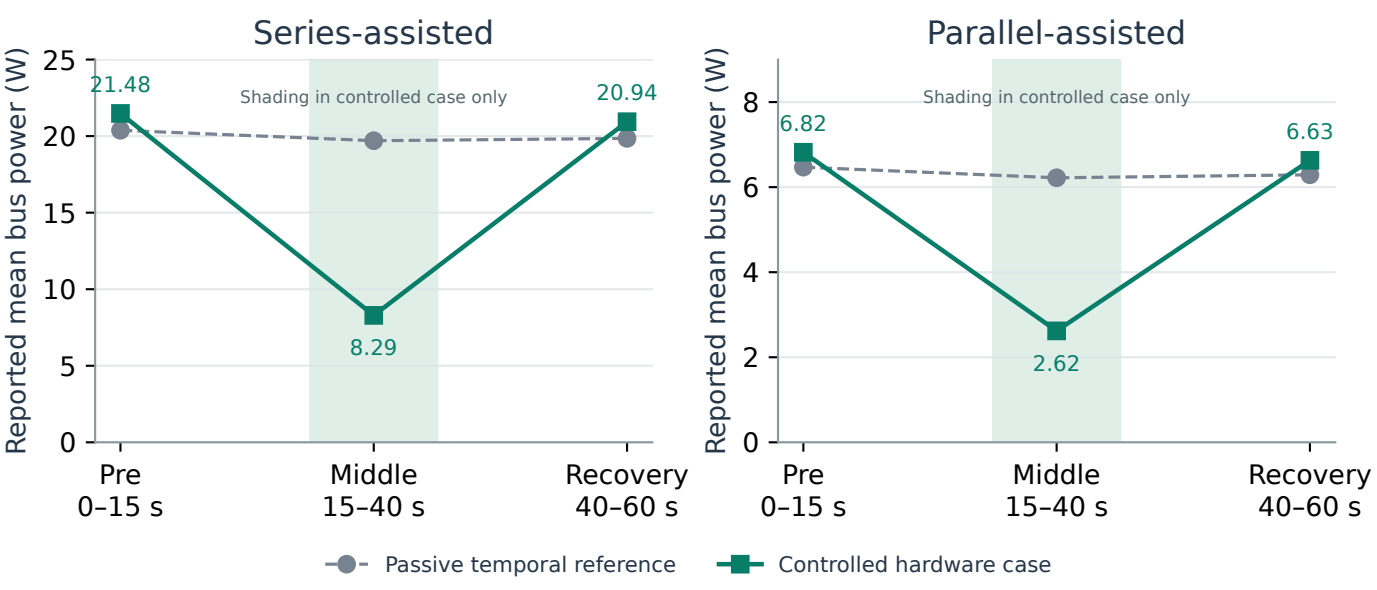
Series-assisted
Parallel-assisted
Reported mean bus power (W)
Shading in controlled case only
21.48
8.29
20.94
6.82
2.62
6.63
Pre
0–15 s
Middle
15–40 s
Recovery
40–60 s
Passive temporal reference
Controlled hardware case