



ROS 2 baseline: model tiers vs the board

camera → goal latency

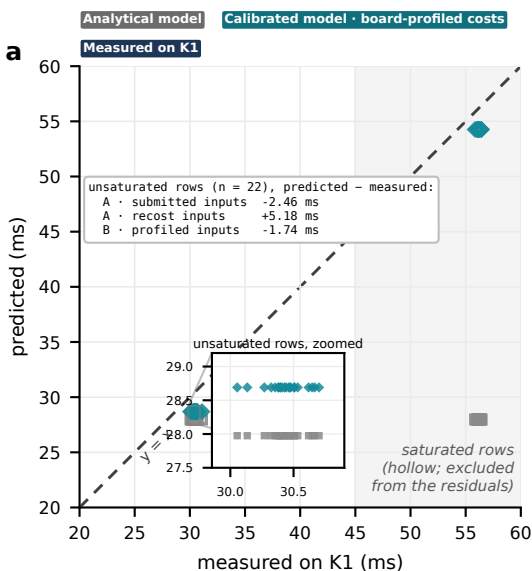

control command rate

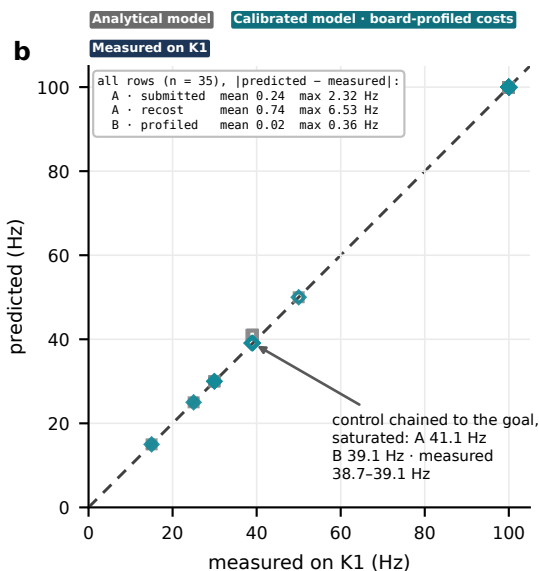

- A · analytical, submitted inputs
- ◆ B · same model, board-profiled costs
- hollow = saturated row
- · y = x: C, measured on K1