

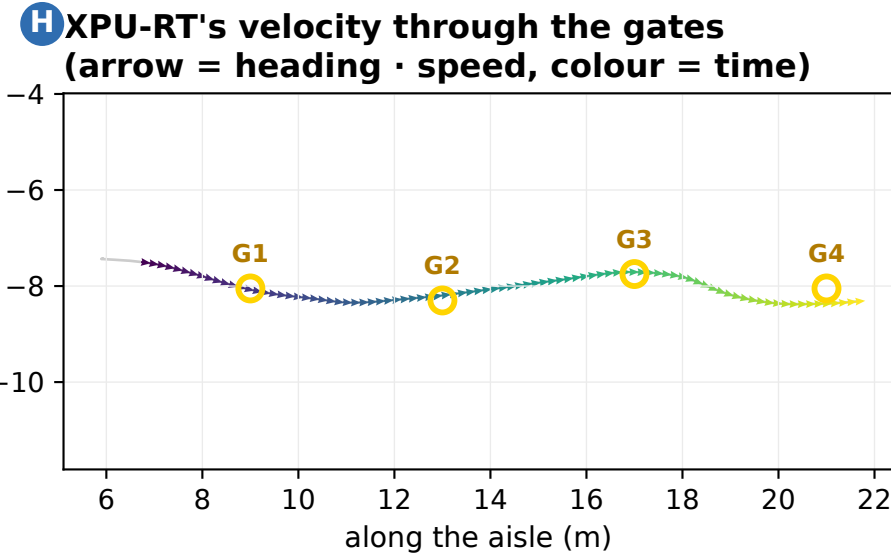
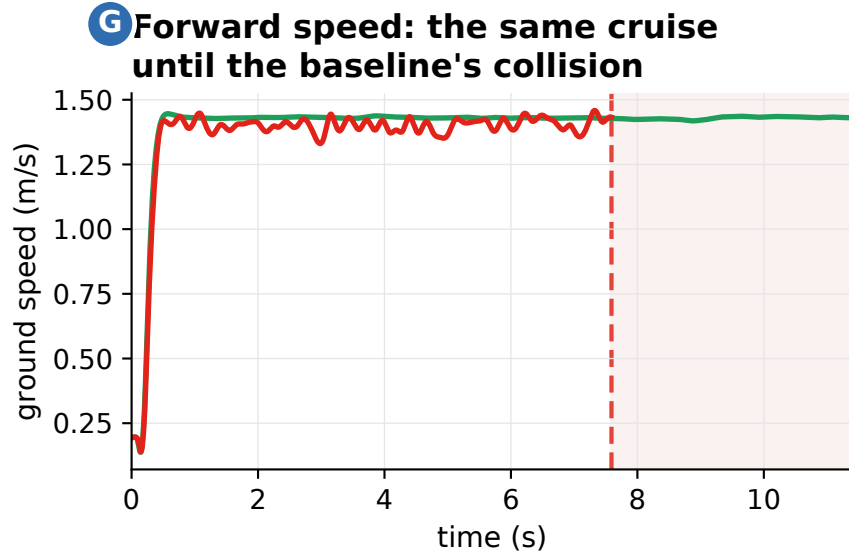
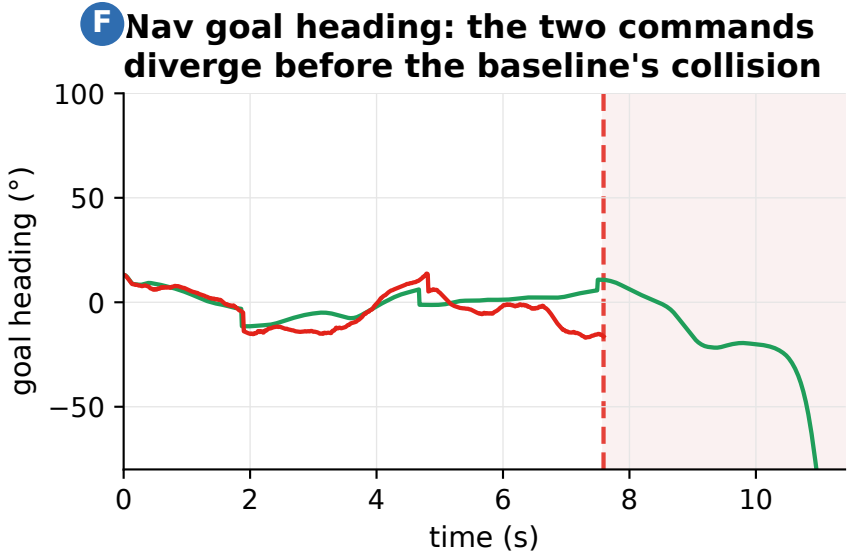
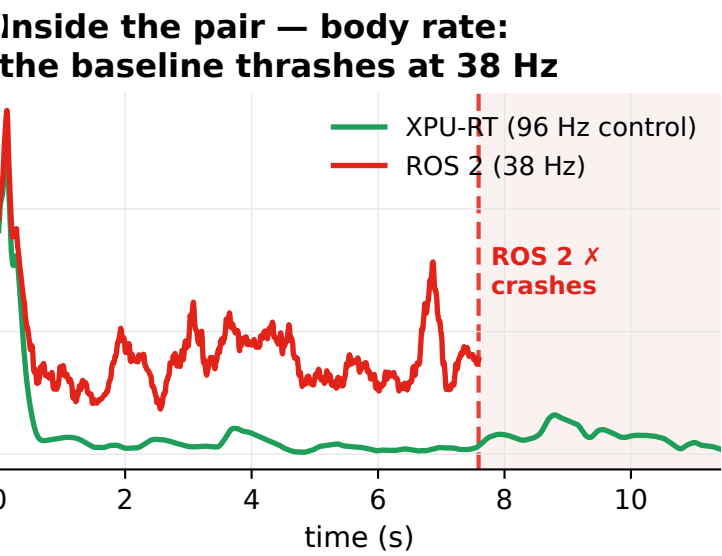
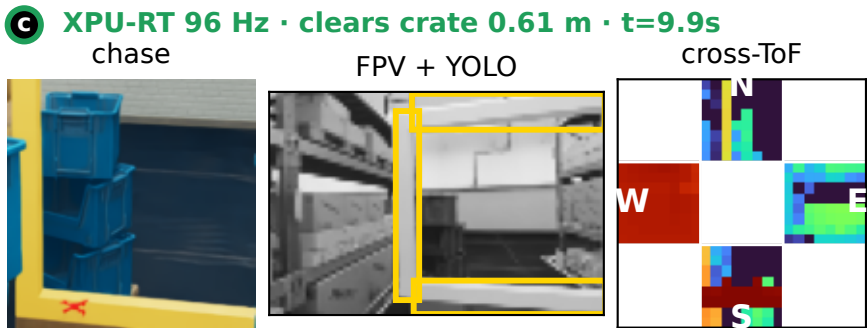
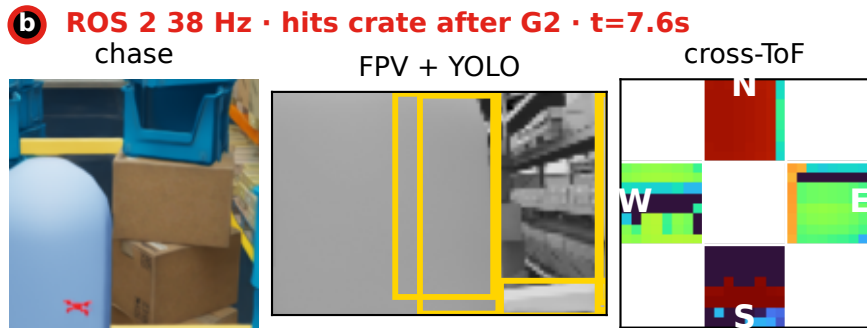
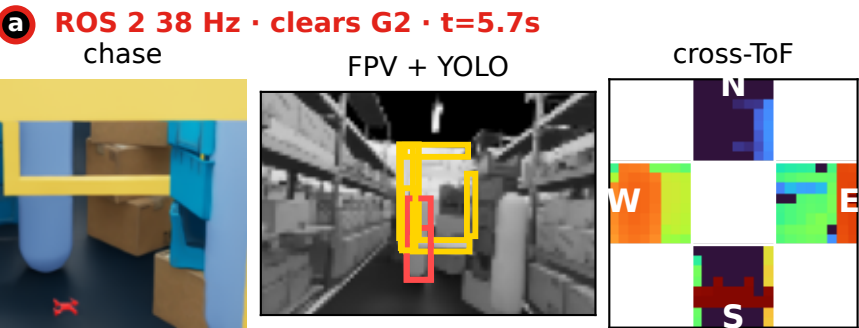
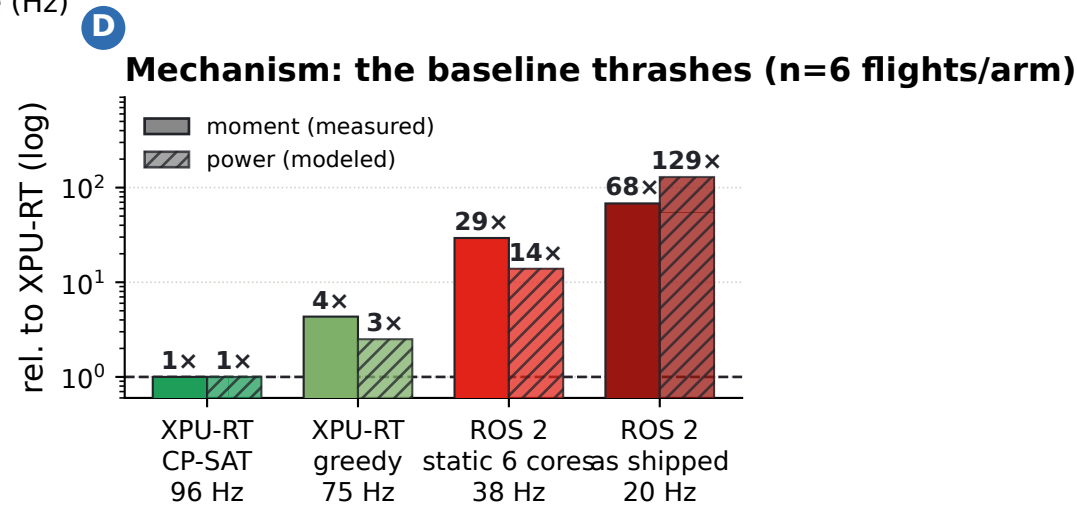
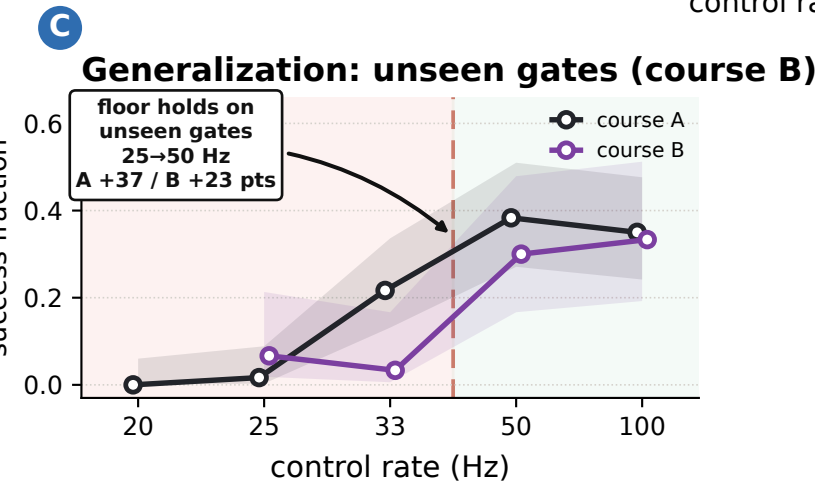


Warehouse gate-course showdown — same scene, drone and gain, at 1.4 m/s
XPU-RT · CP-SAT, hand-pinned placement (96 Hz control) clears all 4 gates
ROS 2 · static 6-core partition, two cores idle (38 Hz control) clears G2 → hits a crate
one seed of this scene (seed 1011); over its 12 seeds XPU-RT completes 4, ROS 2 4

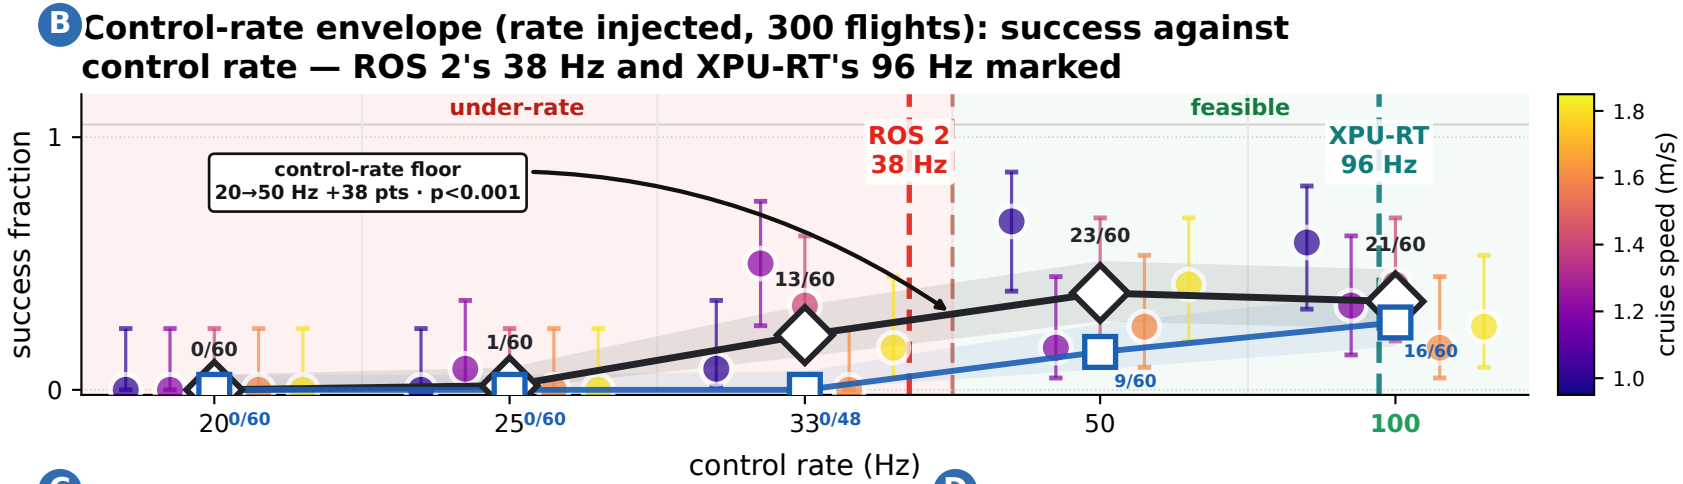

I Onboard K1 schedule, measured at the 45 Hz camera — XPU-RT · CP-SAT, hand-pinned placement places the kernels over all 8 harts: camera→control 57 ms, control every 10.0 ms, 44/44 frames late · YOLO on 8 harts, control on 8 harts, nav on 8 harts
ROS 2 · pinned (3 processes · single executor · chained control · pinned): camera→control 57 ms, control every 25.9 ms, 765/769 frames late · YOLO on 4 harts, 1 traced, control on 1 hart, nav on 1 hart

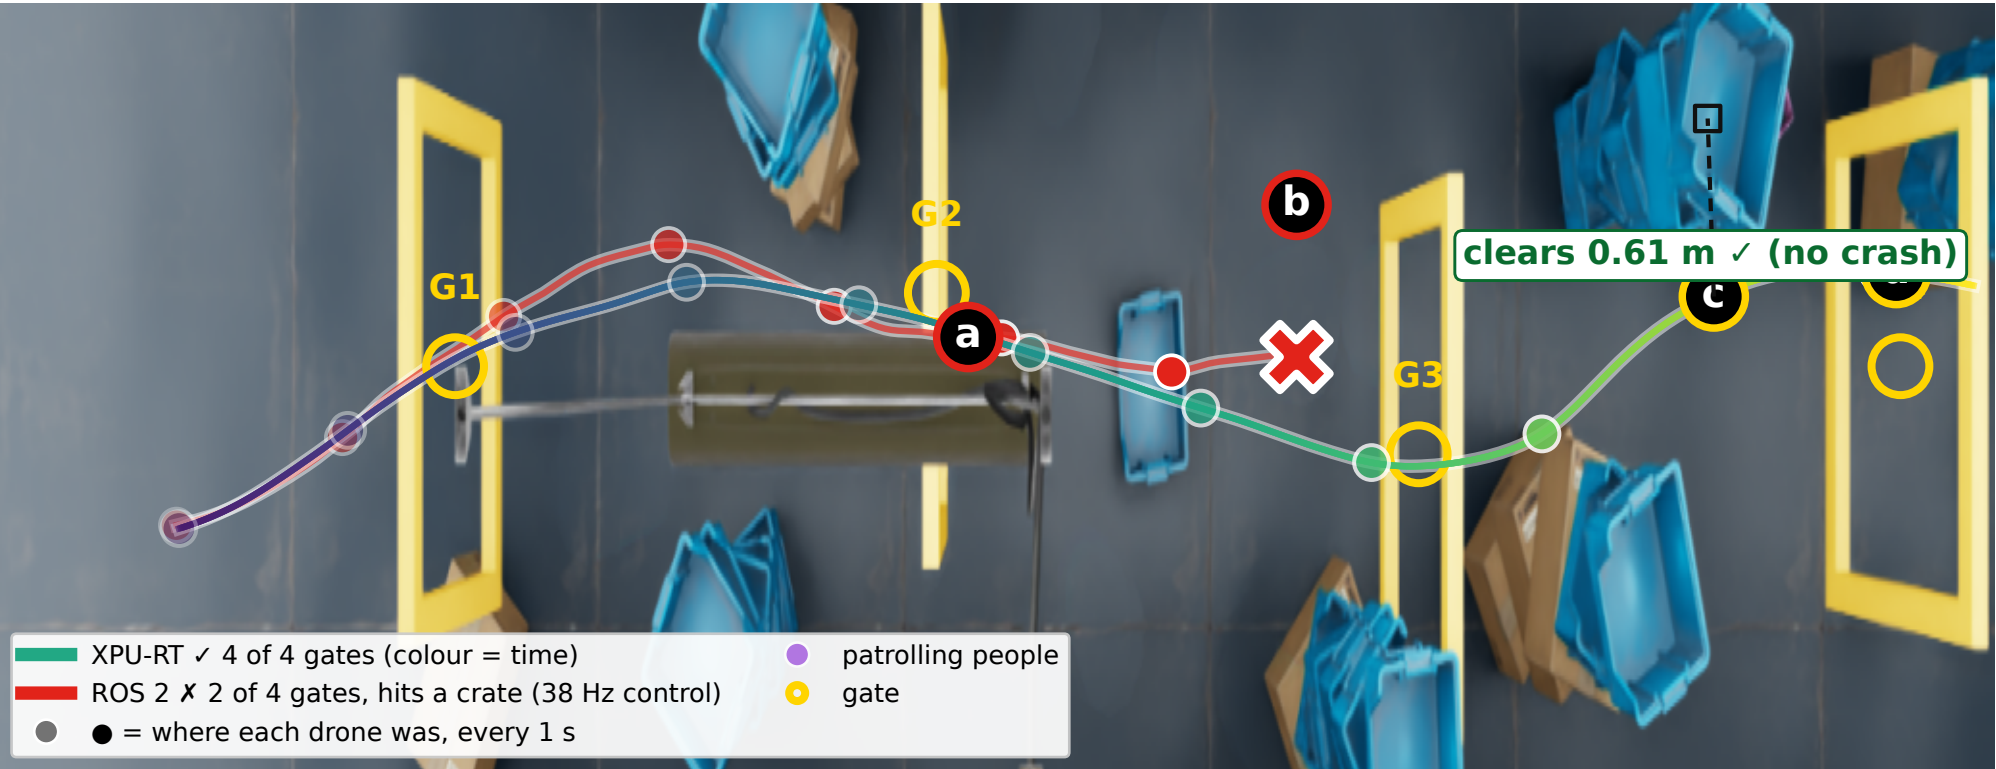