

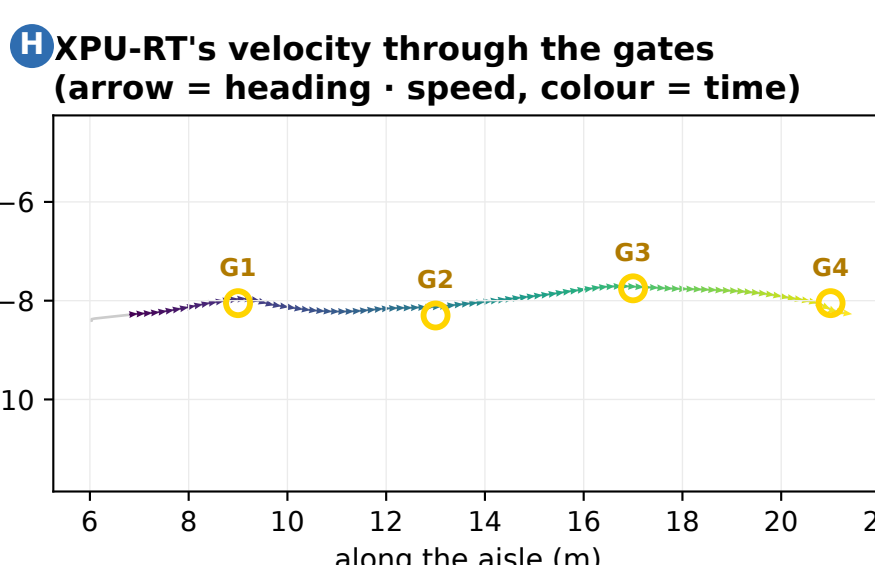
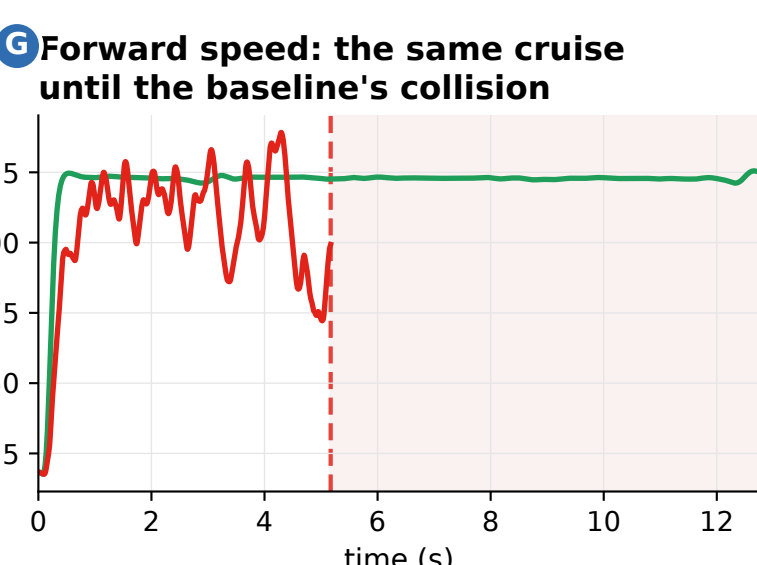
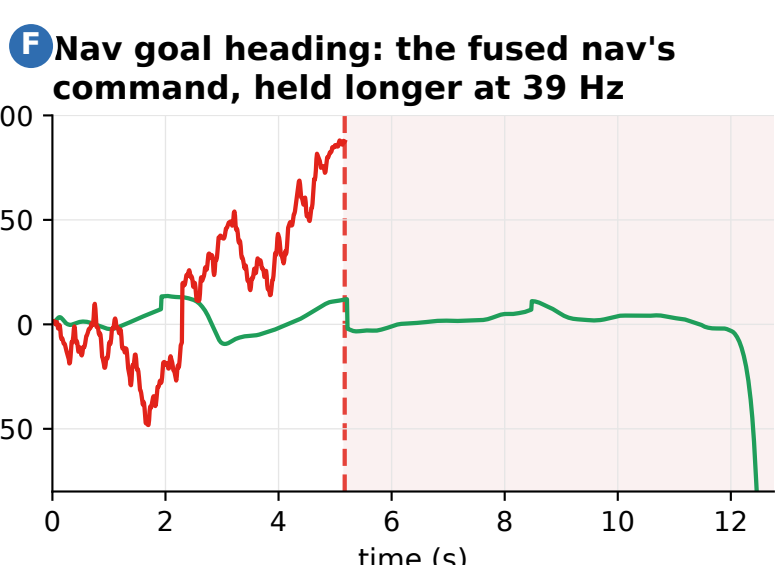
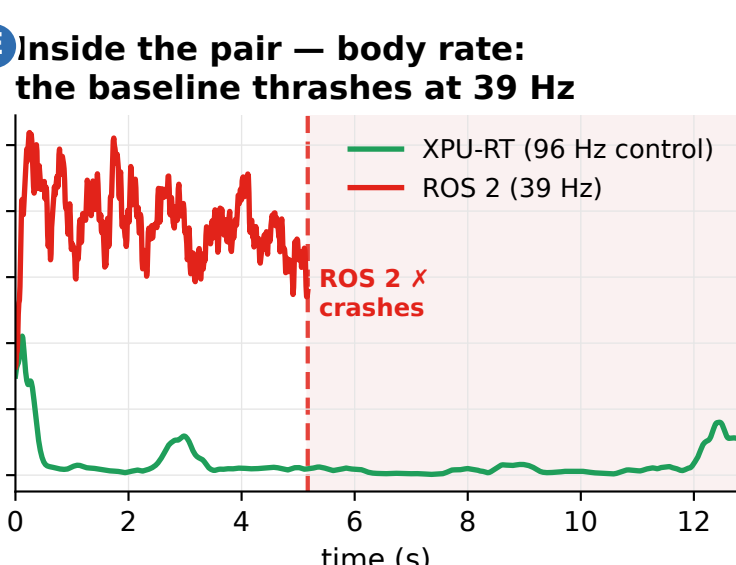
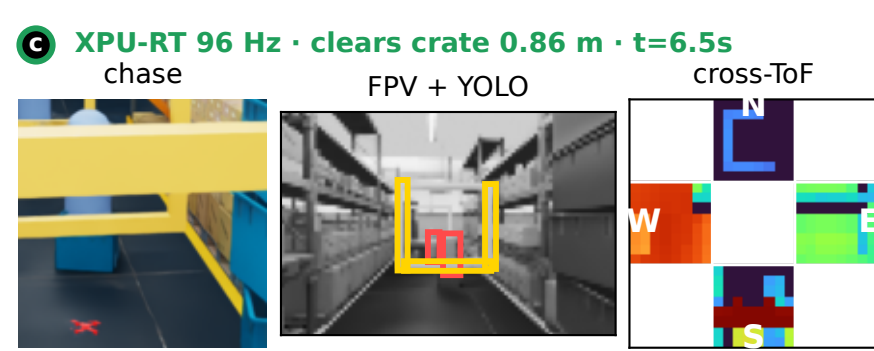
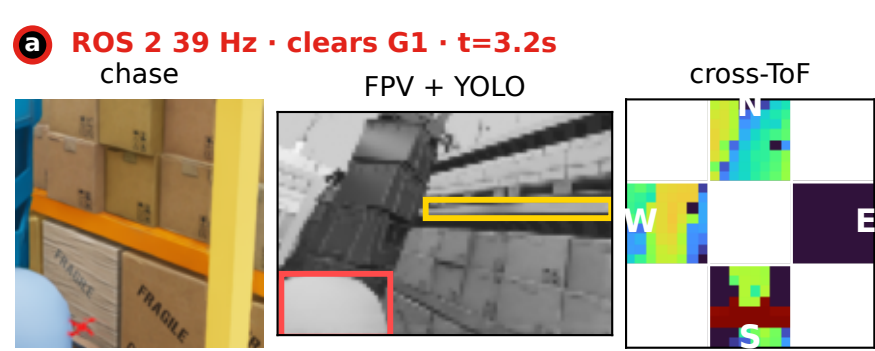
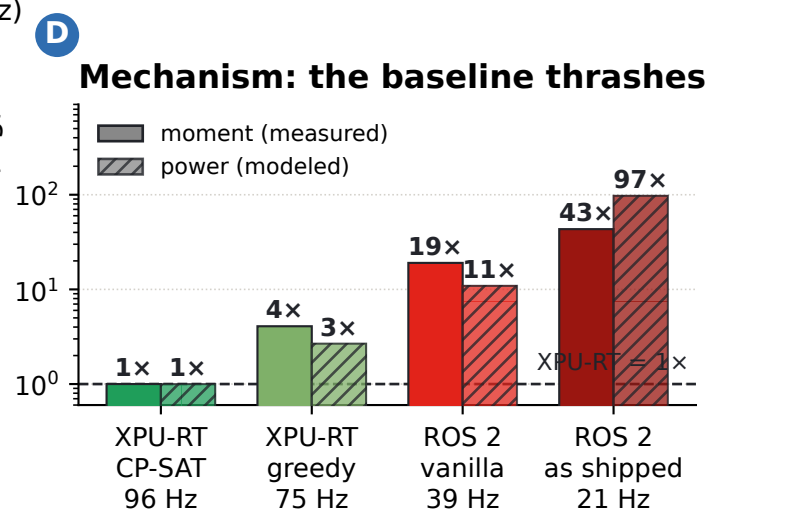


Warehouse gate-course showdown — same scene and drone, gain 0.5 / control rate per arm, at 1.2 m/s
XPU-RT · CP-SAT (96 Hz control) clears all 4 gates · ROS 2 vanilla (39 Hz control) clears G1 → hits a crate

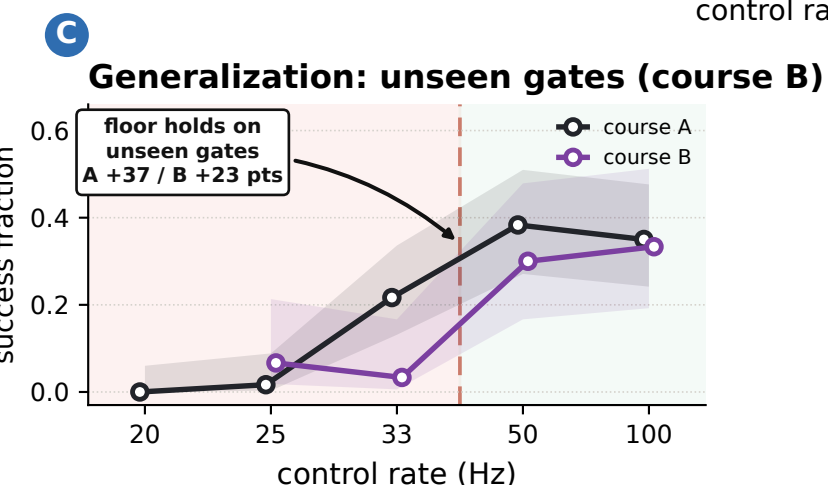

I Onboard K1 schedule, measured at the 45 Hz camera — XPU-RT · CP-SAT places the kernels over all 8 harts: camera→control 57 ms, control every 10.0 ms, every frame on time
 ROS 2 vanilla (YOLO on a 4-hart pool, OS-scheduled): camera→control 242 ms, control every 25.6 ms, 766/775 frames late

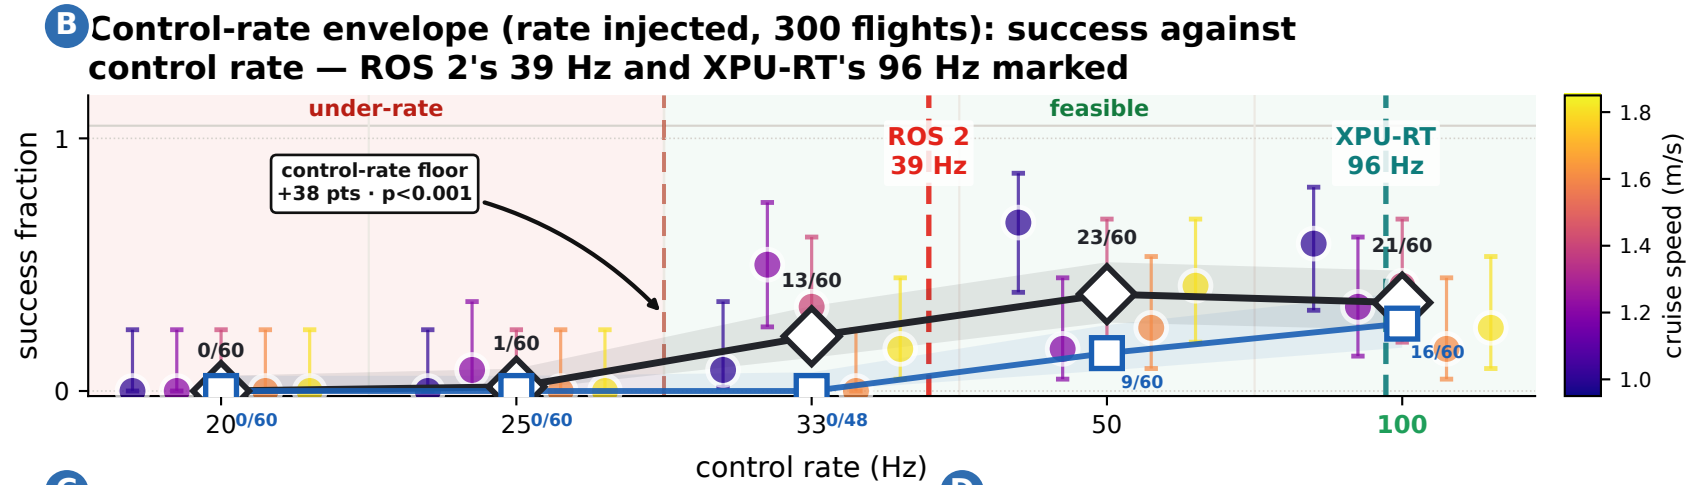