


HIL-in-loop ablation: where the drone flies vs crashes (real Isaac flights, ZOH latency injection)
 each point = 6 seeds; colour = success rate (green=flyes, red=crashes)

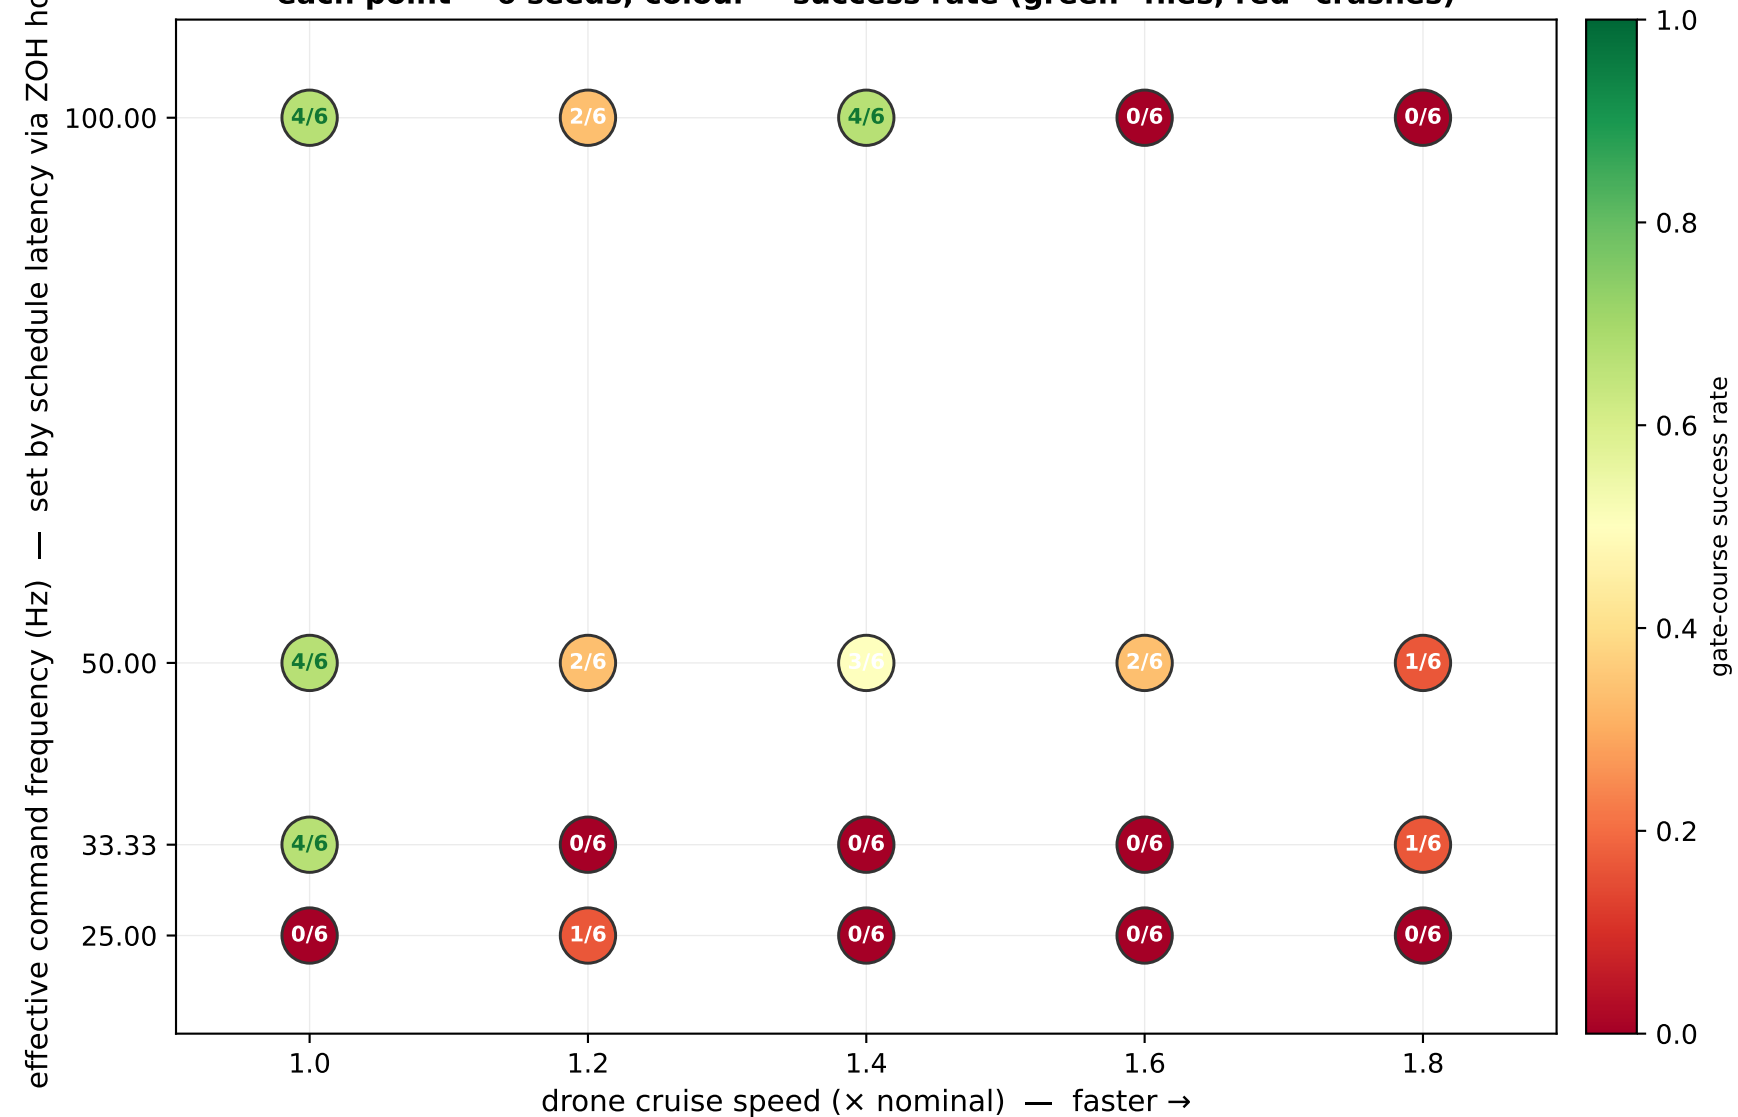

In-sim zero-order-hold latency injection (RoSE-style software lockstep), NOT live FPGA/K1 co-sim. A slower onboard schedule → higher latency → fewer command refreshes/sec → the aggressive weave destabilizes.