


← Depth in m to reference level (Wellington 1953 m.s.l)

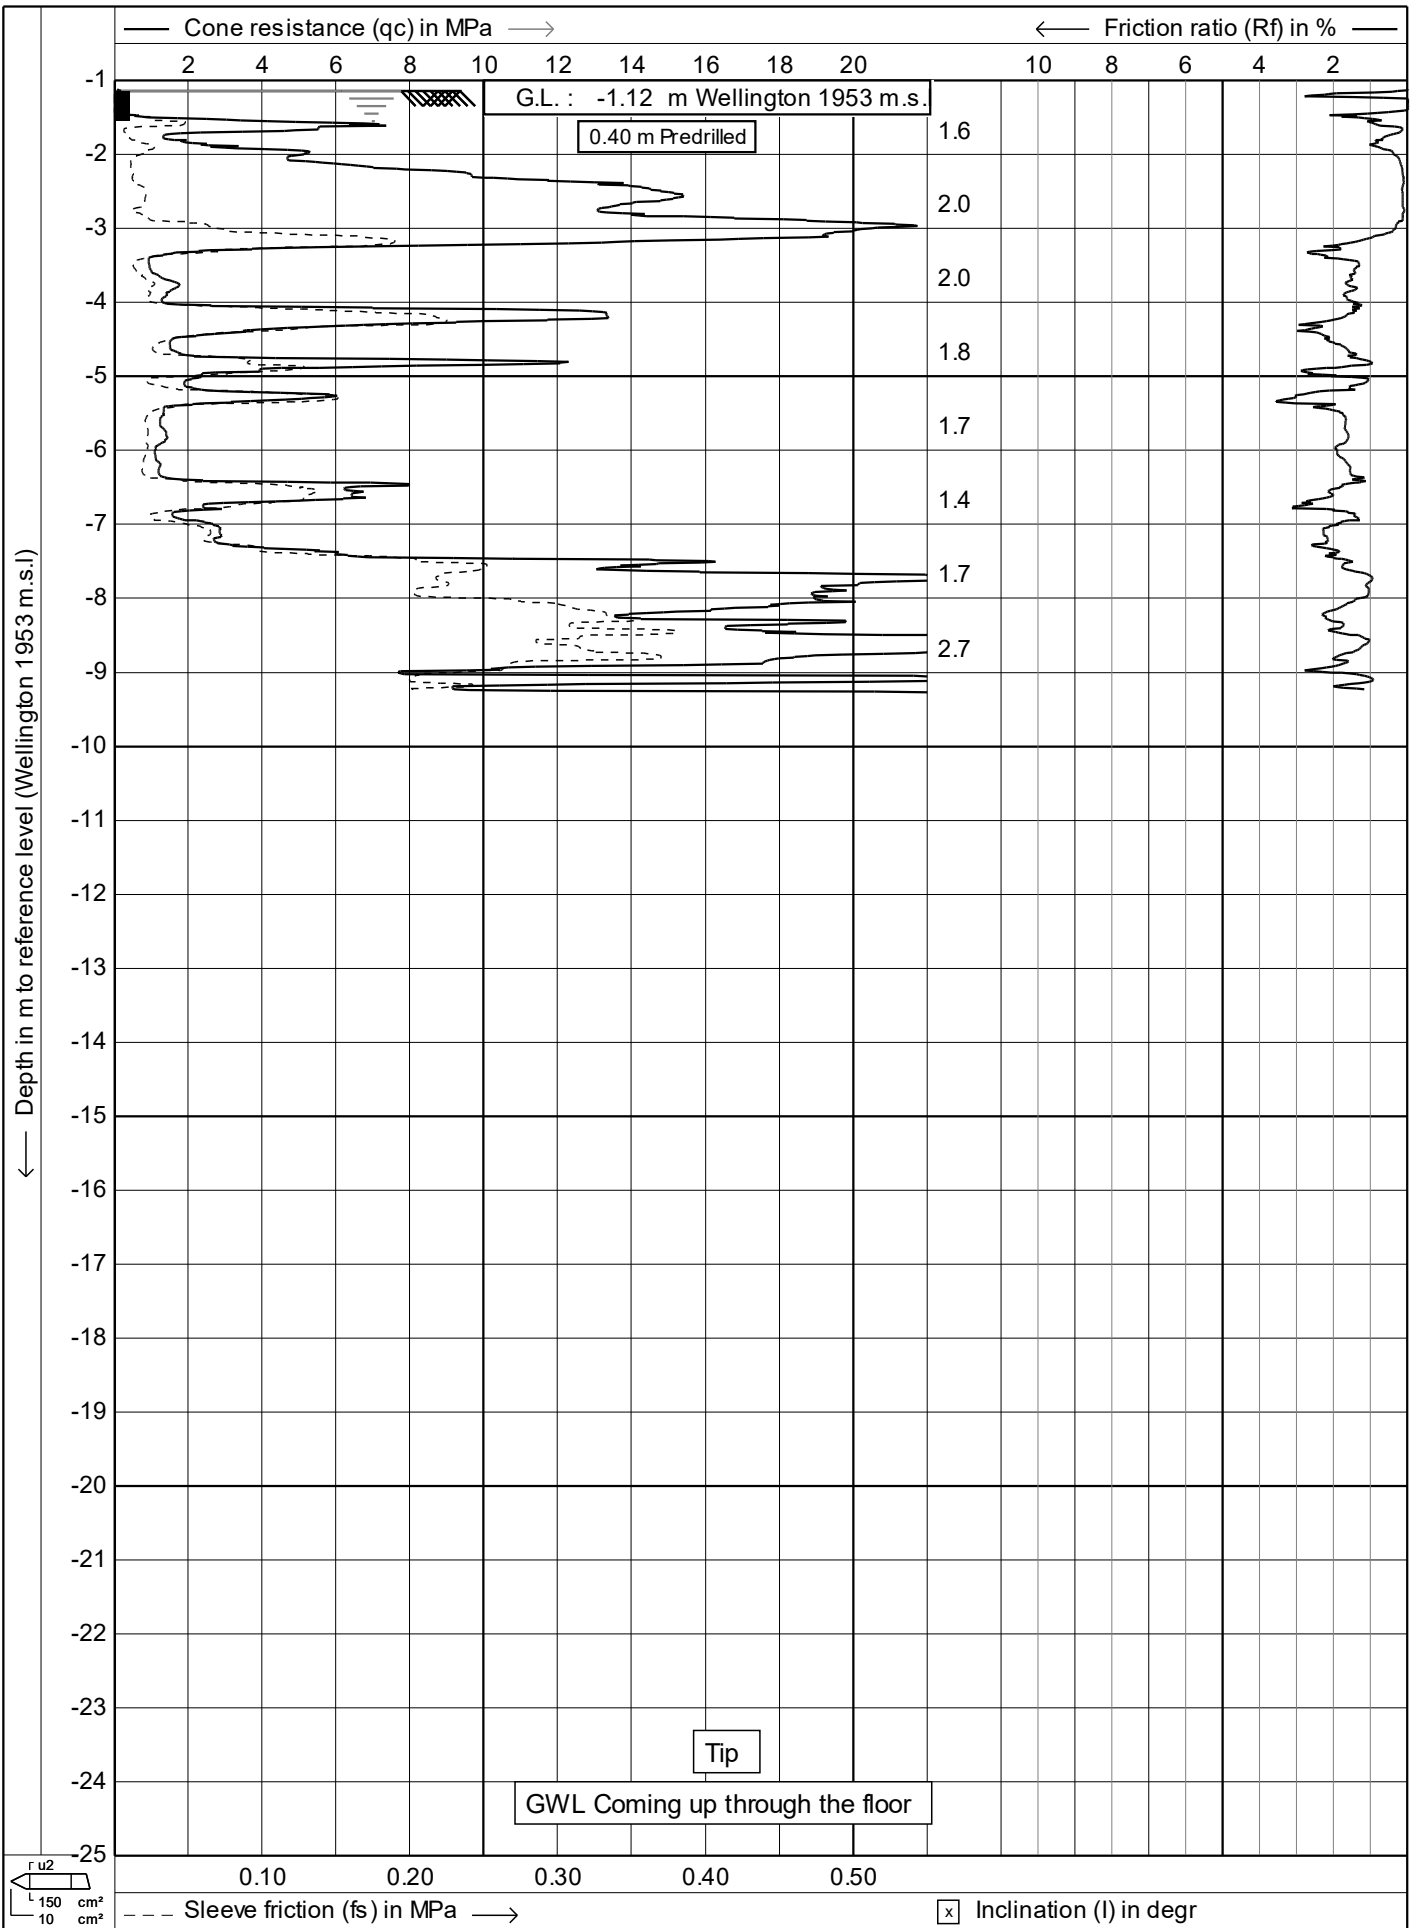

Test according ASTM D5778-12

Project : **Site Investigations**

Location: **Wellington Town Hall**

Position: **1748831, 5427629 NZTM**

Date : **22/03/2017**


Cone no. : **C10CFIP.C13082**

Project no. : **04TT1**

CPT no. : **306**

1/14

← Depth in m to reference level (Wellington 1953 m.s.)

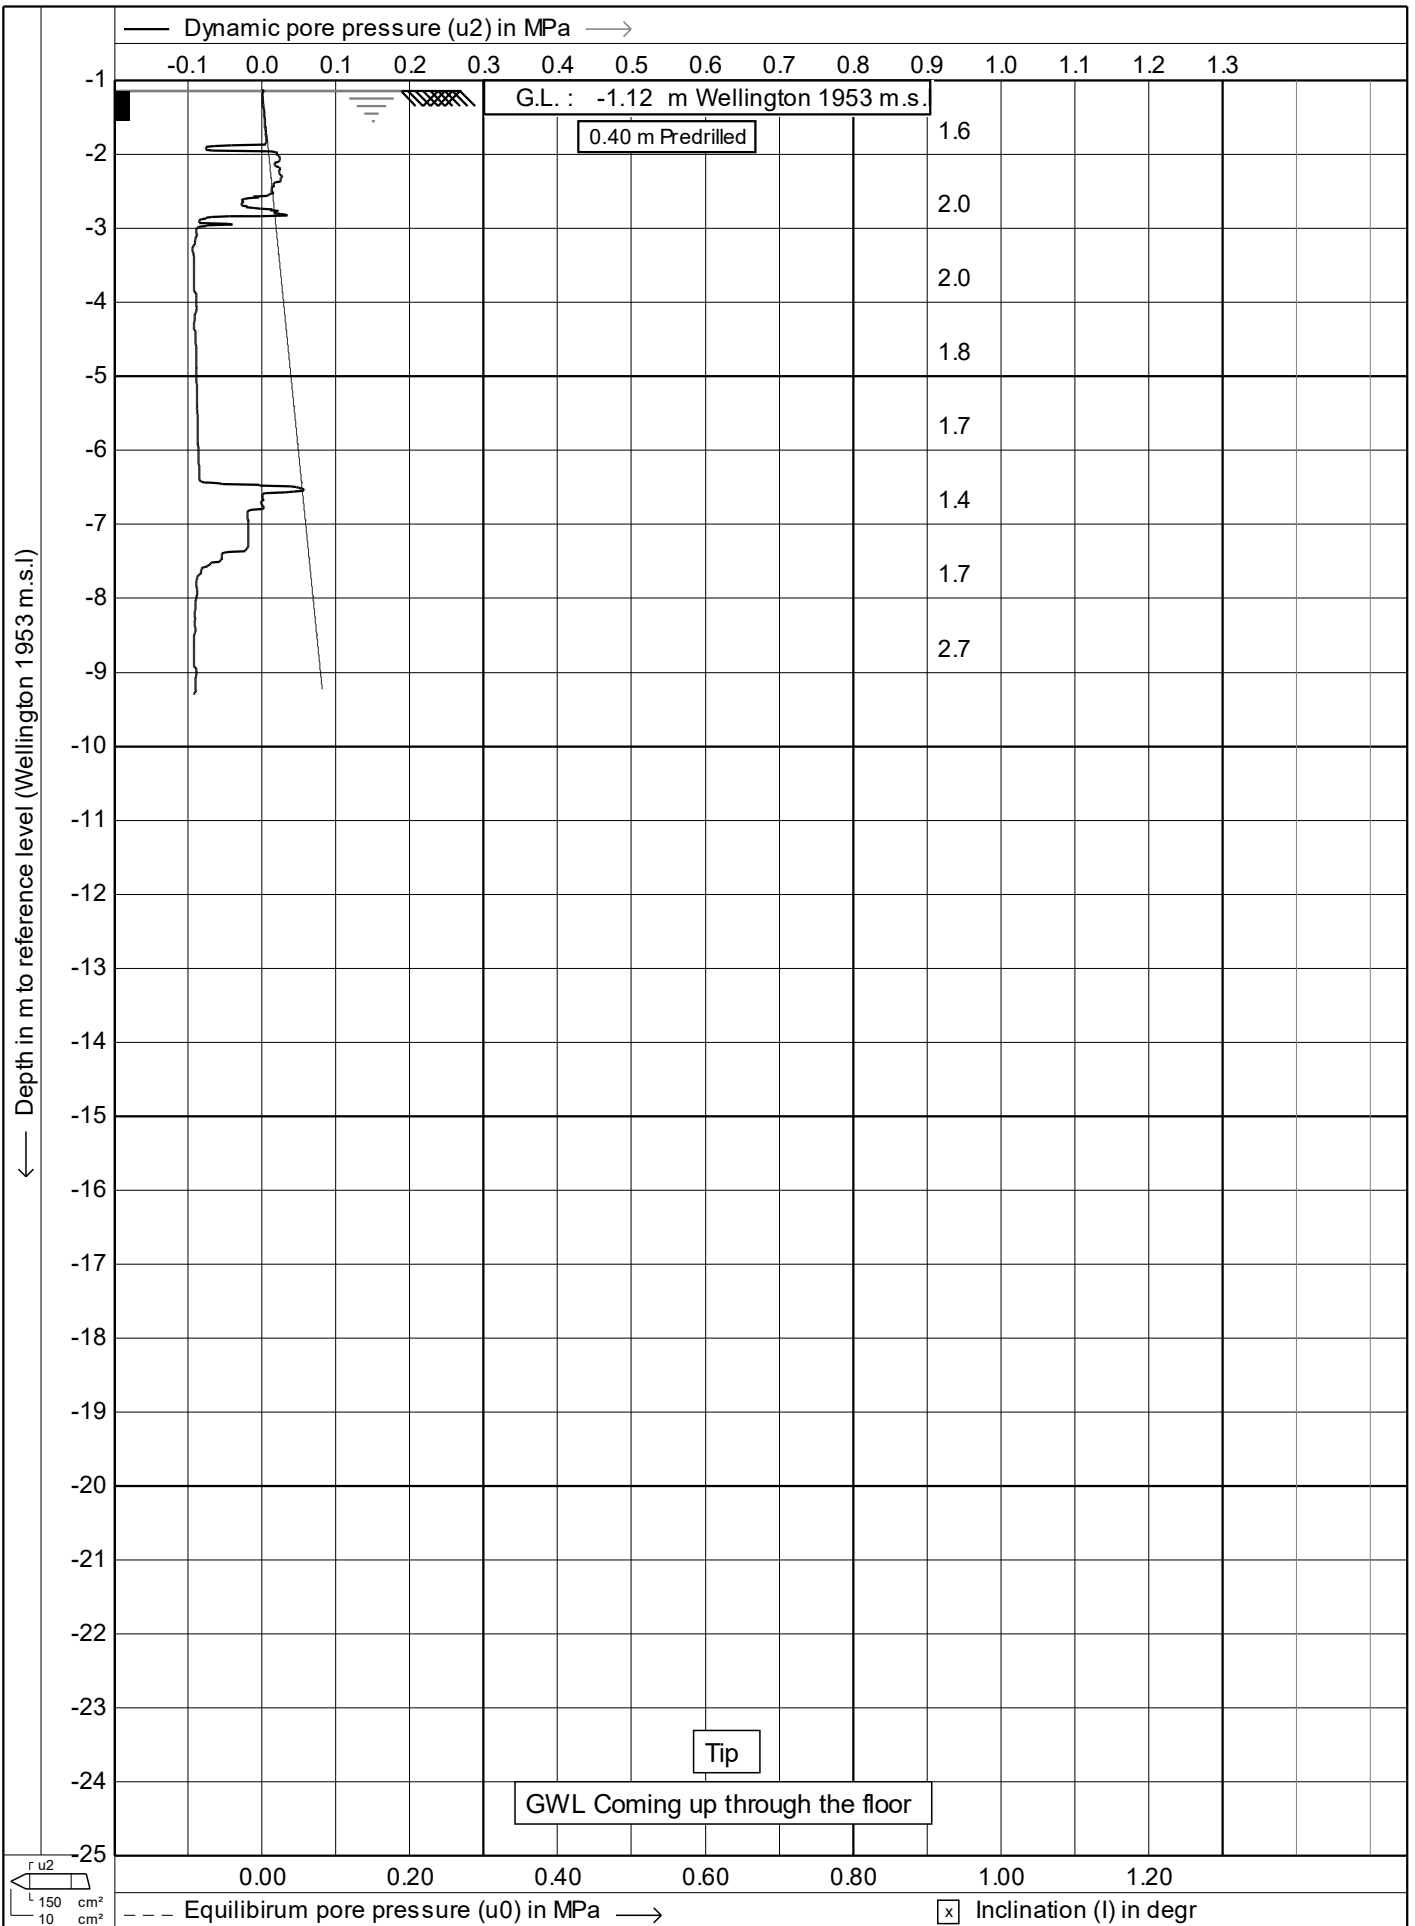

Test according ASTM D5778-12

Project : **Site Investigations**

Location: **Wellington Town Hall**

Position: **1748831, 5427629 NZTM**

Date : **22/03/2017**

Cone no. : **C10CFIP.C13082**

Project no. : **04TT1**

CPT no. : **306**

2/14

← Depth in m to reference level (Wellington 1953 m.s.)

— Corrected cone resistance (qt) in MPa —→


2 4 6 8 10 12 14 16 18 20 22 24 26 28 30

G.L. : -1.12 m Wellington 1953 m.s.

0.40 m Predrilled

Tip

GWL Coming up through the floor



Test according ASTM D5778-12

Project : **Site Investigations**

Location: **Wellington Town Hall**

Position: **1748831, 5427629 NZTM**

Date : **22/03/2017**


Cone no. : **C10CFIP.C13082**

Project no. : **04TT1**

CPT no. : **306**

**3/14**

← Depth in m to reference level (Wellington 1953 m.s.)

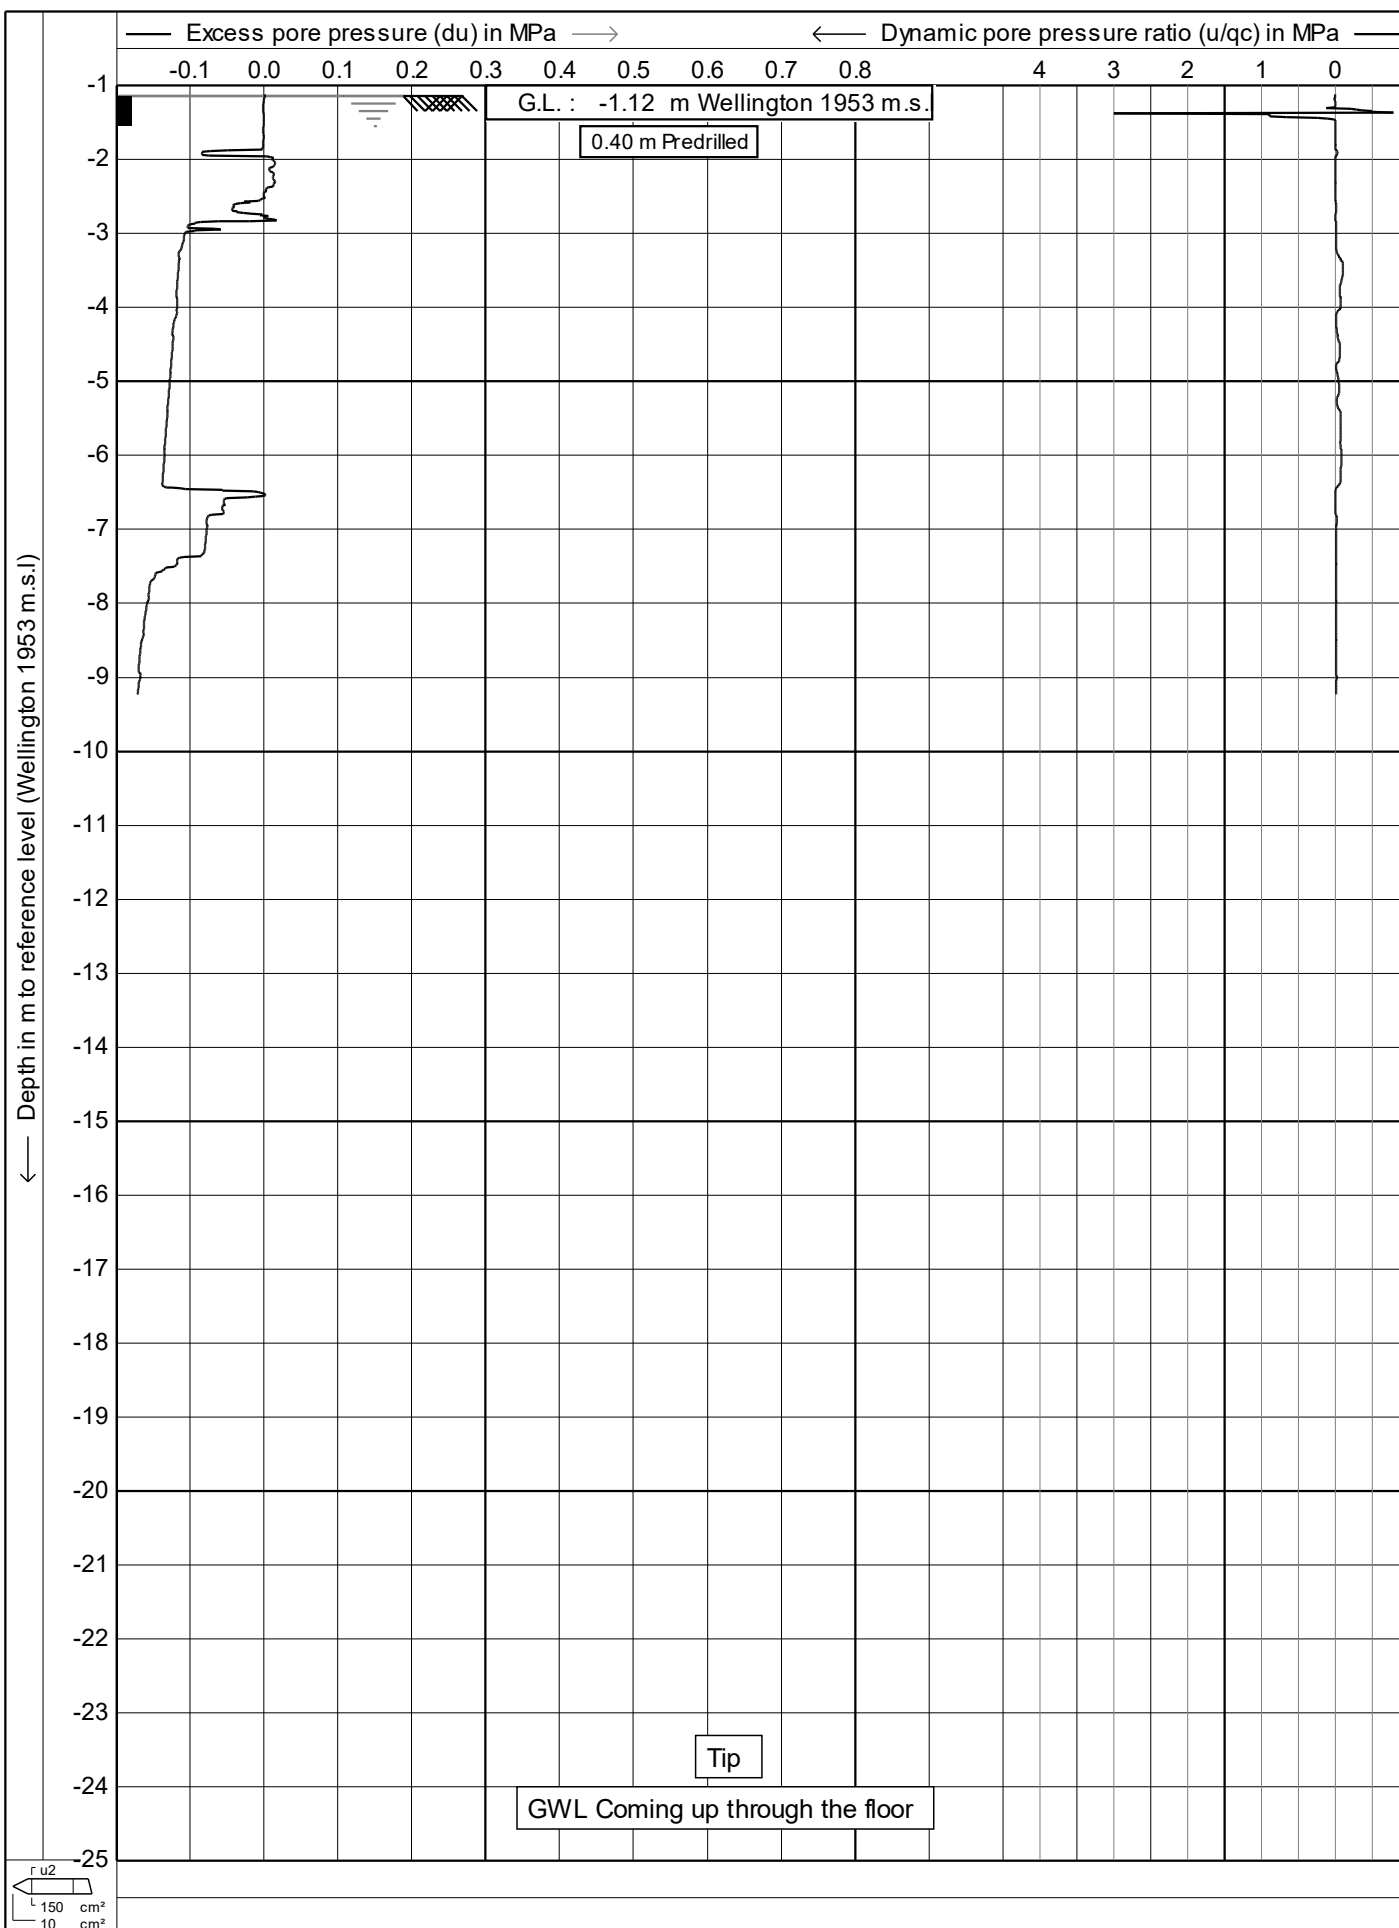

← Depth in m to reference level (Wellington 1953 m.s.)

— Effective cone resistance ( $q_e$ ) in MPa —→


2 4 6 8 10 12 14 16 18 20 22 24 26 28 30

G.L. : -1.12 m Wellington 1953 m.s.

0.40 m Predrilled

Tip

GWL Coming up through the floor



Test according ASTM D5778-12

Project : **Site Investigations**

Location: **Wellington Town Hall**

Position: **1748831, 5427629 NZTM**

Date : **22/03/2017**


Cone no. : **C10CFIP.C13082**

Project no. : **04TT1**

CPT no. : **306**

**5/14**



← Depth in m to reference level (Wellington 1953 m.s.)

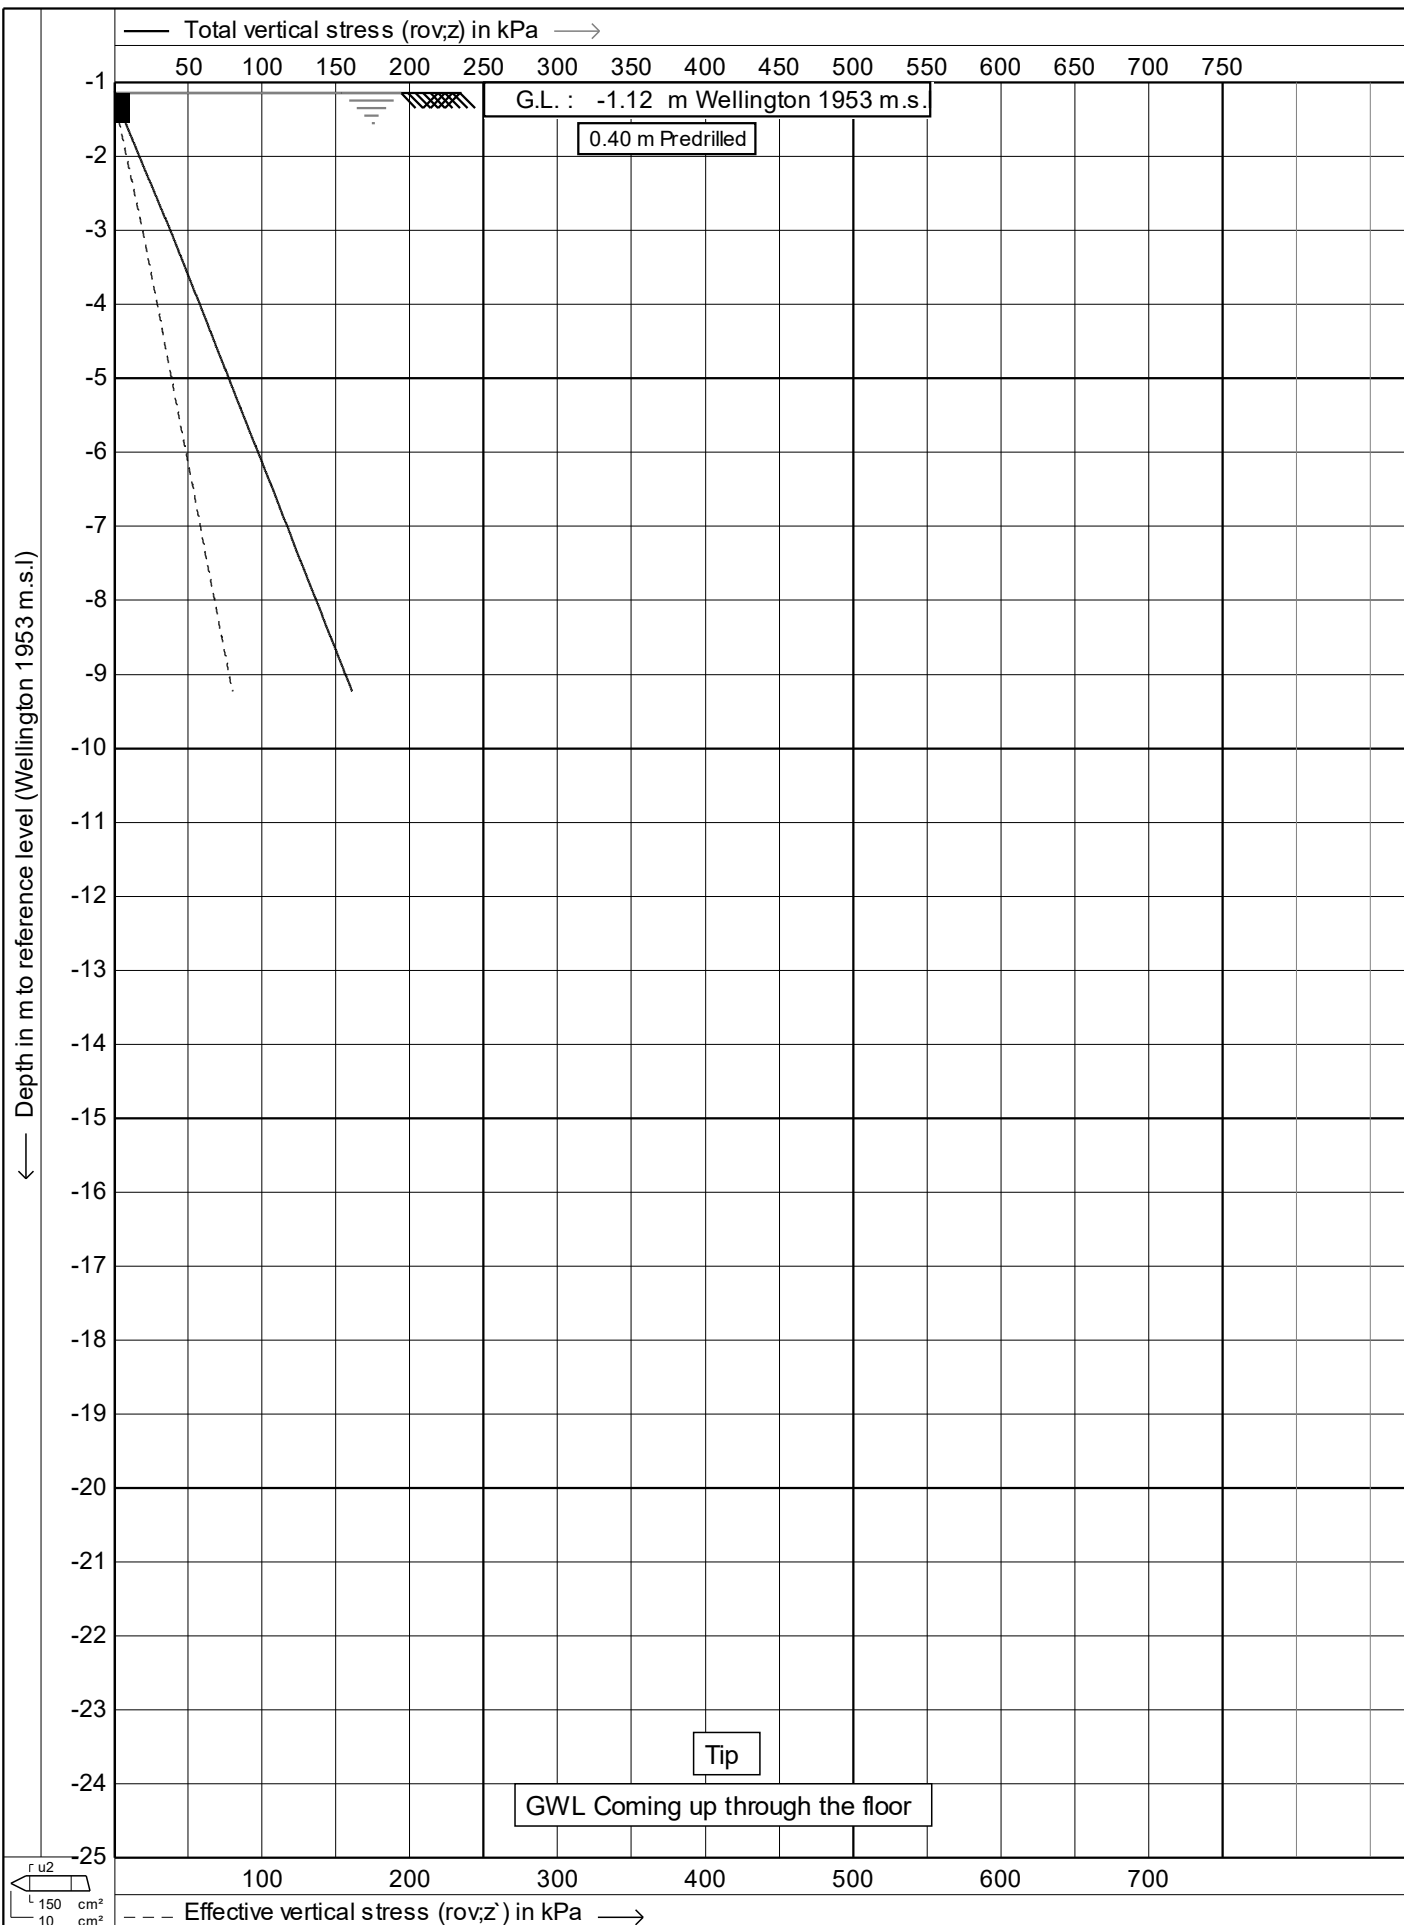

← Depth in m to reference level (Wellington 1953 m.s.)

— Net cone resistance (qn) in MPa —→

← Pore pressure ratio (Bq) —

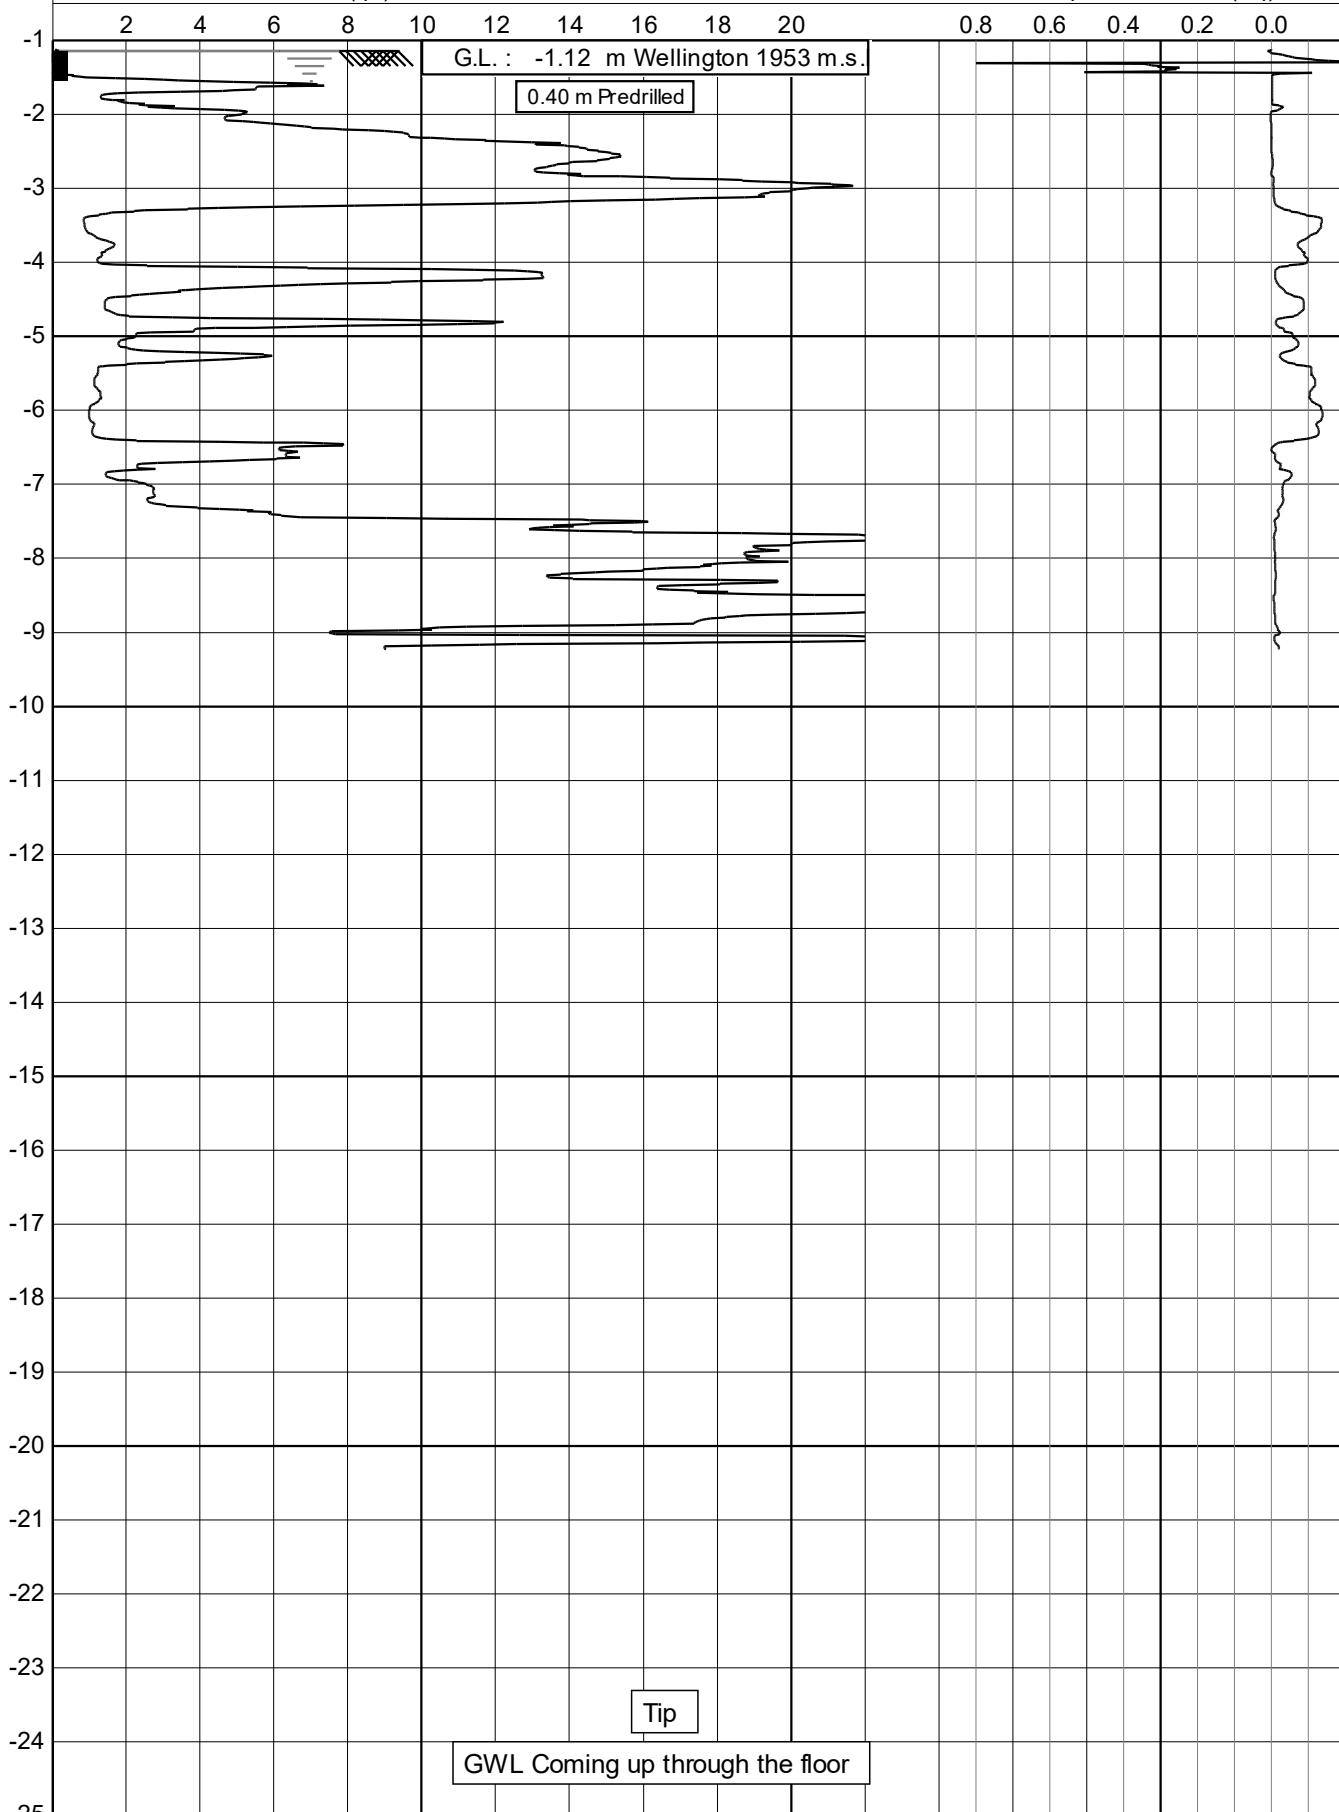

Test according ASTM D5778-12

Project : **Site Investigations**

Location: **Wellington Town Hall**

Position: **1748831, 5427629 NZTM**

Date : **22/03/2017**


Cone no. : **C10CFIP.C13082**

Project no. : **04TT1**

CPT no. : **306**

7/14

← Depth in m to reference level (Wellington 1953 m.s.)

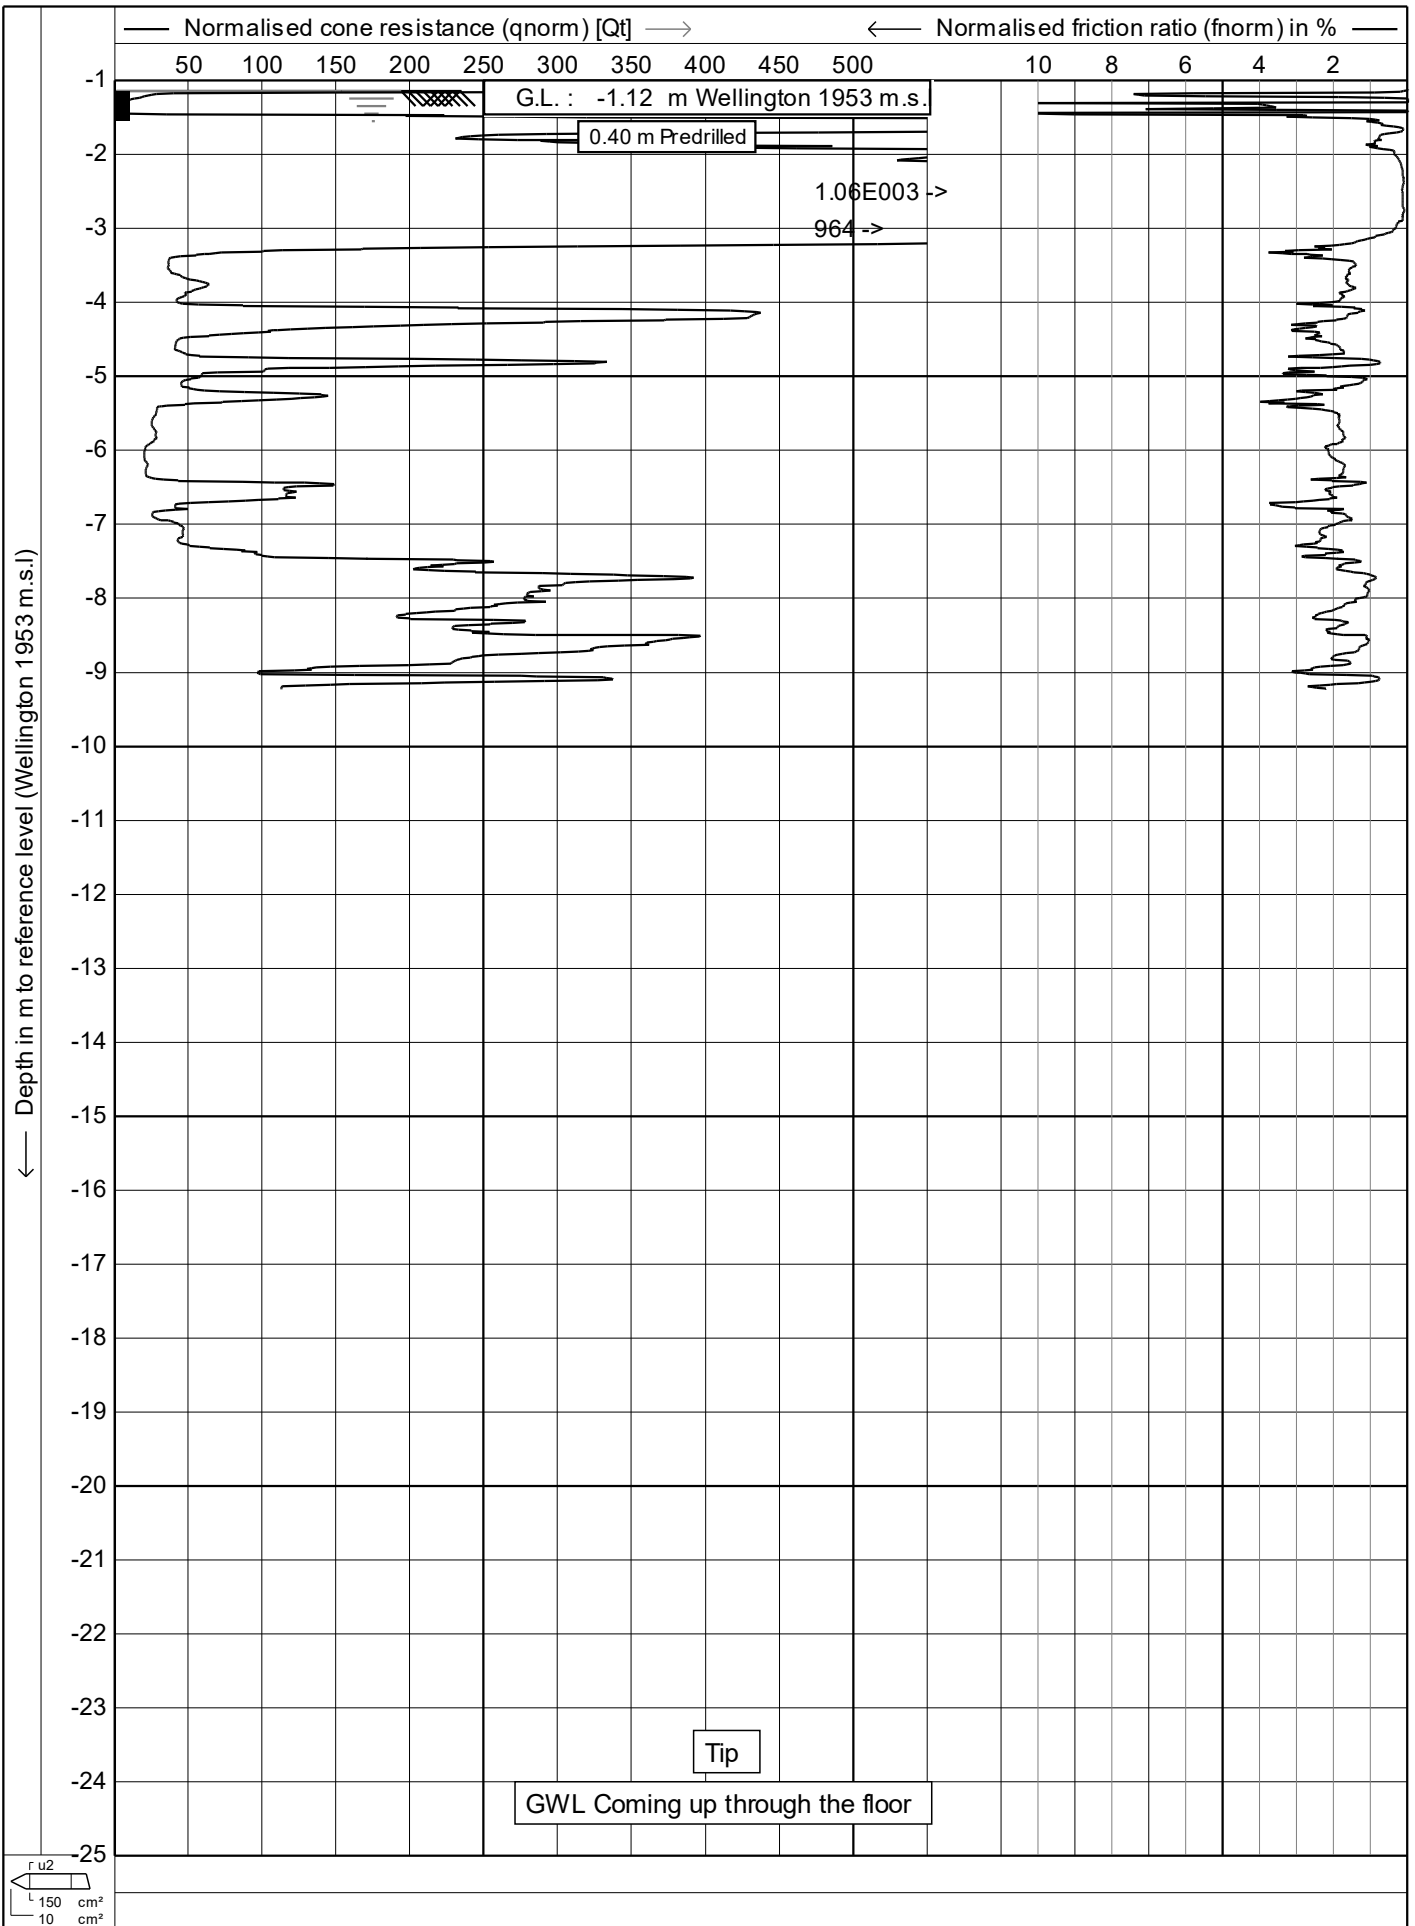

Test according ASTM D5778-12

Project : **Site Investigations**

Location: **Wellington Town Hall**

Position: **1748831, 5427629 NZTM**

Date : **22/03/2017**

Cone no. : **C10CFIP.C13082**

Project no. : **04TT1**

CPT no. : **306**

8/14



← Depth in m to reference level (Wellington 1953 m.s.)

— Soil behaviour type index (Ic) —→

0.5 1.0 1.5 2.0 2.5 3.0 3.5 4.0 4.5 5.0 5.5 6.0 6.5 7.0 7.5

G.L. : -1.12 m Wellington 1953 m.s.

0.40 m Predrilled

- (2) Organic soils
- (3) Clay
- (4) Silt mixtures
- (5) Sand mixtures
- (6) Sand clean to silty
- (7) Gravelly sand

150 cm<sup>2</sup>  
10 cm<sup>2</sup>

7

6

5

4

3

2



Test according ASTM D5778-12

Project : Site Investigations

Location: Wellington Town Hall

Position: 1748831, 5427629 NZTM

Date : 22/03/2017

Cone no. : C10CFIP.C13082

Project no. : 04TT1

CPT no. : 306

9/14

← Depth in m to reference level (Wellington 1953 m.s.)

— Undrained shear strength (Su) in kPa —→

100 200 300 400 500 600 700 800 900 1000 1100 1200 1300 1400 1500

G.L. : -1.12 m Wellington 1953 m.s.

0.40 m Predrilled

Tip

GWL Coming up through the floor

150 cm<sup>2</sup>  
10 cm<sup>2</sup>



Test according ASTM D5778-12

Project : **Site Investigations**

Location: **Wellington Town Hall**

Position: **1748831, 5427629 NZTM**

Date : **22/03/2017**


Cone no. : **C10CFIP.C13082**

Project no. : **04TT1**

CPT no. : **306**

10/14

← Depth in m to reference level (Wellington 1953 m.s.)

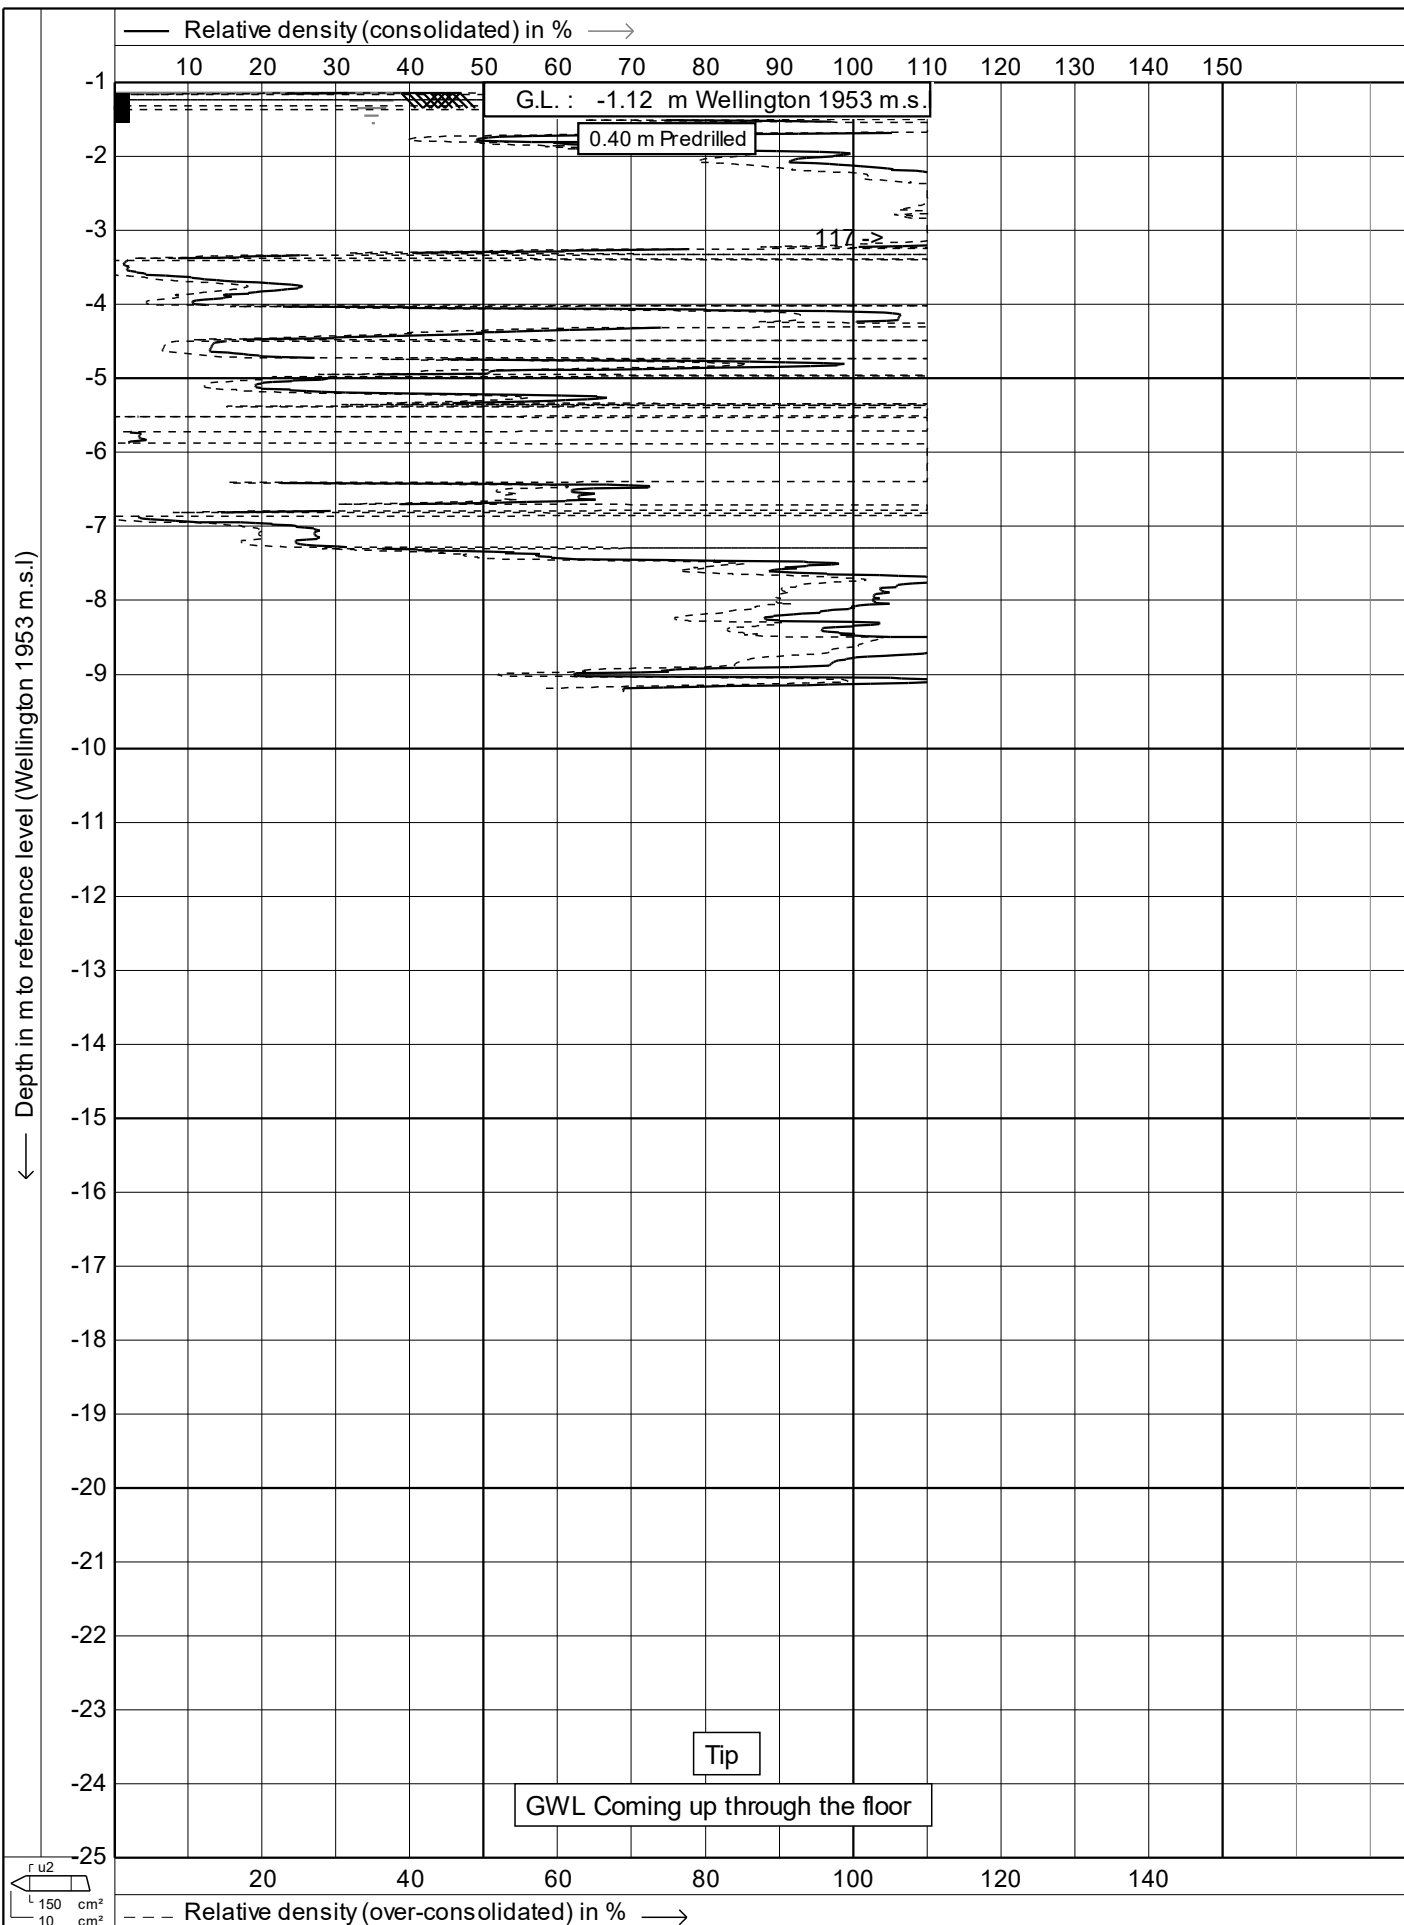

Test according ASTM D5778-12

Project : **Site Investigations**

Location: **Wellington Town Hall**

Position: **1748831, 5427629 NZTM**

Date : **22/03/2017**

Cone no. : **C10CFIP.C13082**

Project no. : **04TT1**

CPT no. : **306**

11/14

← Depth in m to reference level (Wellington 1953 m.s.)

— Equivalent SPT N60 Value →


5 10 15 20 25 30 35 40 45 50 55 60 65 70 75

G.L. : -1.12 m Wellington 1953 m.s.

0.40 m Predrilled

Tip

GWL Coming up through the floor



Test according ASTM D5778-12

Project : **Site Investigations**

Location: **Wellington Town Hall**

Position: **1748831, 5427629 NZTM**



Date : **22/03/2017**

Cone no. : **C10CFIP.C13082**

Project no. : **04TT1**

CPT no. : **306**

12/14

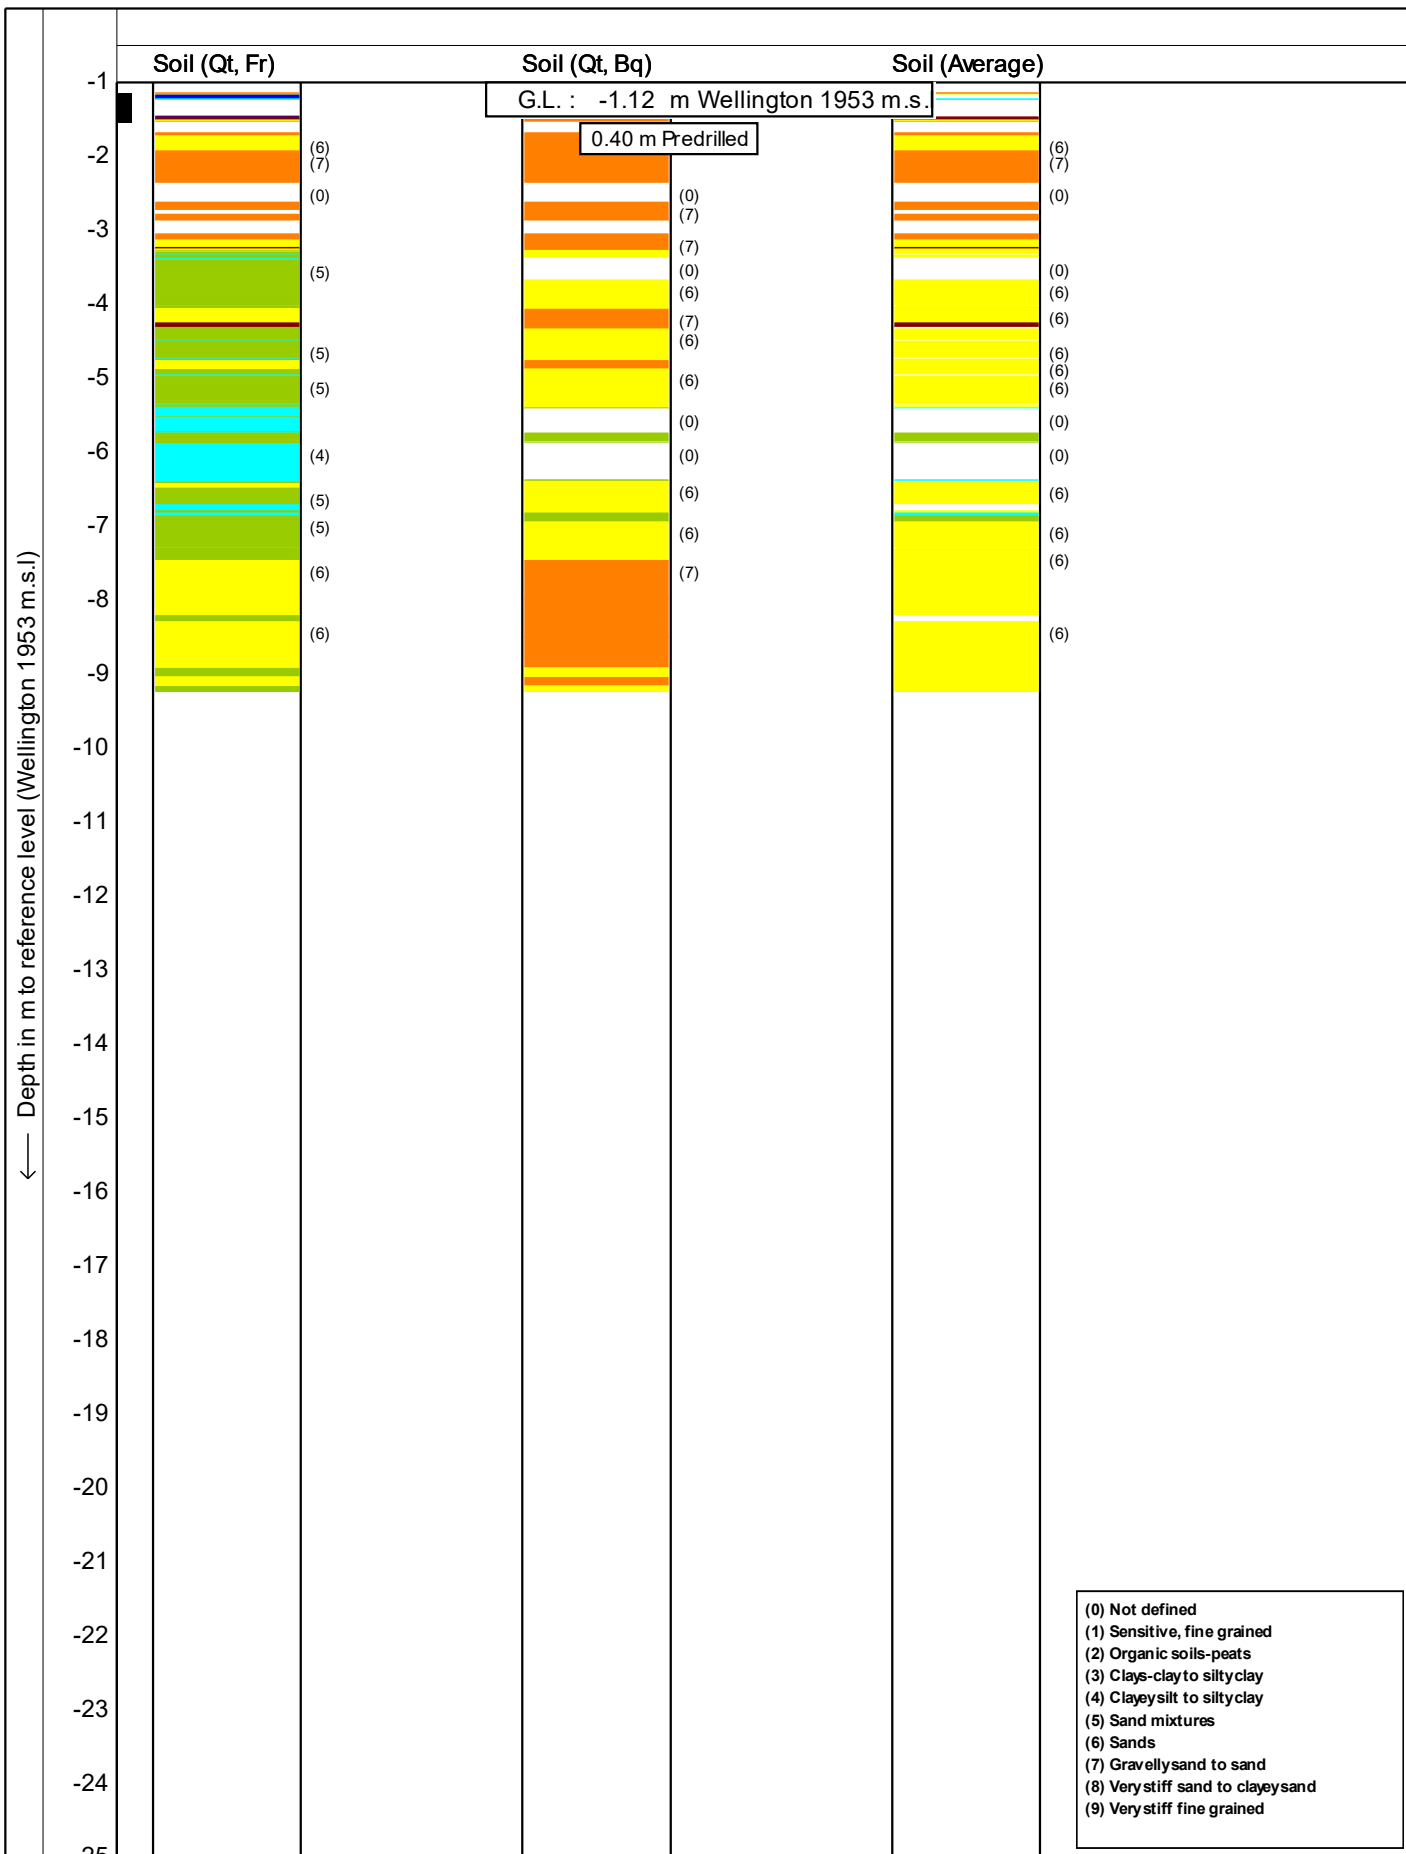

- (0) Not defined
- (1) Sensitive, fine grained
- (2) Organic soils-peats
- (3) Clays-clay to silty clay
- (4) Clayey silt to silty clay
- (5) Sand mixtures
- (6) Sands
- (7) Gravelly sand to sand
- (8) Very stiff sand to clayey sand
- (9) Very stiff fine grained

### Soil behaviour type classification after Robertson 1990

	Test according ASTM D5778-12	Date : 22/03/2017
	Project : <b>Site Investigations</b>	Cone no. : <b>C10CFIIP.C13082</b>
	Location: <b>Wellington Town Hall</b>	Project no. : <b>04TT1</b>
	Position: <b>1748831, 5427629 NZTM</b>	CPT no. : <b>306</b>

← Depth in m to reference level (Wellington 1953 m.s.)

Internal friction angle in degrees →

5 10 15 20 25 30 35 40 45 50 55 60 65 70 75

G.L. : -1.12 m Wellington 1953 m.s.

0.40 m Predrilled

Tip

GWL Coming up through the floor

150 cm<sup>2</sup>  
10 cm<sup>2</sup>



Test according ASTM D5778-12

Project : Site Investigations

Location: Wellington Town Hall

Position: 1748831, 5427629 NZTM

Date : 22/03/2017

Cone no. : C10CFIP.C13082

Project no. : 04TT1

CPT no. : 306

14/14