



Depth in m to reference level ()

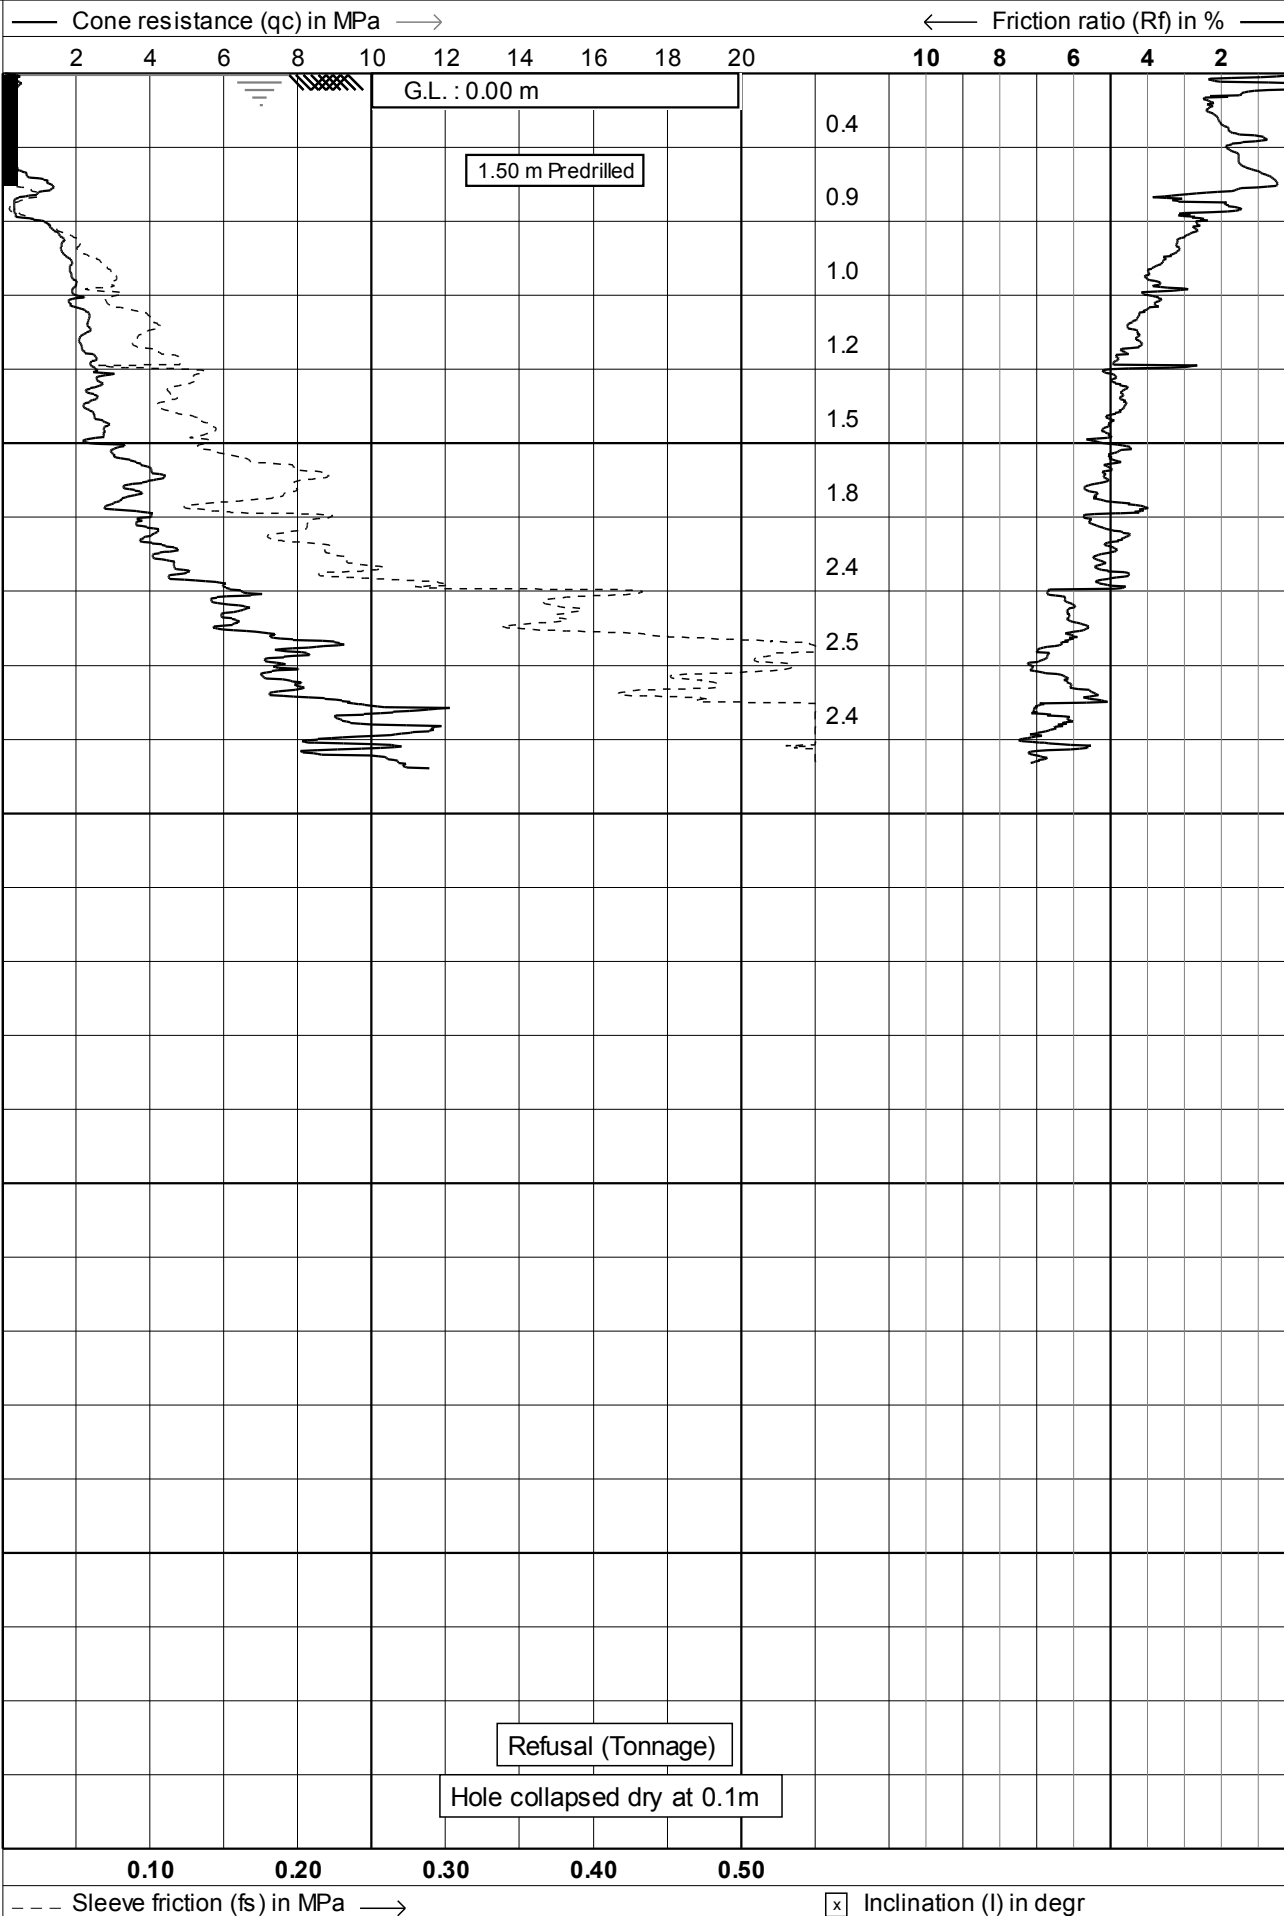

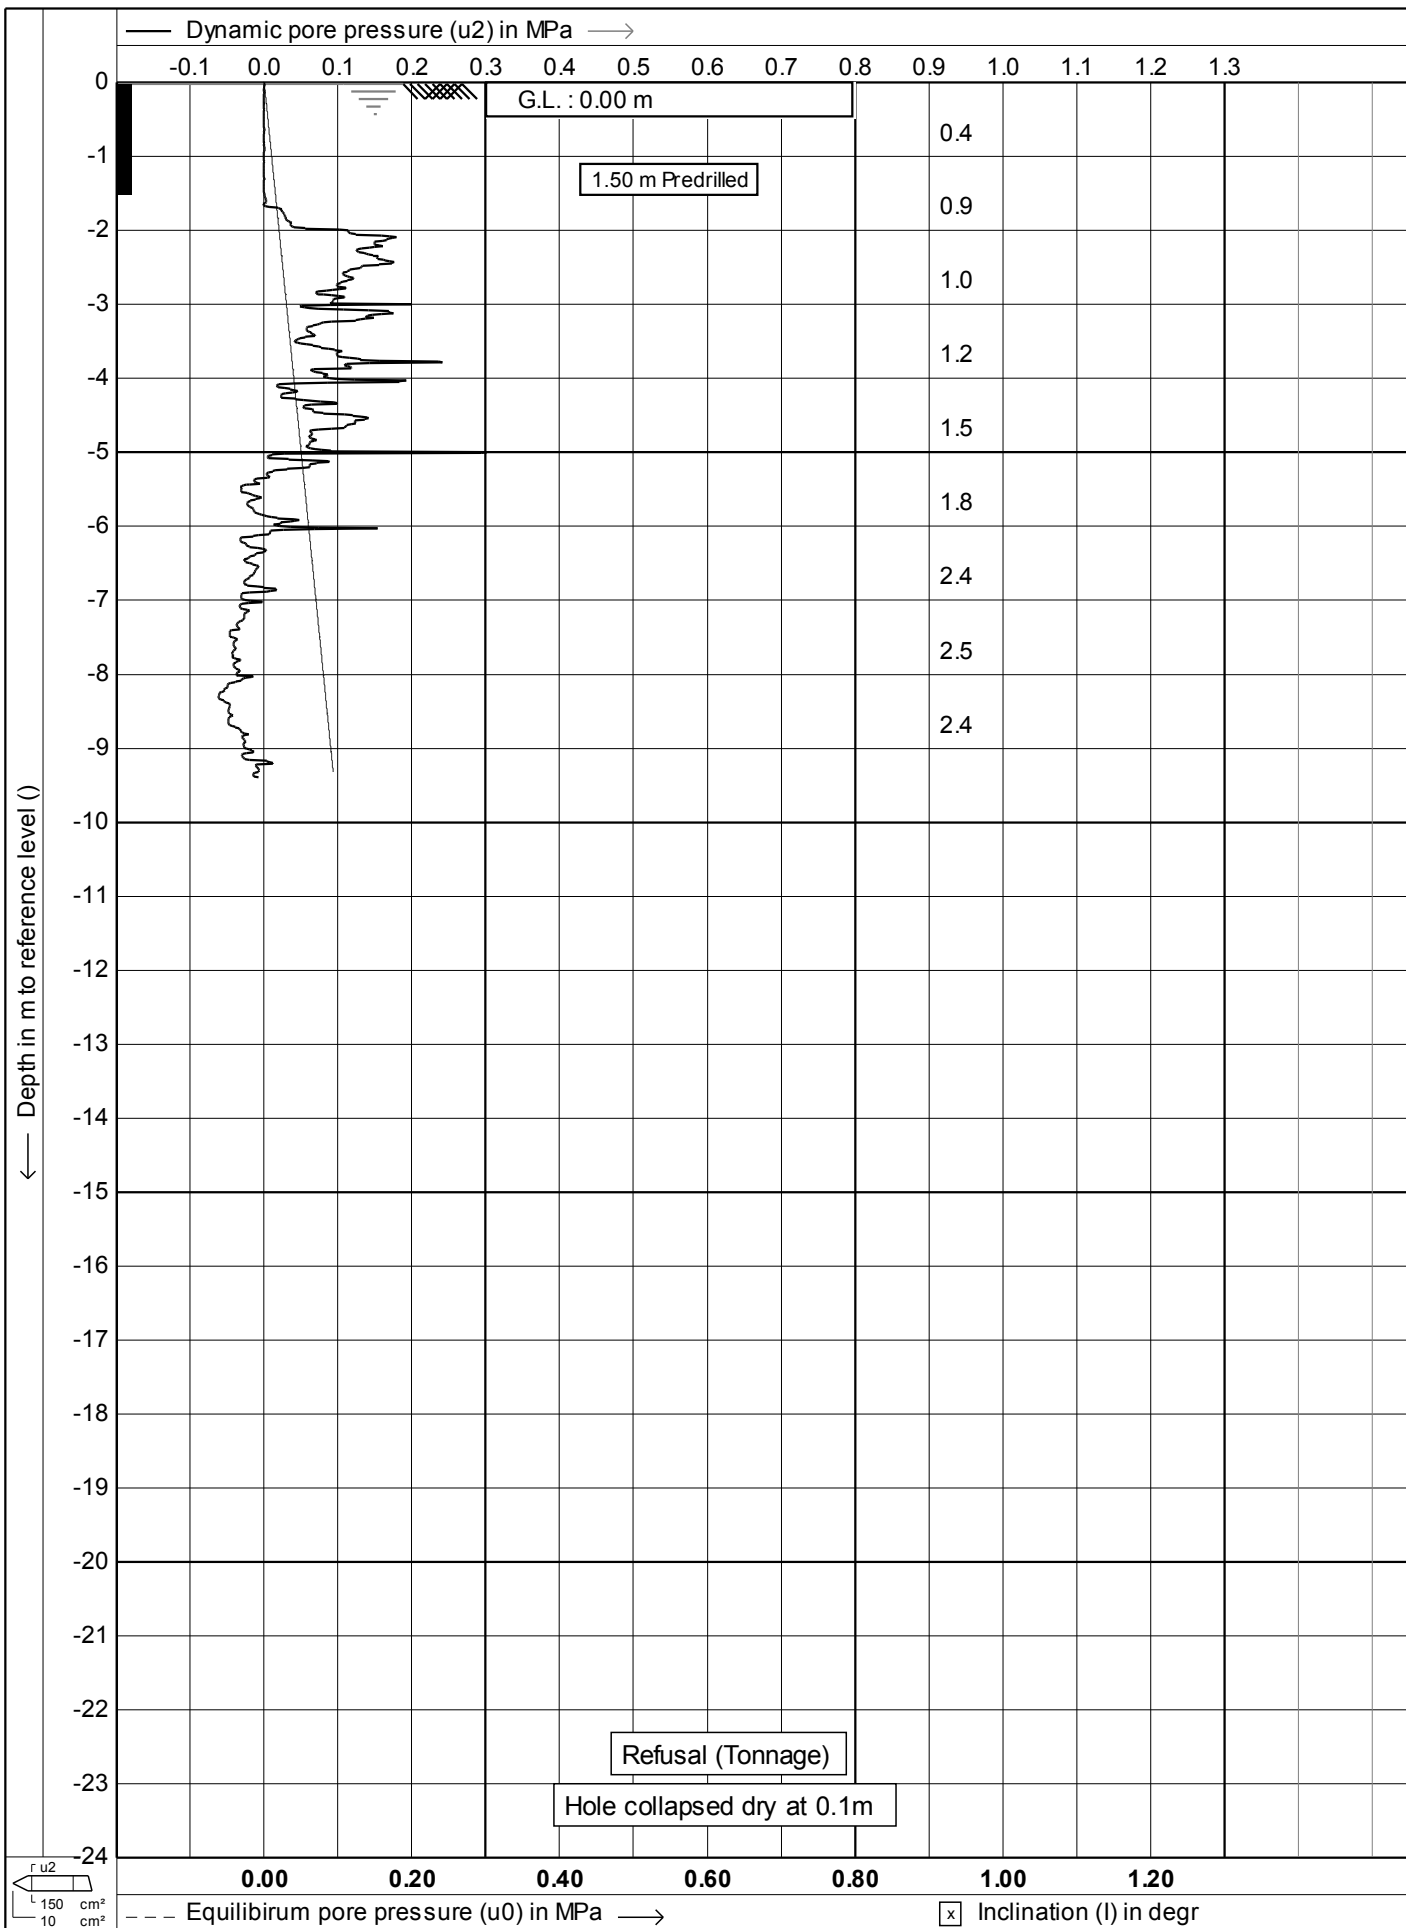

← Depth in m to reference level ()

— Corrected cone resistance (qt) in MPa —→

2 4 6 8 10 12 14 16 18 20 22 24 26 28 30

G.L. : 0.00 m

1.50 m Predrilled

Refusal (Tonnage)

Hole collapsed dry at 0.1m

150 cm²
10 cm²



Test according A.S.T.M Standard D 5778-12

Project : **Site Investigation**

Location: **Brougham St - Wellington**


Date : **31-1-2013**


Cone no. : **C10CFIP.F04**

Project no. : **02TT1**

CPT no. : **43**

3/14

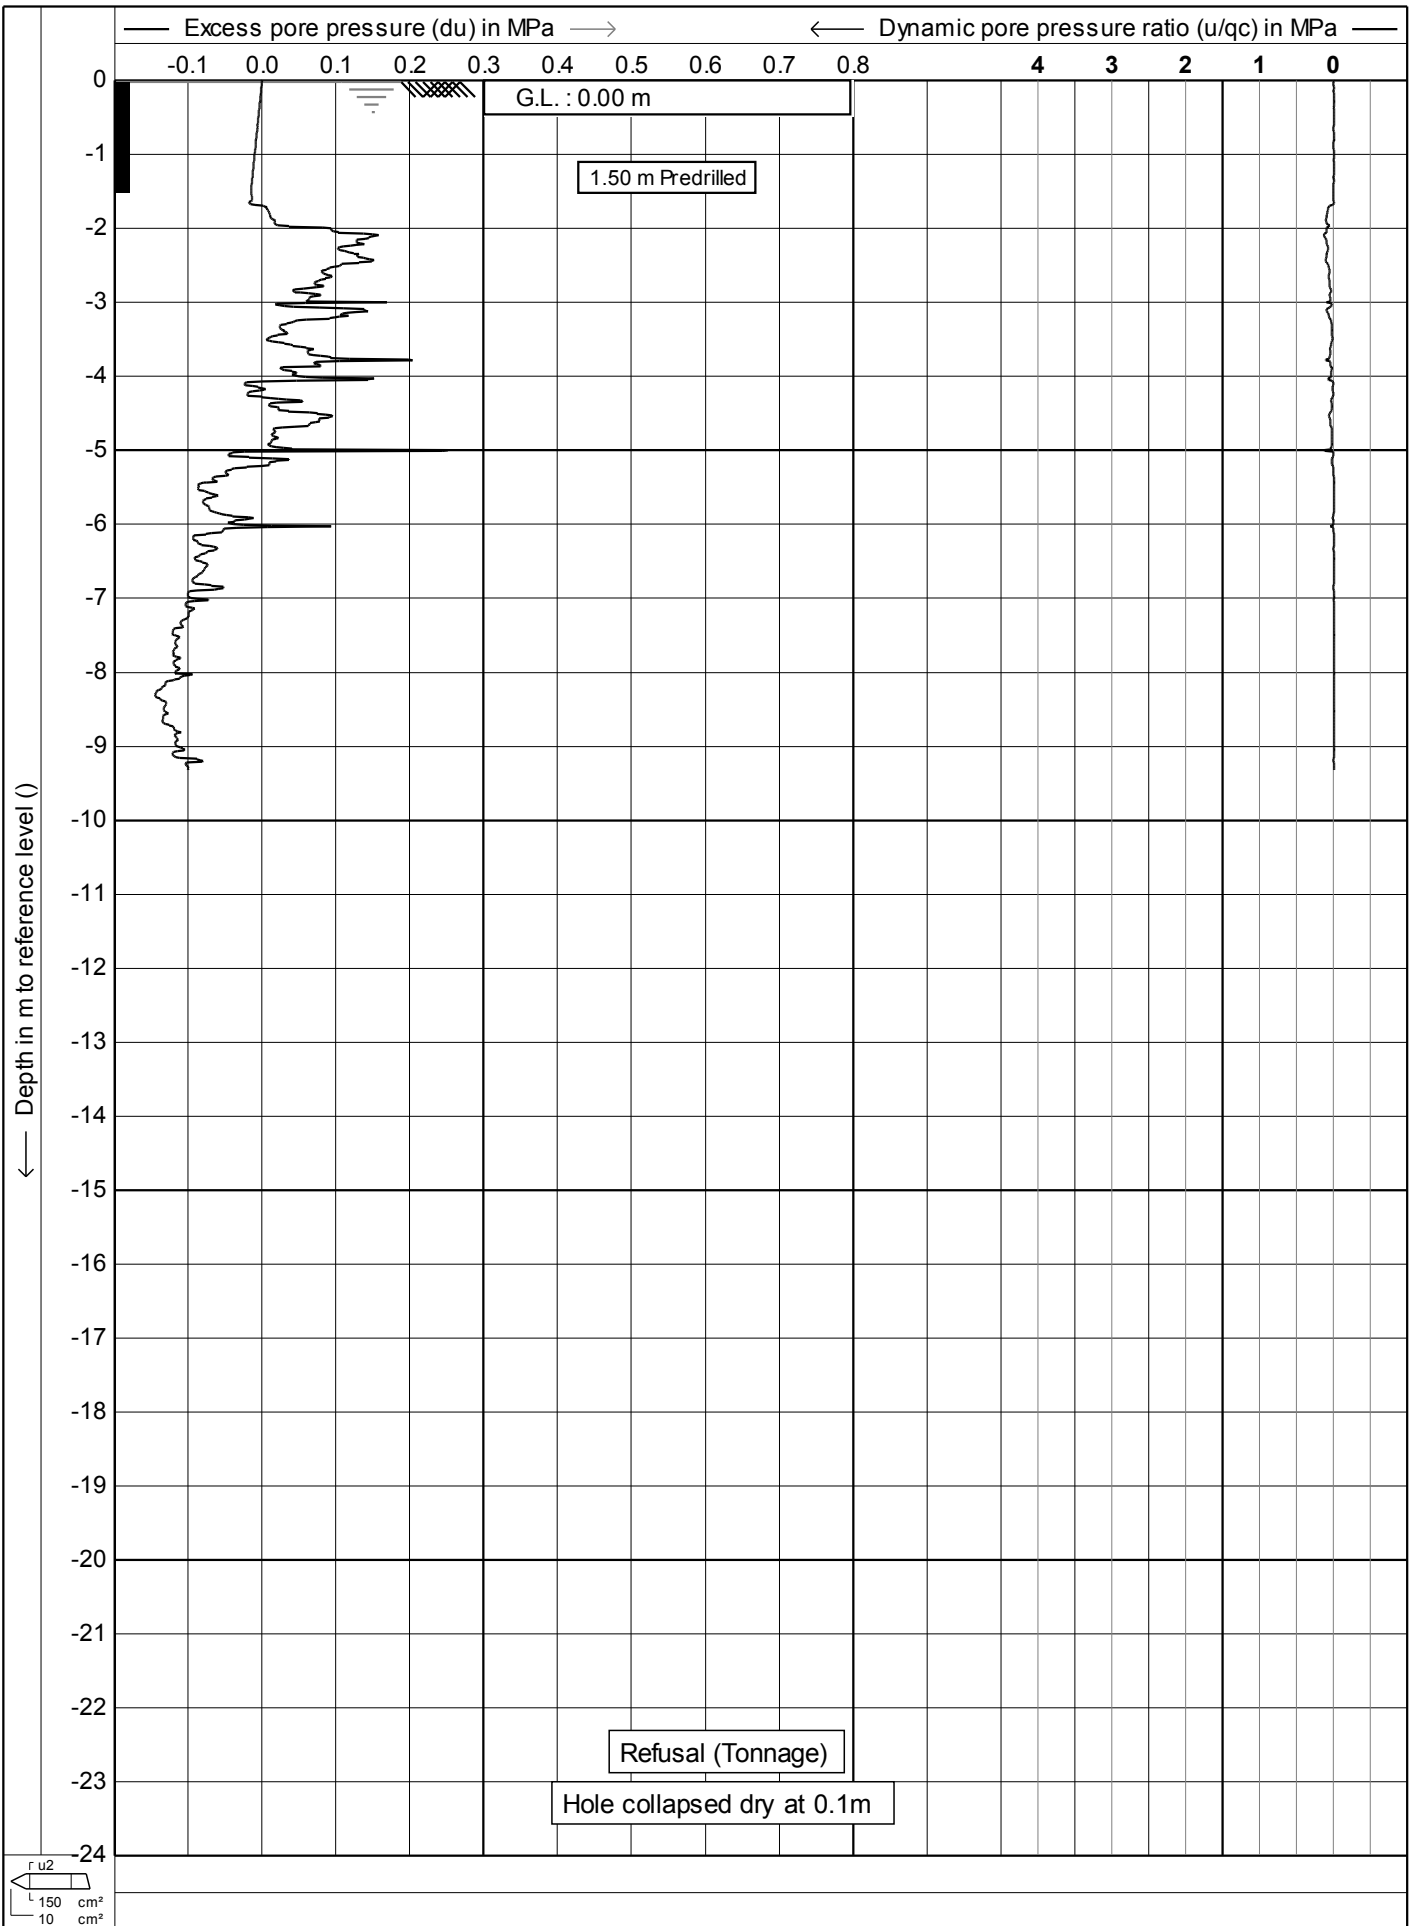

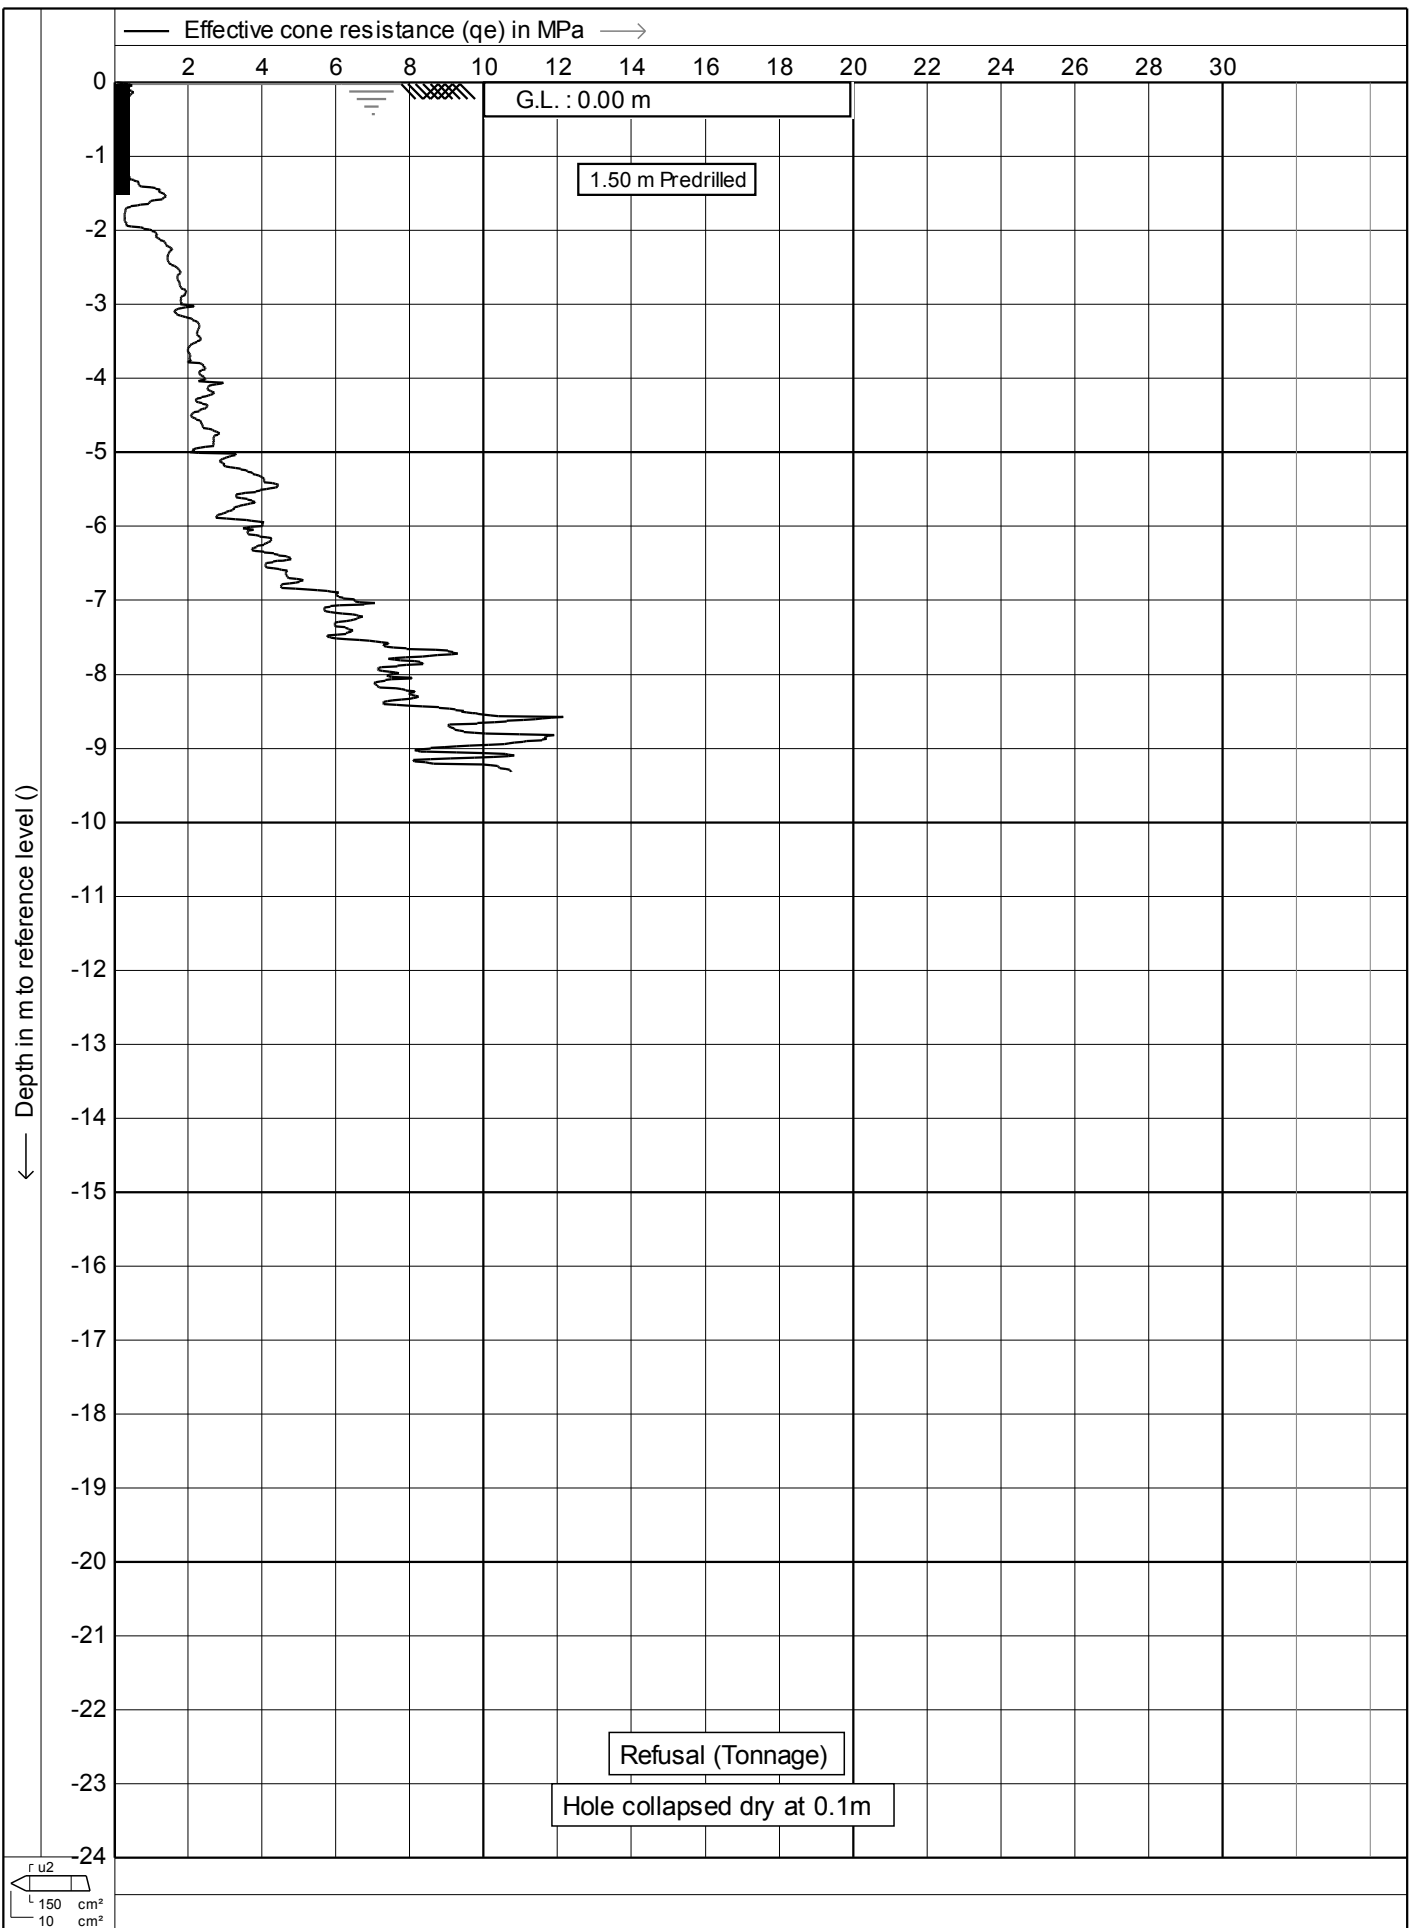

← Depth in m to reference level ()

— Total vertical stress (rov;z) in kPa →

50 100 150 200 250 300 350 400 450 500 550 600 650 700 750

G.L. : 0.00 m

1.50 m Predrilled

Refusal (Tonnage)

Hole collapsed dry at 0.1m

--- Effective vertical stress (rov;z') in kPa →

100

200

300

400

500

600

700



Test according A.S.T.M Standard D 5778-12

Project : **Site Investigation**

Location: **Brougham St - Wellington**


Date : **31-1-2013**

Cone no. : **C10CFIP.F04**



Project no. : **02TT1**

CPT no. : **43**

6/14

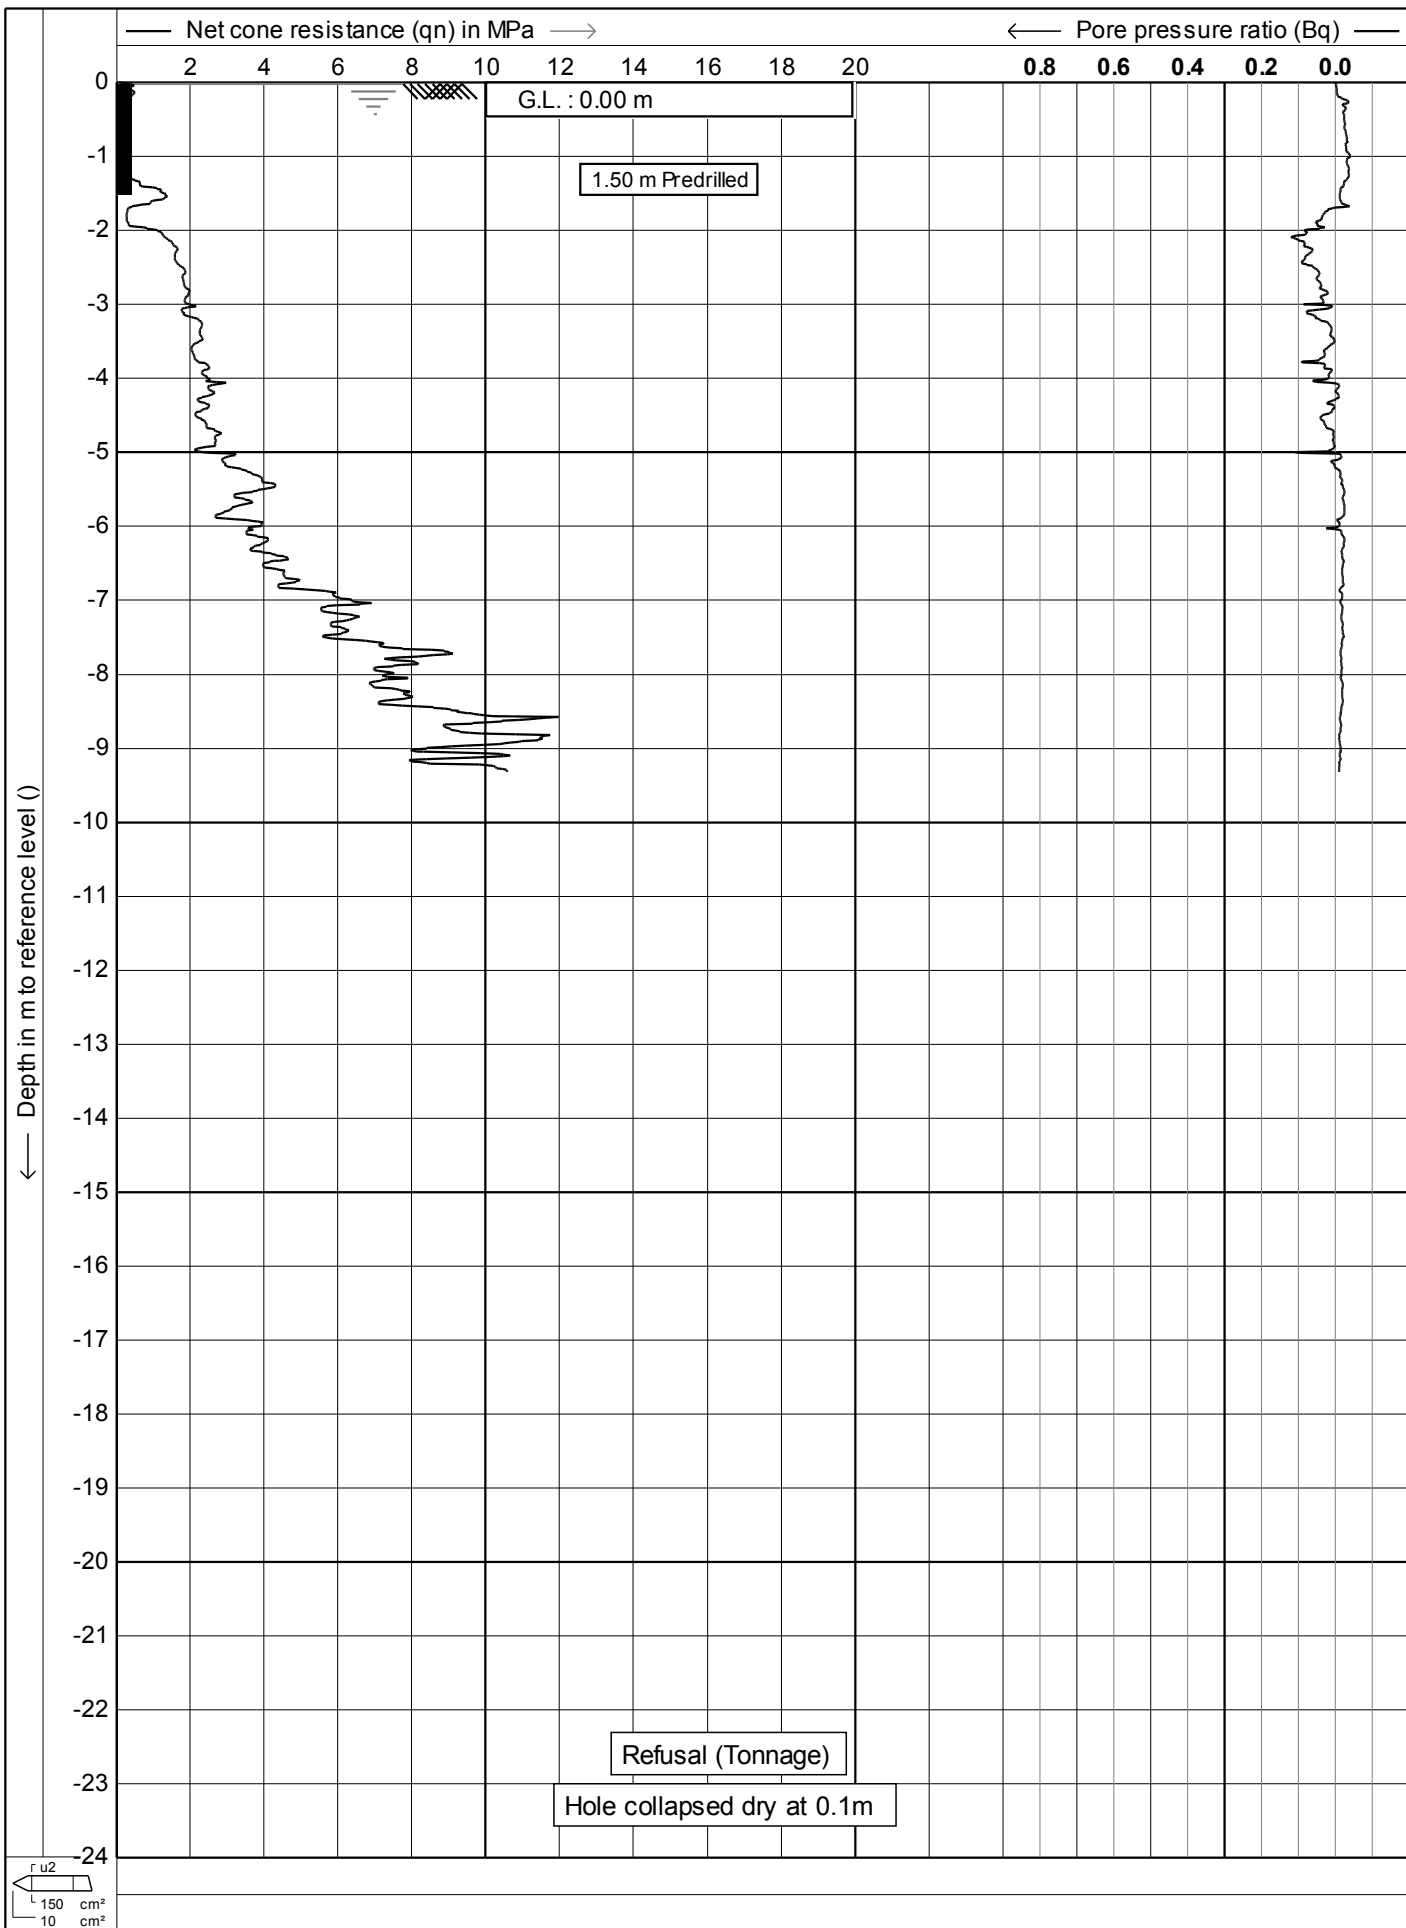

← Depth in m to reference level ()

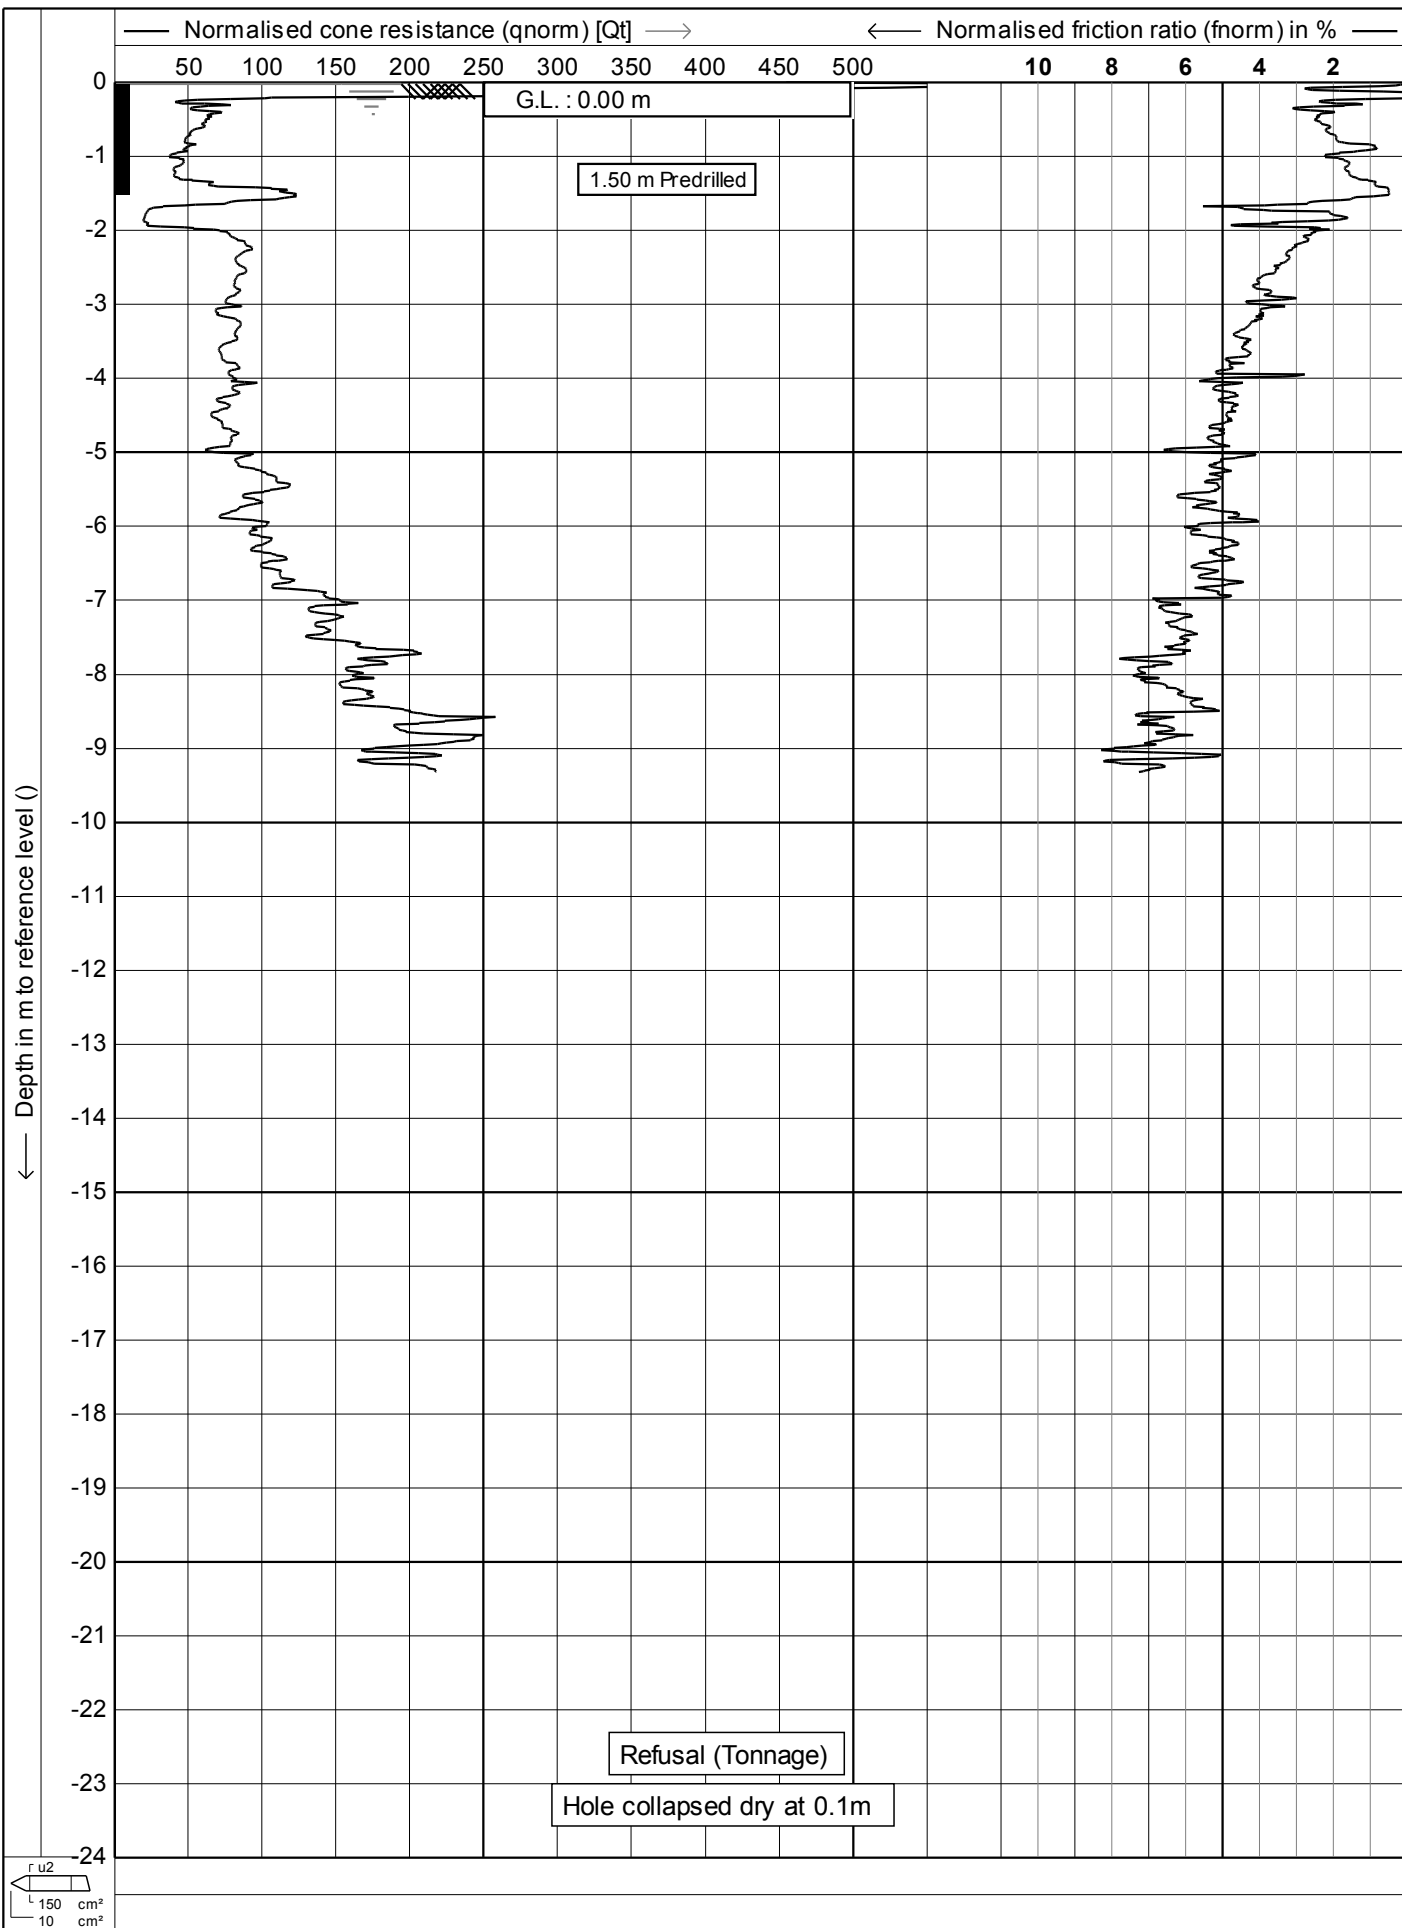

Test according A.S.T.M Standard D 5778-12

Project : **Site Investigation**

Location: **Brougham St - Wellington**

Date : **31-1-2013**

Cone no. : **C10CFIP.F04**

Project no. : **02TT1**

CPT no. : **43**

8/14

← Depth in m to reference level ()

— Soil behaviour type index (Ic) —→

0.5 1.0 1.5 2.0 2.5 3.0 3.5 4.0 4.5 5.0 5.5 6.0 6.5 7.0 7.5

0
-1
-2
-3
-4
-5
-6
-7
-8
-9
-10
-11
-12
-13
-14
-15
-16
-17
-18
-19
-20
-21
-22
-23
-24

G.L. : 0.00 m

1.50 m Predrilled

(2) Organic soils
(3) Clay
(4) Silt mixtures
(5) Sand mixtures
(6) Sand clean to silty
(7) Gravelly sand

150 cm²
10 cm²

7

6

5

4

3

2



Test according A.S.T.M Standard D 5778-12

Project : **Site Investigation**

Location: **Brougham St - Wellington**



Date : **31-1-2013**

Cone no. : **C10CFIP.F04**

Project no. : **02TT1**

CPT no. : **43**

9/14

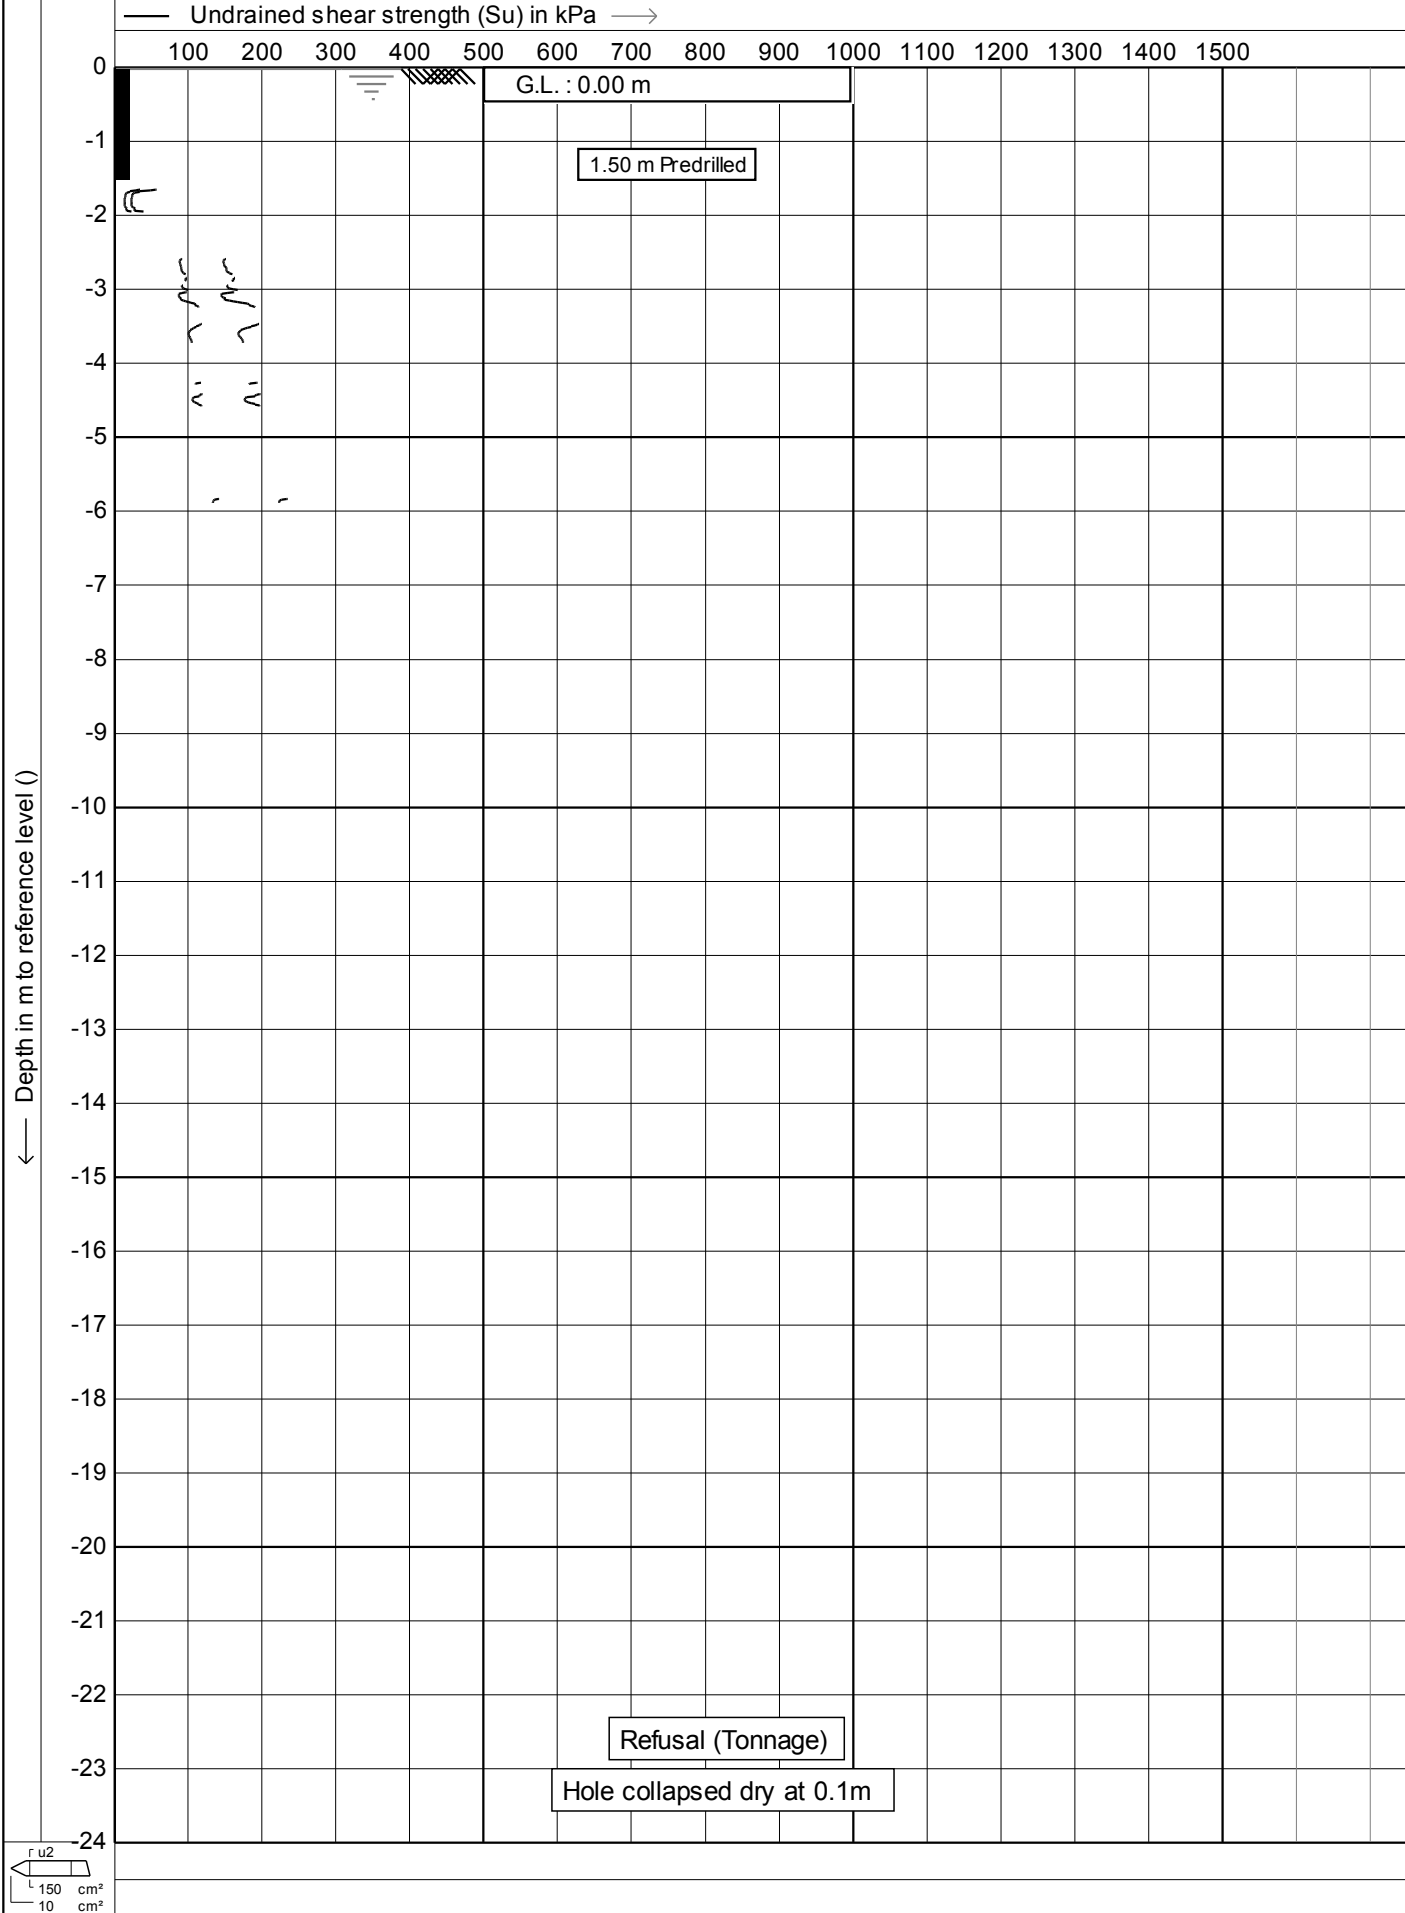

Test according A.S.T.M Standard D 5778-12

Project : **Site Investigation**

Location: **Brougham St - Wellington**

Date : **31-1-2013**


Cone no. : **C10CFIP.F04**

Project no. : **02TT1**

CPT no. : **43**

10/14

← Depth in m to reference level ()

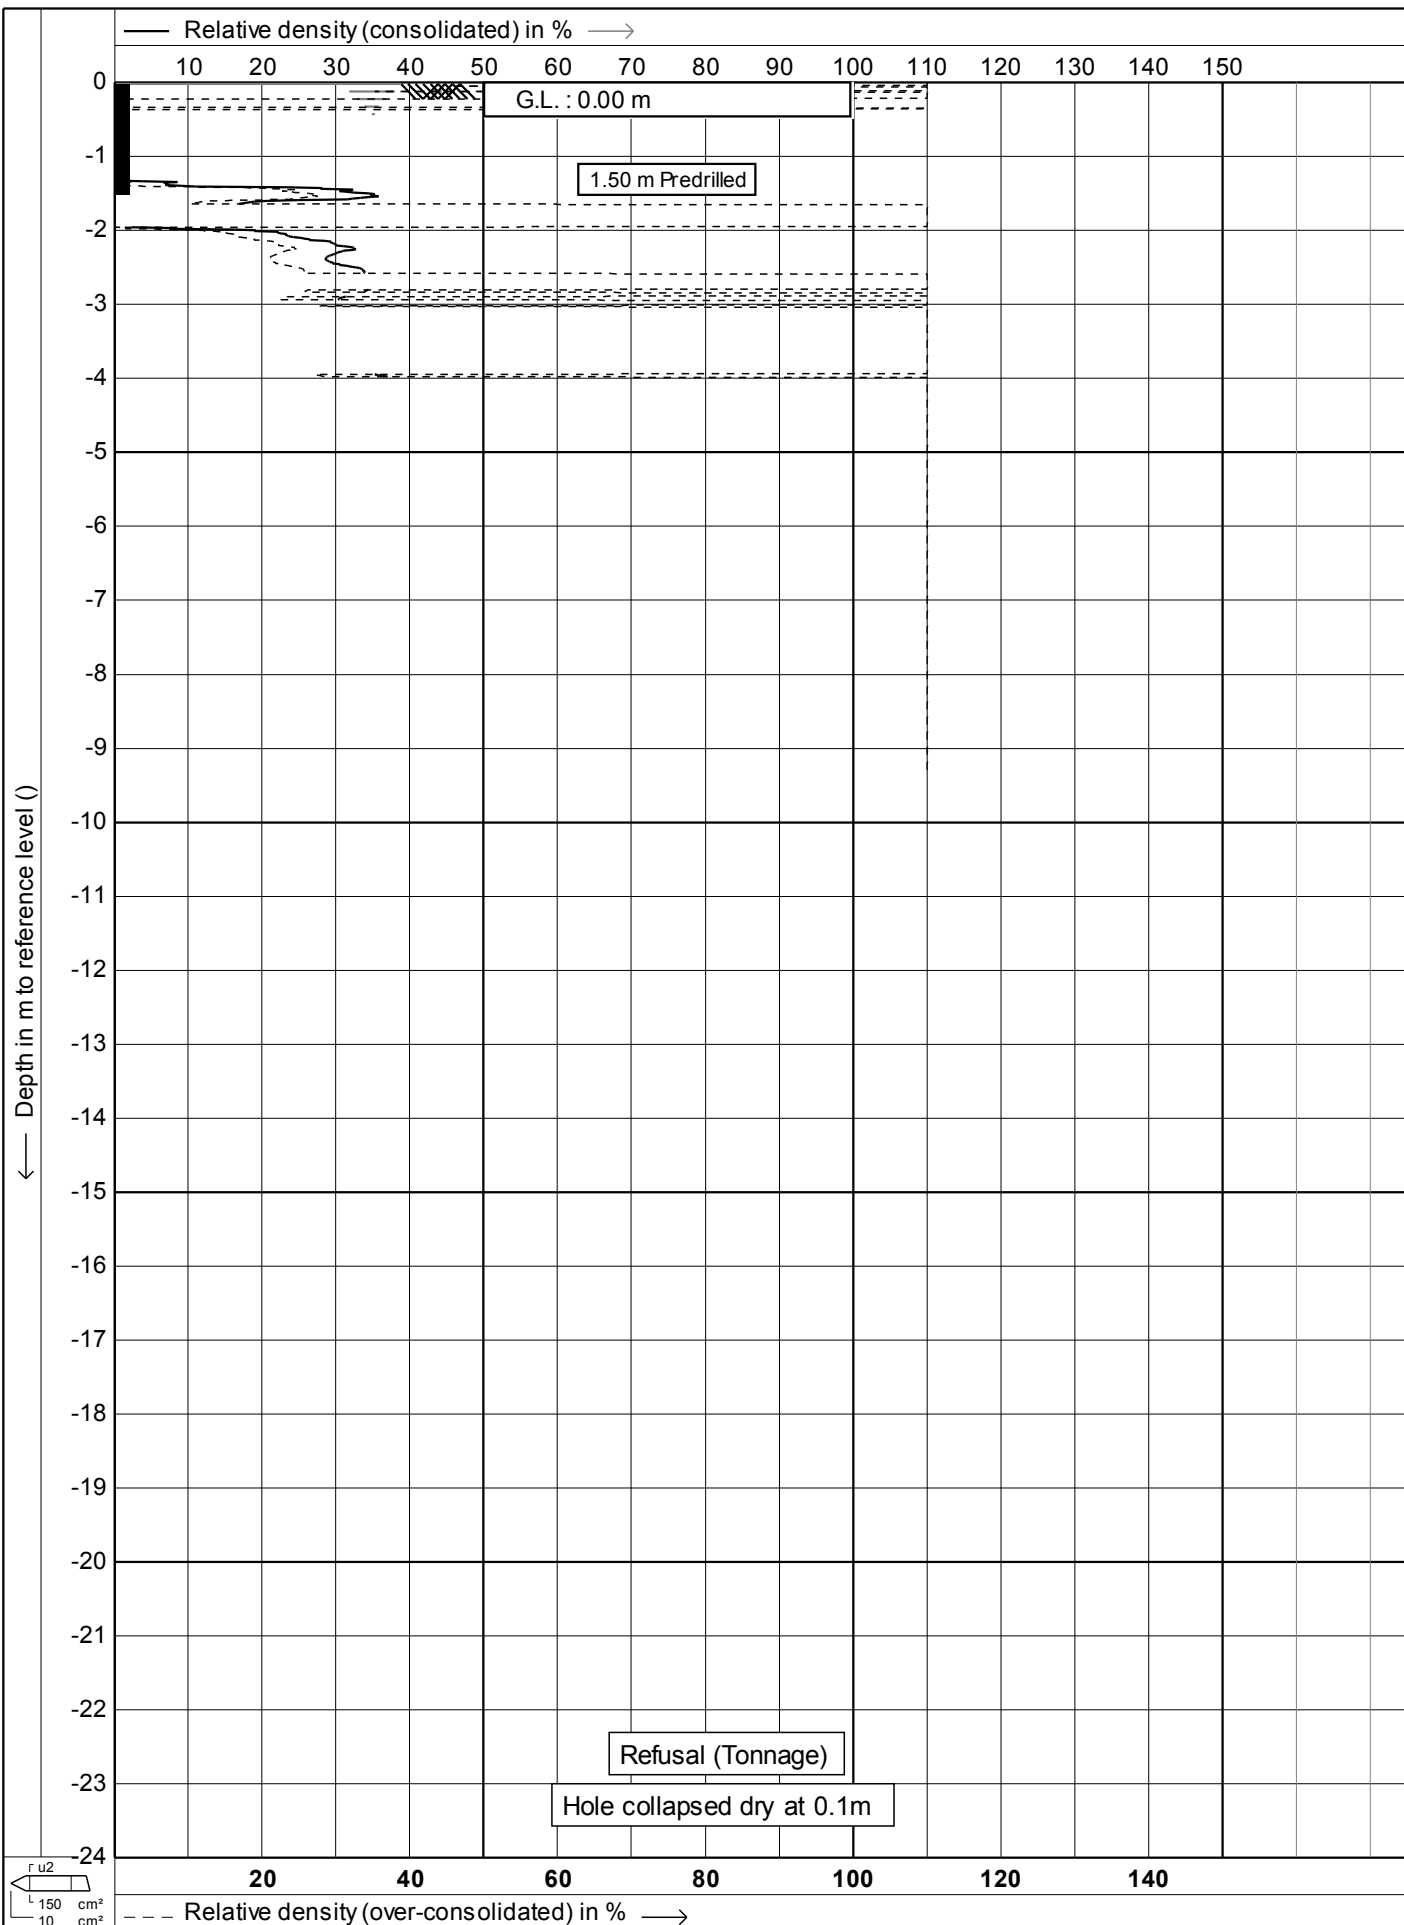

← Depth in m to reference level ()

— Equivalent SPT N60 Value →

5 10 15 20 25 30 35 40 45 50 55 60 65 70 75

G.L. : 0.00 m

1.50 m Predrilled

Refusal (Tonnage)

Hole collapsed dry at 0.1m

150 cm²
10 cm²



Test according A.S.T.M Standard D 5778-12

Project : **Site Investigation**

Location: **Brougham St - Wellington**

Date : **31-1-2013**

Cone no. : **C10CFIP.F04**

Project no. : **02TT1**

CPT no. : **43**

12/14

← Depth in m to reference level ()

Internal friction angle in degrees →

5 10 15 20 25 30 35 40 45 50 55 60 65 70 75

G.L. : 0.00 m

1.50 m Predrilled

Refusal (Tonnage)

Hole collapsed dry at 0.1m

150 cm²
10 cm²



Test according A.S.T.M Standard D 5778-12

Project : **Site Investigation**

Location: **Brougham St - Wellington**

Date : **31-1-2013**

Cone no. : **C10CFIP.F04**

Project no. : **02TT1**

CPT no. : **43**

14/14