



← Depth in m to reference level (Wellington 1953 m.s.)

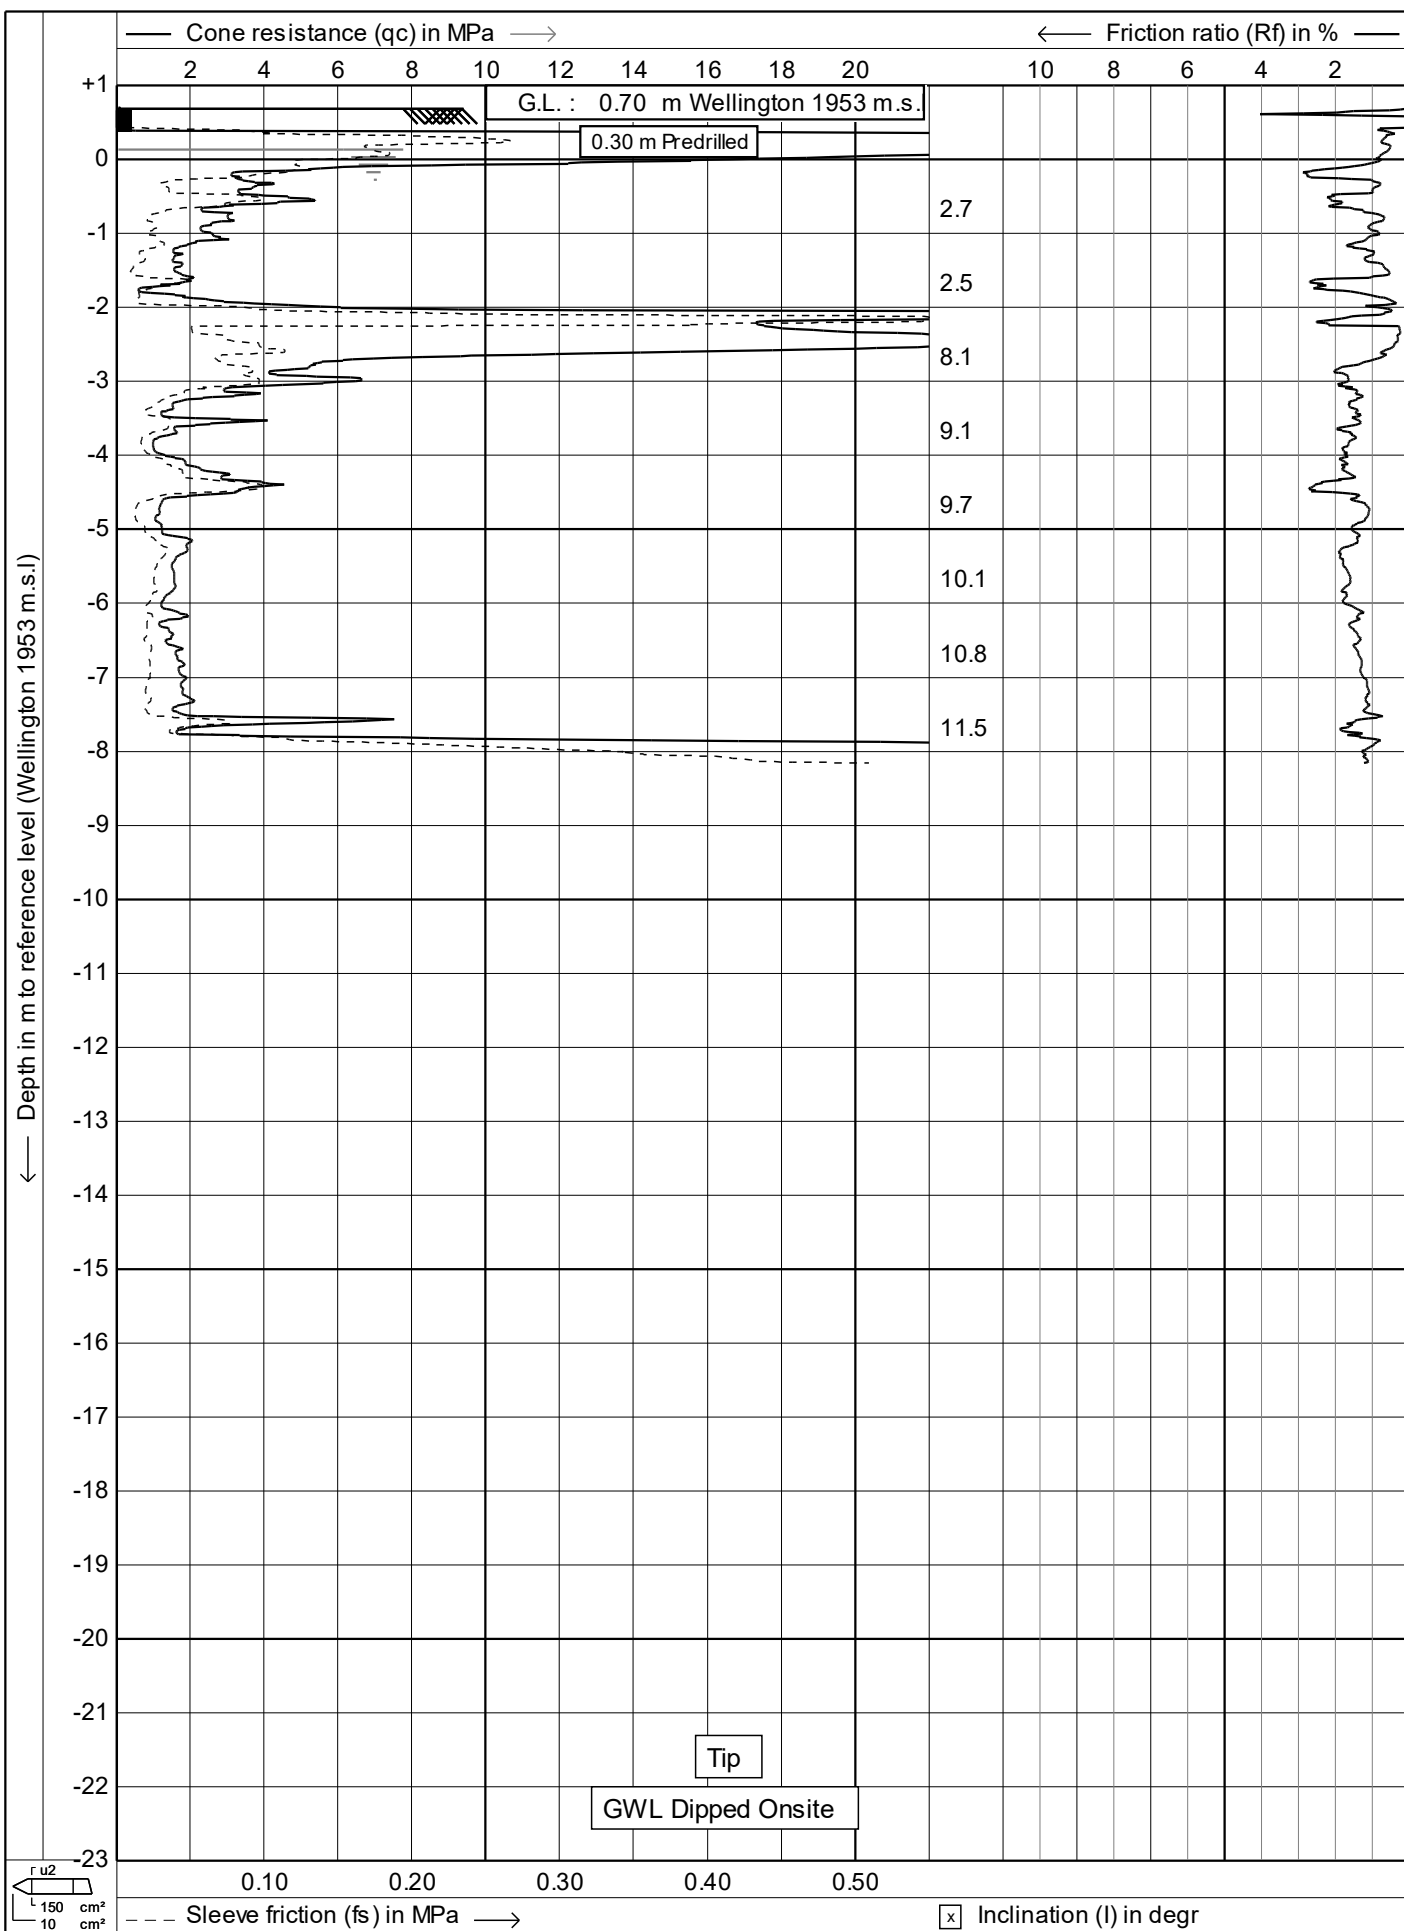

← Depth in m to reference level (Wellington 1953 m.s.)

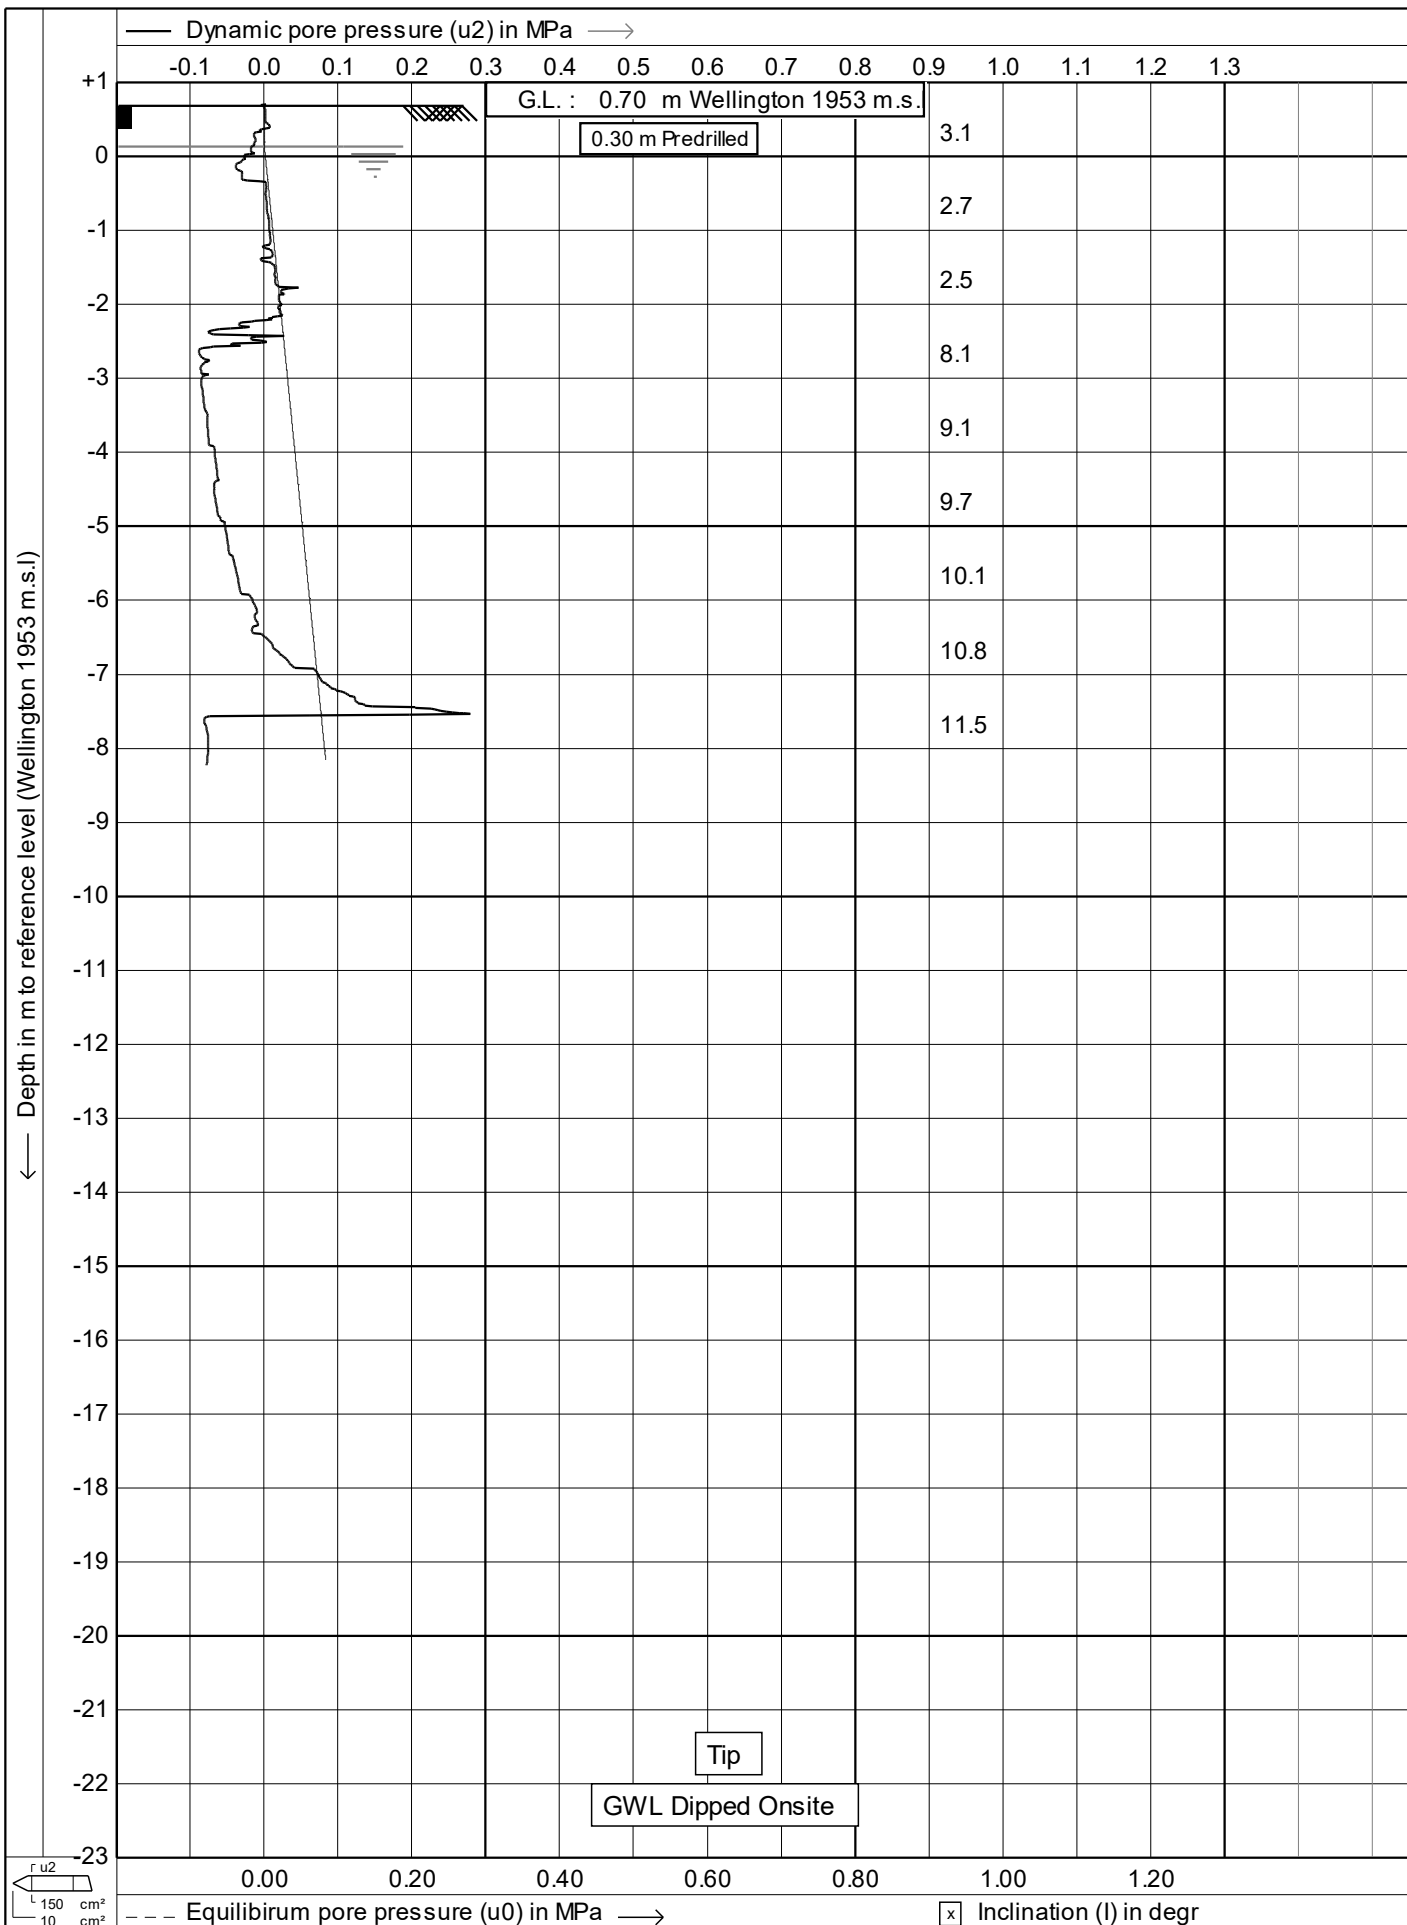

Test according ASTM D5778-12

Project : **Site Investigations**

Location: **Wellington Town Hall**

Position: **1748829, 5427583 NZTM**

Date : **21/03/2017**

Cone no. : **C10CFIP.C13082**

Project no. : **04TT1**

CPT no. : **304**

**2/14**

← Depth in m to reference level (Wellington 1953 m.s.)

— Corrected cone resistance (qt) in MPa —→


2 4 6 8 10 12 14 16 18 20 22 24 26 28 30

G.L. : 0.70 m Wellington 1953 m.s.

0.30 m Predrilled

Tip

GWL Dipped Onsite



Test according ASTM D5778-12

Project : Site Investigations

Location: Wellington Town Hall

Position: 1748829, 5427583 NZTM

Date : 21/03/2017



Cone no. : C10CFIP.C13082

Project no. : 04TT1

CPT no. : 304

3/14

← Depth in m to reference level (Wellington 1953 m.s.l)

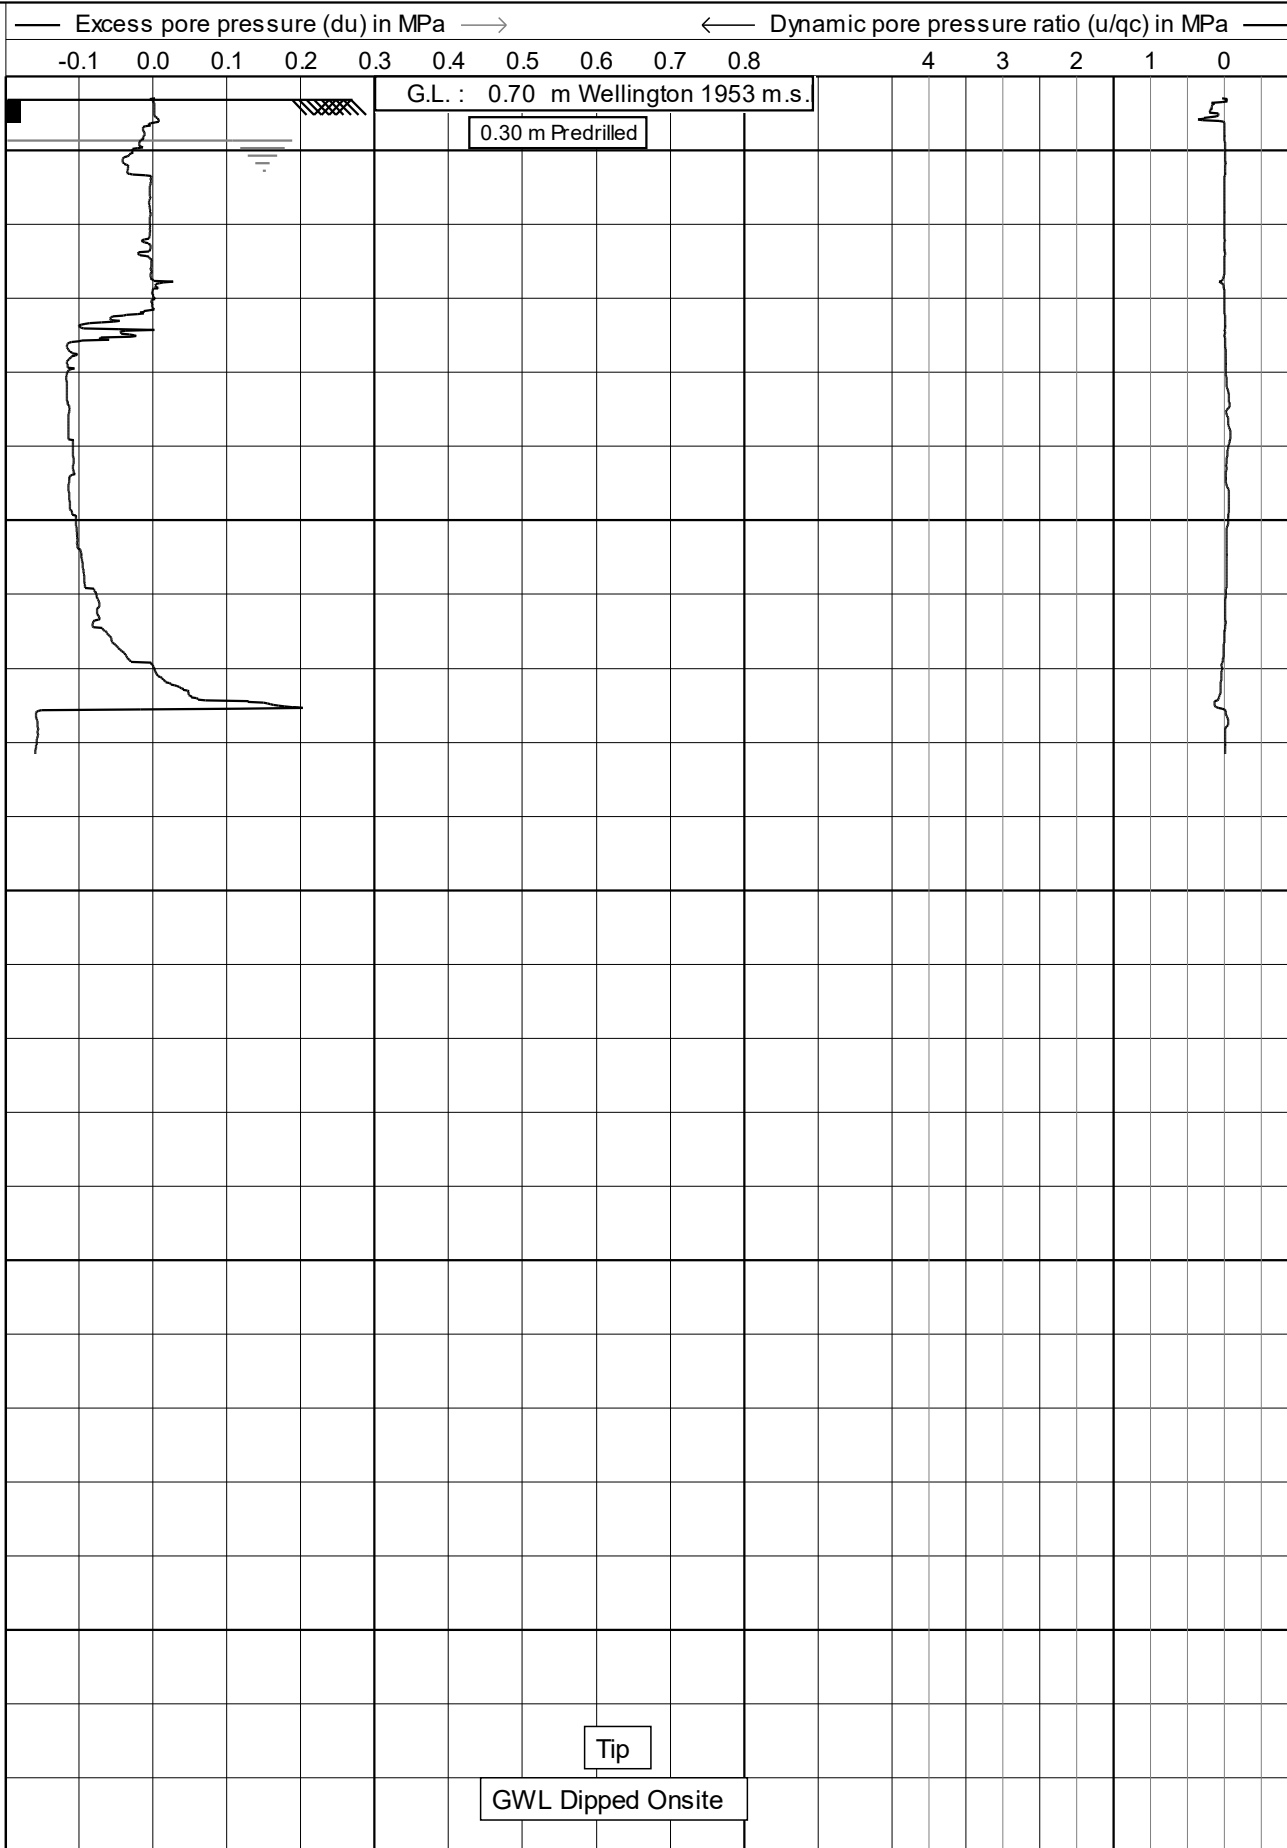

Test according ASTM D5778-12		Date : 21/03/2017	
Project : Site Investigations		Cone no. : C10CFIP.C13082	
Location: Wellington Town Hall		Project no. : 04TT1	
Position: 1748829, 5427583 NZTM		CPT no. : 304	4/14

← Depth in m to reference level (Wellington 1953 m.s.)

— Effective cone resistance ( $q_e$ ) in MPa —→

2 4 6 8 10 12 14 16 18 20 22 24 26 28 30

G.L. : 0.70 m Wellington 1953 m.s.

0.30 m Predrilled

Tip

GWL Dipped Onsite

150 cm<sup>2</sup>  
10 cm<sup>2</sup>



Test according ASTM D5778-12

Project : **Site Investigations**

Location: **Wellington Town Hall**

Position: **1748829, 5427583 NZTM**

Date : **21/03/2017**


Cone no. : **C10CFIP.C13082**

Project no. : **04TT1**

CPT no. : **304**

**5/14**

← Depth in m to reference level (Wellington 1953 m.s.)

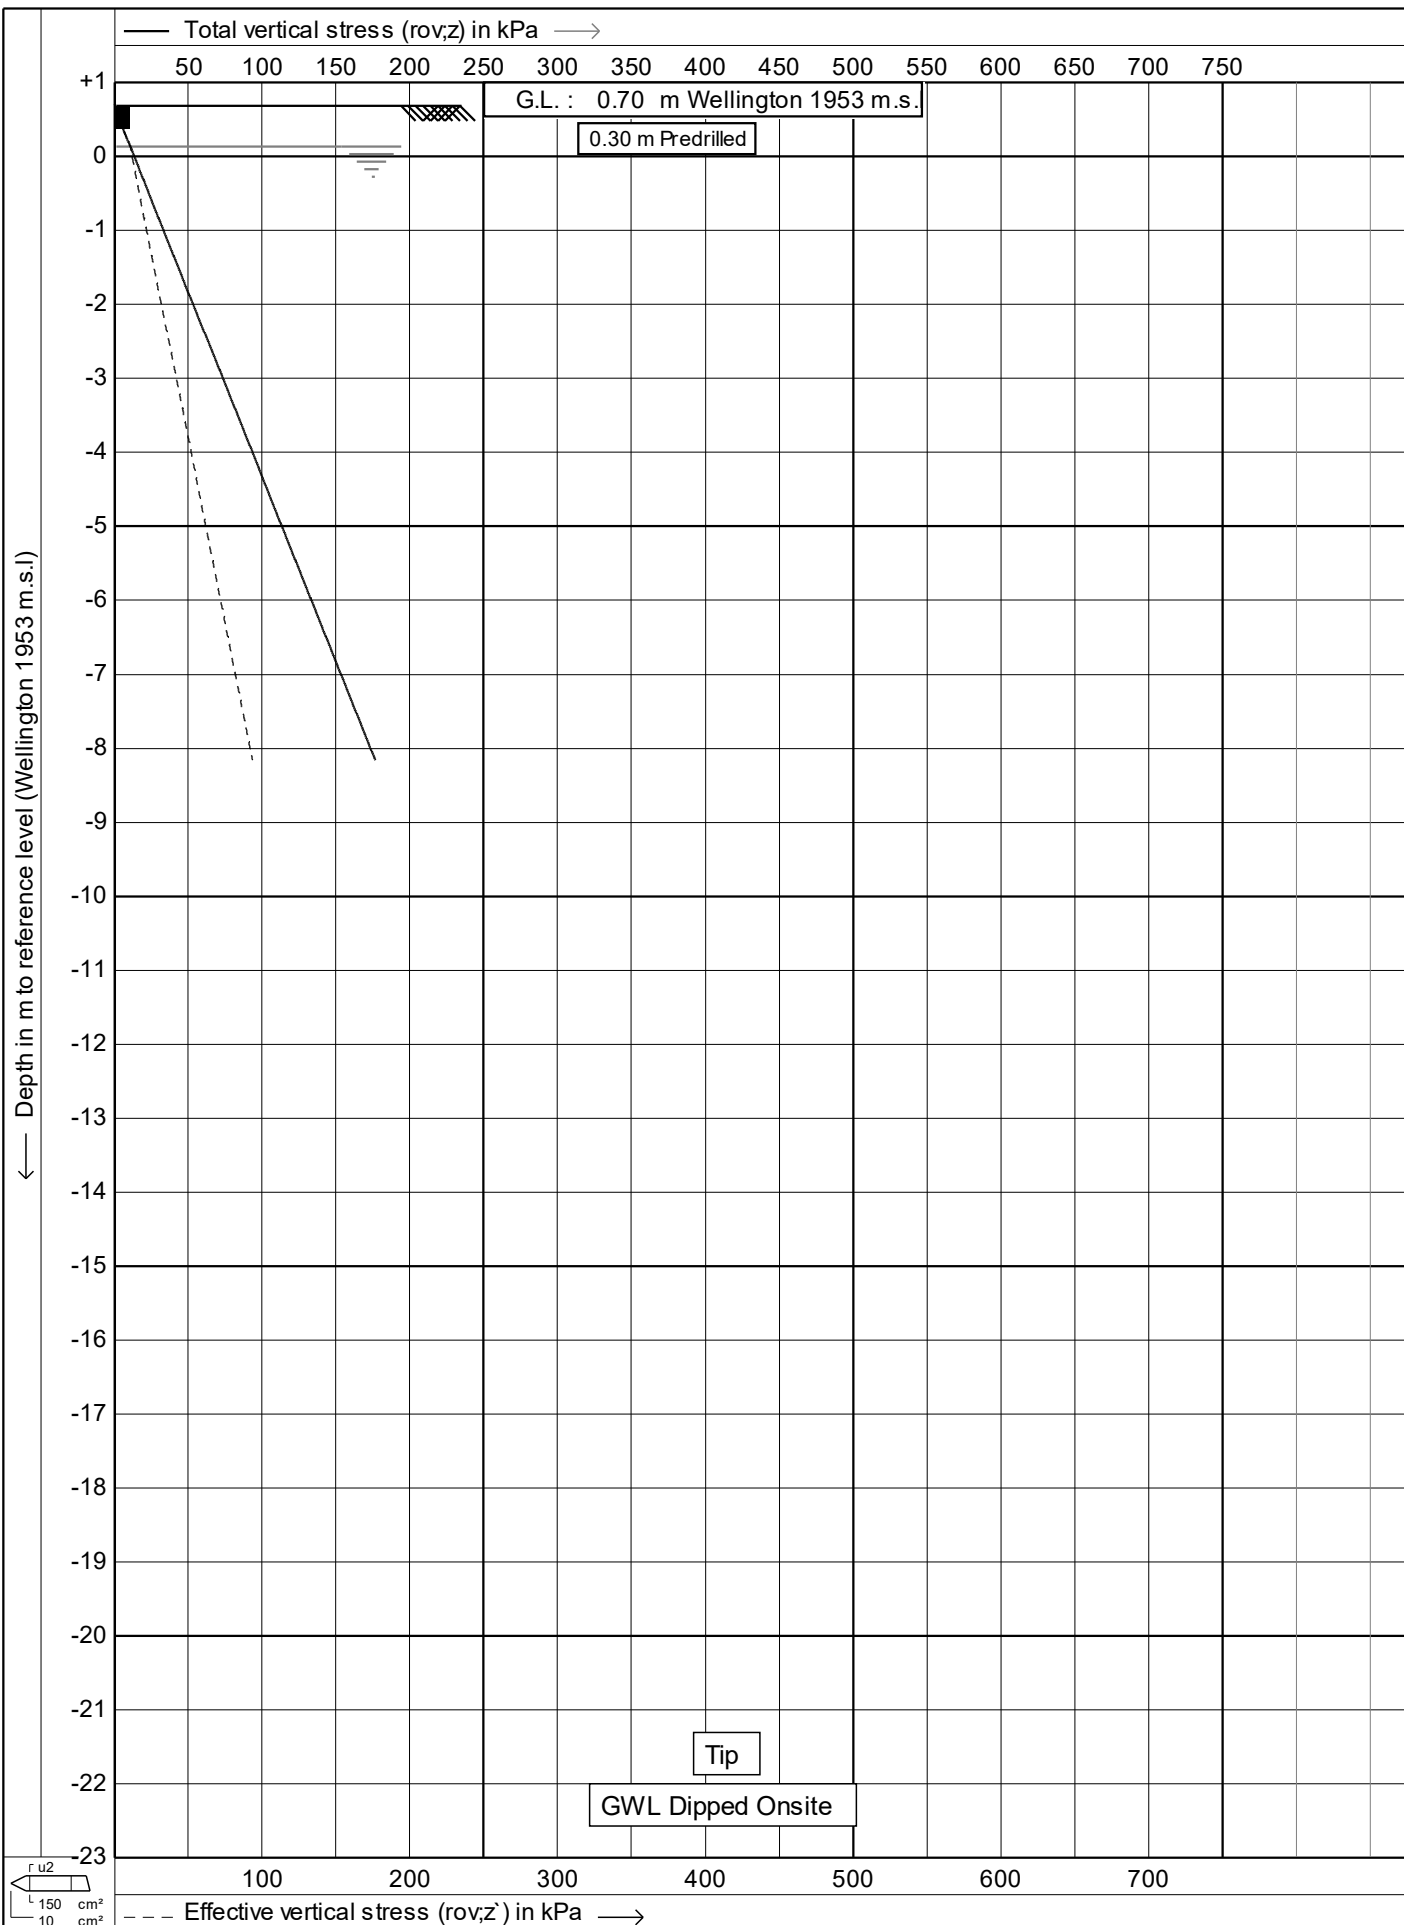

Test according ASTM D5778-12

Project : **Site Investigations**

Location: **Wellington Town Hall**

Position: **1748829, 5427583 NZTM**

Date : **21/03/2017**


Cone no. : **C10CFIP.C13082**

Project no. : **04TT1**


CPT no. : **304**

6/14

← Depth in m to reference level (Wellington 1953 m.s.)

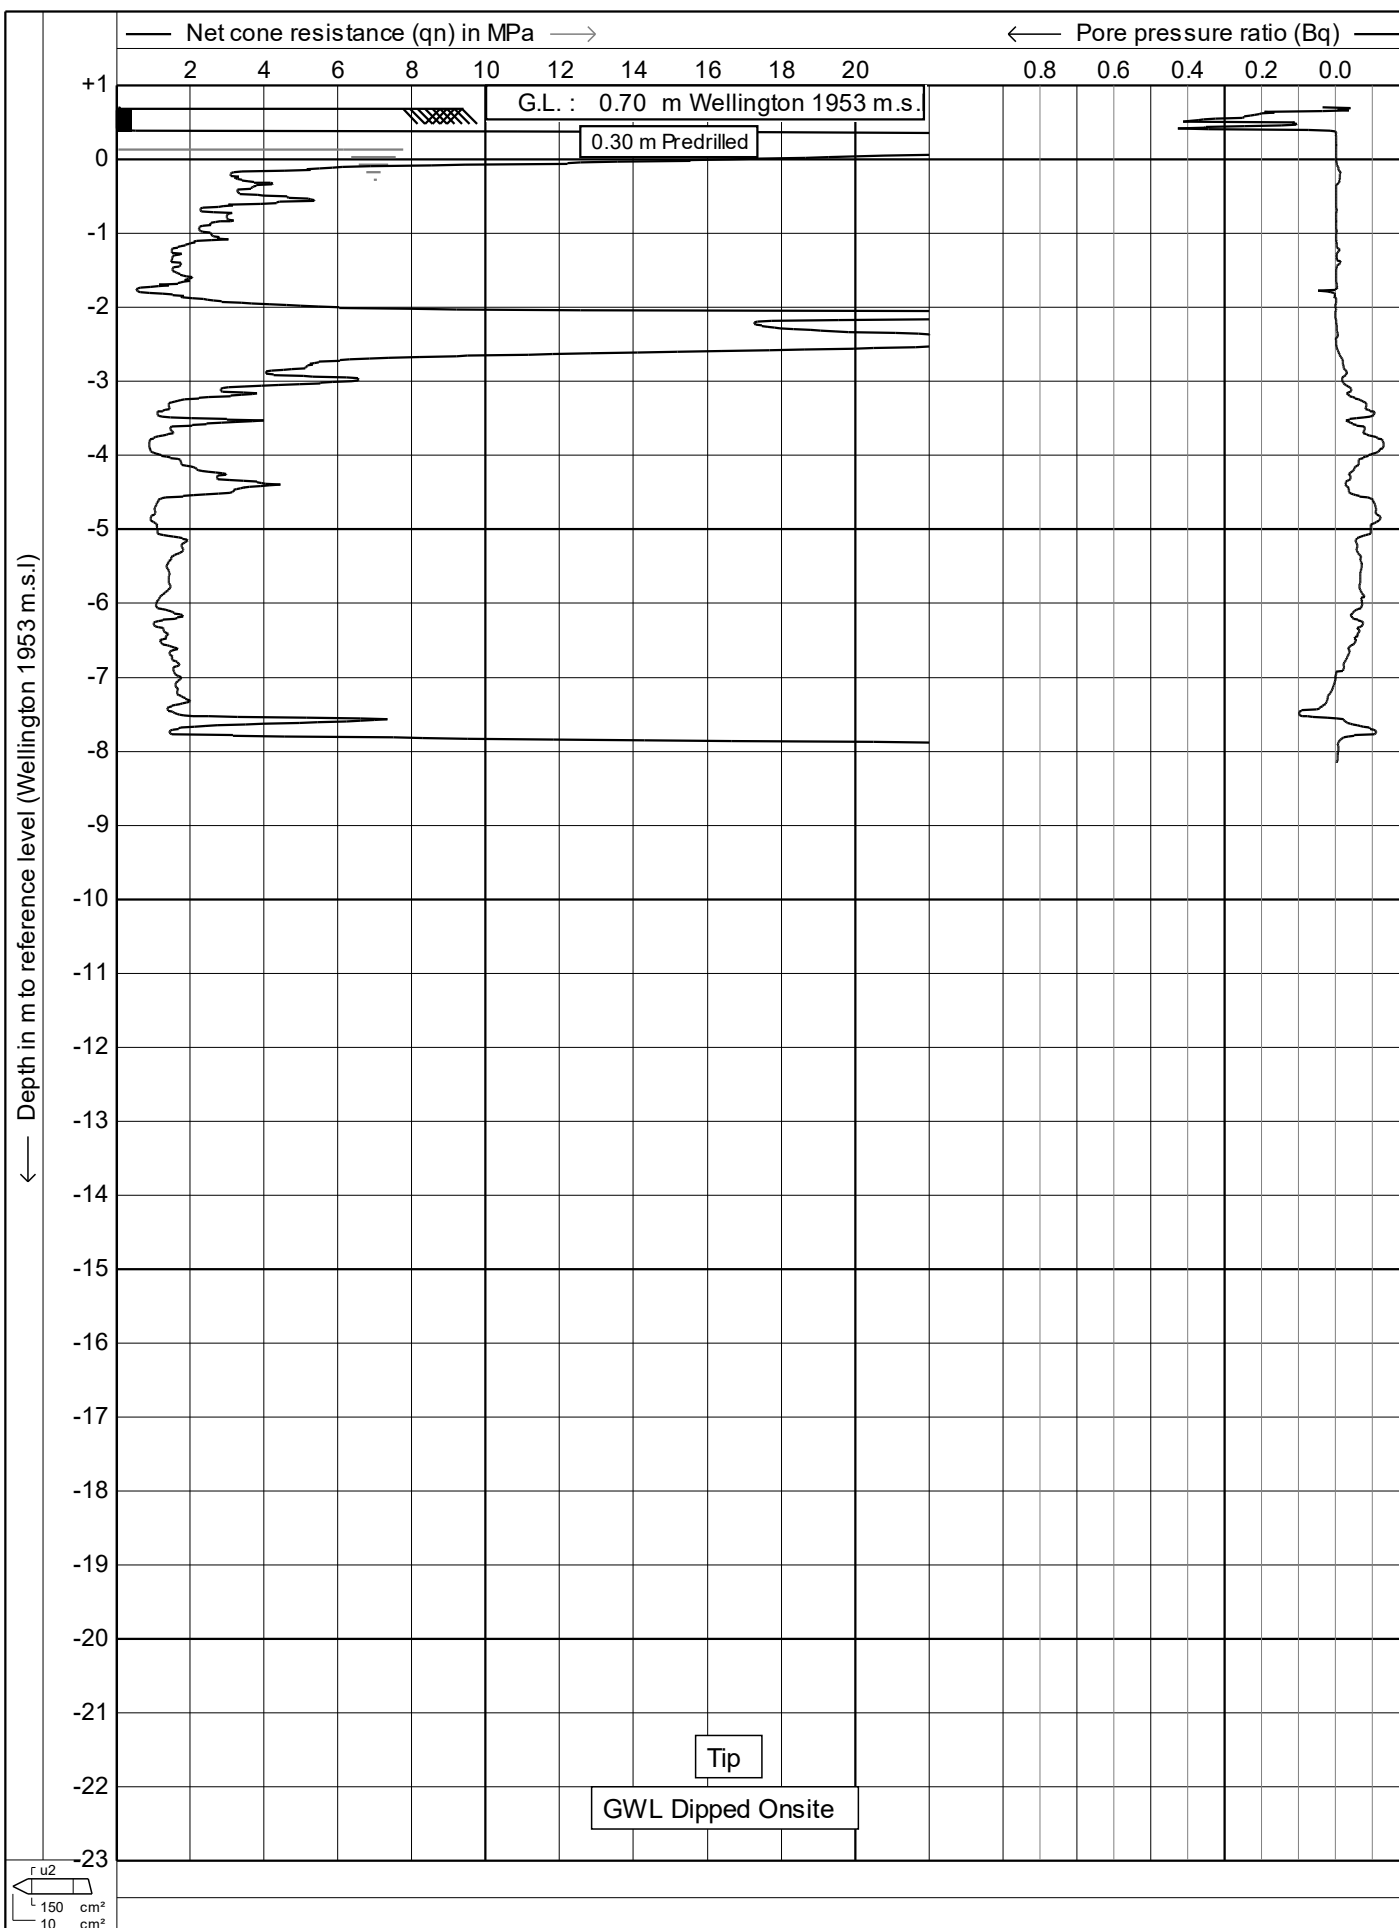

← Depth in m to reference level (Wellington 1953 m.s.)

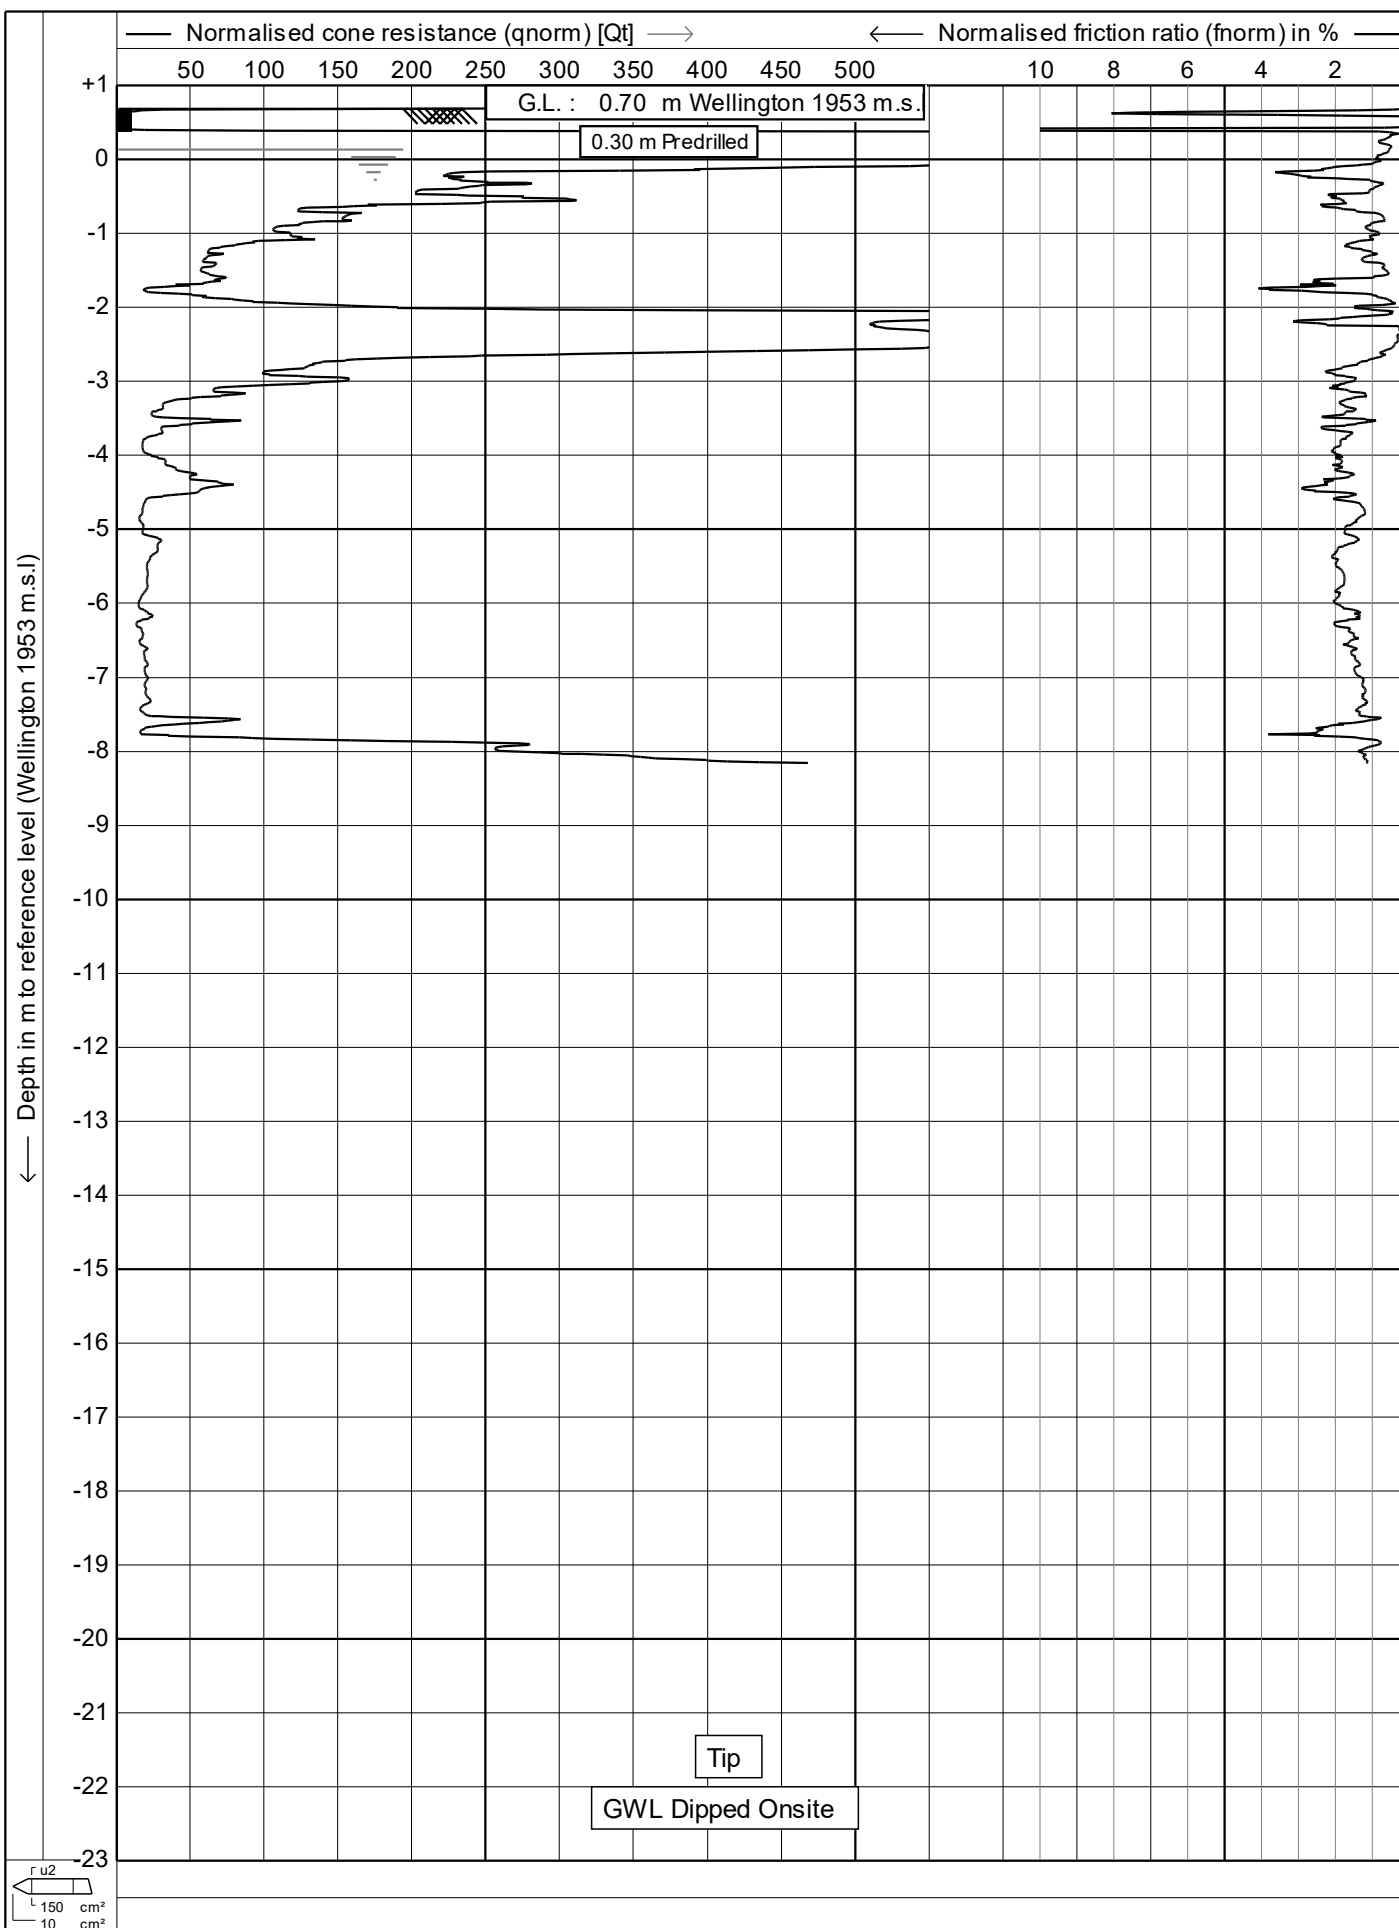



← Depth in m to reference level (Wellington 1953 m.s.)

— Soil behaviour type index (Ic) —→

0.5 1.0 1.5 2.0 2.5 3.0 3.5 4.0 4.5 5.0 5.5 6.0 6.5 7.0 7.5

G.L. : 0.70 m Wellington 1953 m.s.

0.30 m Predrilled

+1  
0  
-1  
-2  
-3  
-4  
-5  
-6  
-7  
-8  
-9  
-10  
-11  
-12  
-13  
-14  
-15  
-16  
-17  
-18  
-19  
-20  
-21  
-22  
-23

(2) Organic soils  
(3) Clay  
(4) Silt mixtures  
(5) Sand mixtures  
(6) Sand clean to silty  
(7) Gravelly sand

150 cm<sup>2</sup>  
10 cm<sup>2</sup>

7

6

5

4

3

2



Test according ASTM D5778-12

Project : Site Investigations

Location: Wellington Town Hall

Position: 1748829, 5427583 NZTM

Date : 21/03/2017

Cone no. : C10CFIP.C13082

Project no. : 04TT1

CPT no. : 304

9/14

← Depth in m to reference level (Wellington 1953 m.s.)

— Undrained shear strength (Su) in kPa —→

100 200 300 400 500 600 700 800 900 1000 1100 1200 1300 1400 1500

G.L. : 0.70 m Wellington 1953 m.s.

0.30 m Predrilled

Tip

GWL Dipped Onsite

150 cm<sup>2</sup>  
10 cm<sup>2</sup>



Test according ASTM D5778-12

Project : **Site Investigations**

Location: **Wellington Town Hall**

Position: **1748829, 5427583 NZTM**

Date : **21/03/2017**


Cone no. : **C10CFIP.C13082**

Project no. : **04TT1**

CPT no. : **304**

10/14

← Depth in m to reference level (Wellington 1953 m.s.l)

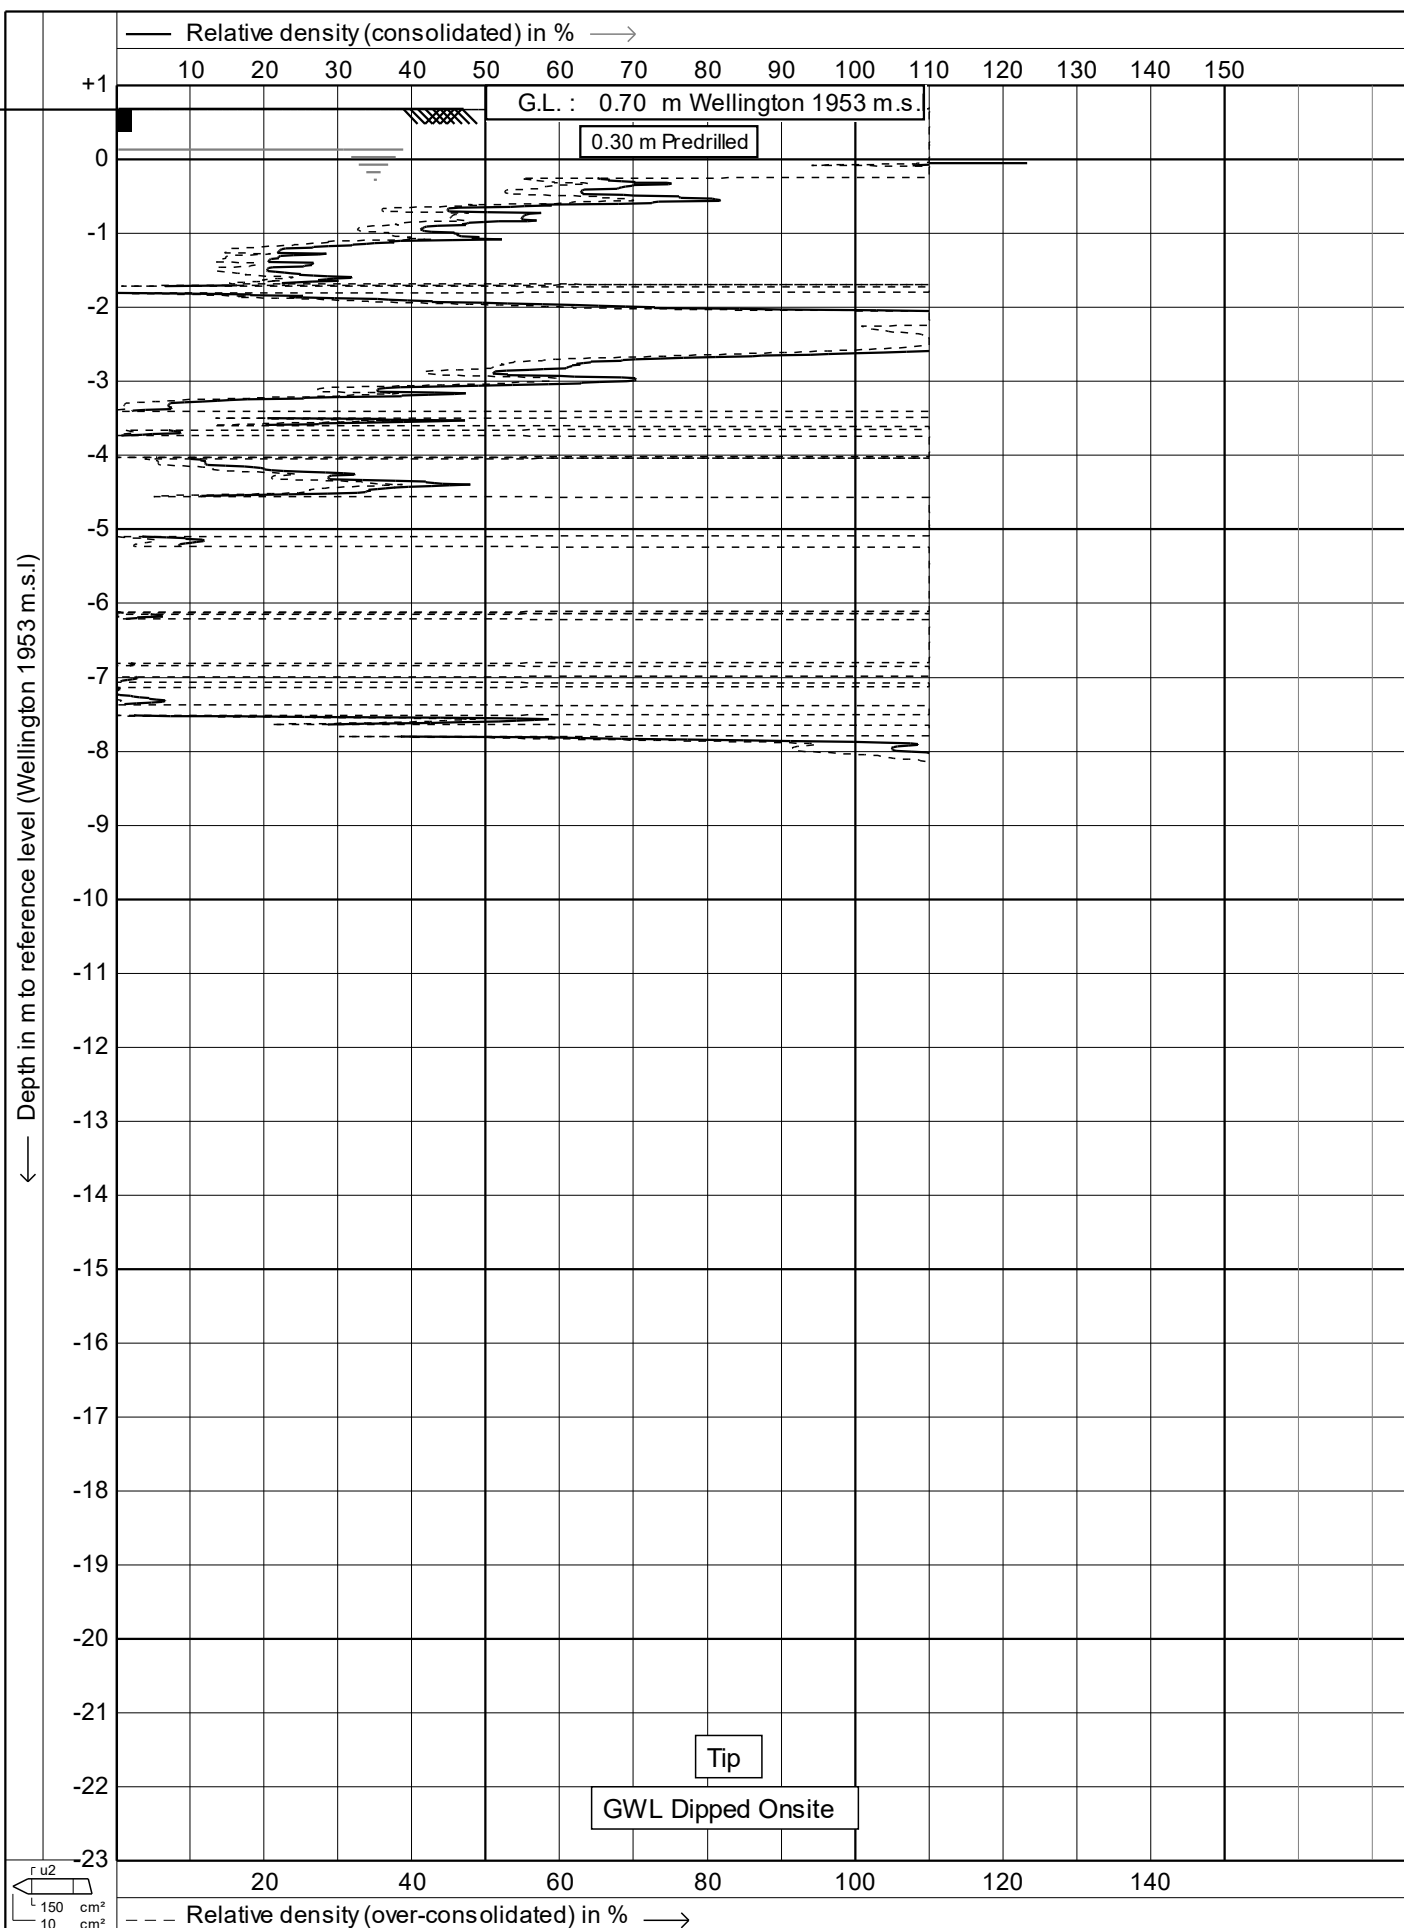

Test according ASTM D5778-12

Project : **Site Investigations**

Location: **Wellington Town Hall**

Position: **1748829, 5427583 NZTM**

Date : **21/03/2017**



Cone no. : **C10CFIP.C13082**

Project no. : **04TT1**

CPT no. : **304**

11/14

← Depth in m to reference level (Wellington 1953 m.s.)

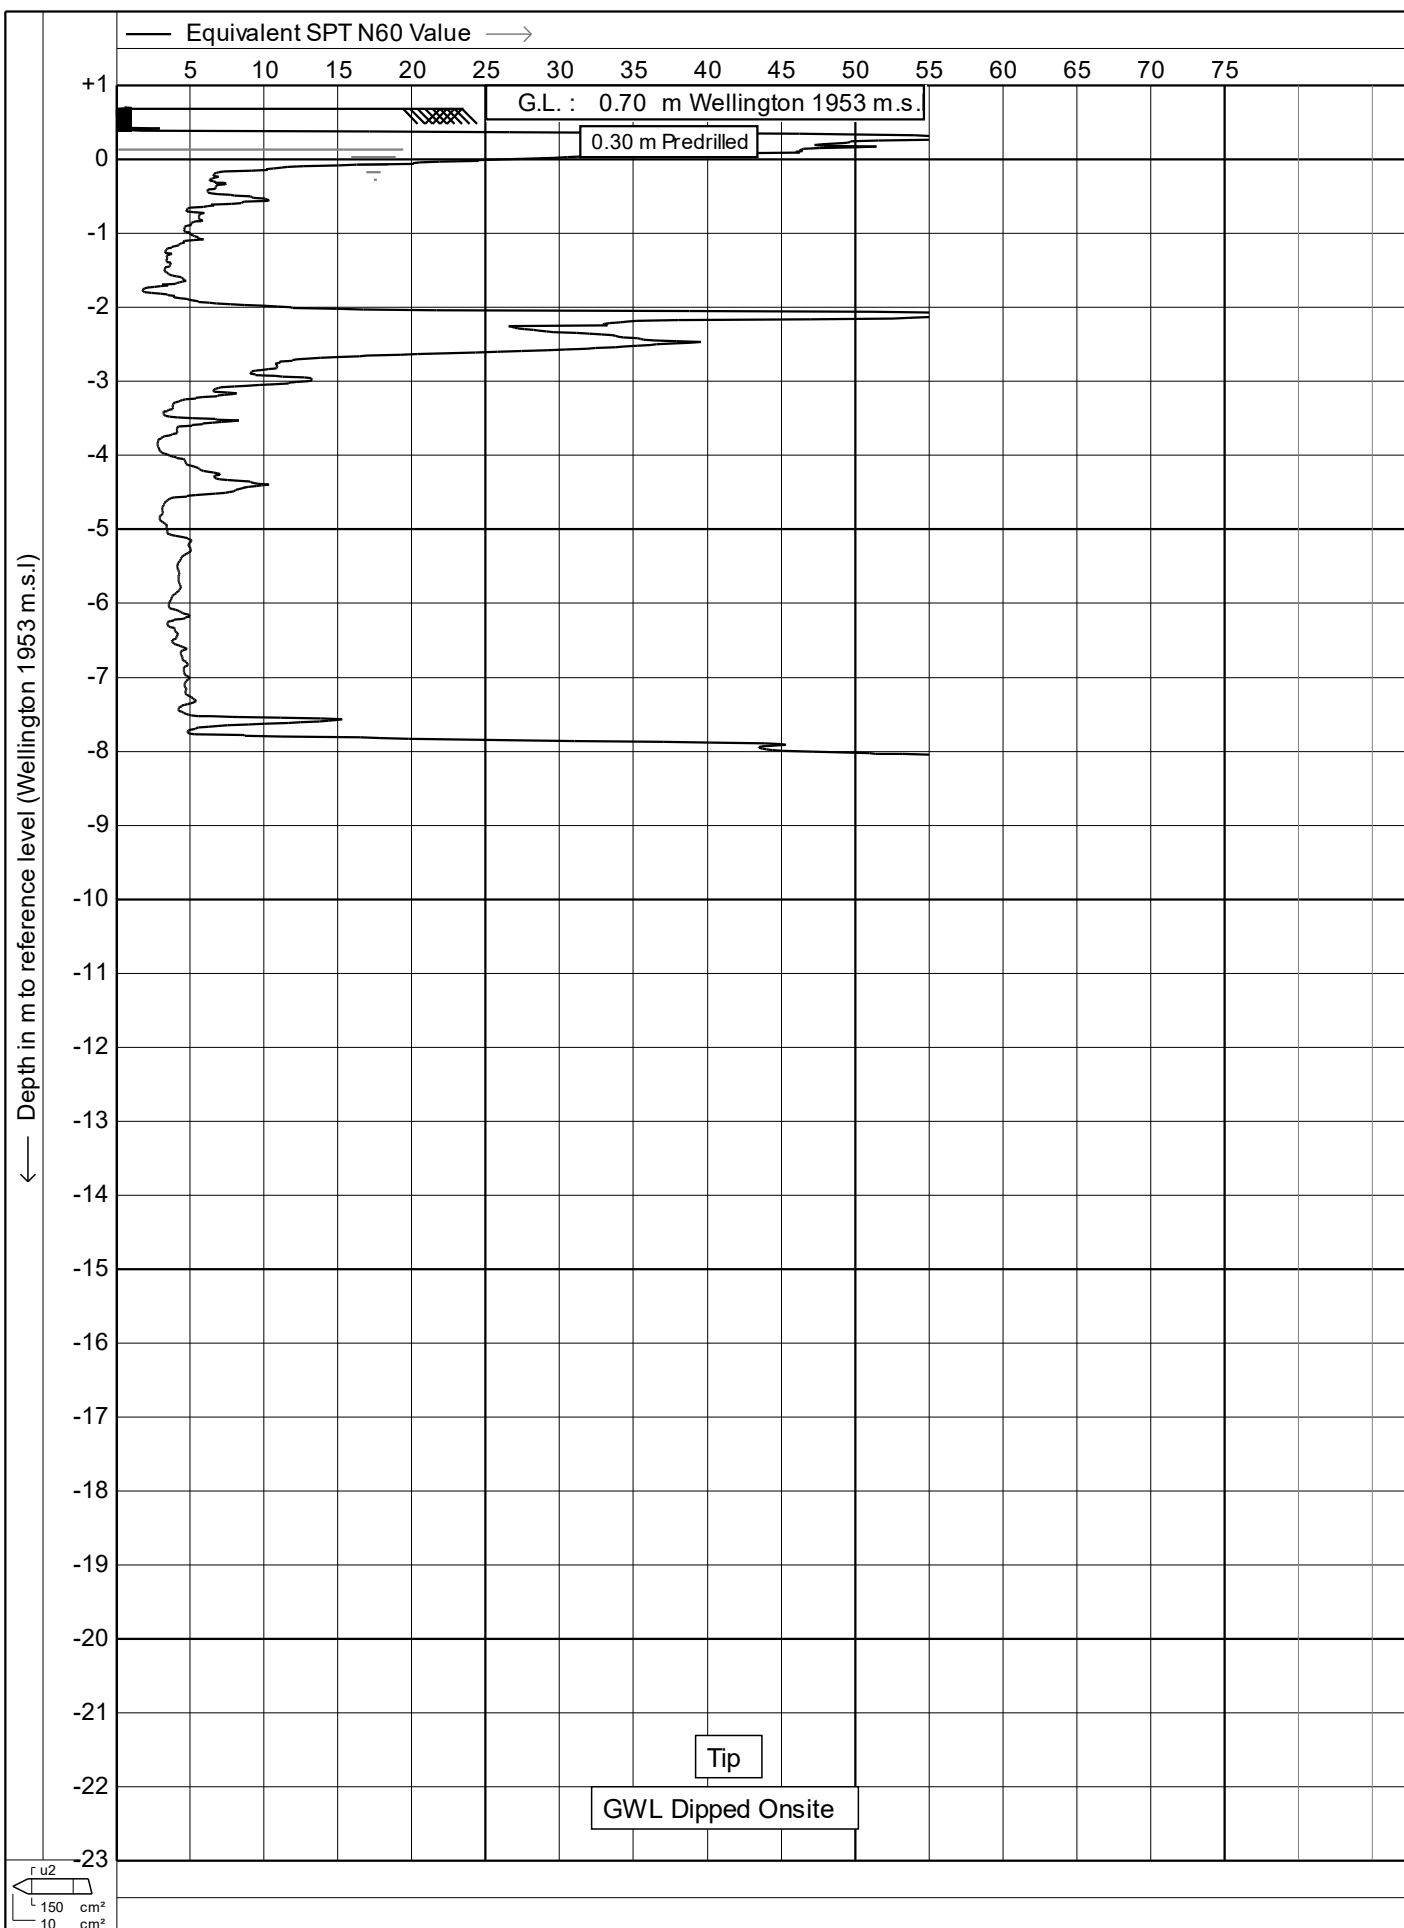

Test according ASTM D5778-12

Project : **Site Investigations**

Location: **Wellington Town Hall**

Position: **1748829, 5427583 NZTM**


Date : **21/03/2017**

Cone no. : **C10CFIP.C13082**

Project no. : **04TT1**

CPT no. : **304**

12/14

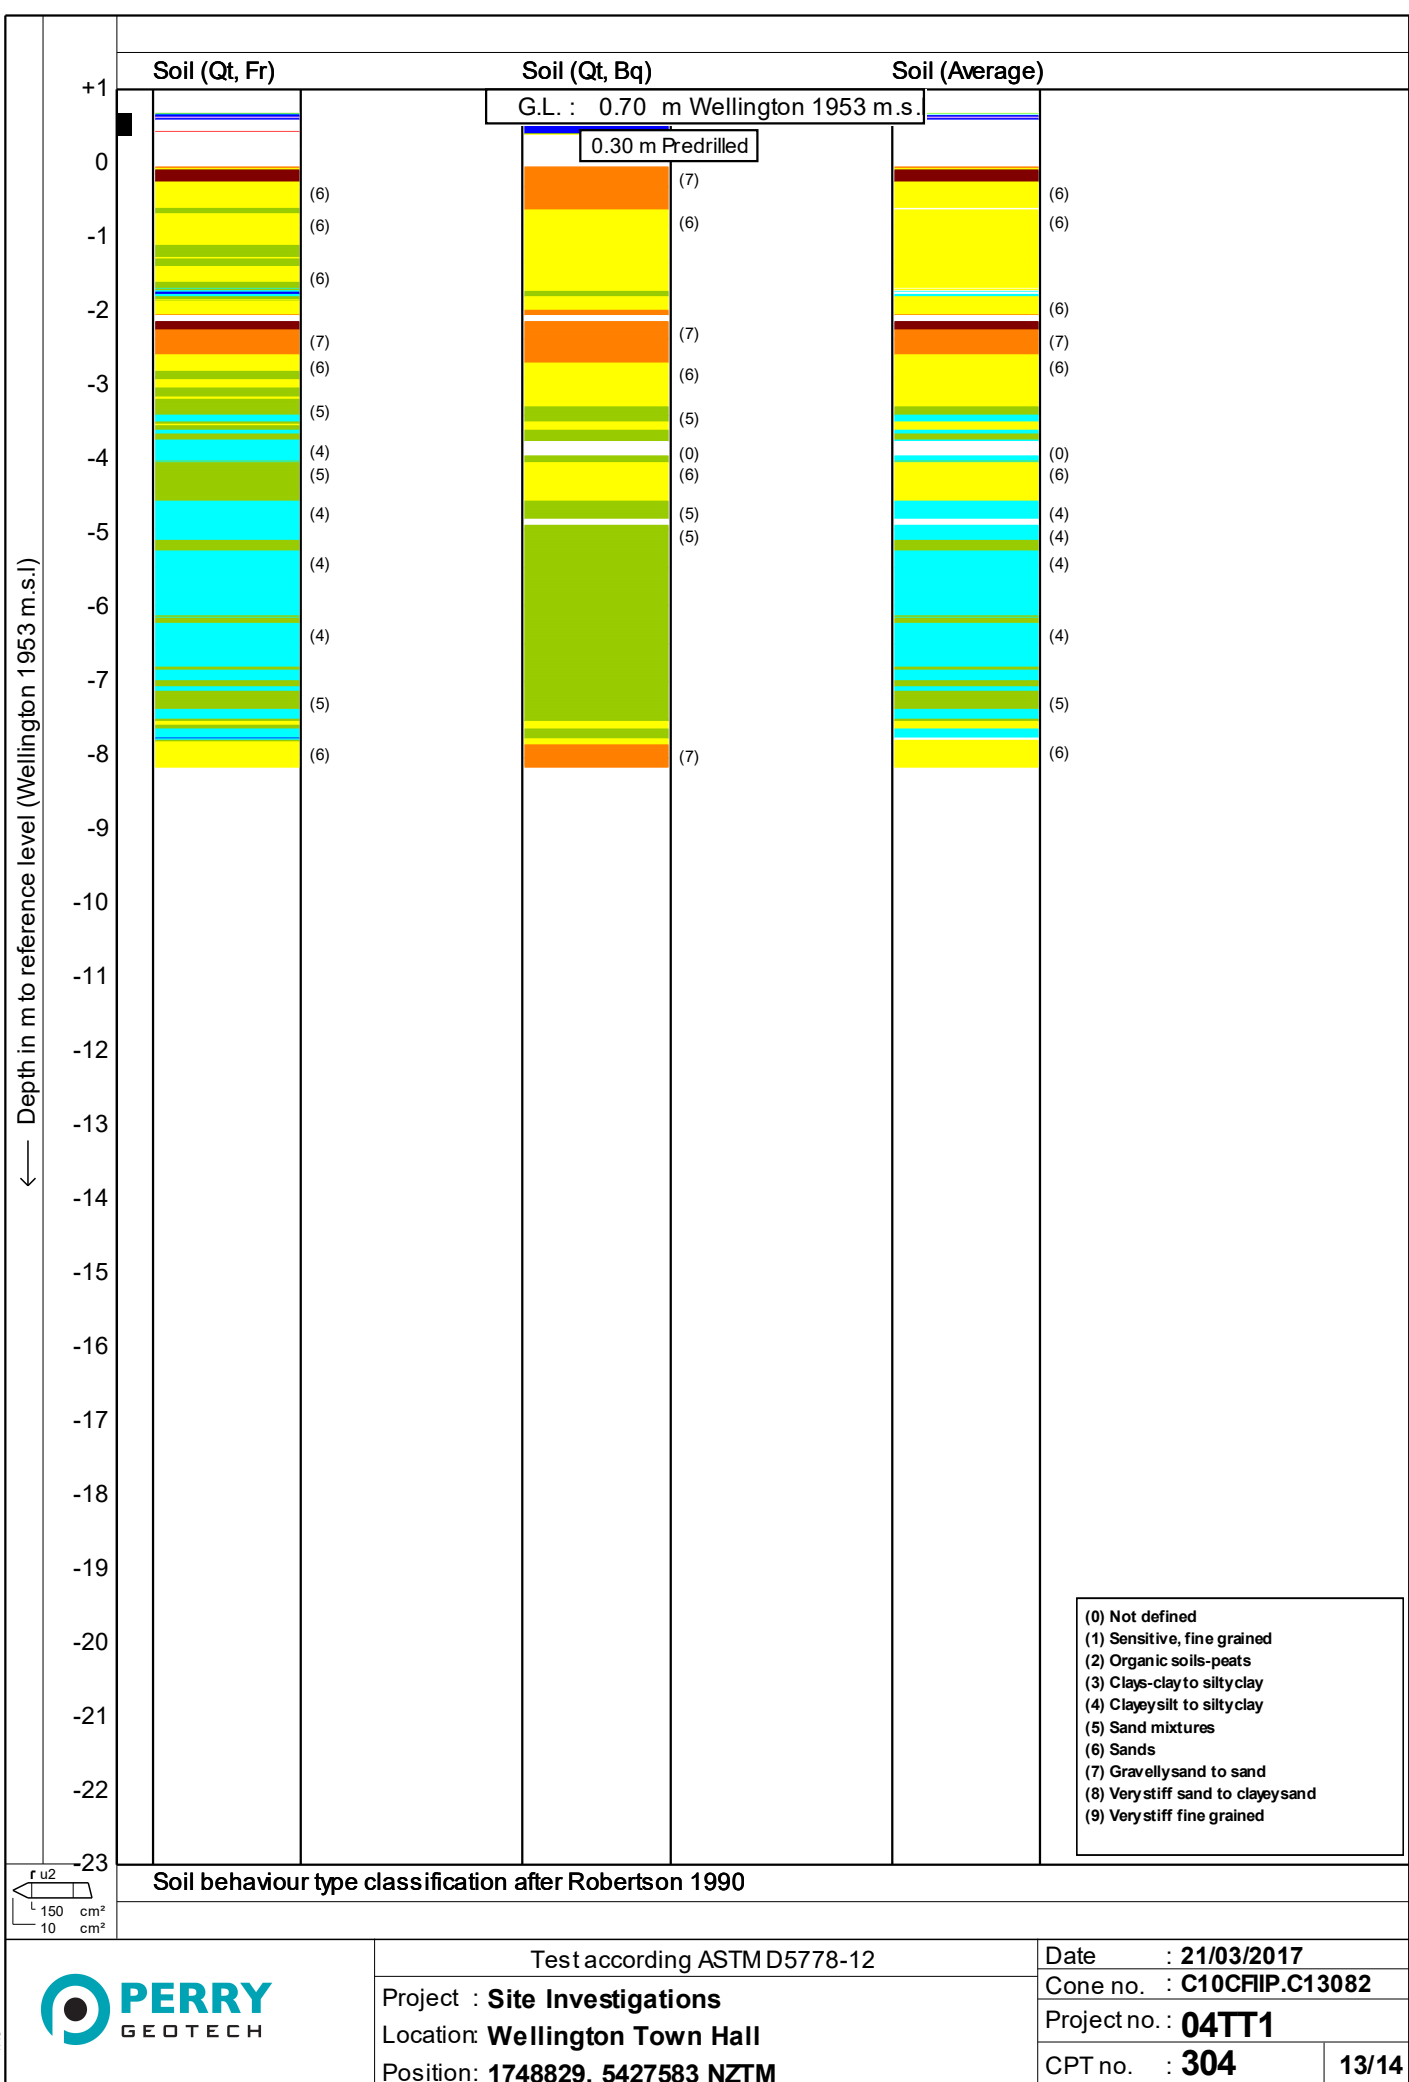

← Depth in m to reference level (Wellington 1953 m.s.)

— Internal friction angle in degrees —→


5 10 15 20 25 30 35 40 45 50 55 60 65 70 75

G.L. : 0.70 m Wellington 1953 m.s.

0.30 m Predrilled

Tip

GWL Dipped Onsite



Test according ASTM D5778-12

Project : **Site Investigations**

Location: **Wellington Town Hall**

Position: **1748829, 5427583 NZTM**

Date : **21/03/2017**

Cone no. : **C10CFIP.C13082**

Project no. : **04TT1**

CPT no. : **304**

14/14