





TCN19-201 (DRex black, 10cm), transmission normalized during prestorage

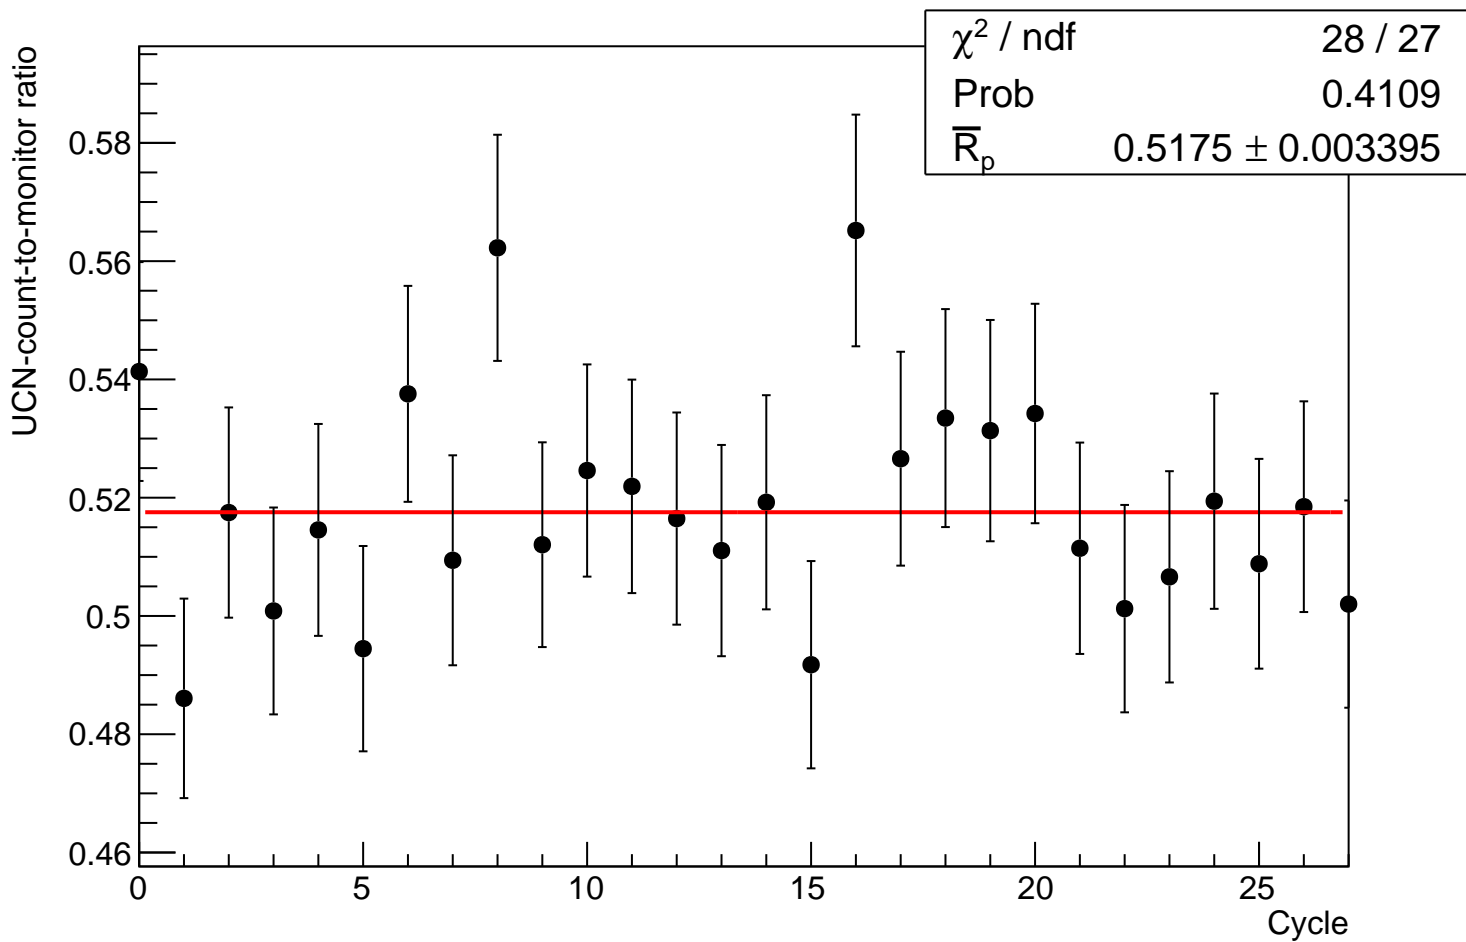

Graph

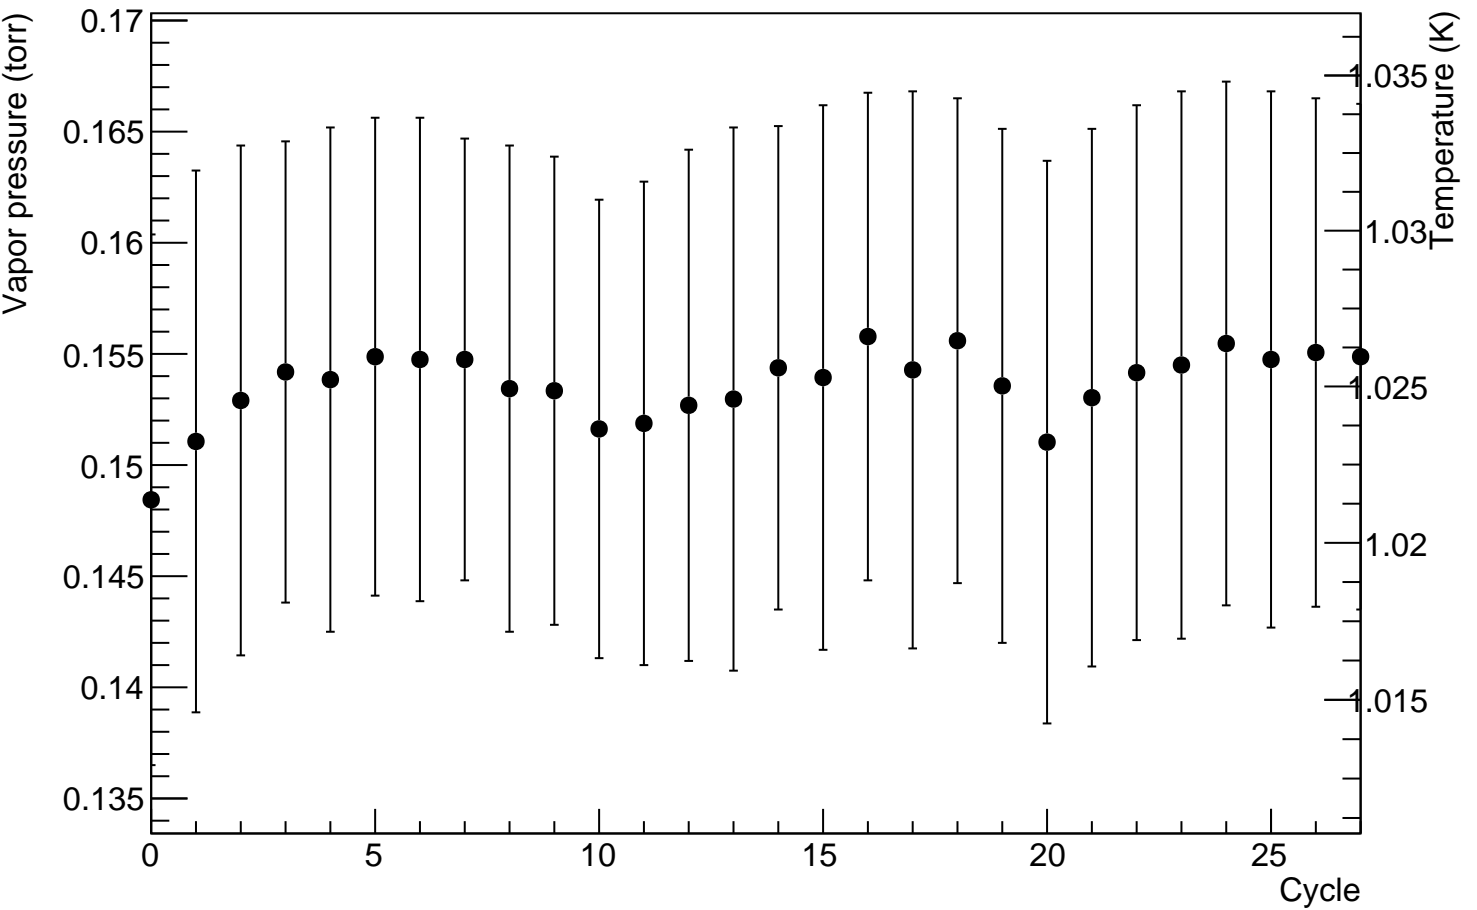


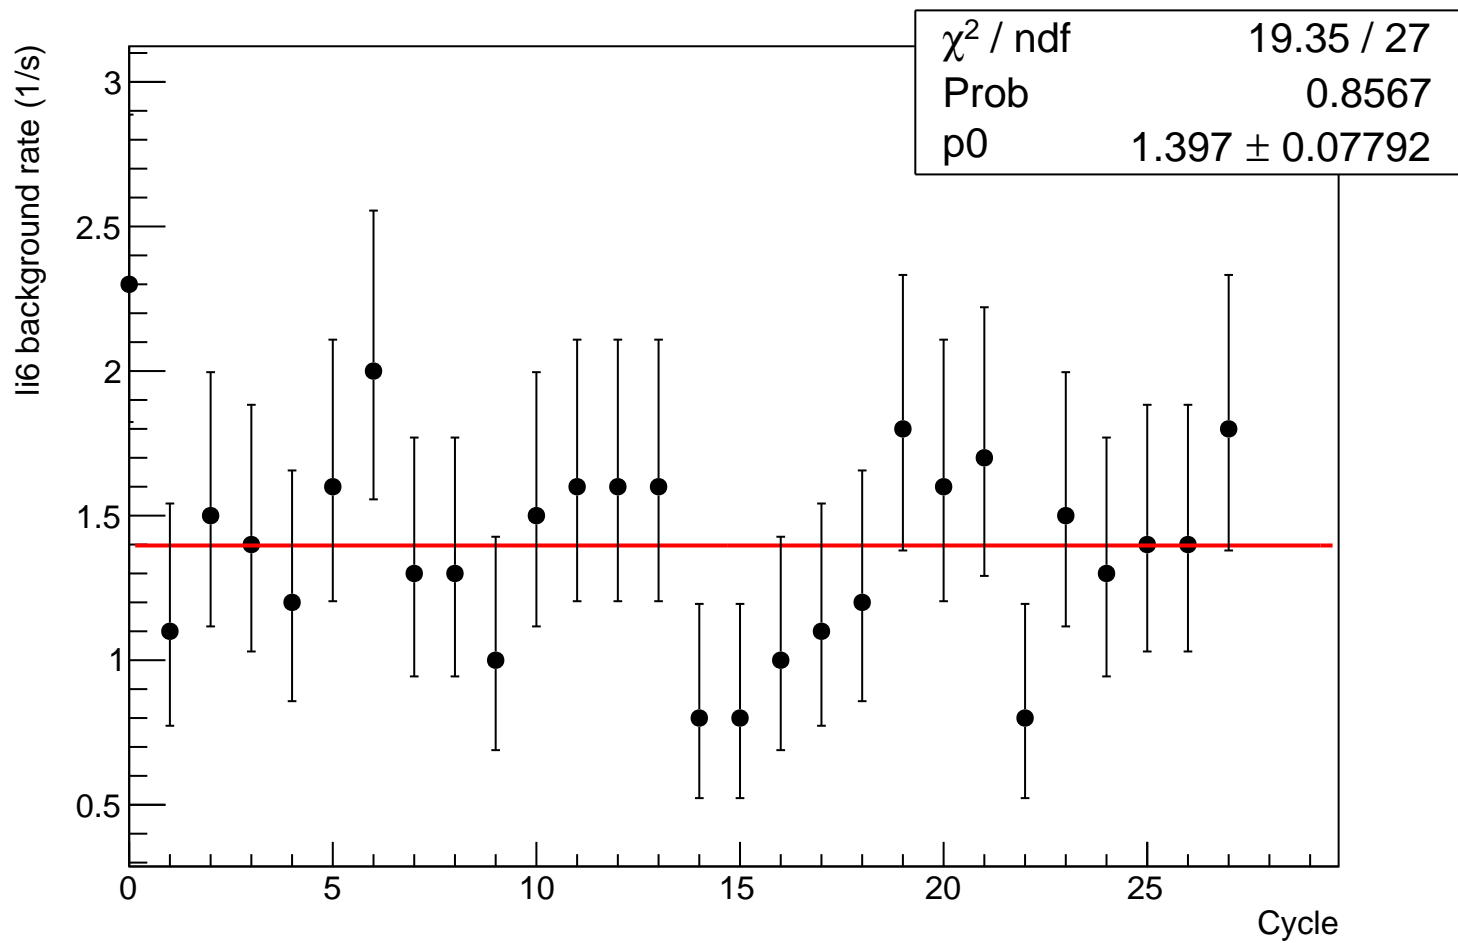


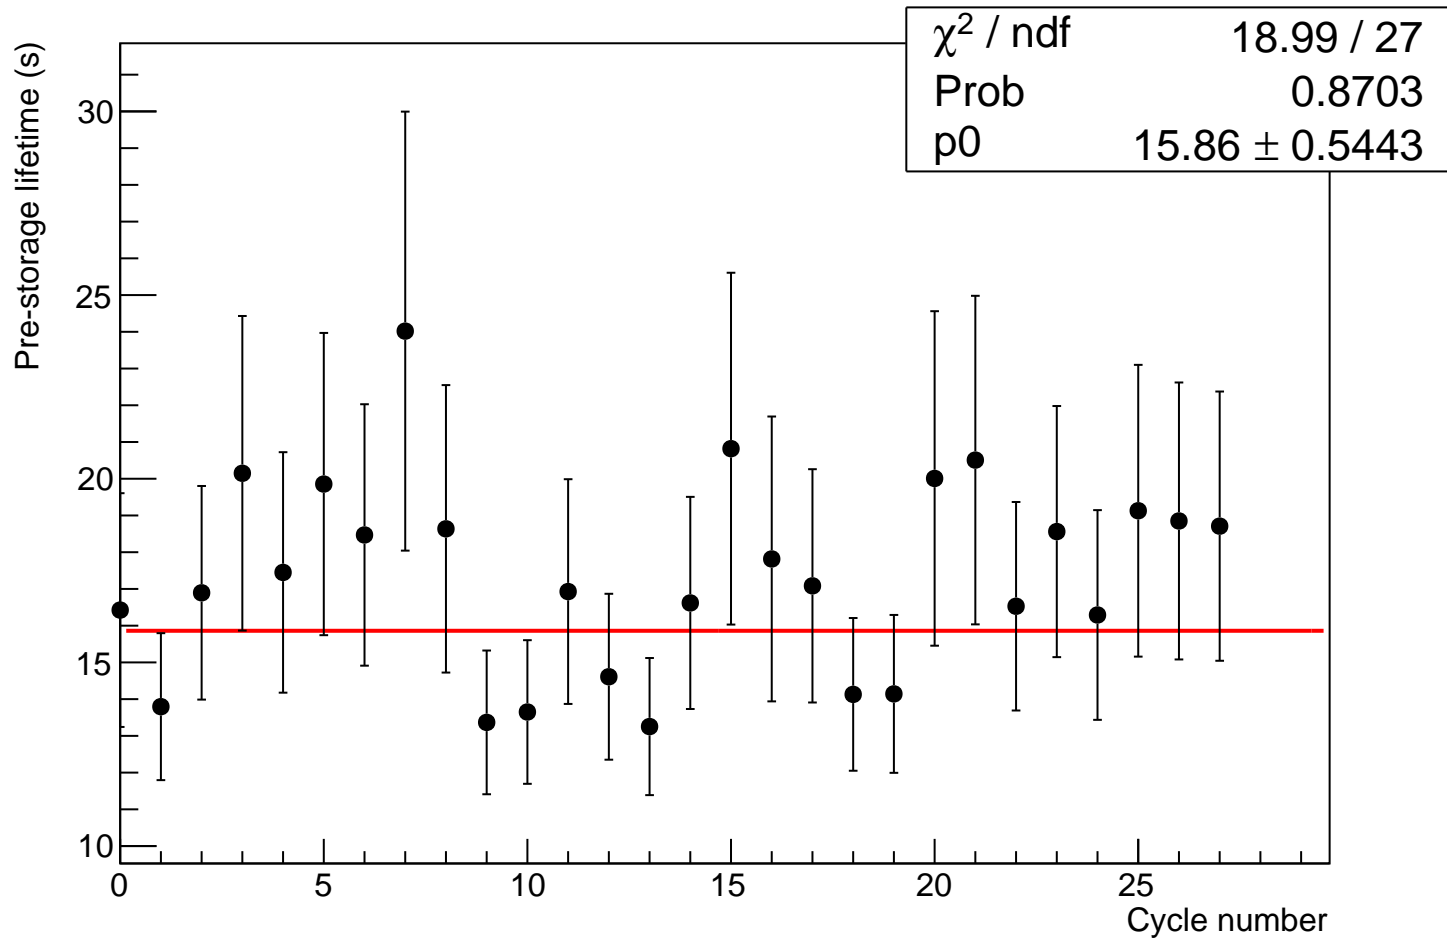


Corrected Li6-He3 ratio


χ^2 / ndf 6.242 / 27
Prob 1
p0 12.63 ± 0.4391

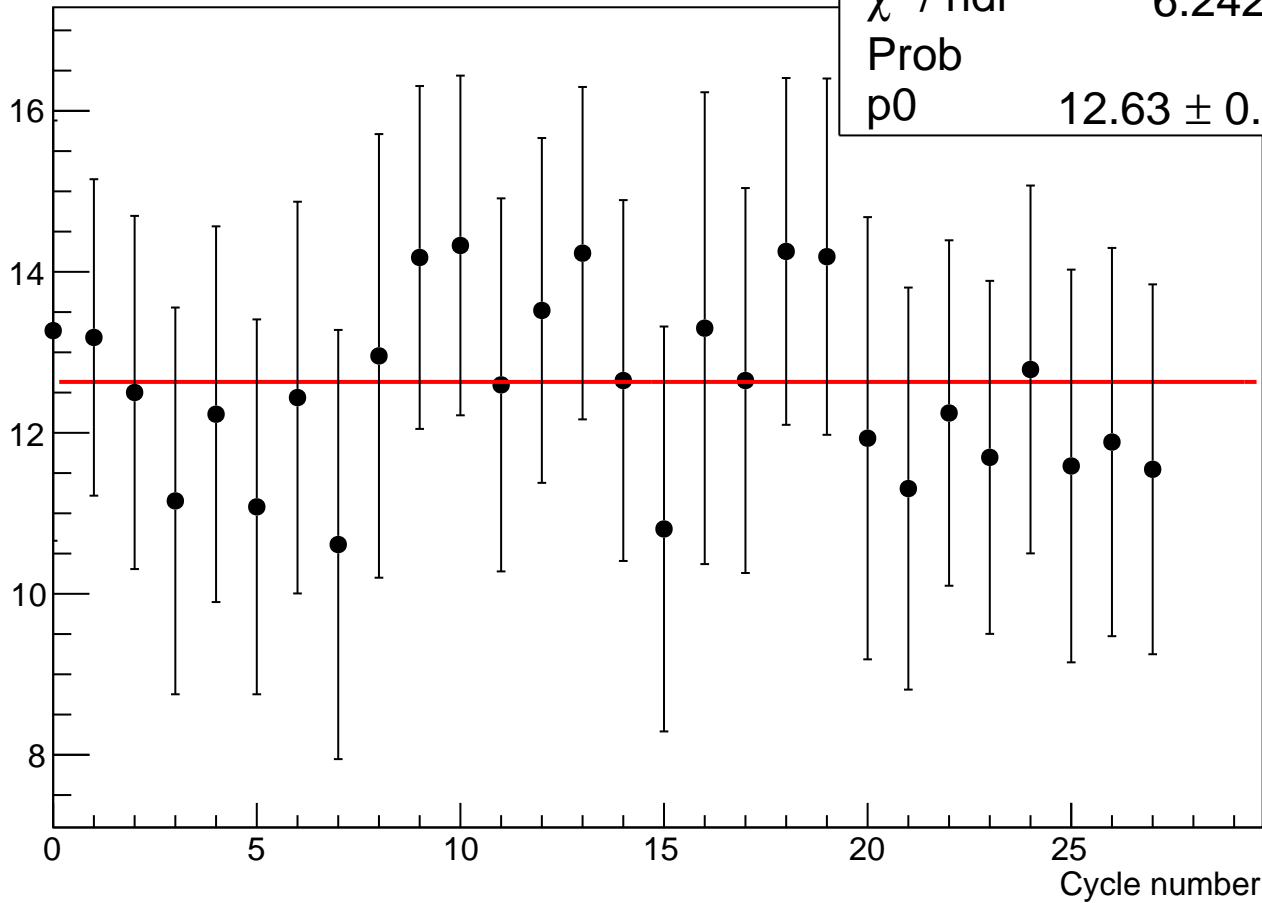


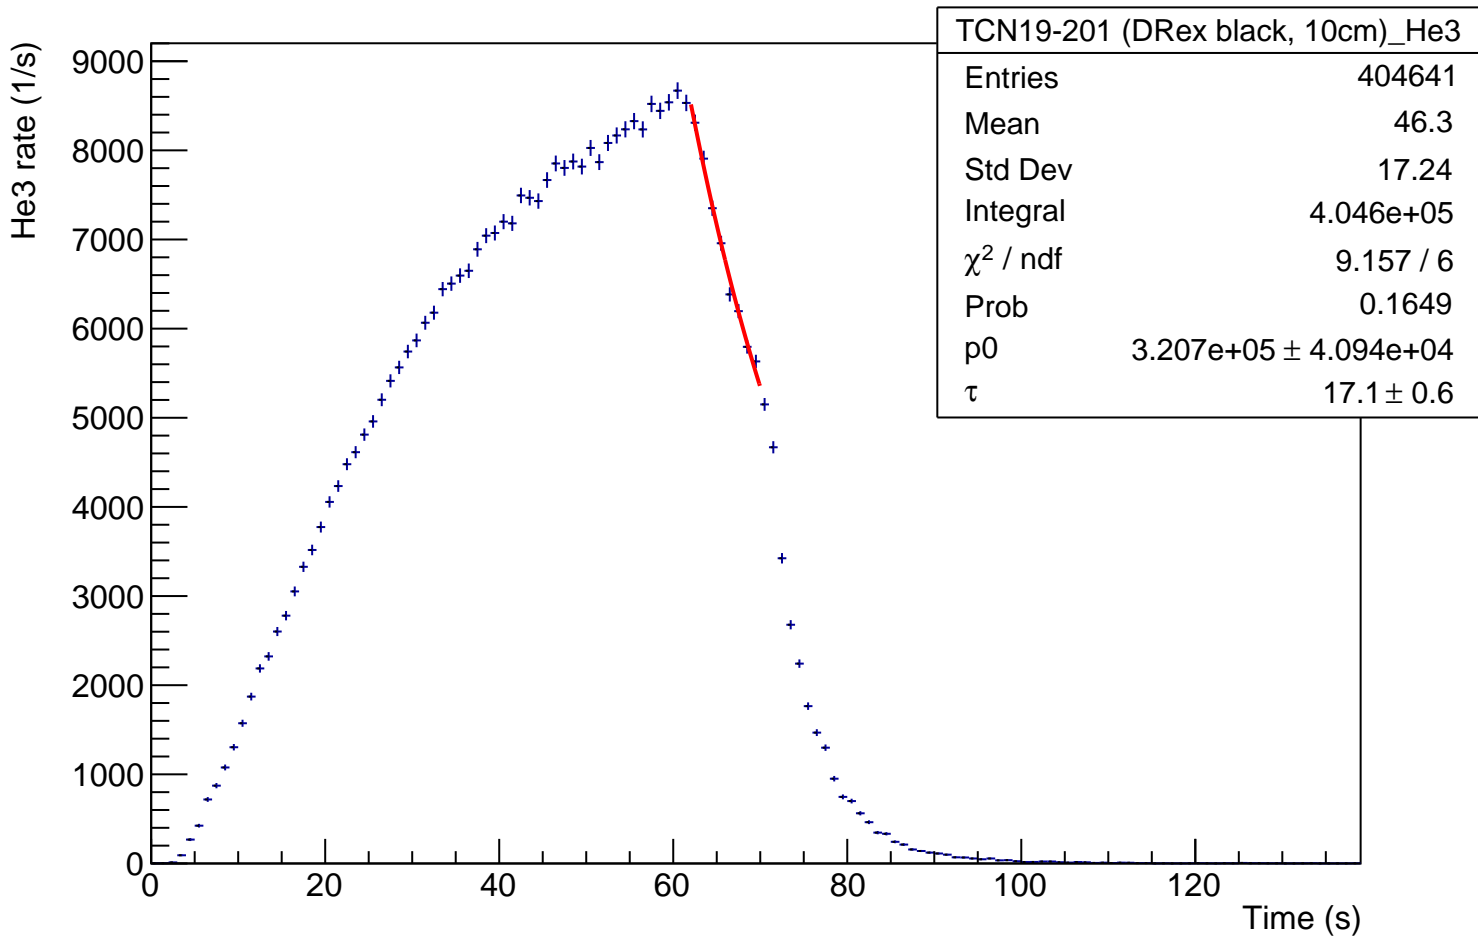

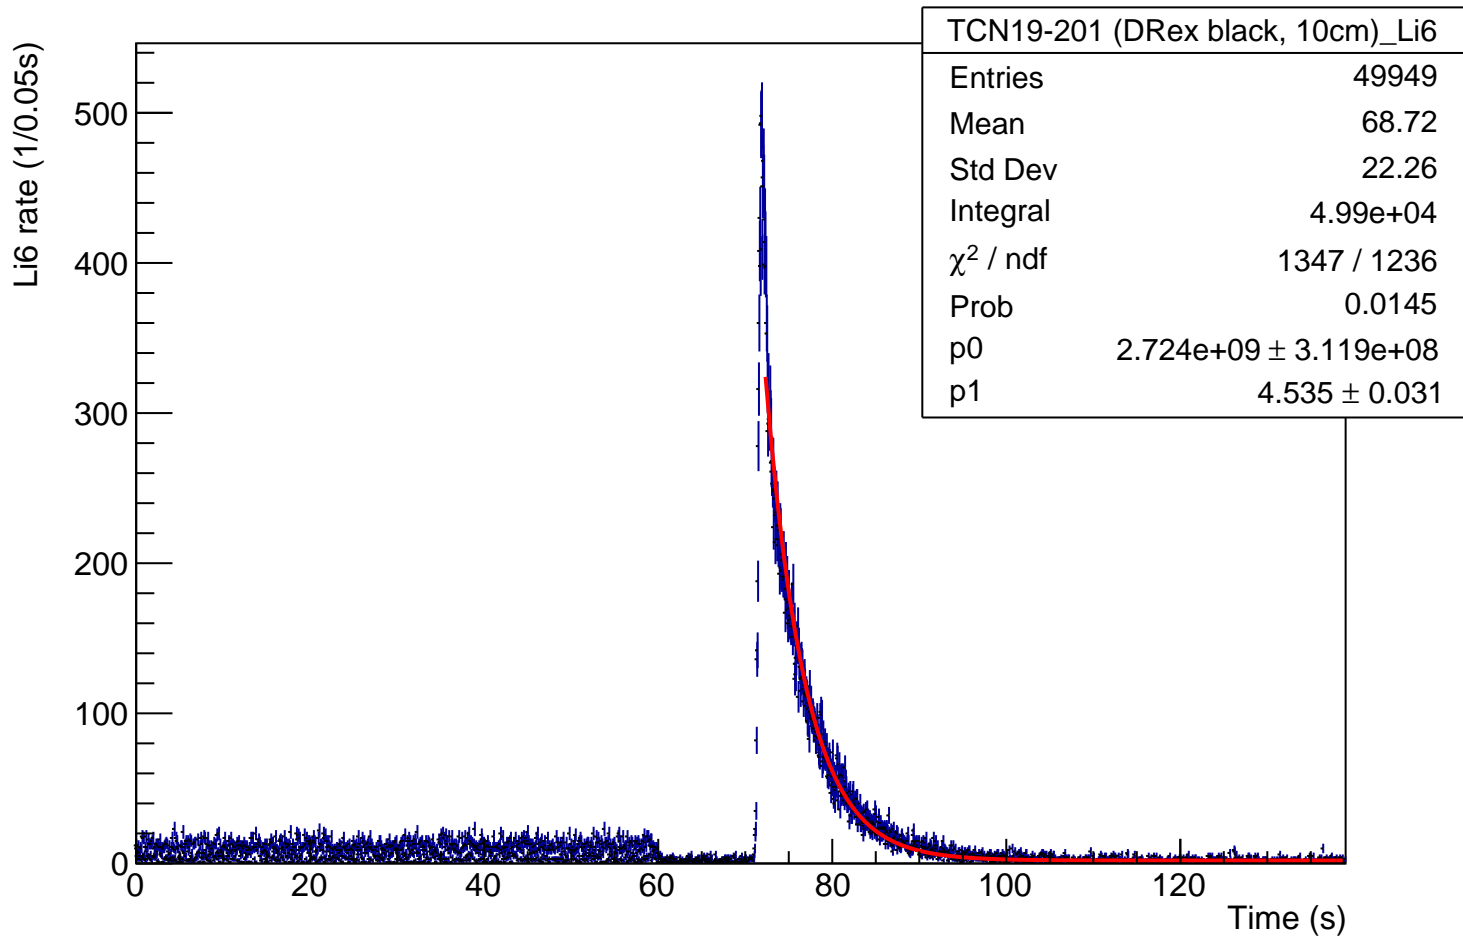


Normalized Li6 rate (1/0.05s)

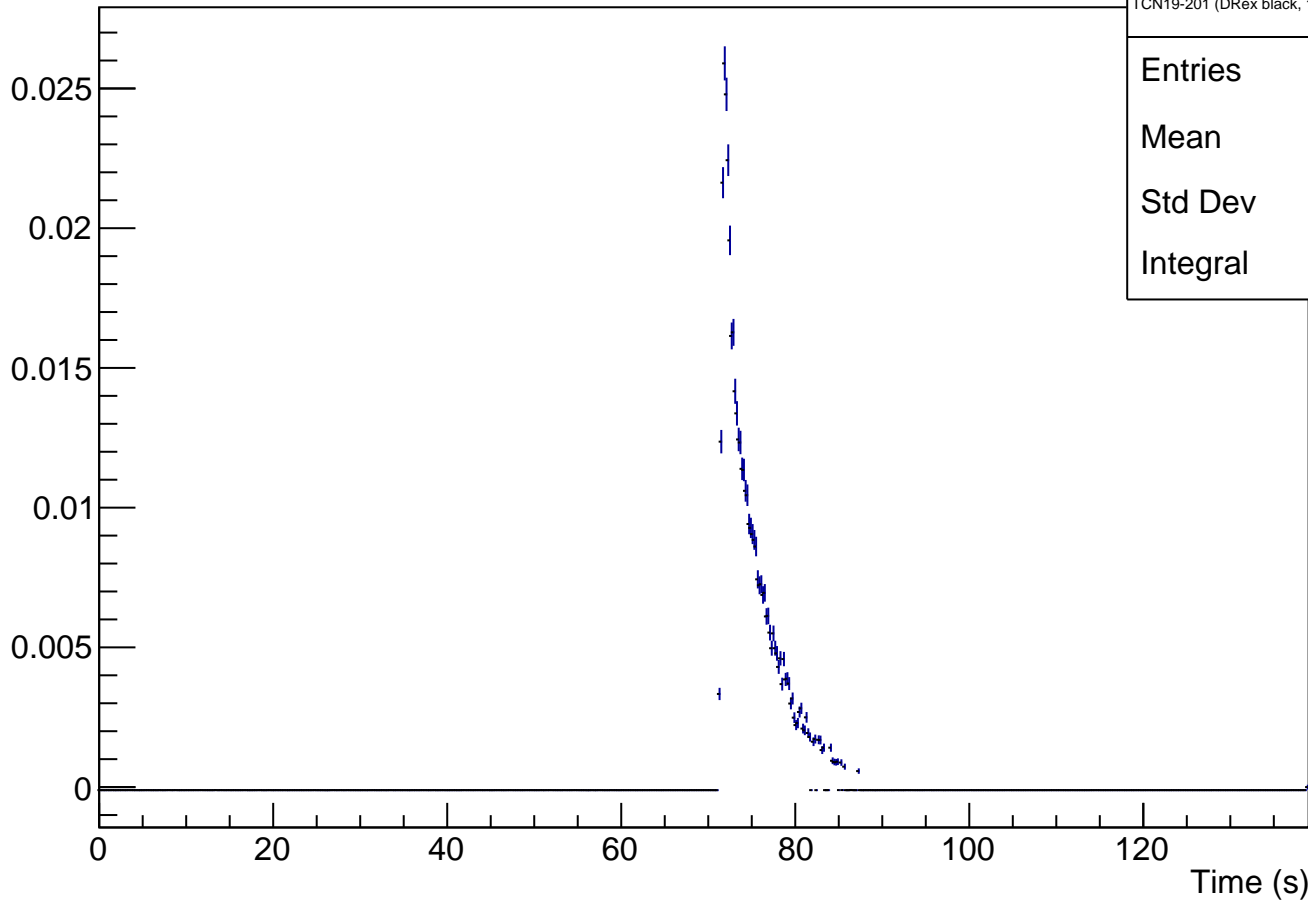

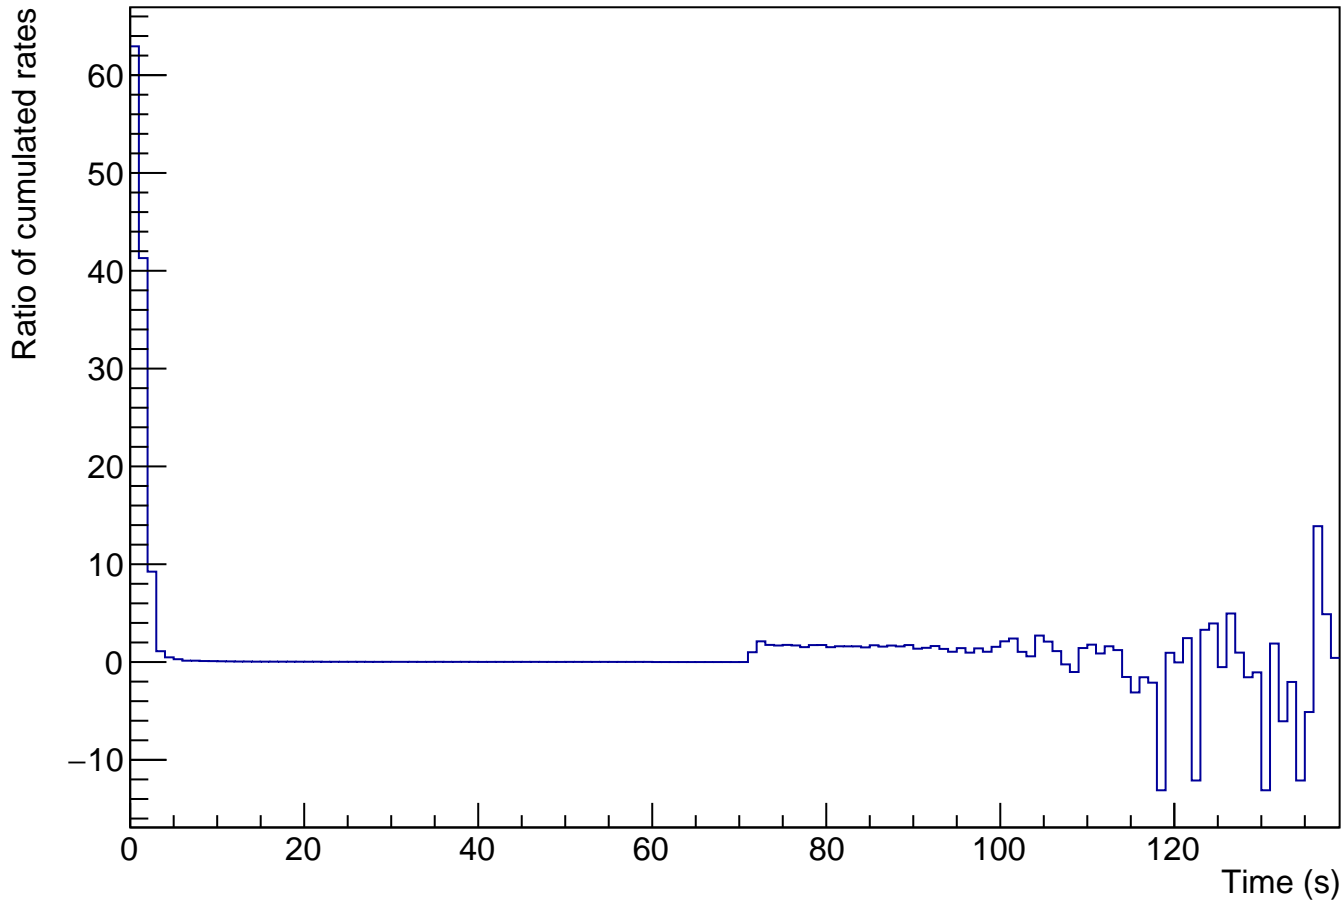

Average rate ratio

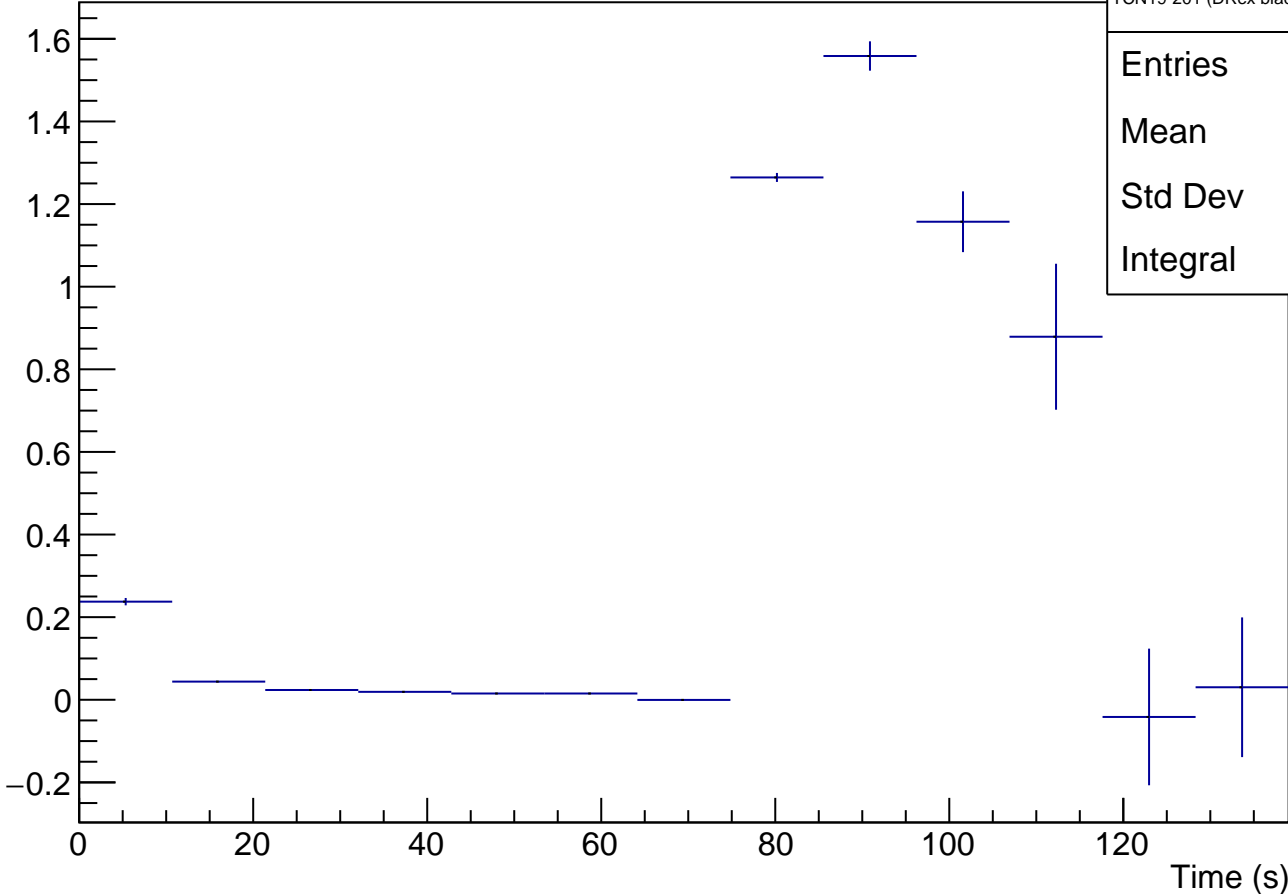


TCN19-201 (DRex black, 10cm)_ratio

Entries	128
Mean	89.9
Std Dev	23.85
Integral	5.202

TCN19-201 (DRex black, 10cm)

Count

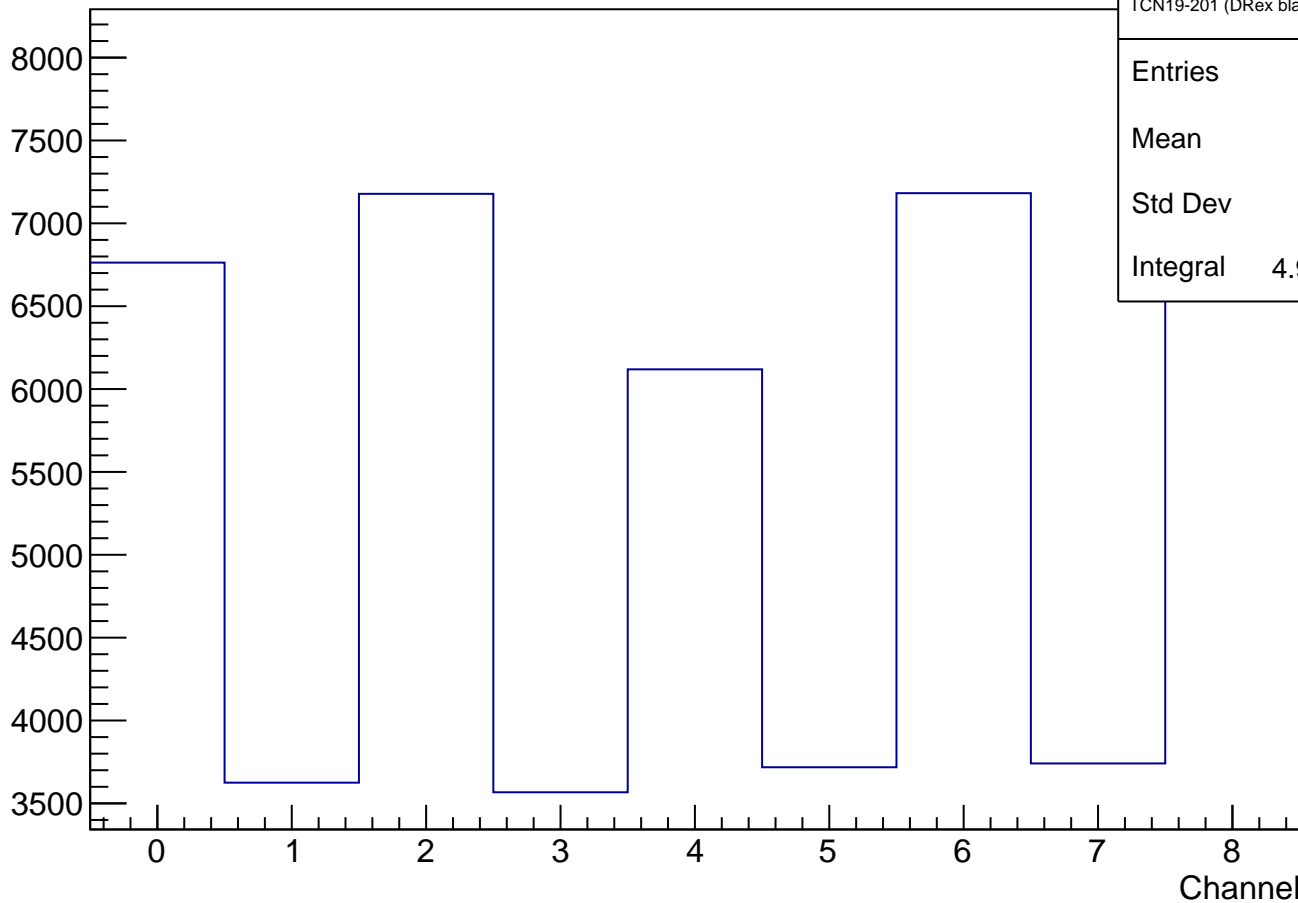

TCN19-201 (DRex black, 10cm)_ch

Entries 49949

Mean 4.114

Std Dev 2.712

Integral 4.995e+04

Li6 window

Frequency

1
0.8
0.6
0.4
0.2
0

0 0.5 1 1.5 2 2.5 3 3.5 4 4.5 5

Time after valve opened (s)

li6window

Entries 28

Mean 0

Std Dev 0

Integral 0