





TCN19-193 (DRex Cu, 60cm), transmission normalized during prestorage

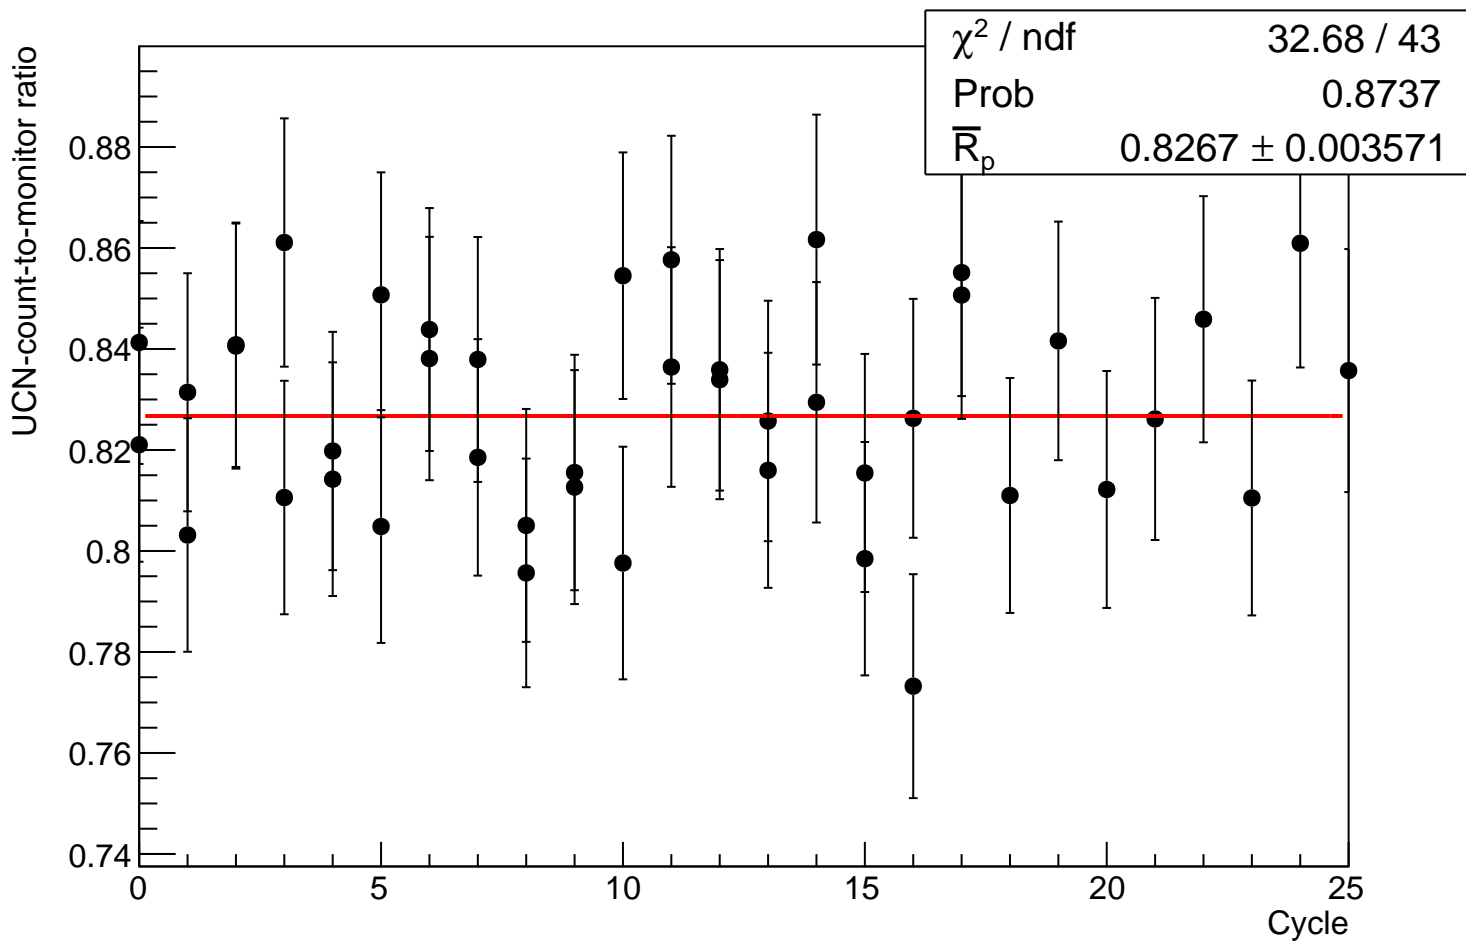



# Graph

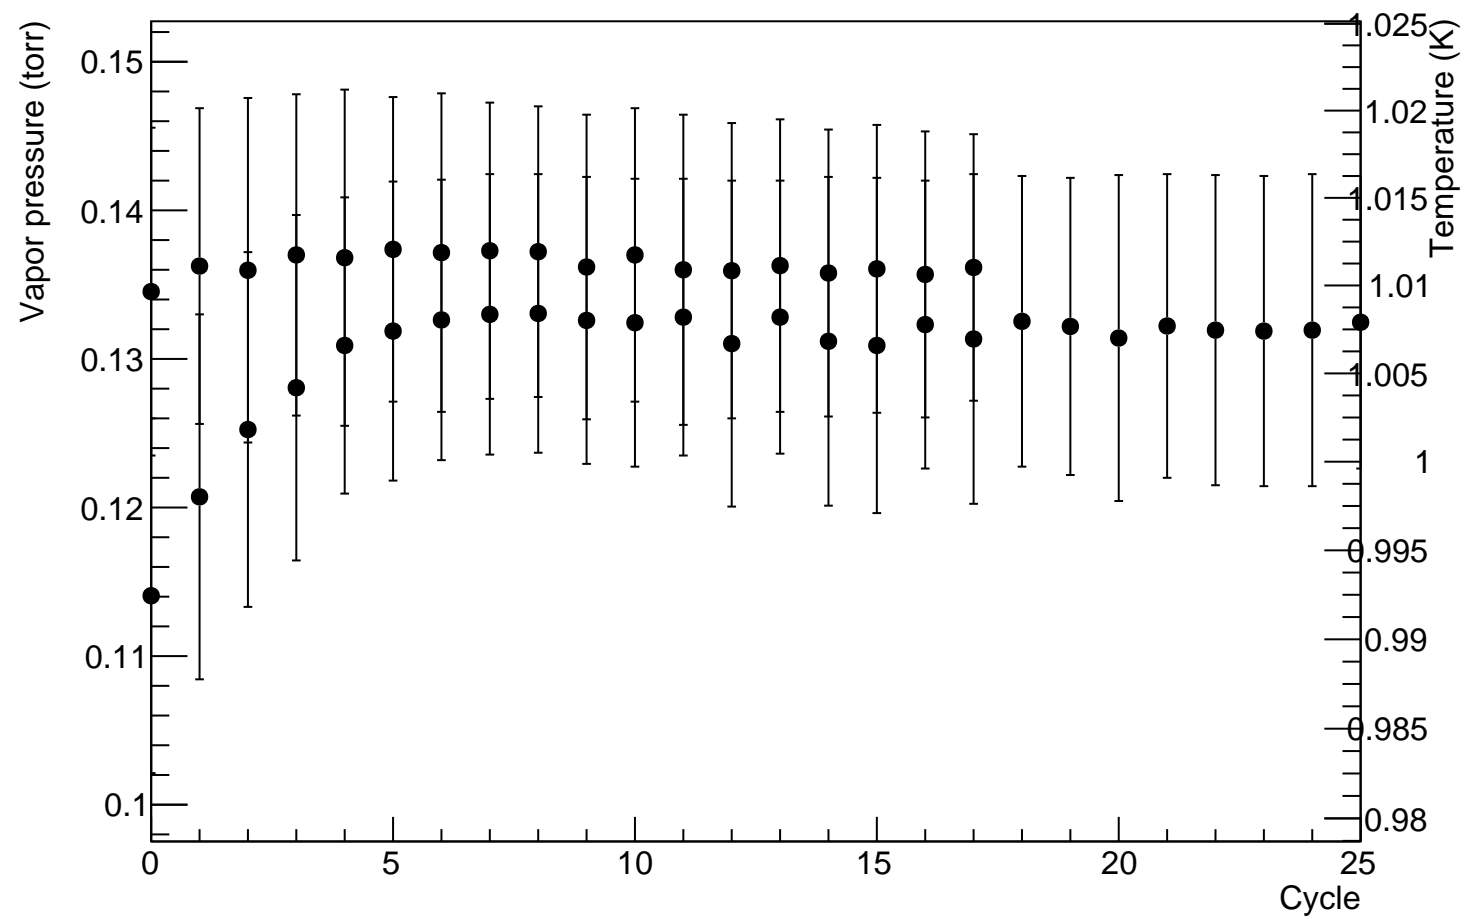

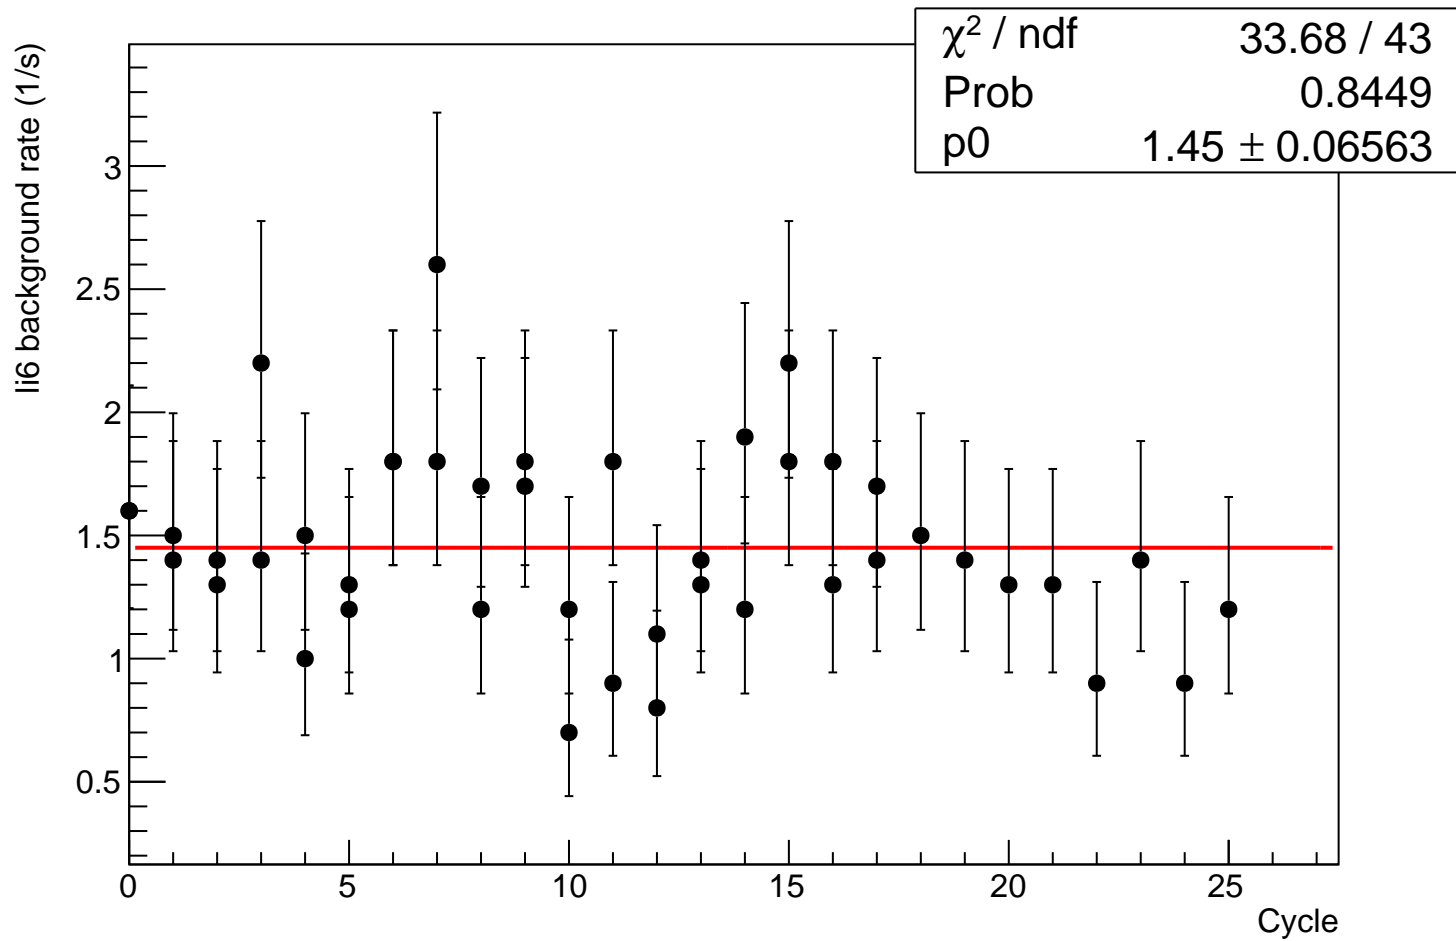


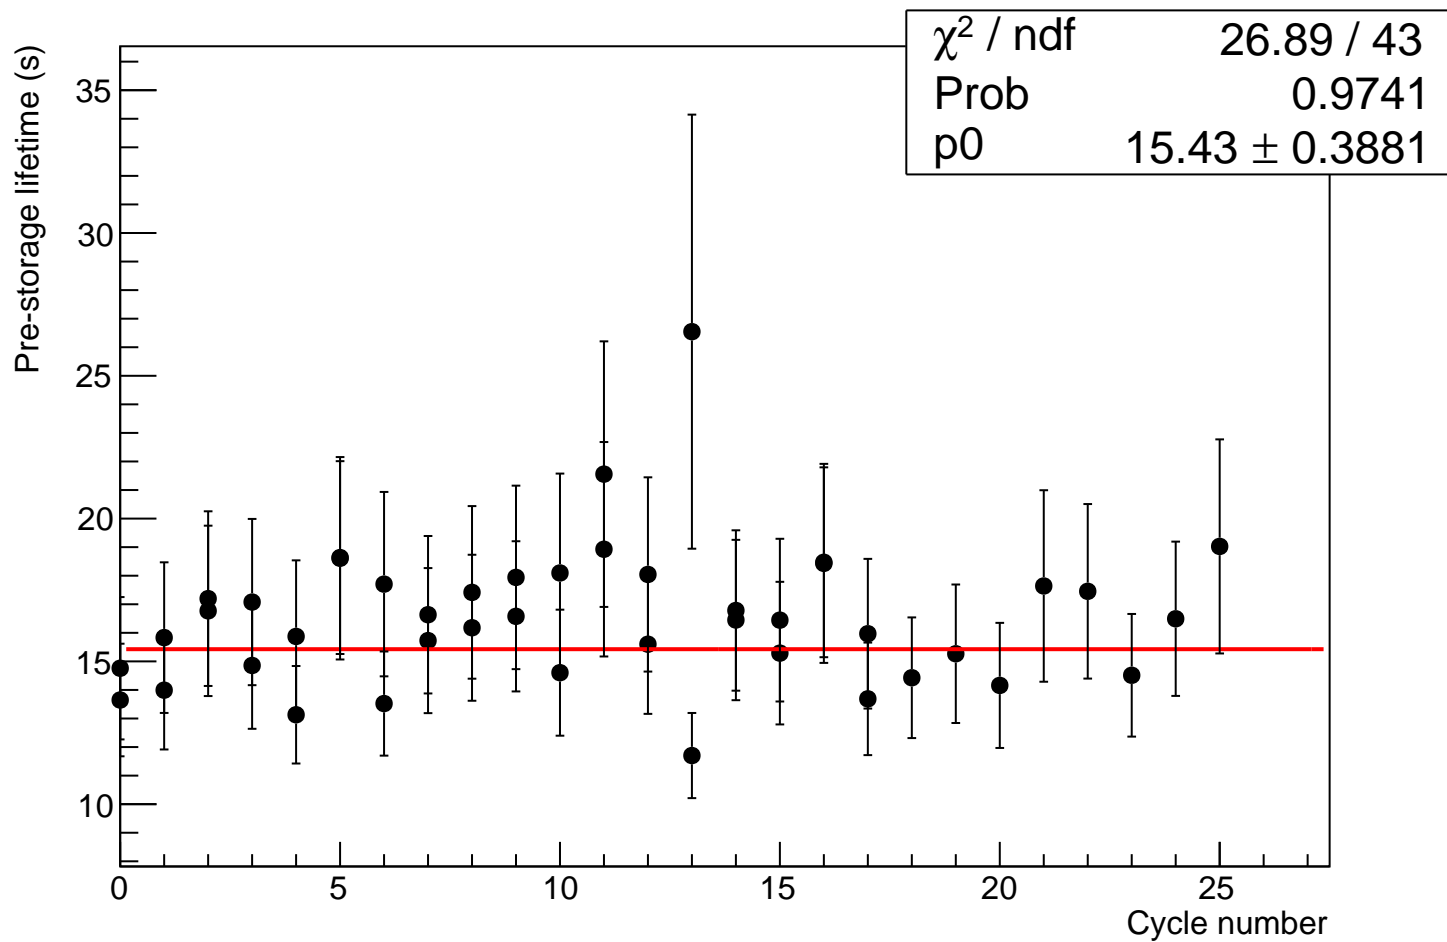

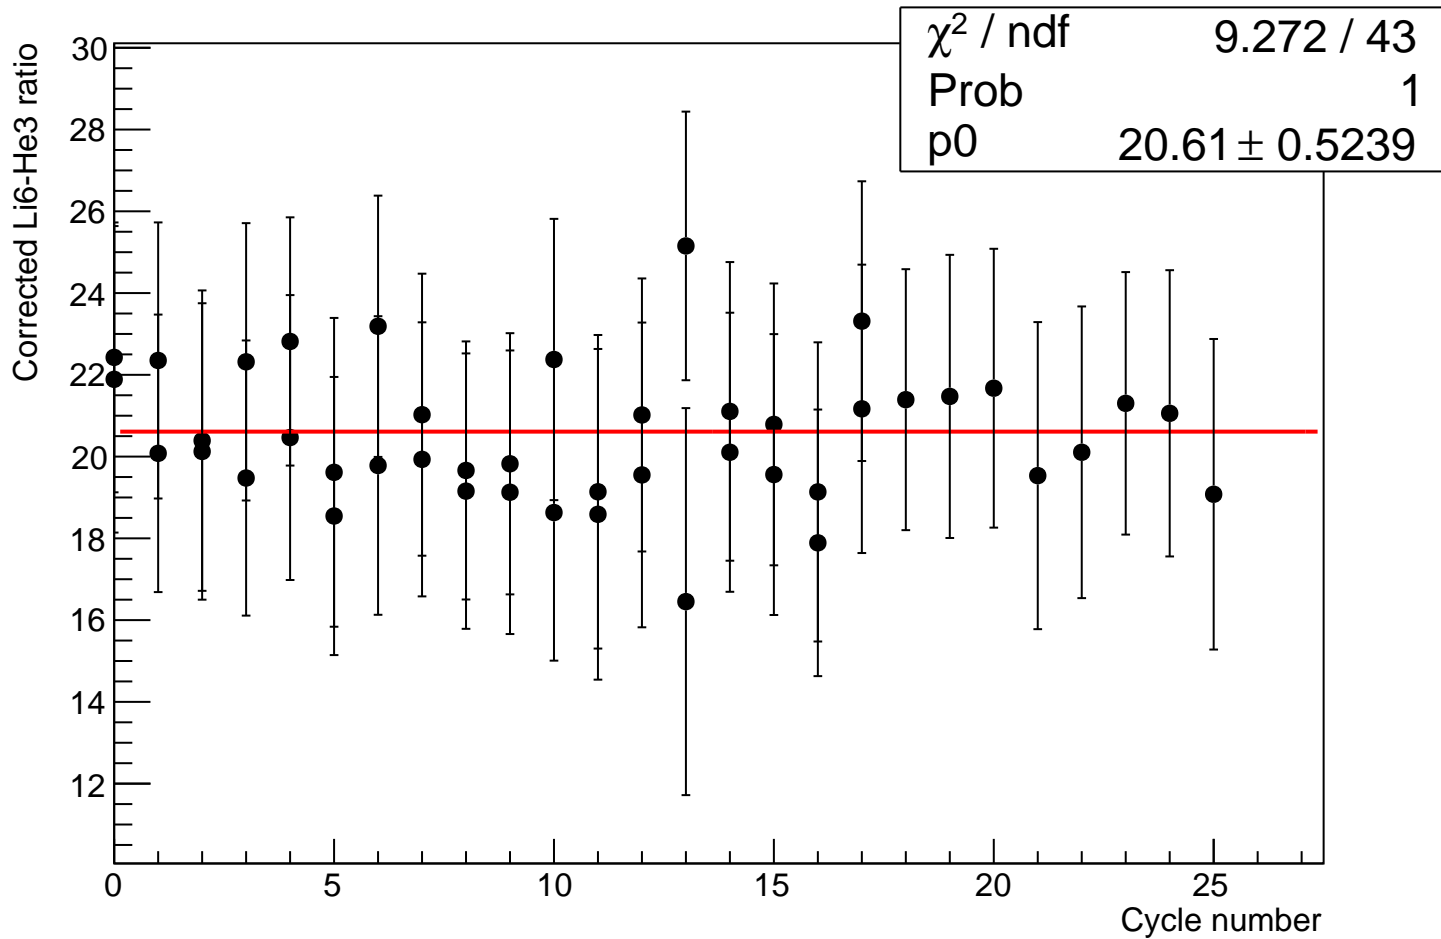


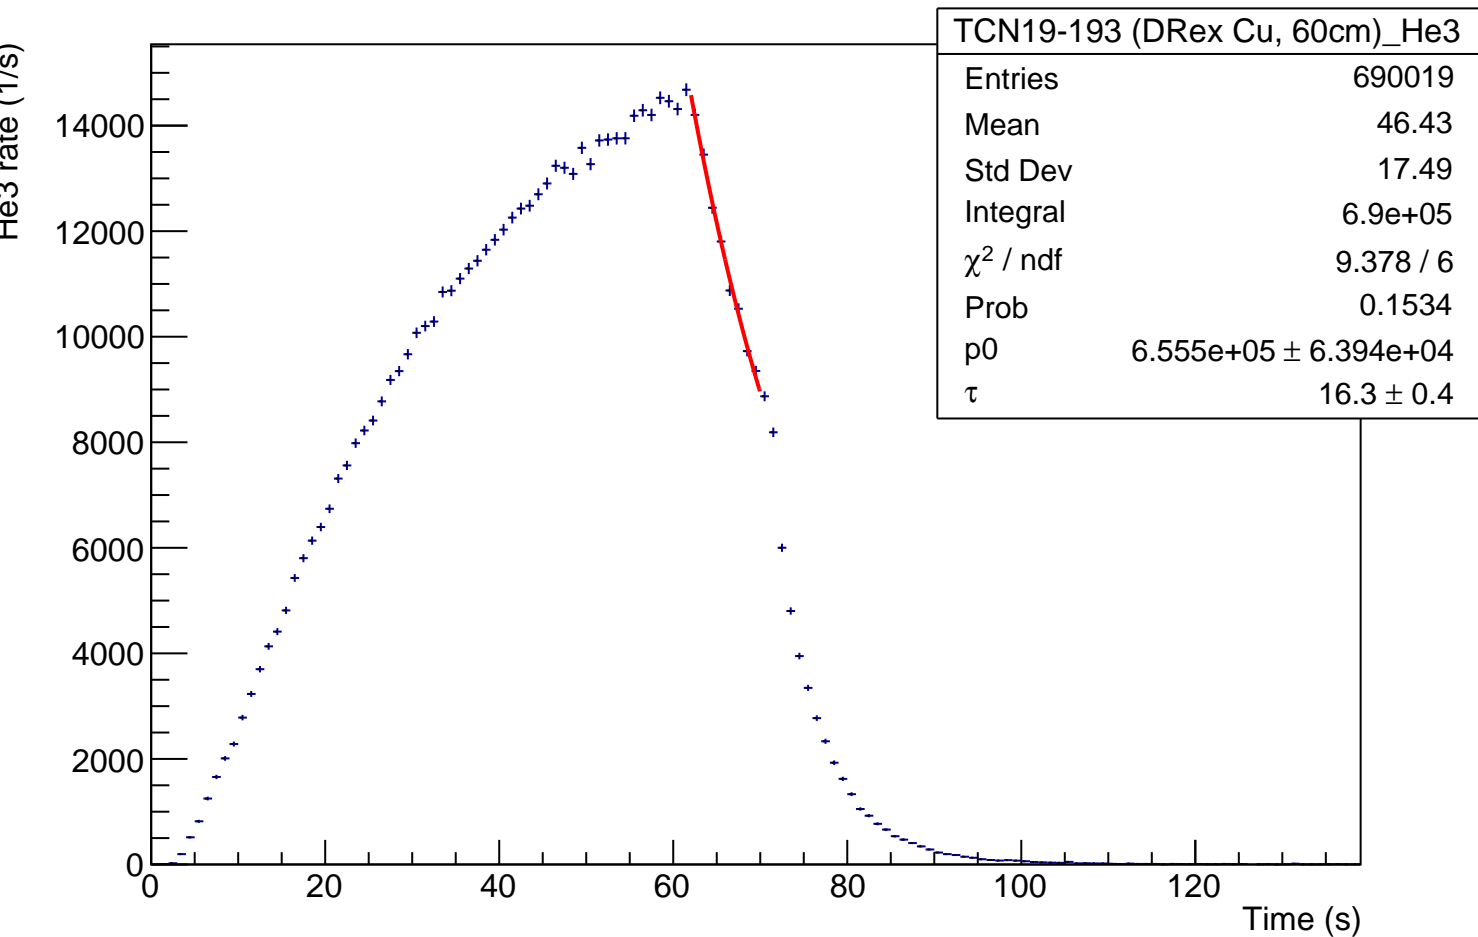

Li6 rate (1/0.05s)

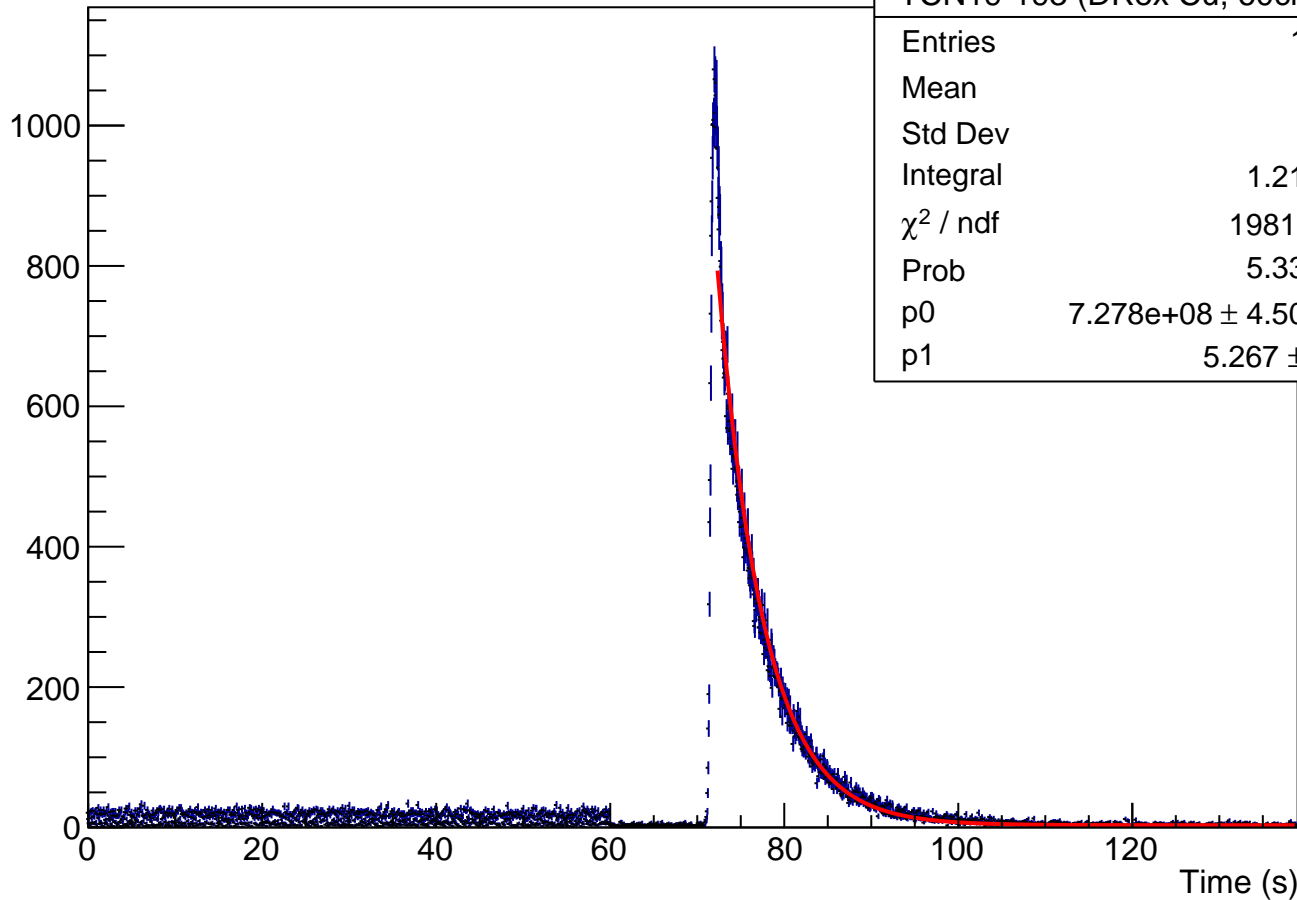

Normalized Li6 rate (1/0.05s)

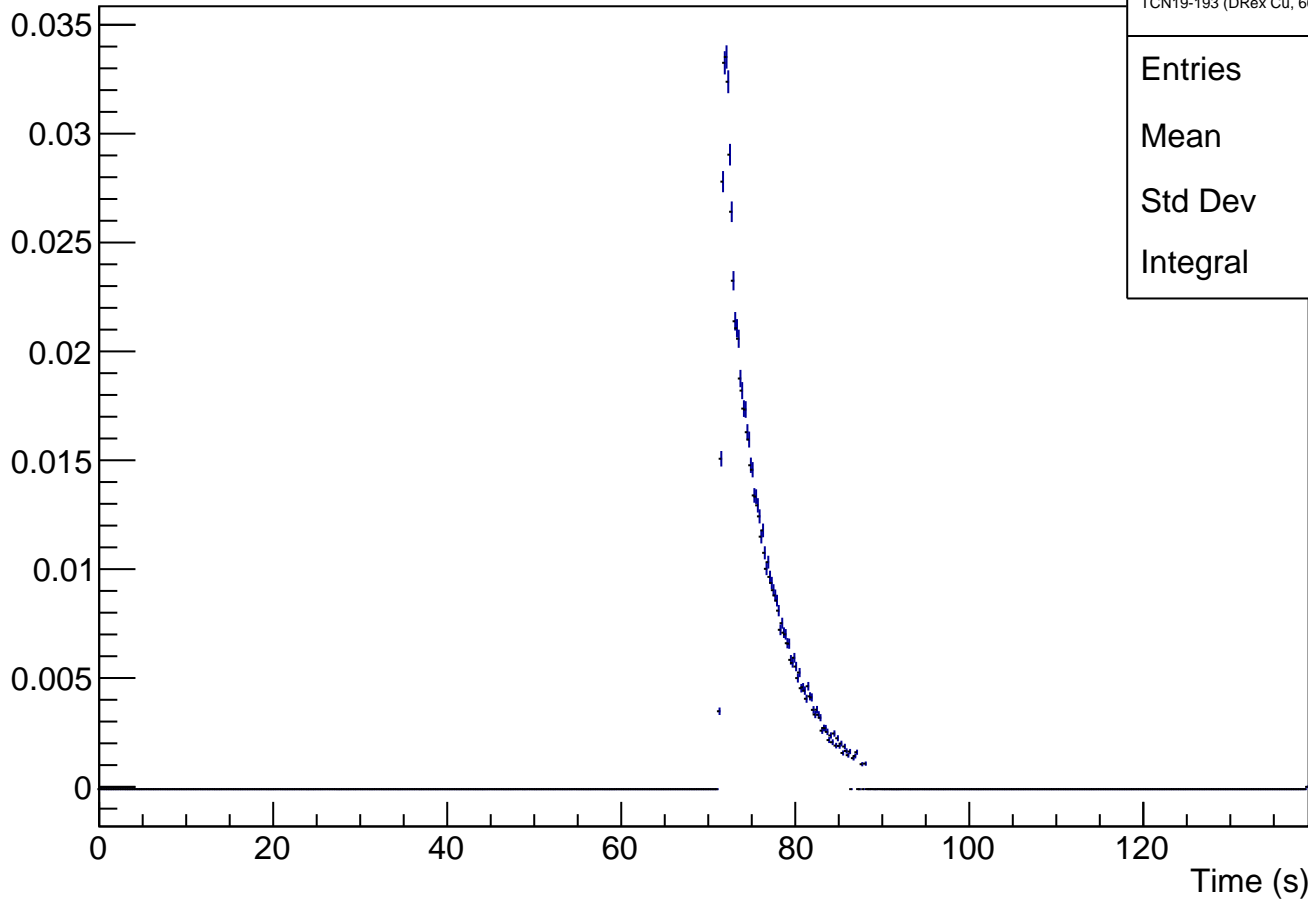

TCN19-193 (DRex Cu, 60cm)\_Li6\_norm

Entries 102962


Mean 71.95

Std Dev 16.74


Integral 0.6807



Ratio of cumulated rates

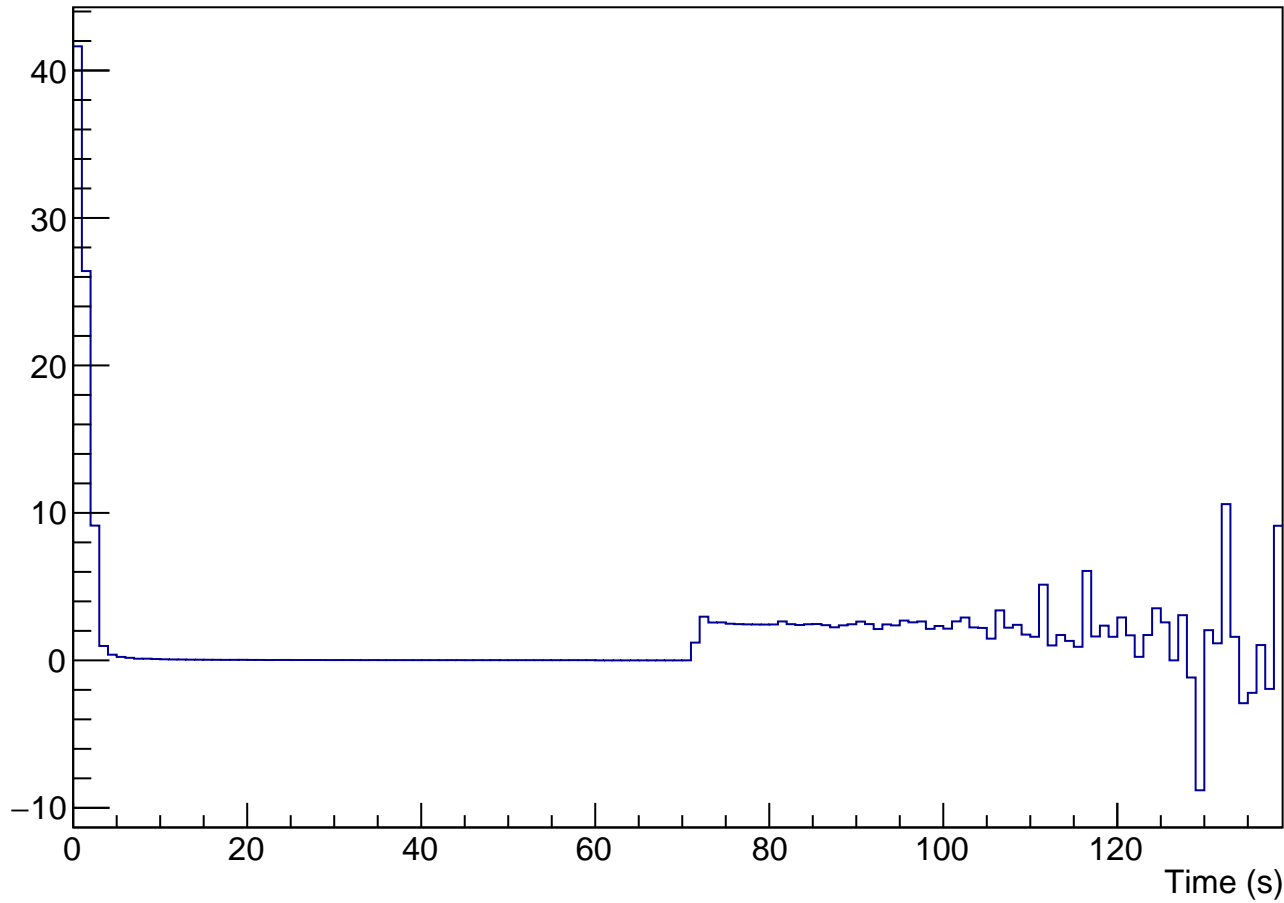

Average rate ratio

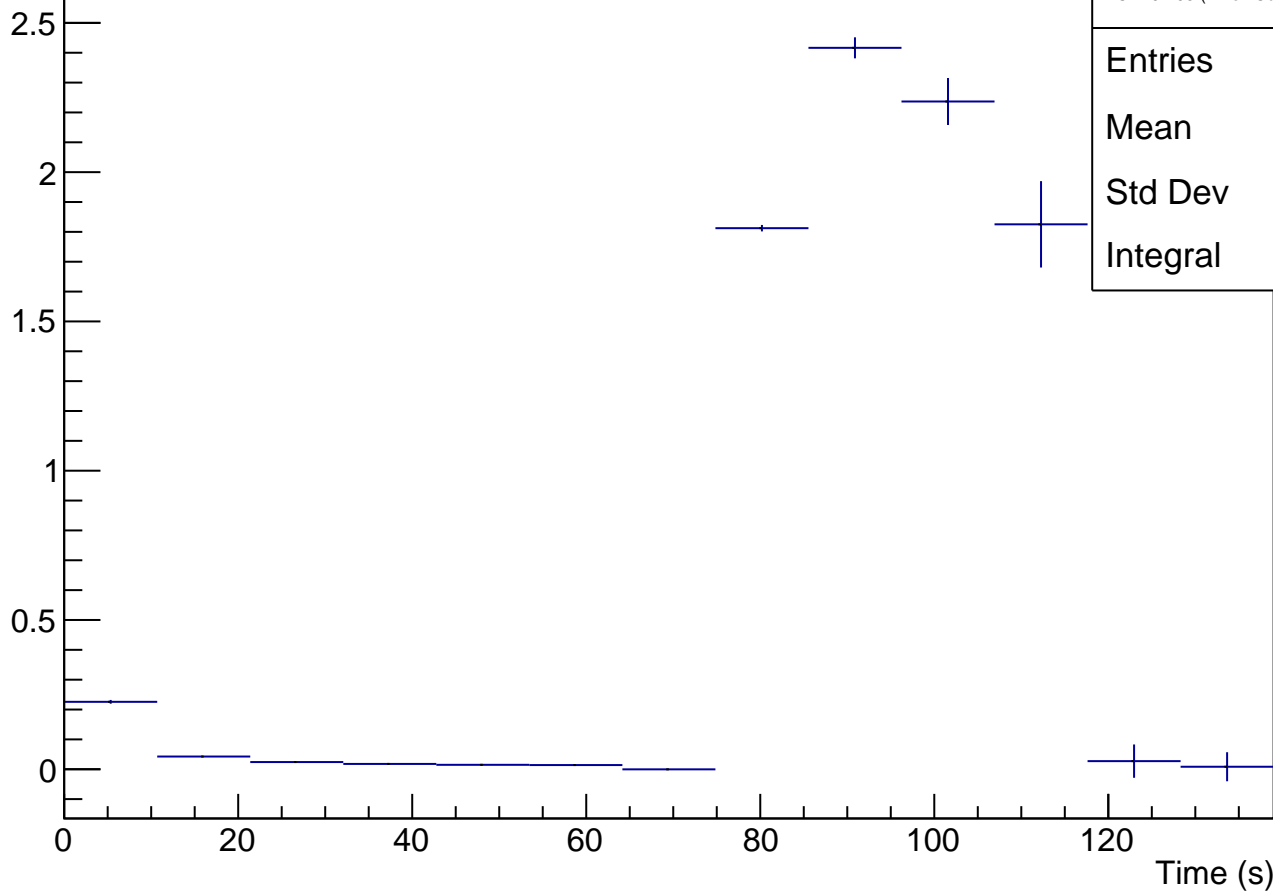

TCN19-193 (DRex Cu, 60cm)\_ratio

Entries 834


Mean 94.86

Std Dev 20.36

Integral 8.665

# TCN19-193 (DRex Cu, 60cm)

Count

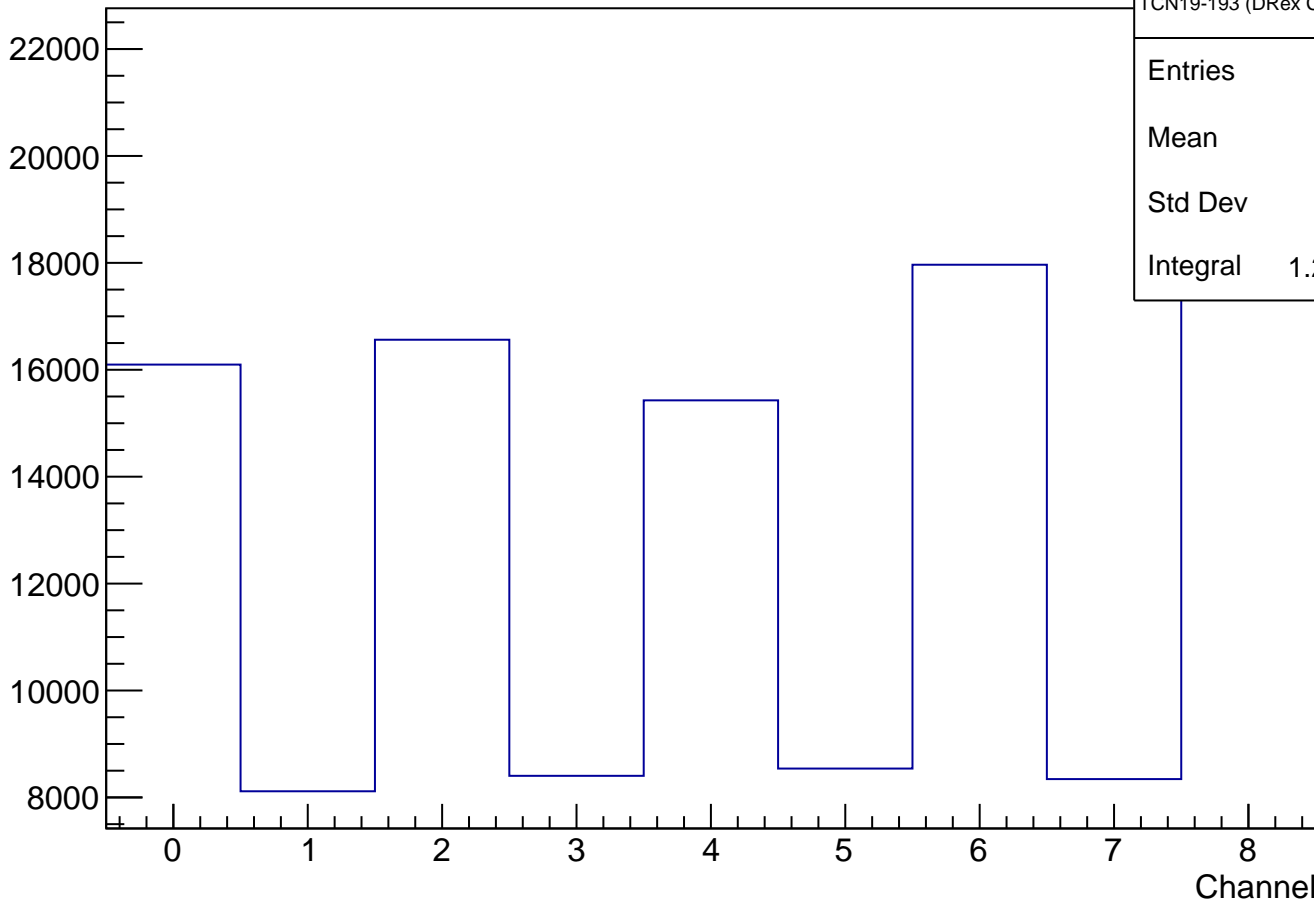

TCN19-193 (DRex Cu, 60cm)\_ch

Entries 121486

Mean 4.225

Std Dev 2.732

Integral 1.215e+05

# Li6 window

Frequency

1  
0.8  
0.6  
0.4  
0.2  
0

0 0.5 1 1.5 2 2.5 3 3.5 4 4.5 5

Time after valve opened (s)

li6window

Entries	44
Mean	0
Std Dev	0
Integral	0