





TCN19-010D, transmission normalized during prestorage

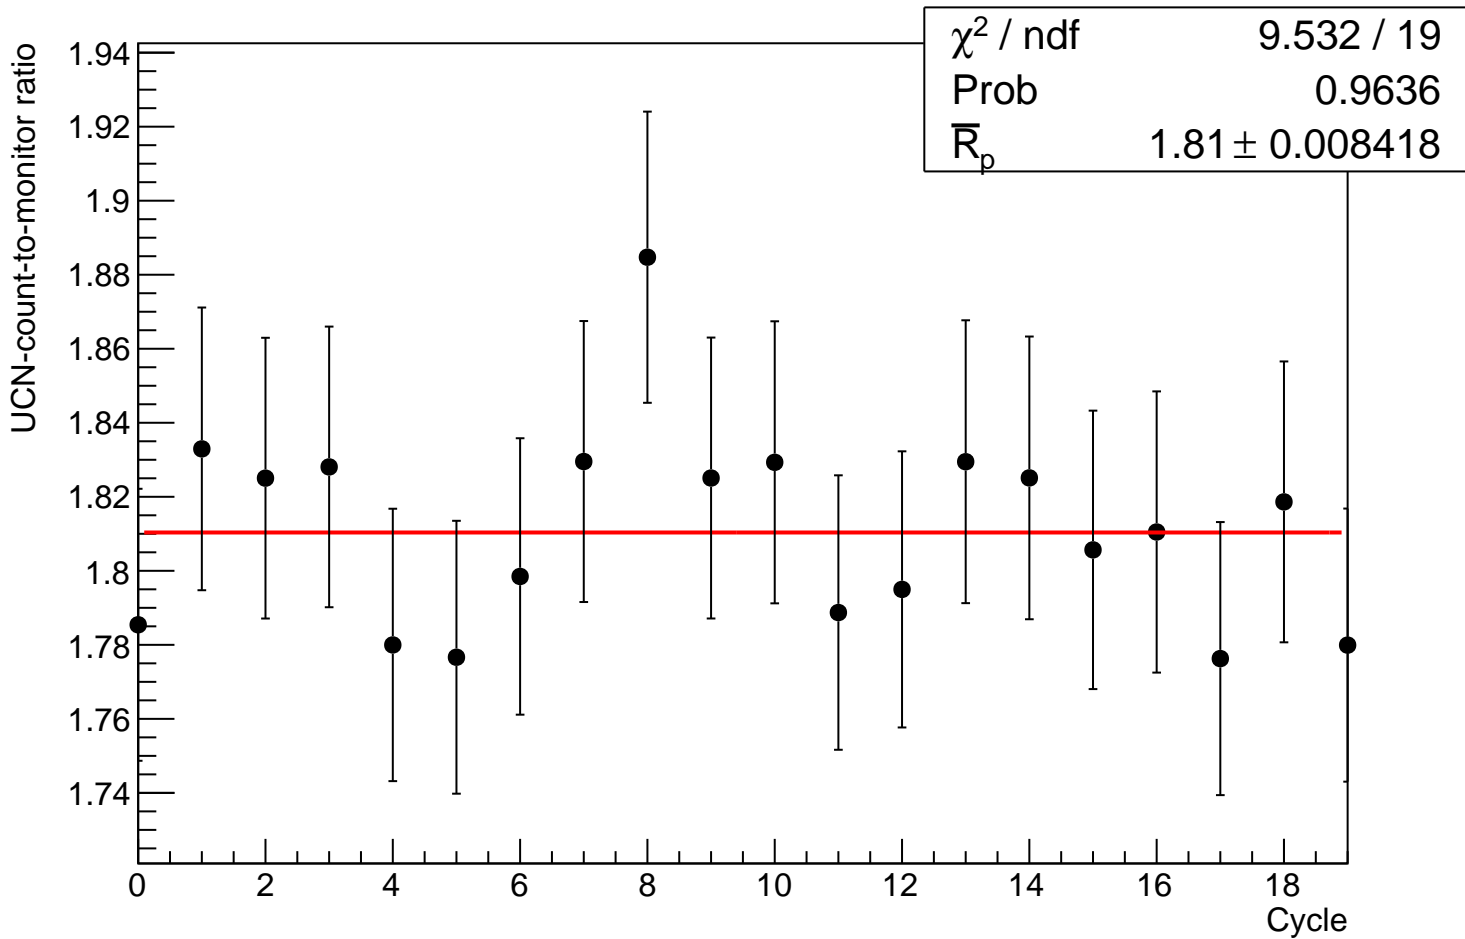



Graph

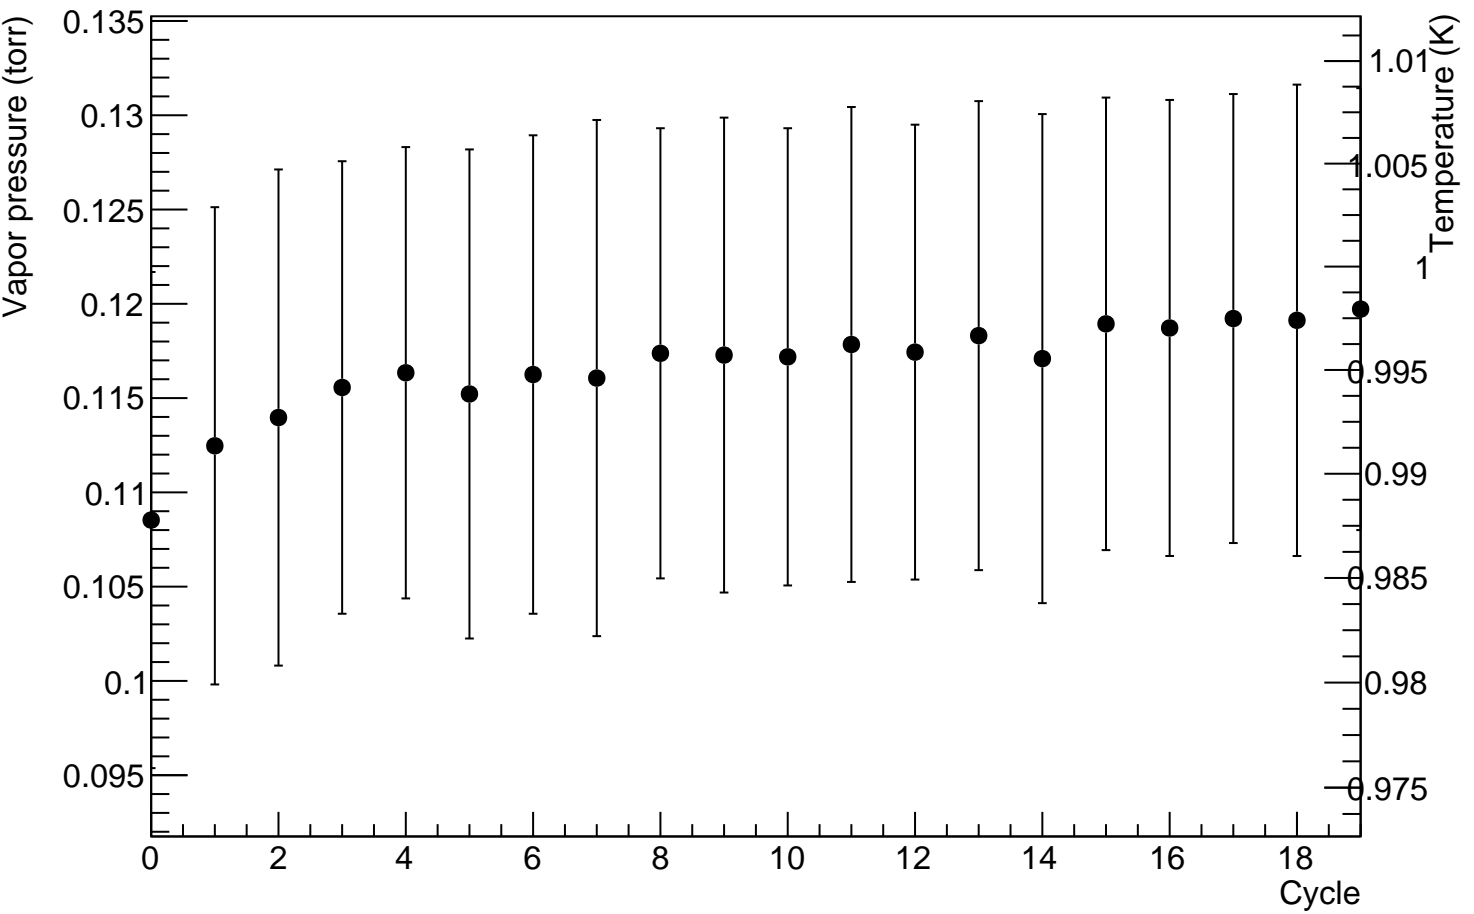

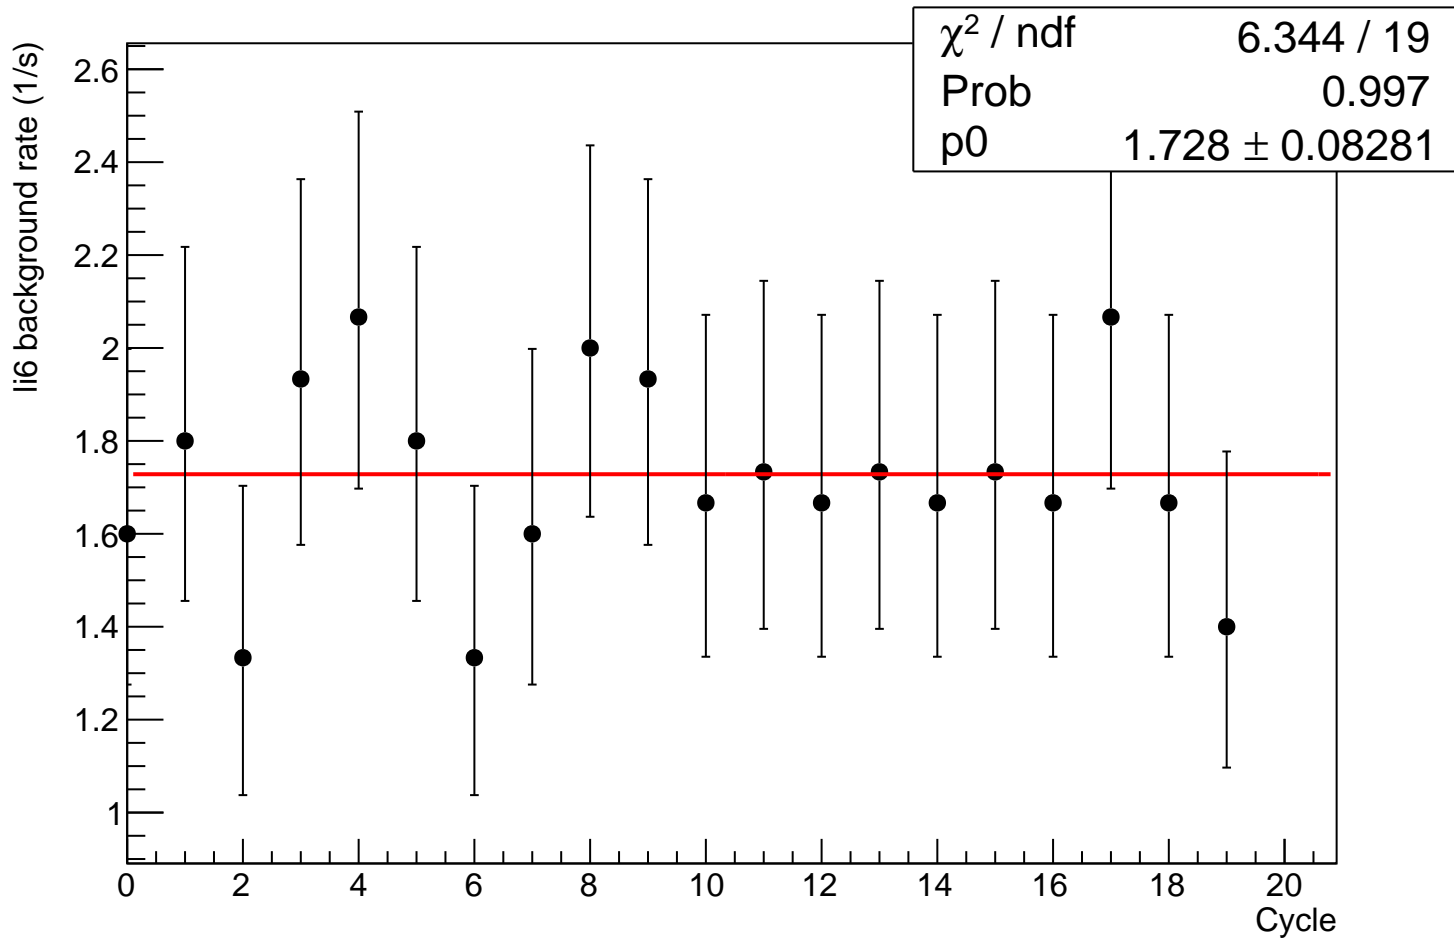


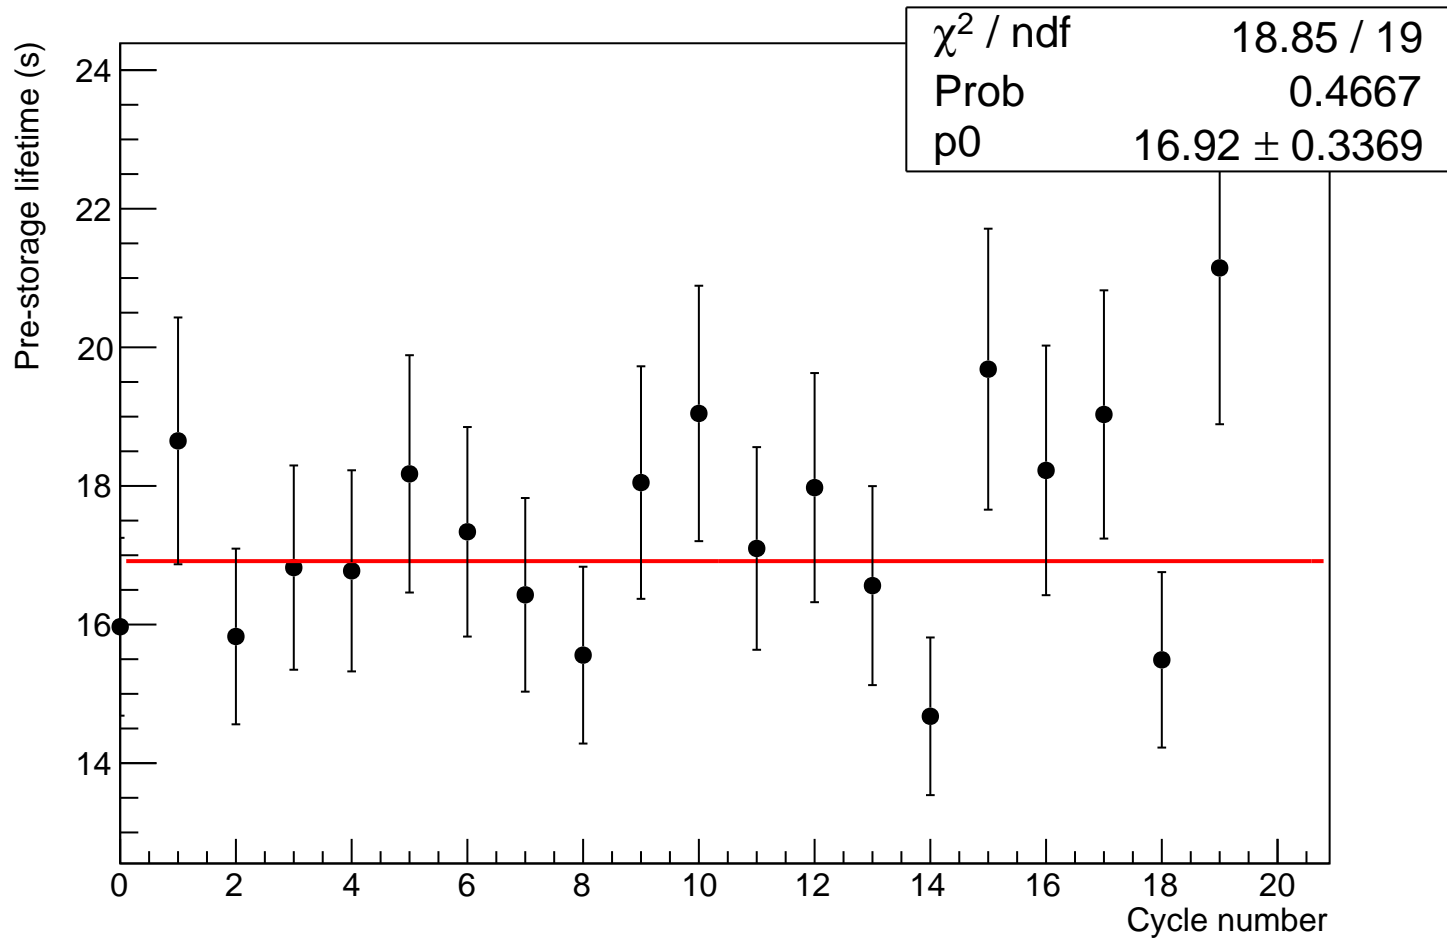

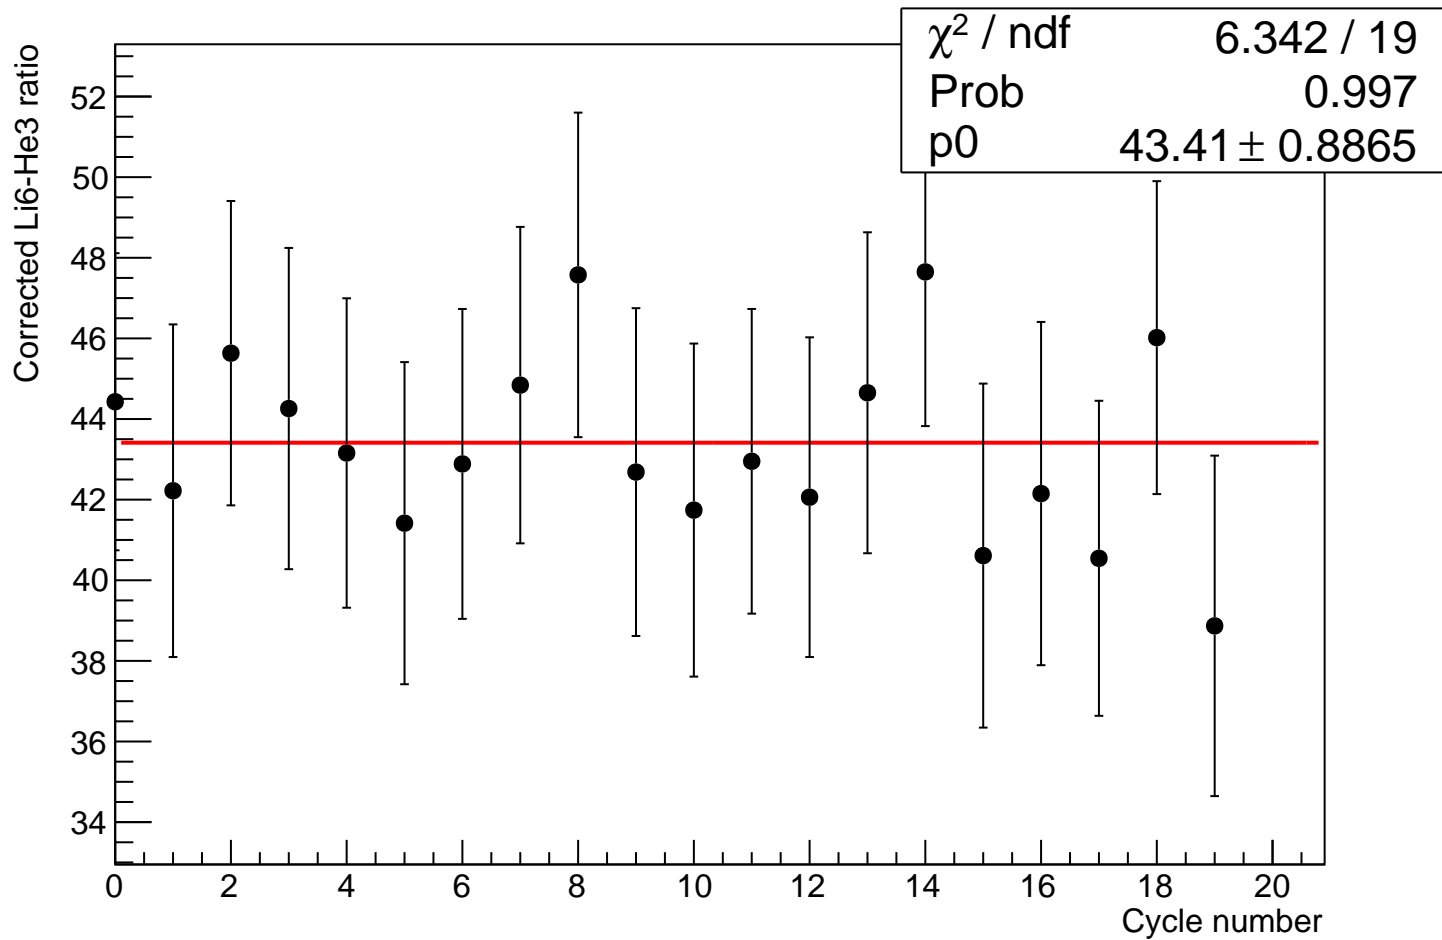


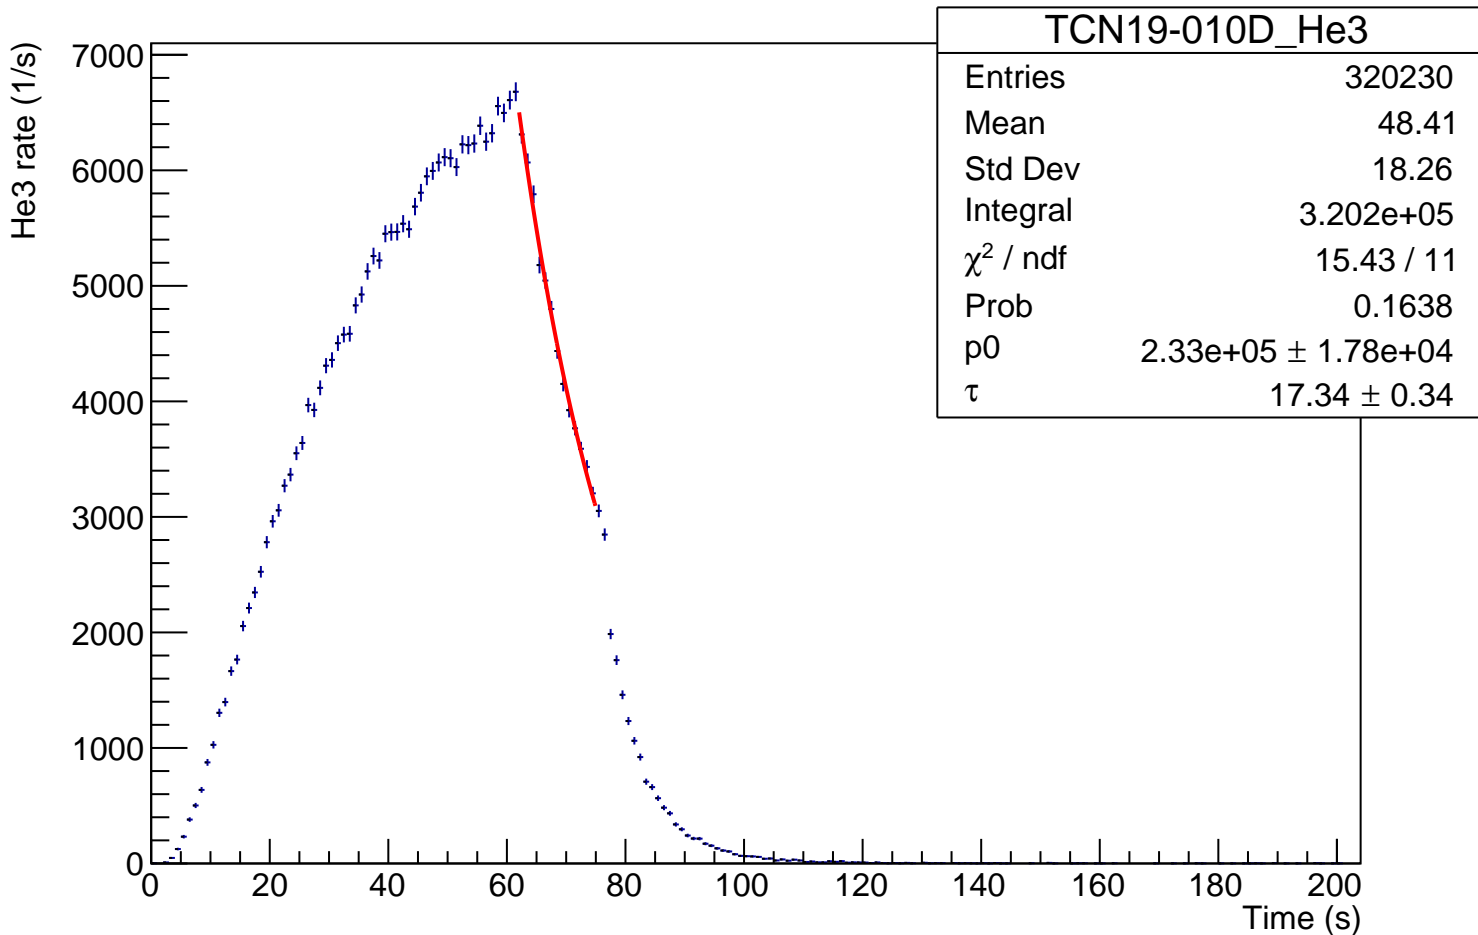

Li6 rate (1/0.05s)

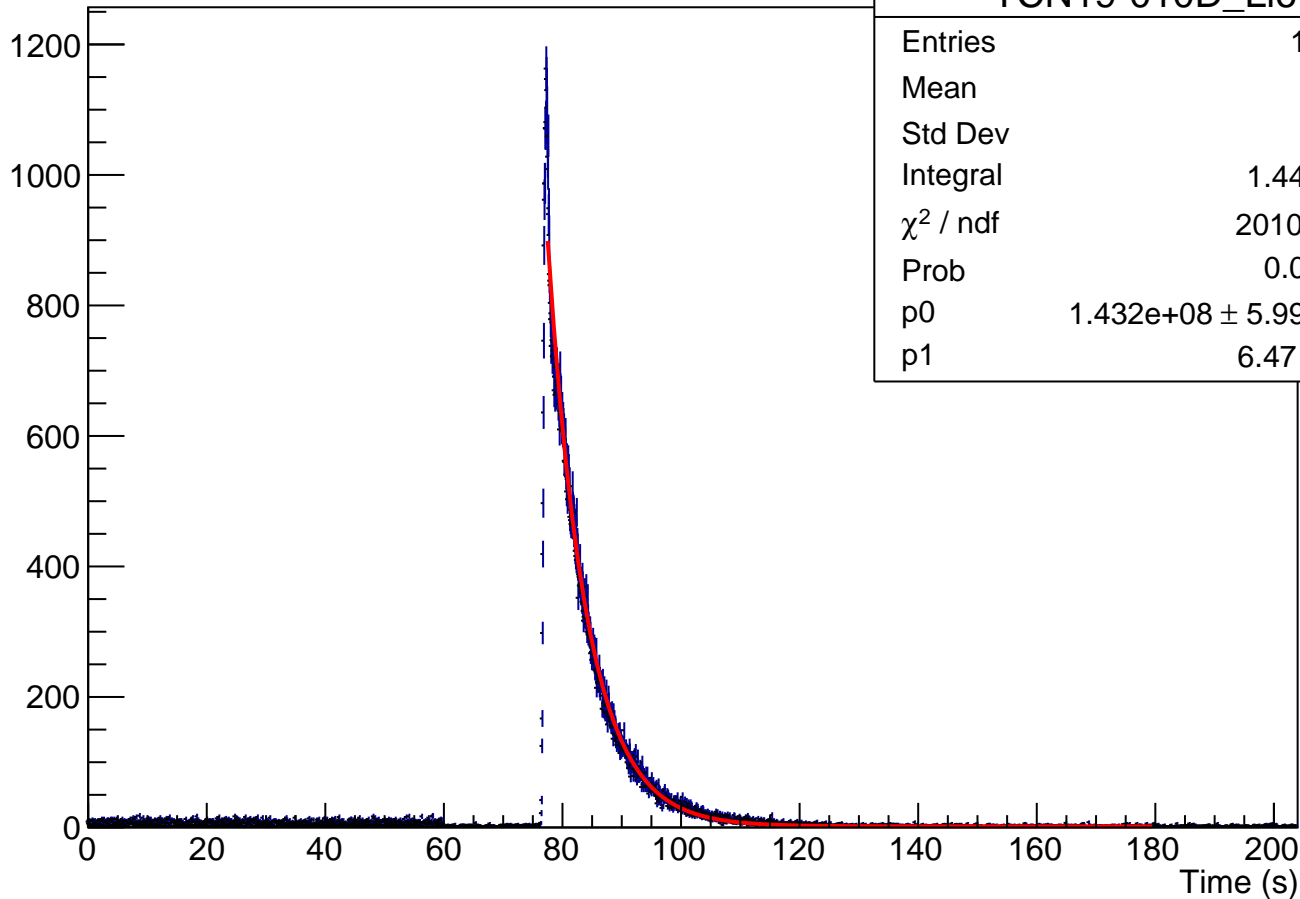

Normalized Li6 rate (1/0.05s)

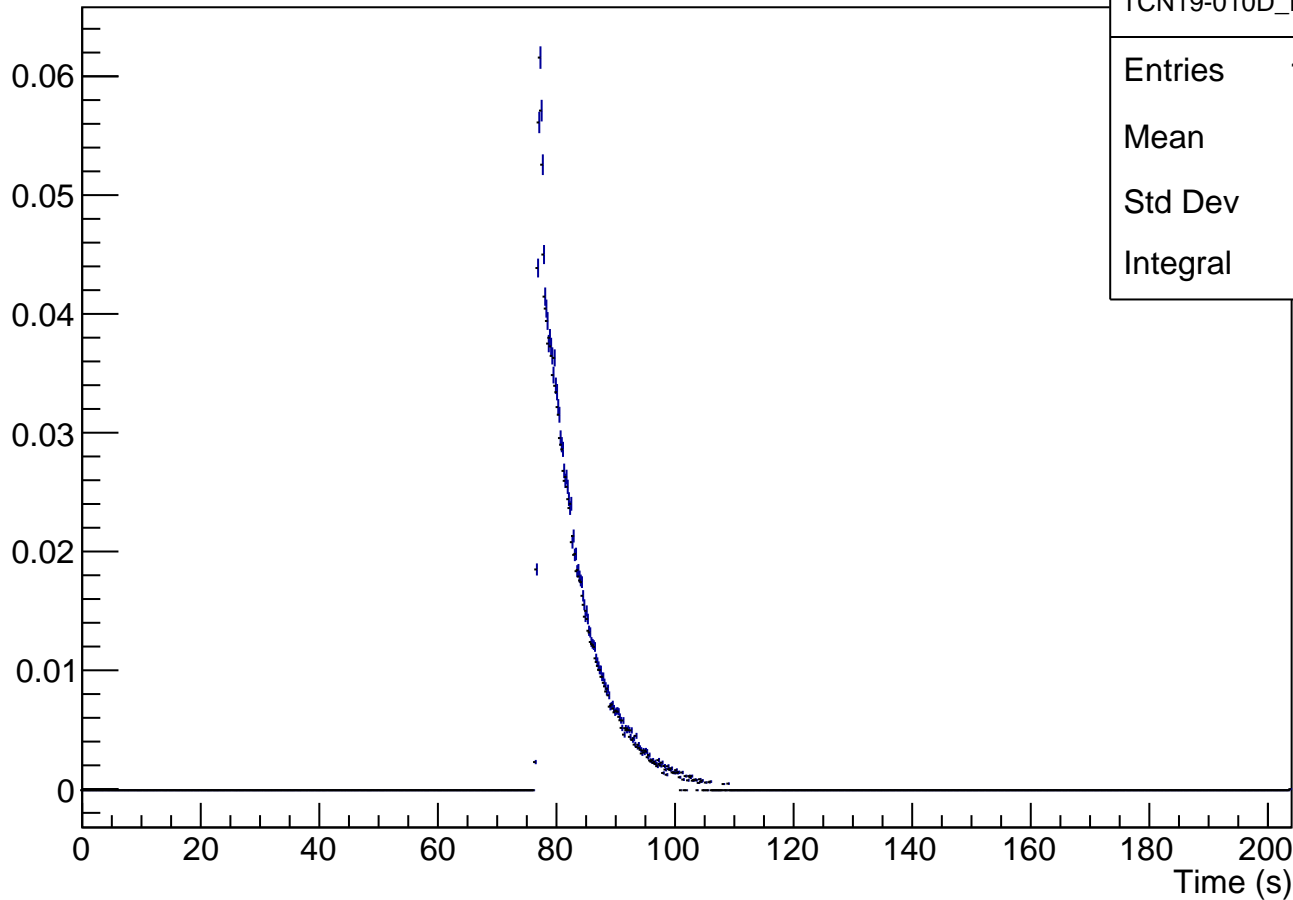

TCN19-010D_Li6_norm


Entries 127245

Mean 81.43

Std Dev 12.5


Integral 1.651

Ratio of cumulated rates

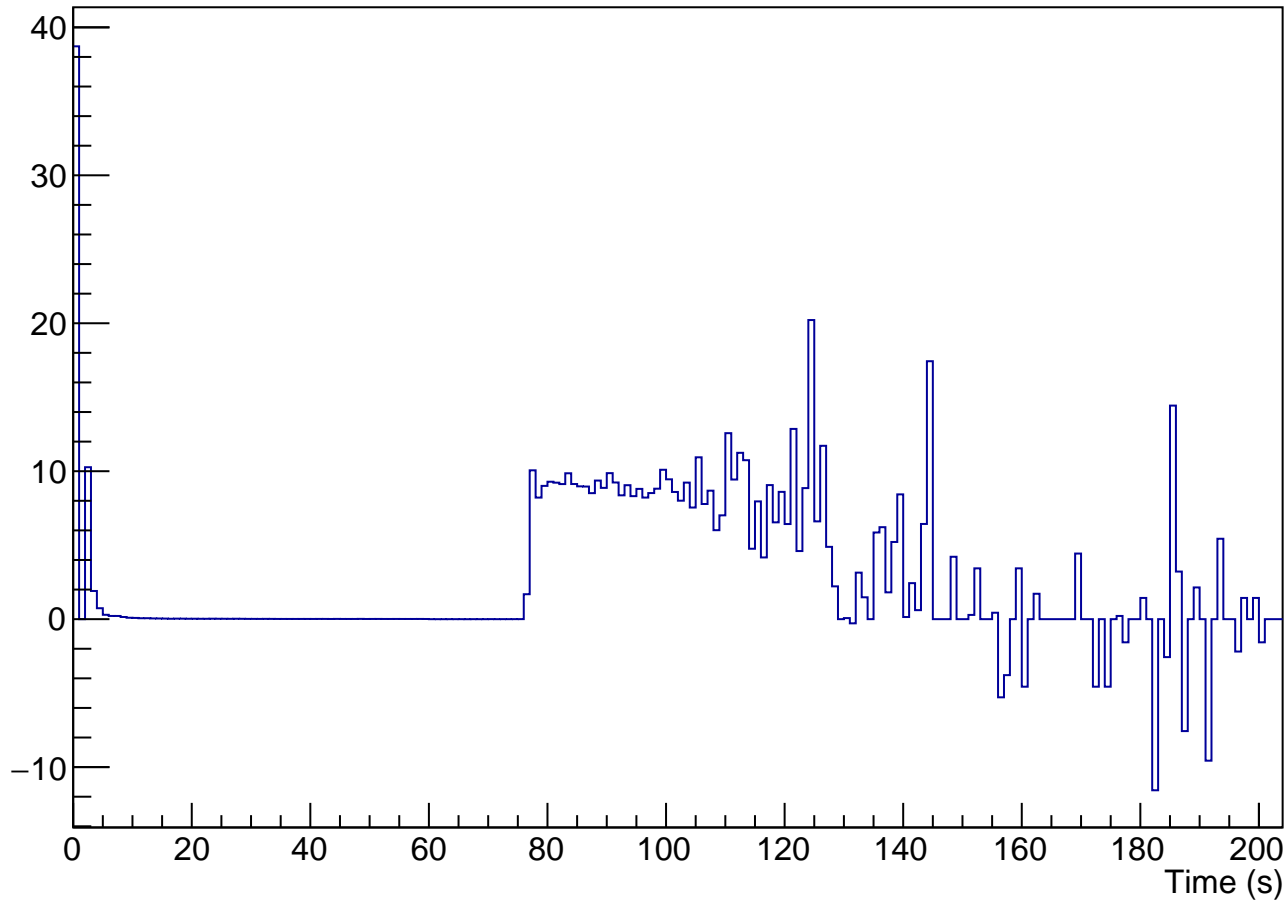


Average rate ratio

TCN19-010D_ratio	
Entries	329
Mean	104.3
Std Dev	16.94
Integral	39.89

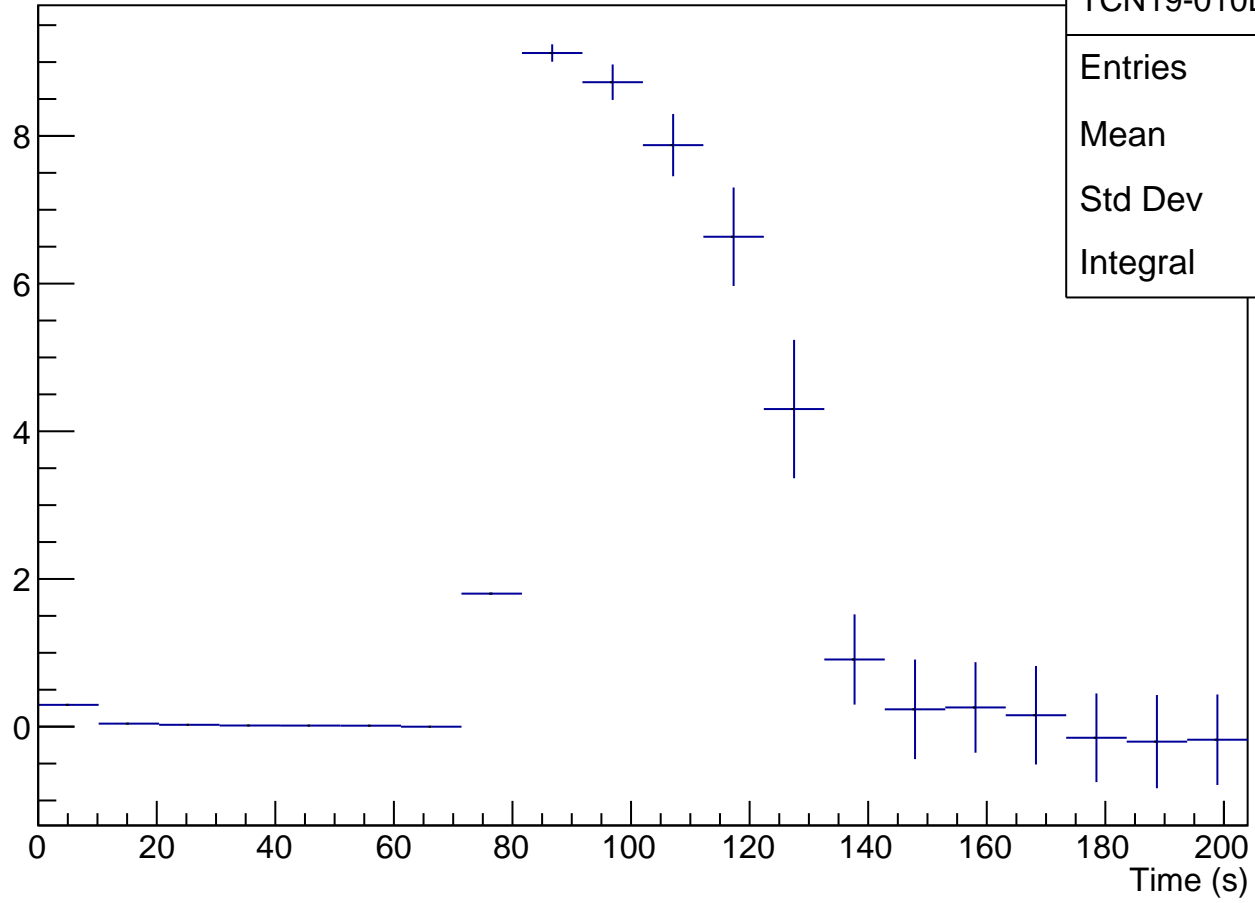

TCN19-010D

Count

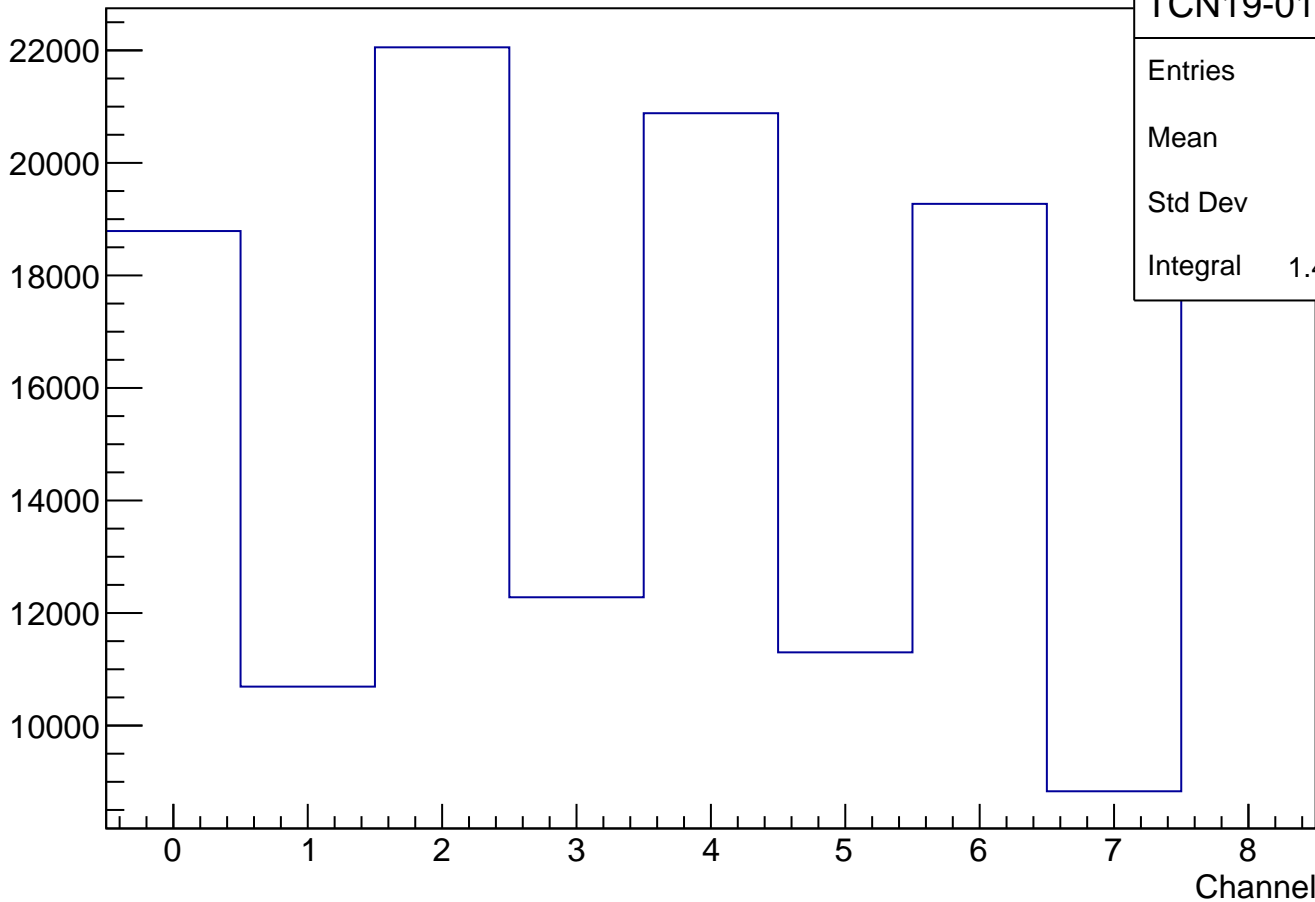

TCN19-010D_ch

Entries 144272

Mean 3.954

Std Dev 2.616

Integral 1.443e+05

Li6 window

Frequency

1
0.8
0.6
0.4
0.2
0

0 0.5 1 1.5 2 2.5 3 3.5 4 4.5 5

Time after valve opened (s)

li6window

Entries 20

Mean 0

Std Dev 0

Integral 0