




TCN19-190 (DRex UGD02, 20cm), transmission normalized during prestorage

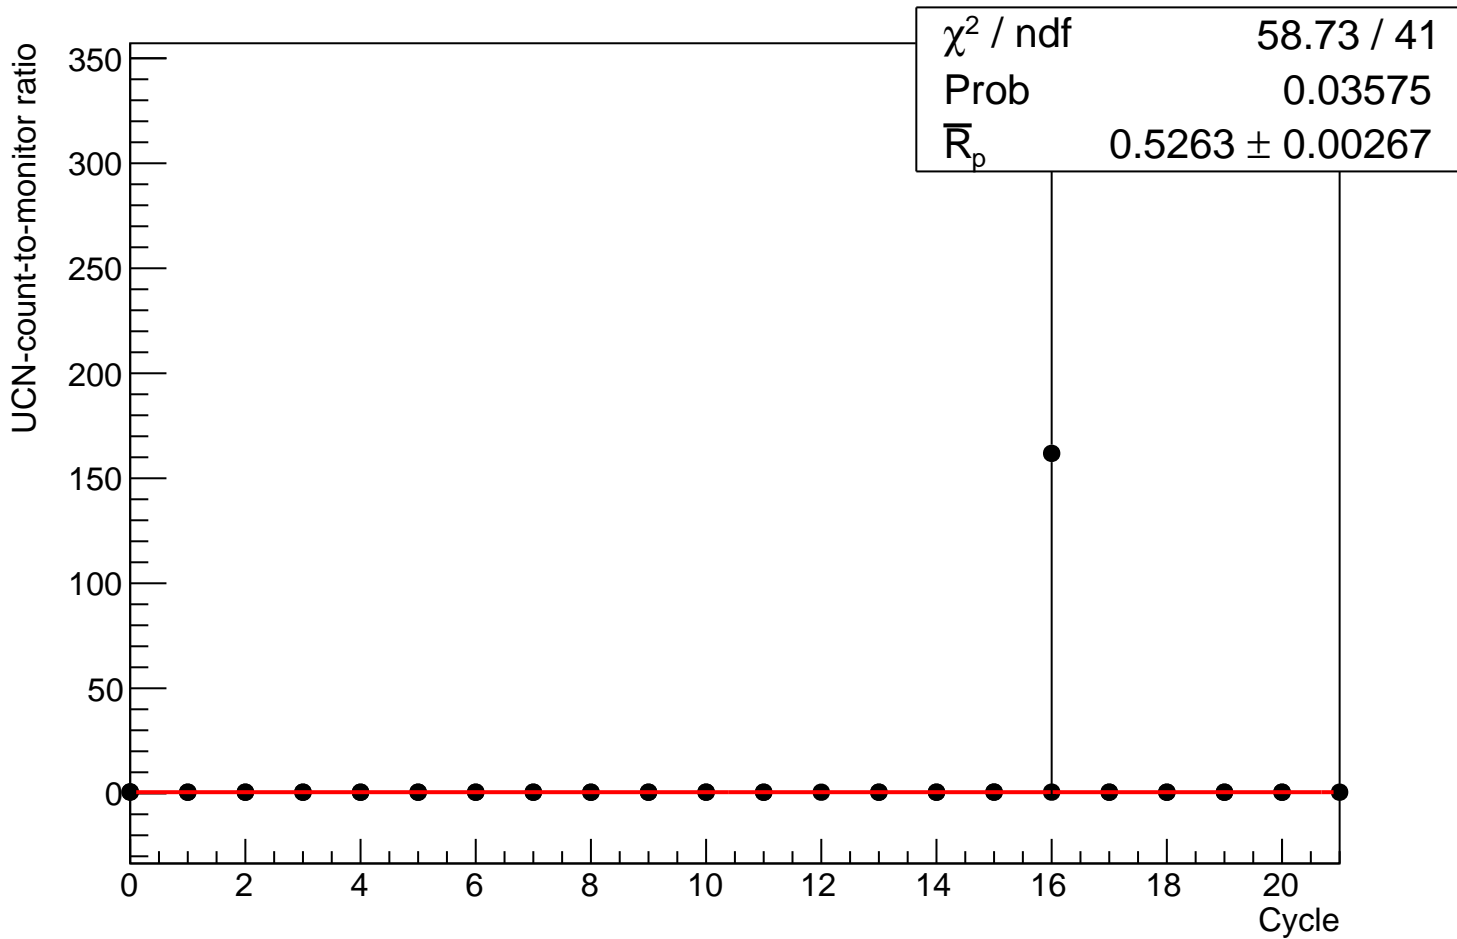


# Graph

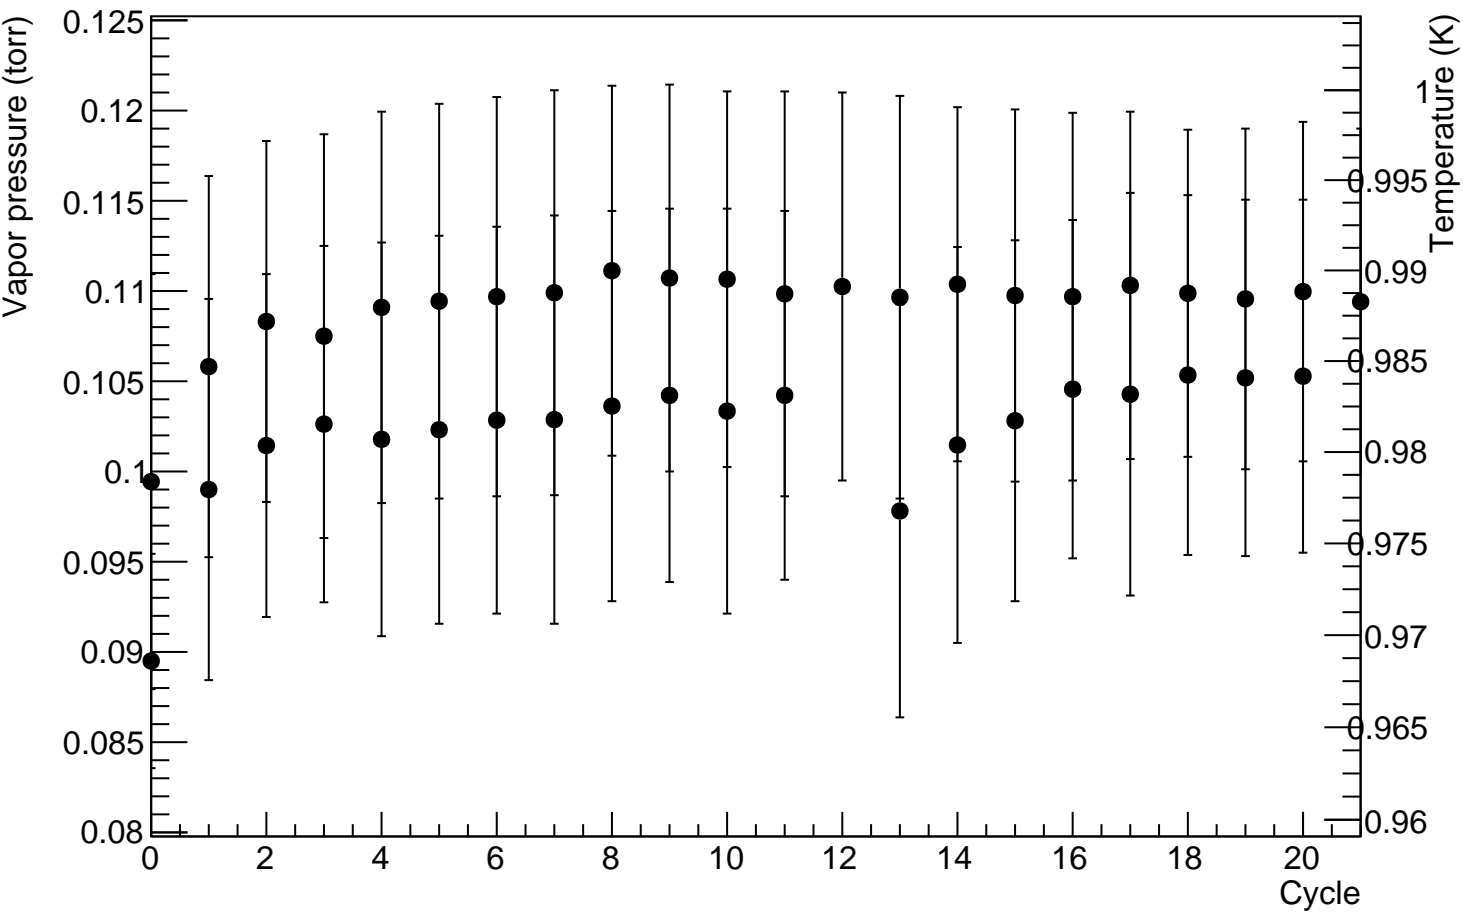


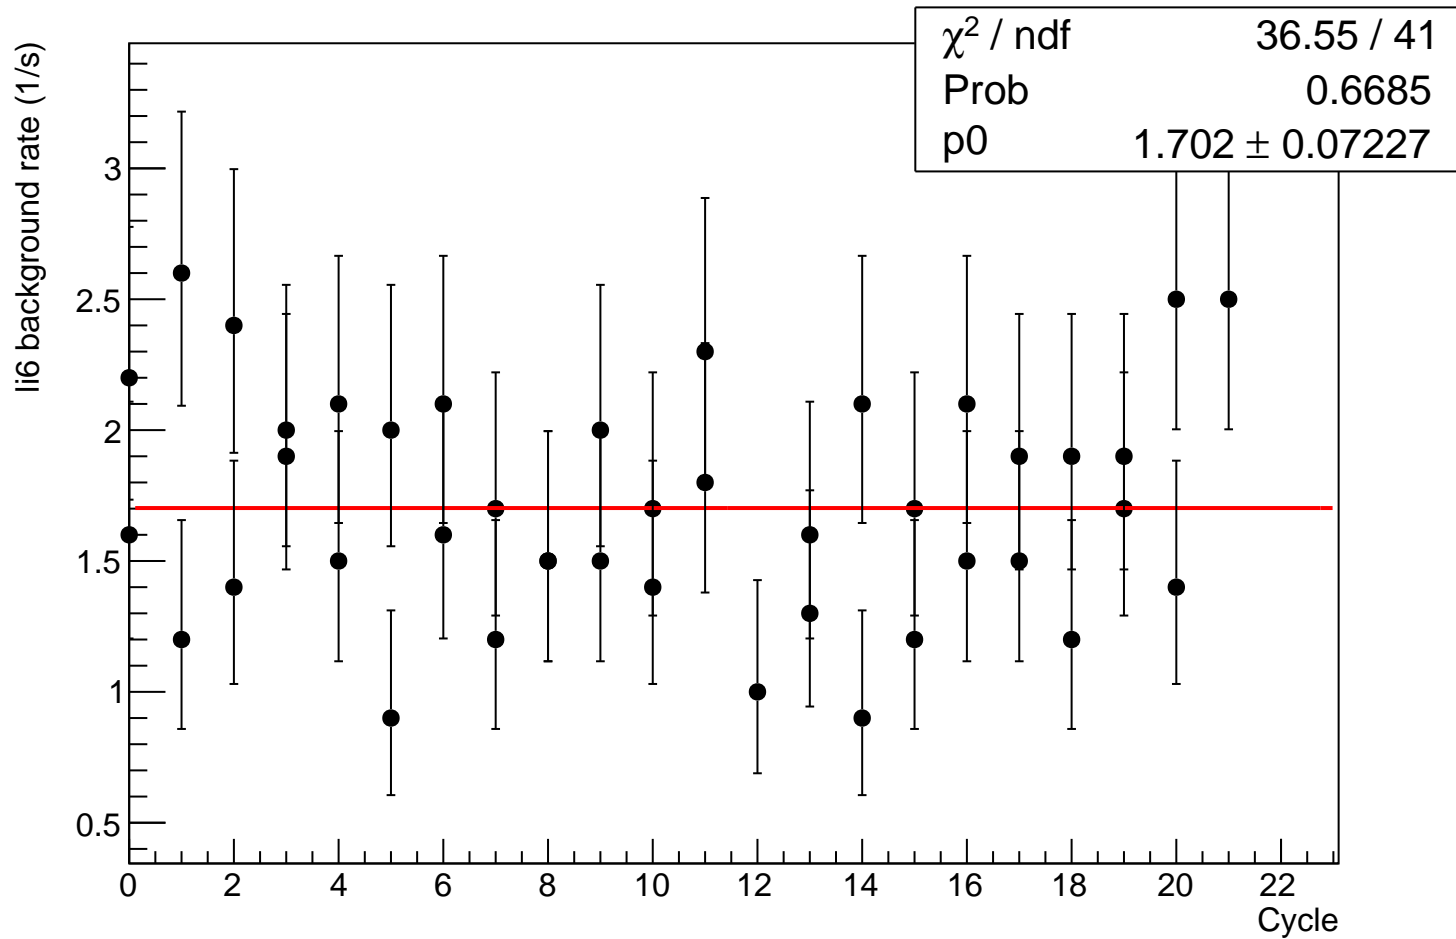



Pre-storage lifetime (s)

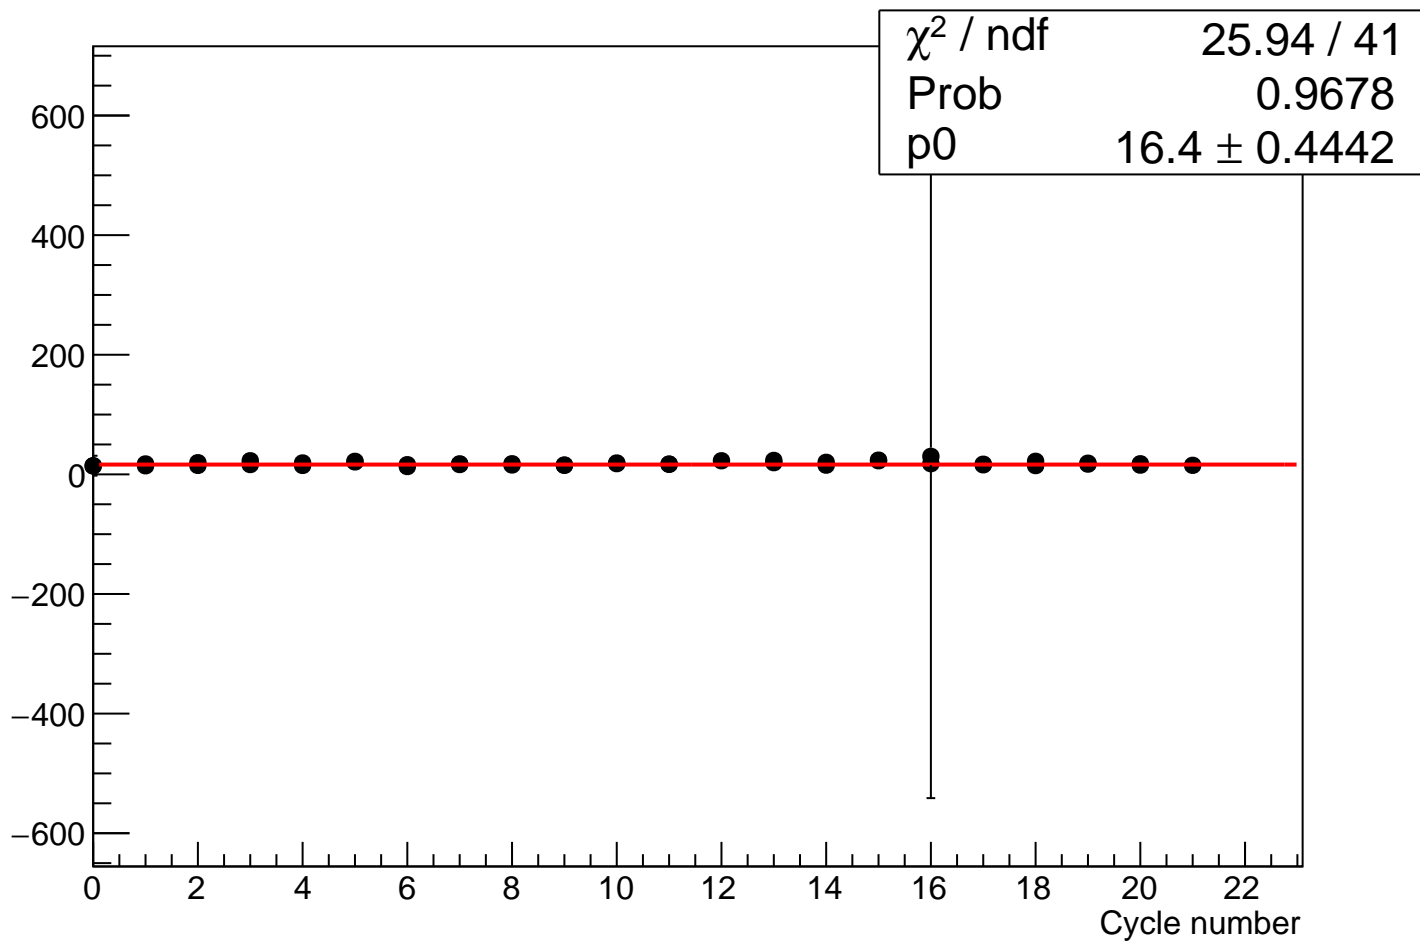


Connected LEO Ties ratio

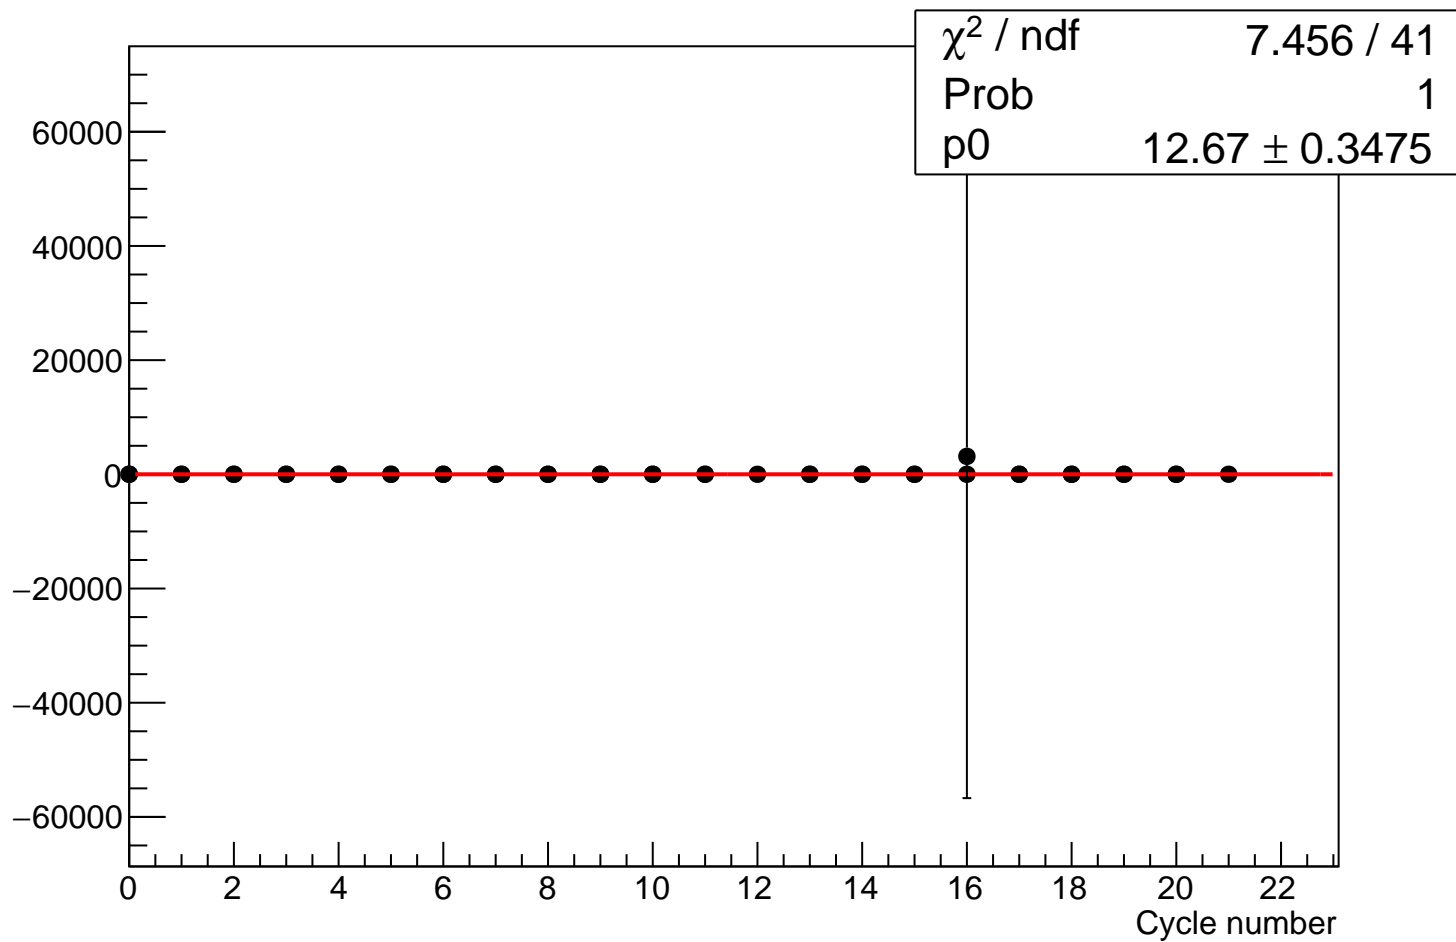

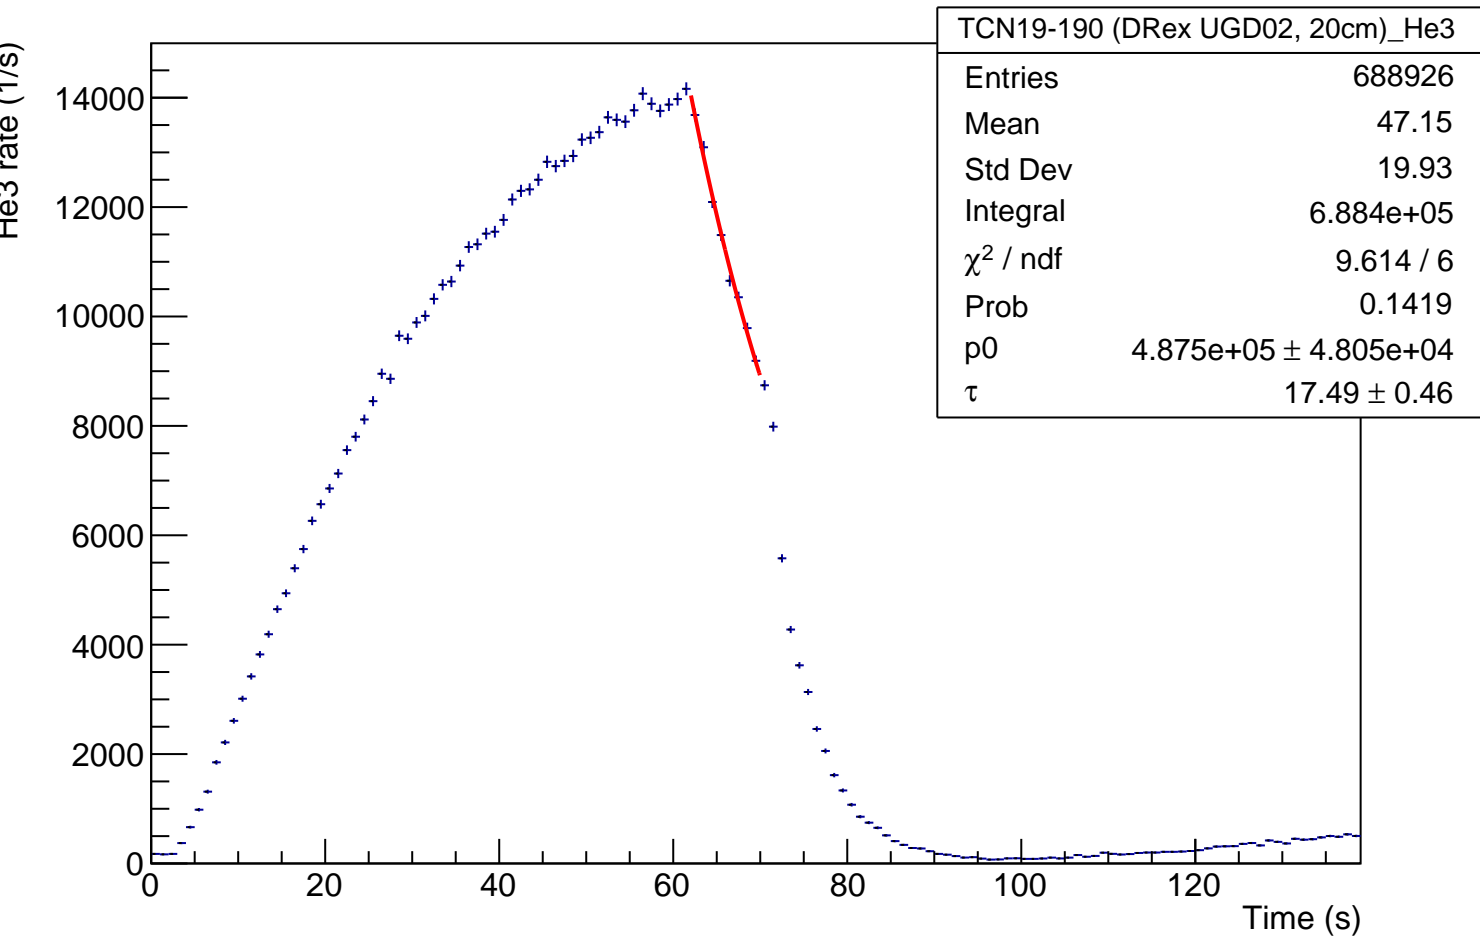


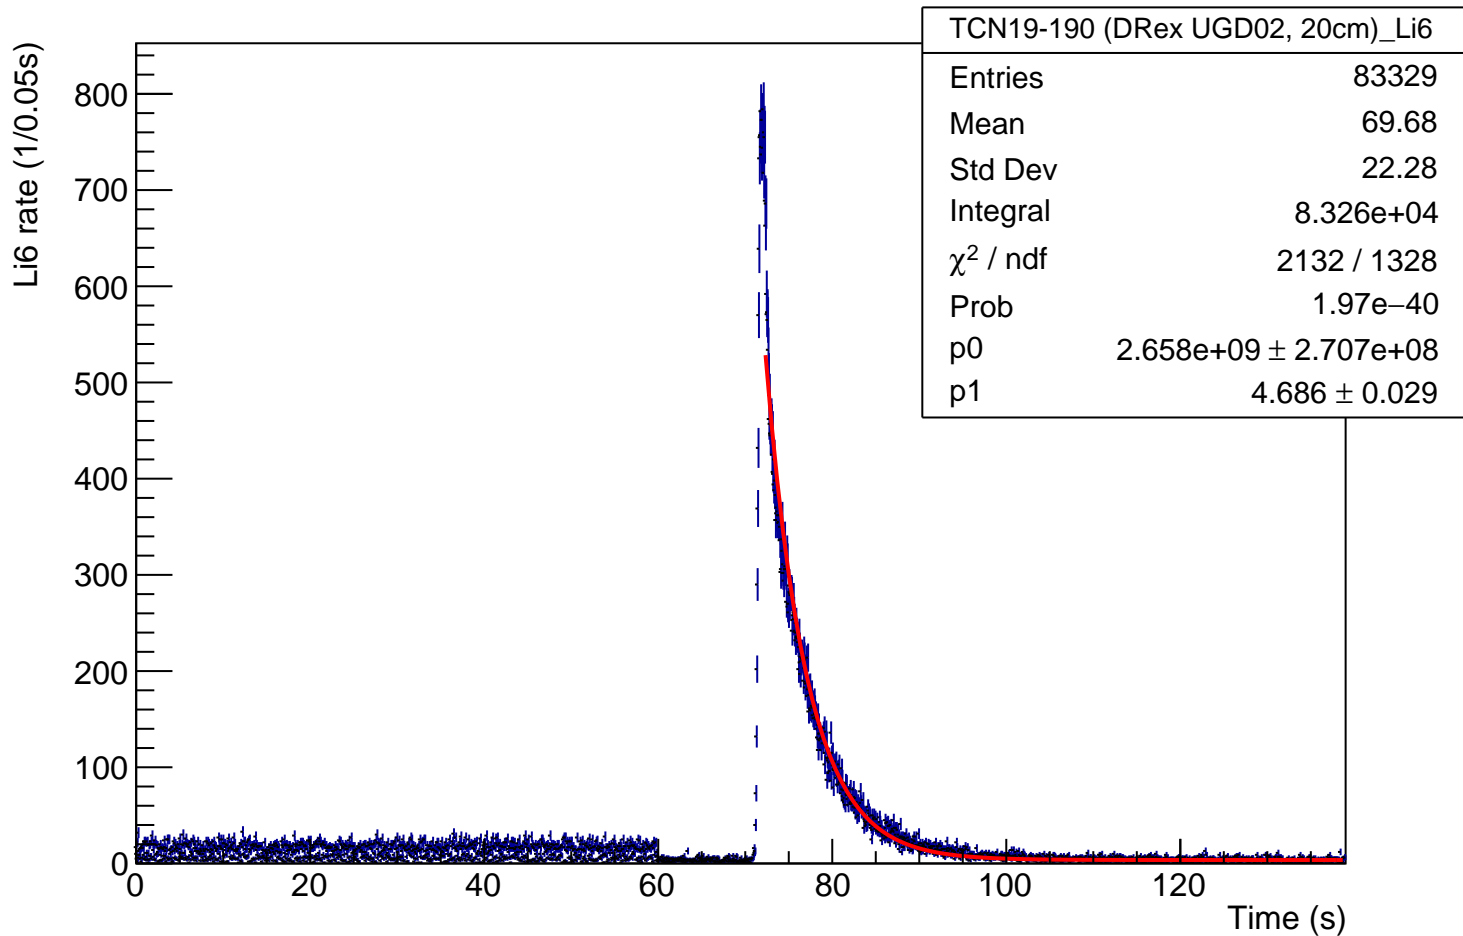


Normalized Li6 rate (1/0.05s)

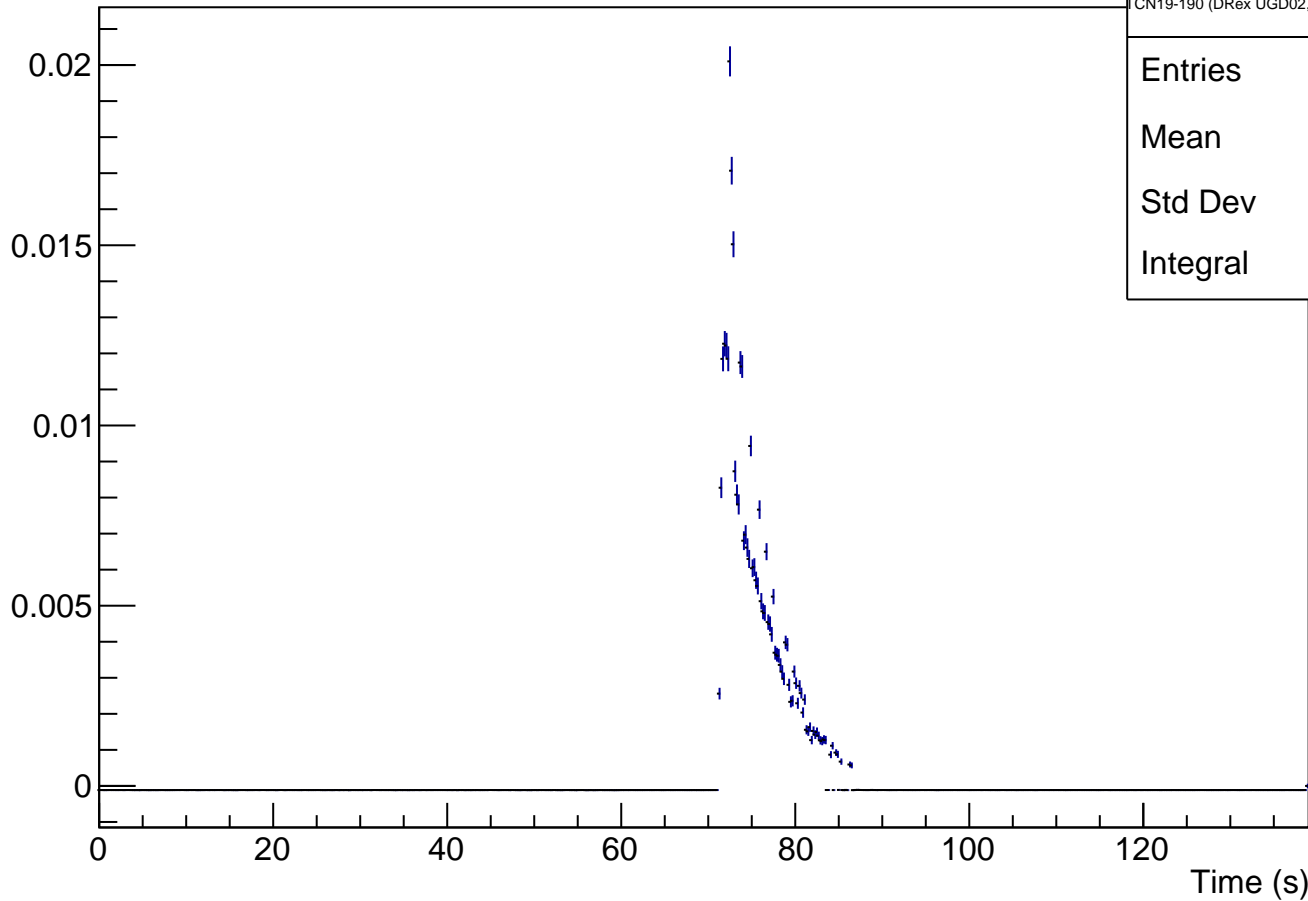



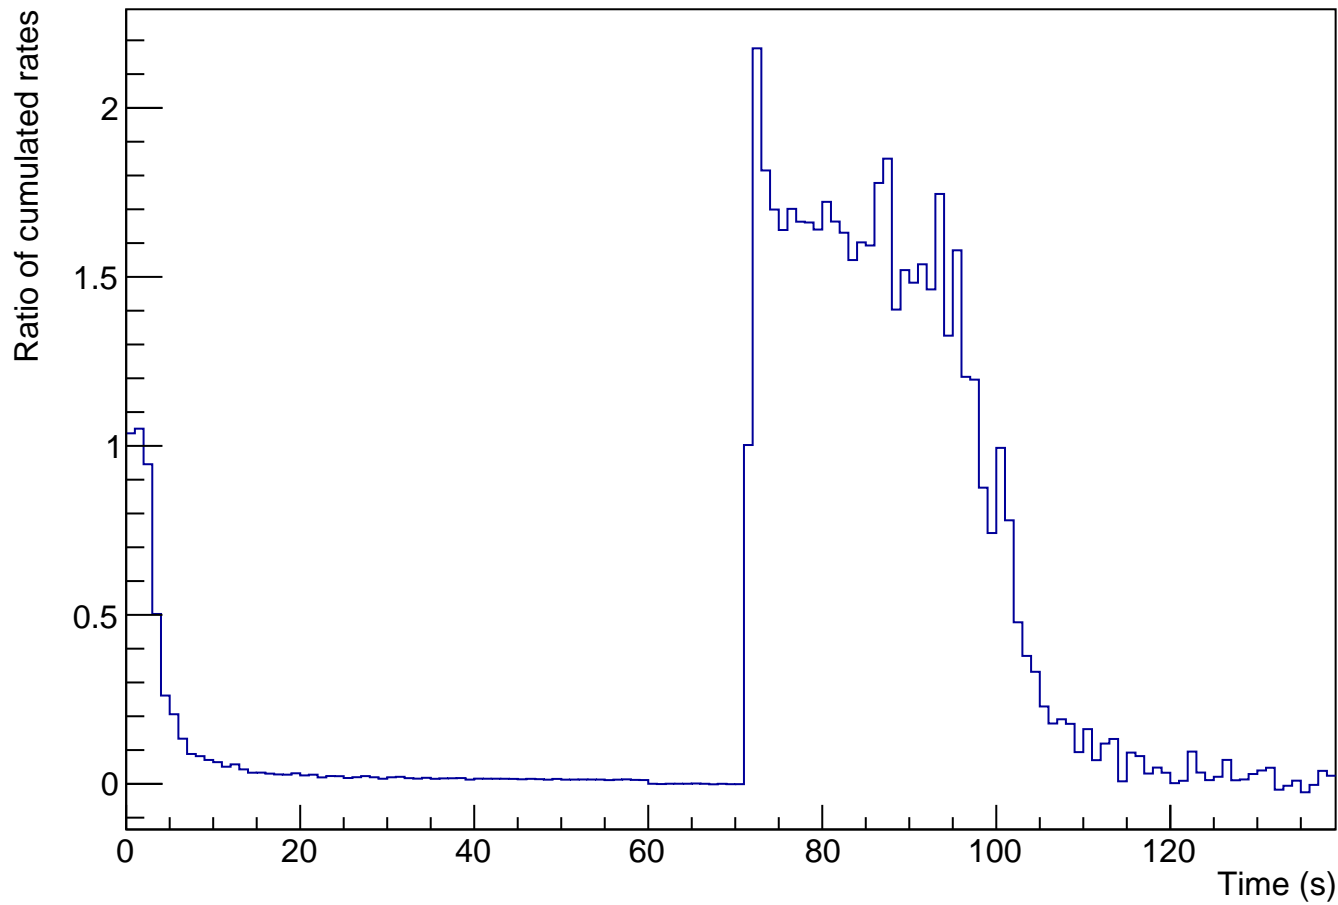

Average rate ratio

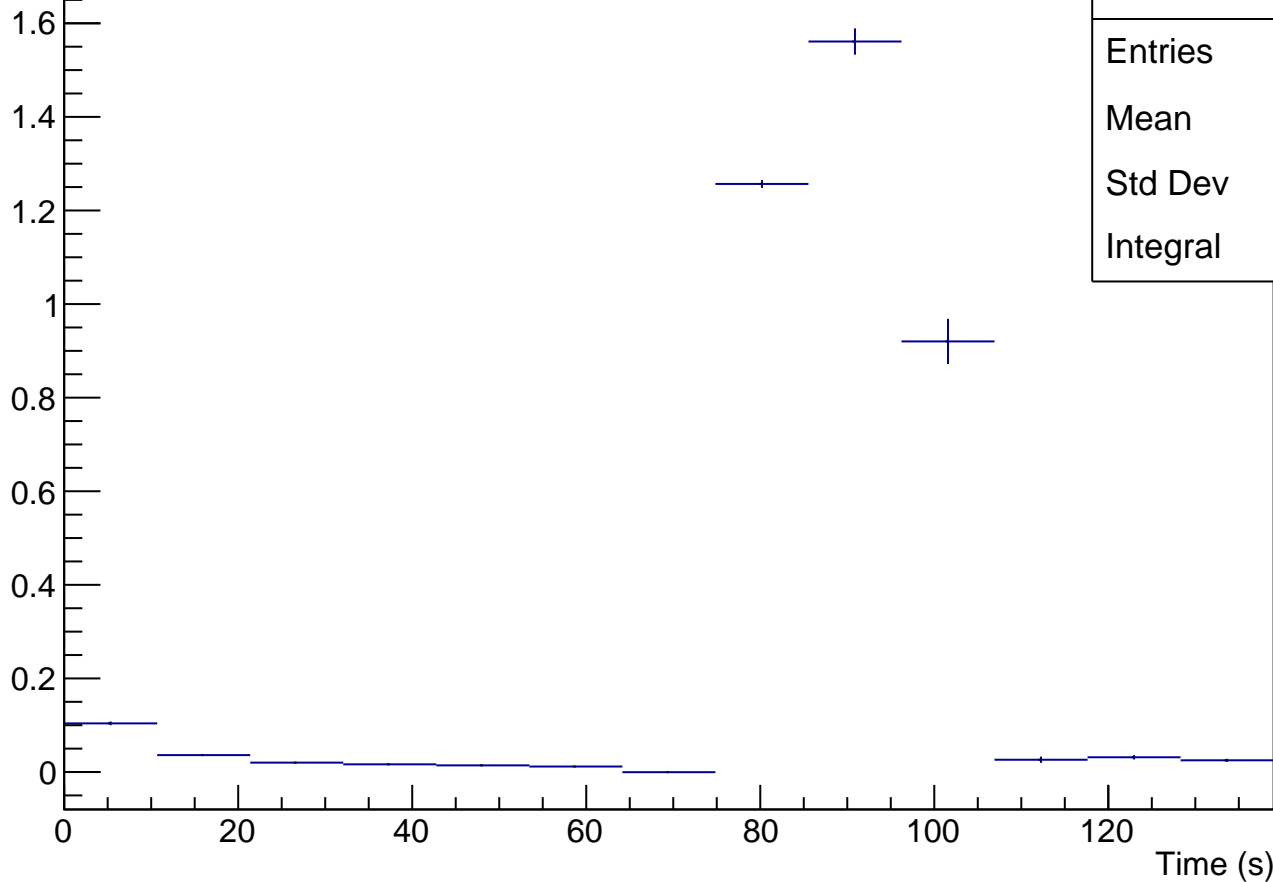

TCN19-190 (DRex UGD02, 20cm)\_ratio

Entries 186


Mean 86.02

Std Dev 23.88

Integral 4.023

# TCN19-190 (DRex UGD02, 20cm)

Count

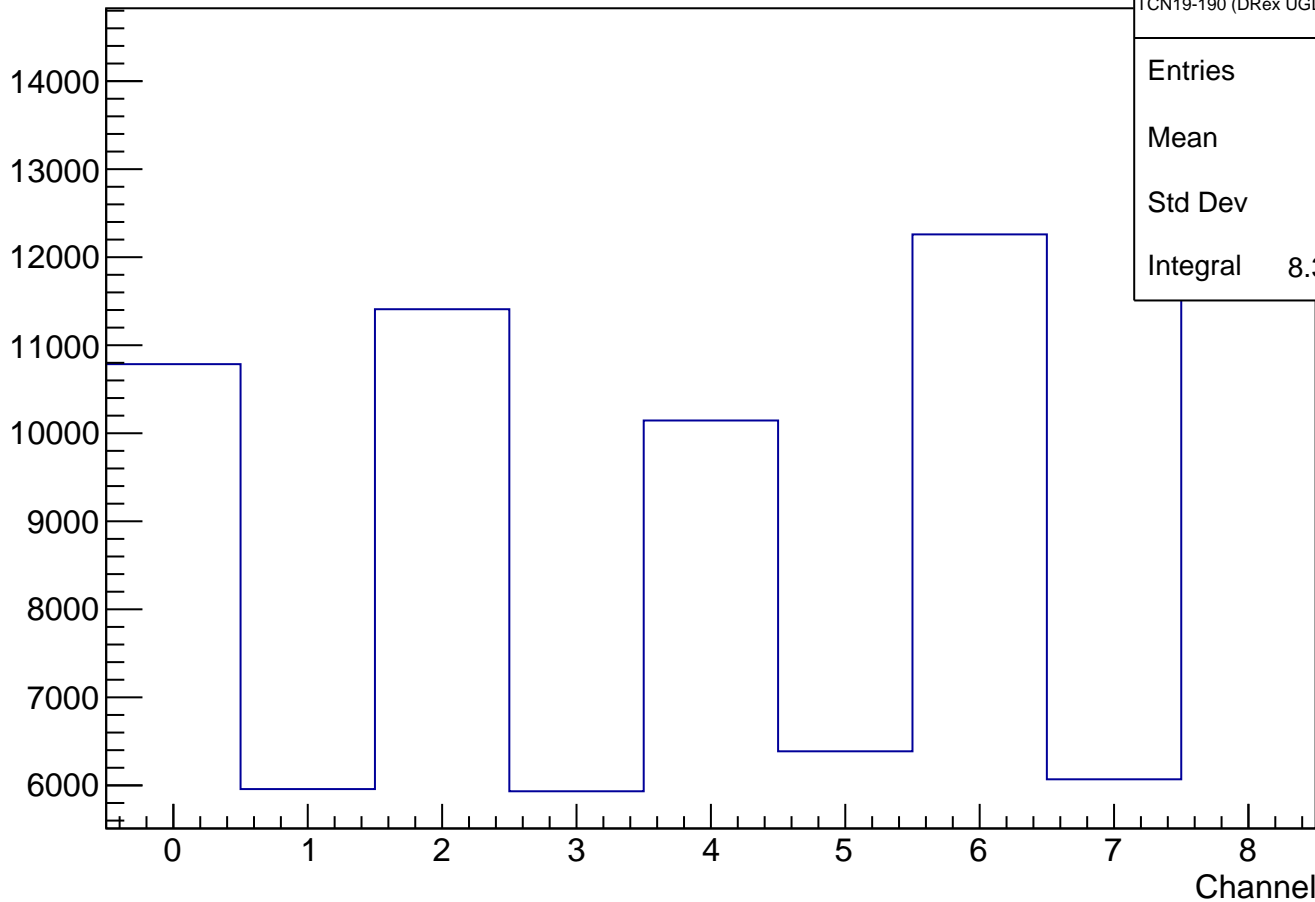

TCN19-190 (DRex UGD02, 20cm)\_ch

Entries 83329

Mean 4.203

Std Dev 2.716

Integral 8.333e+04

# Li6 window

Frequency

1  
0.8  
0.6  
0.4  
0.2  
0

0 0.5 1 1.5 2 2.5 3 3.5 4 4.5 5

Time after valve opened (s)

li6window

Entries 42

Mean 0

Std Dev 0

Integral 0