





TCN19-280 (spider v2), transmission normalized during prestorage

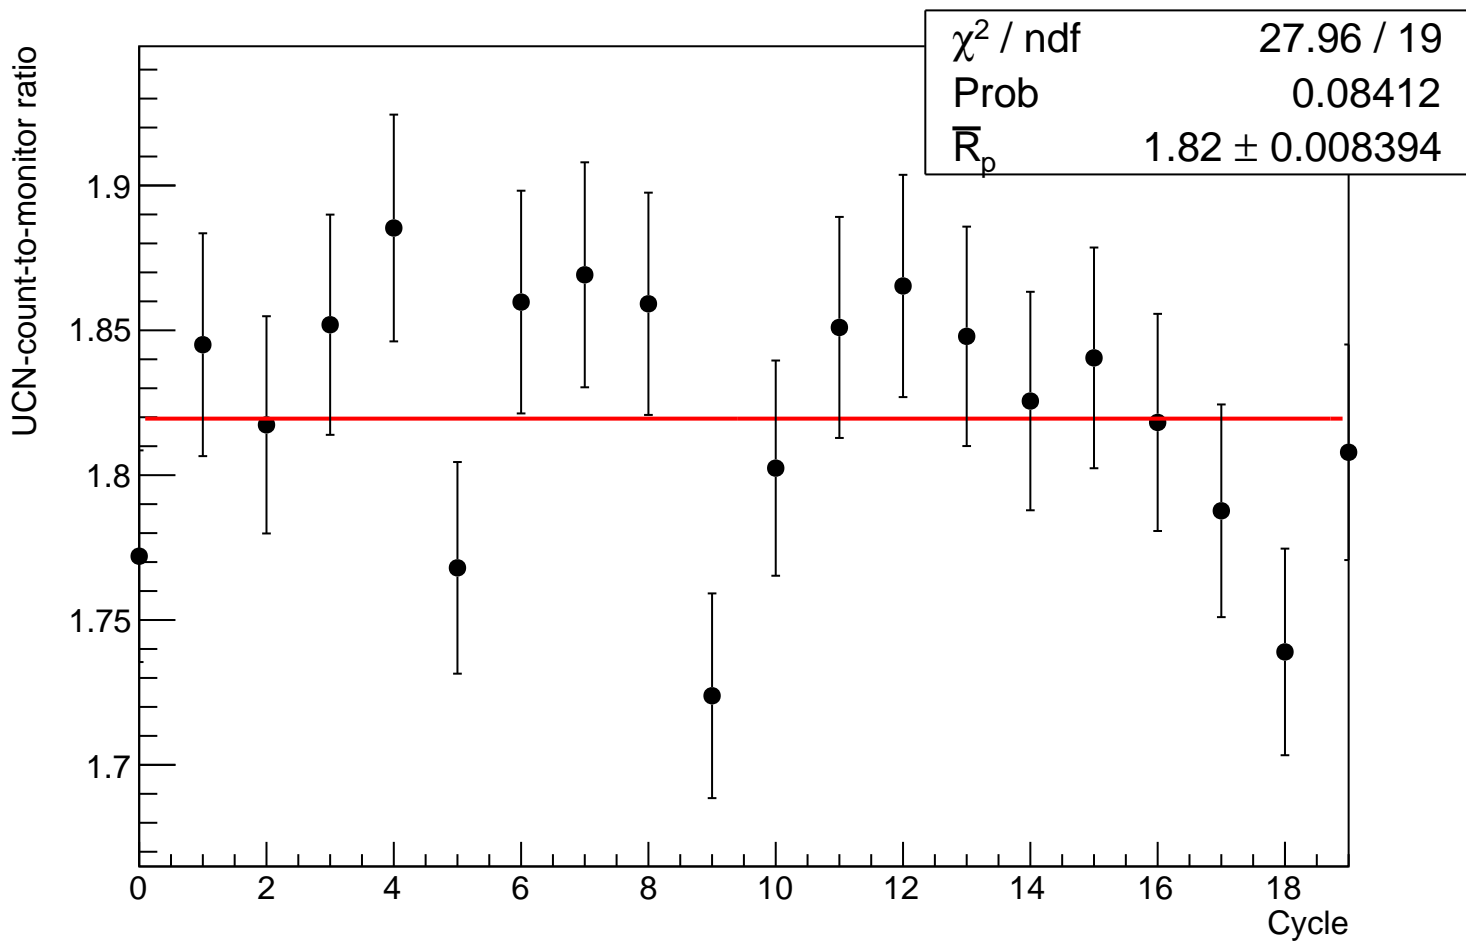



# Graph

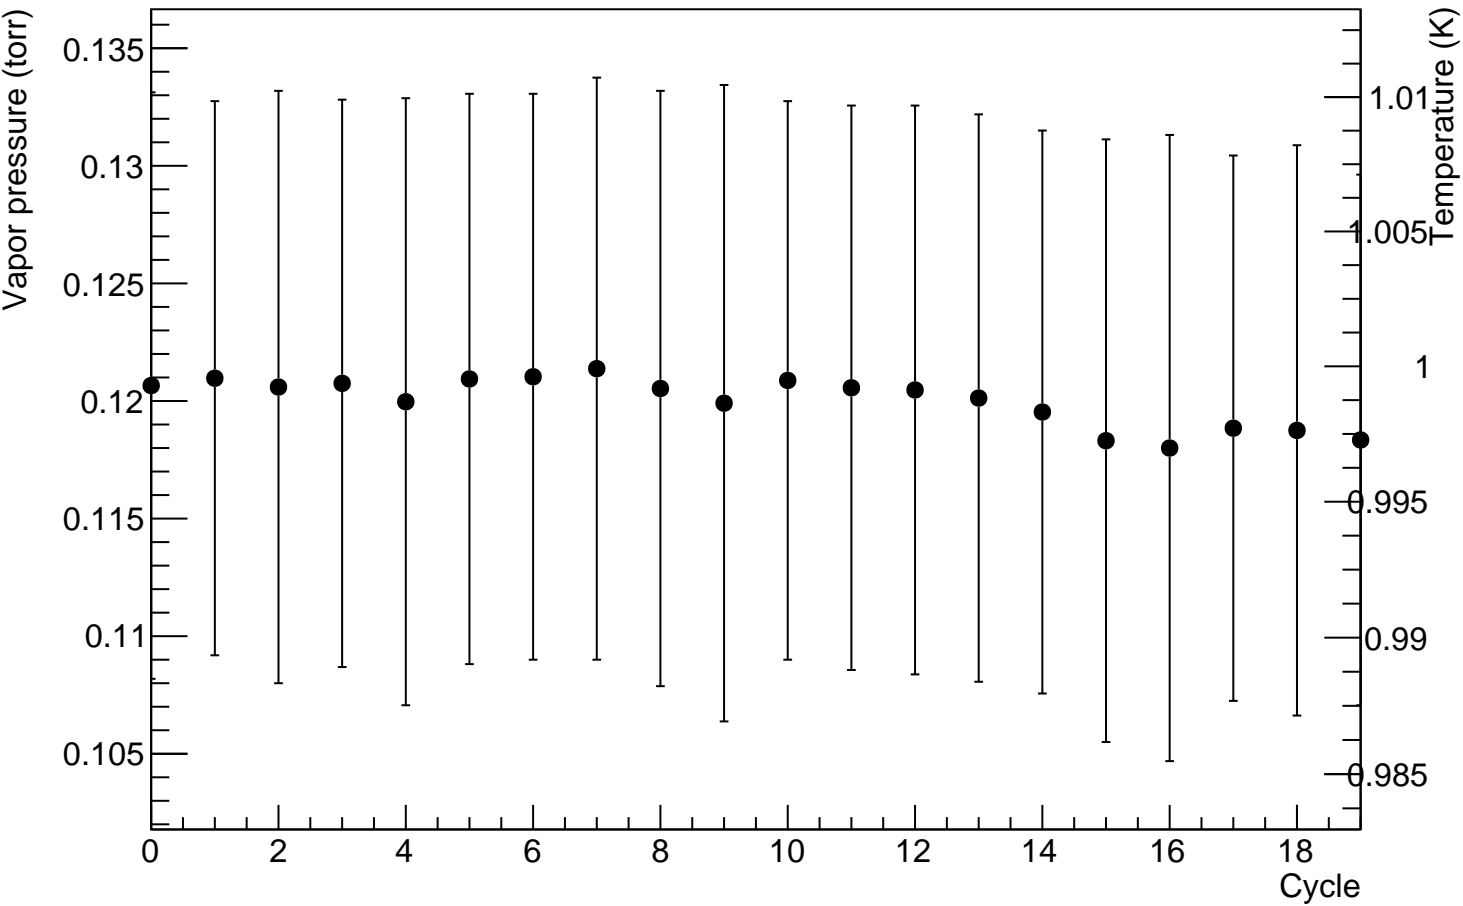

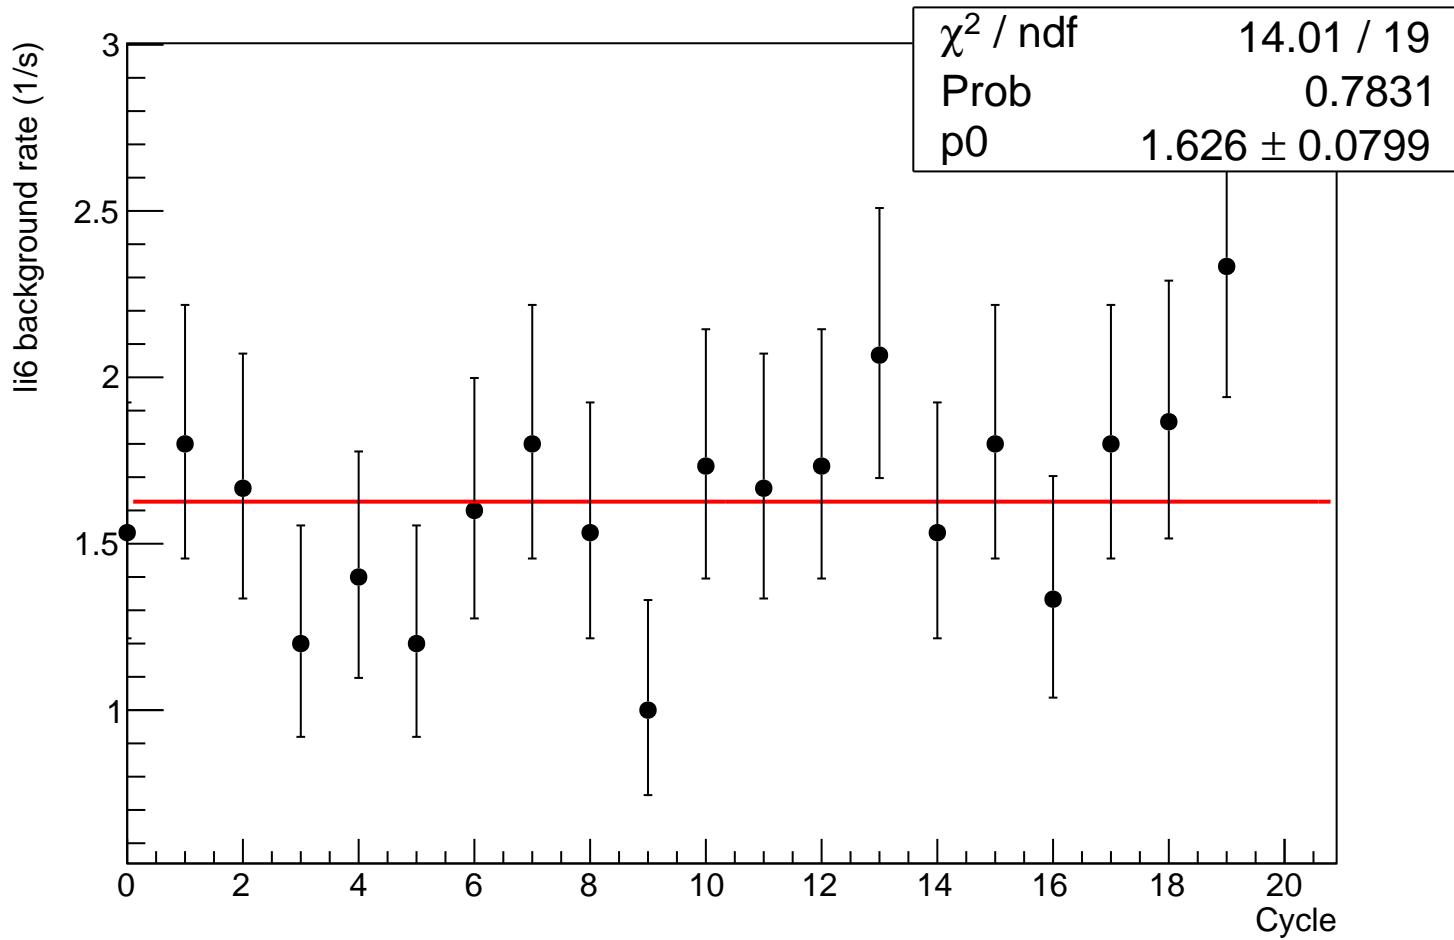


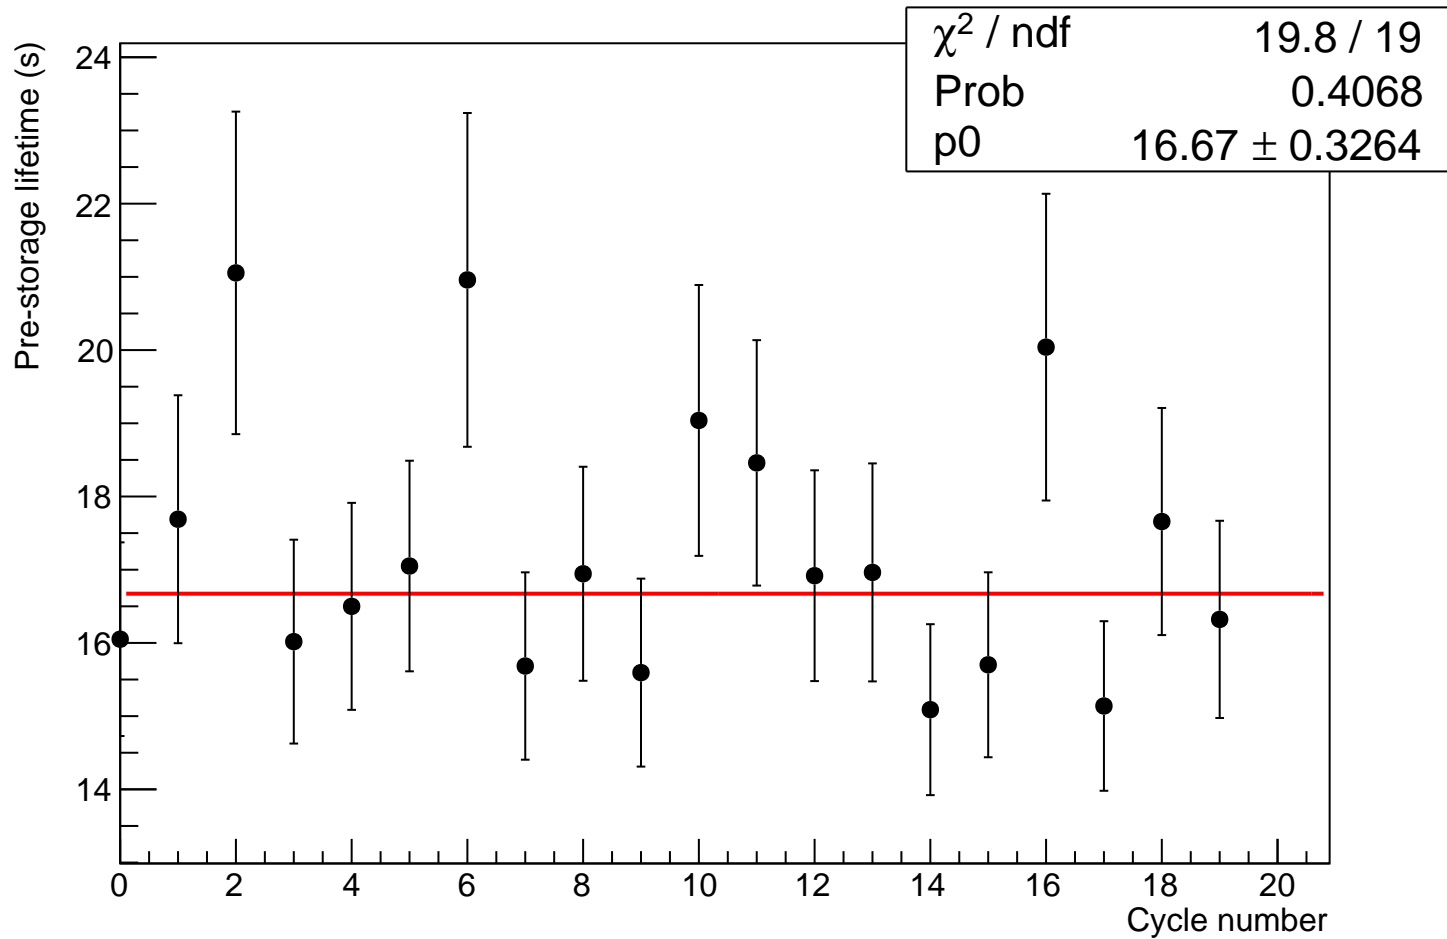


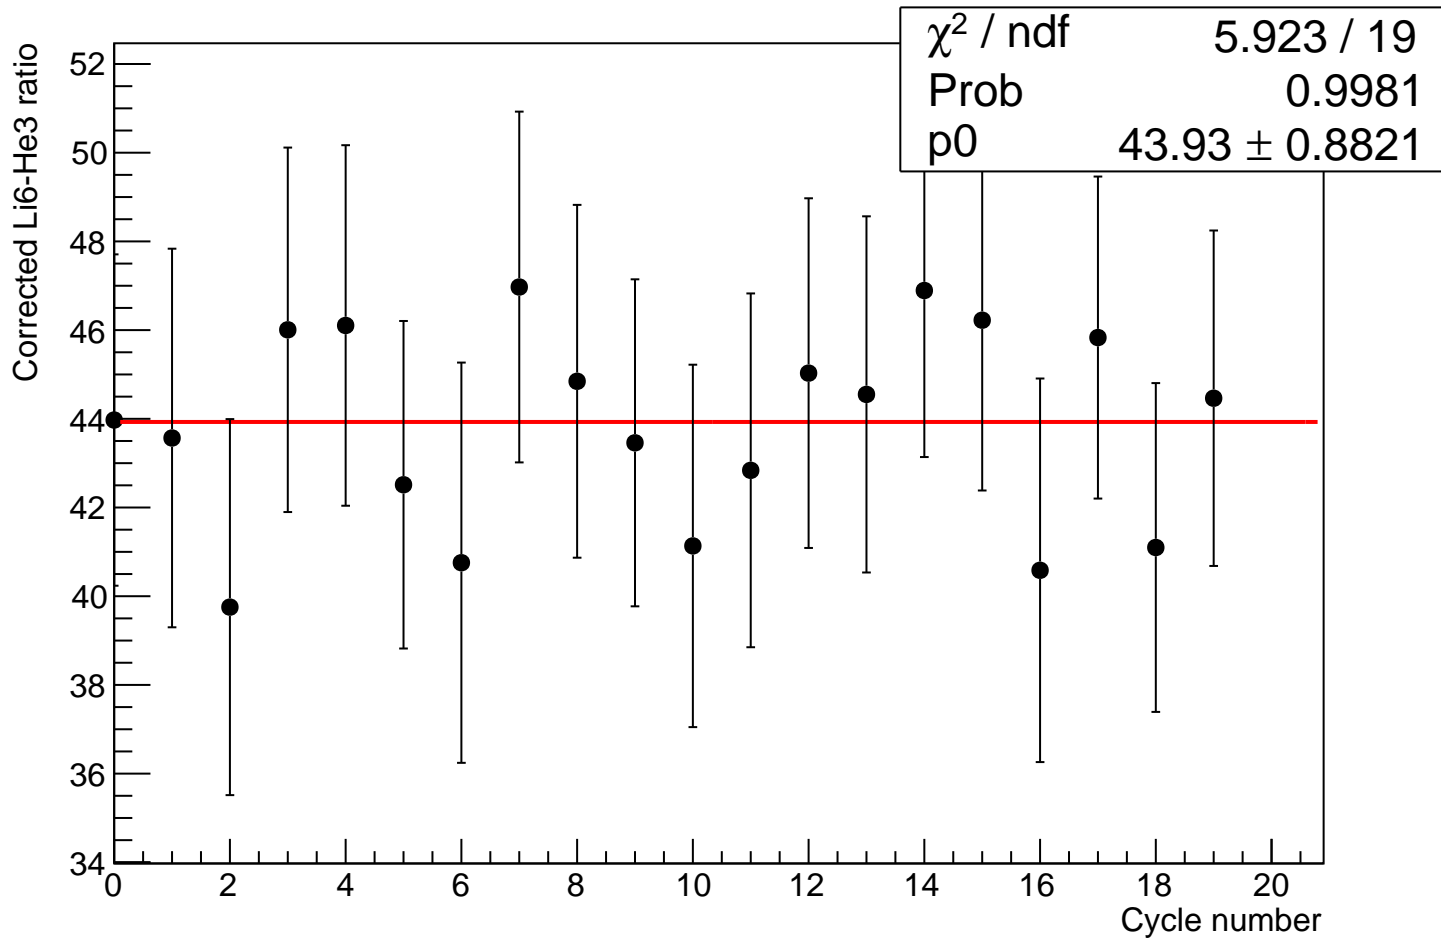

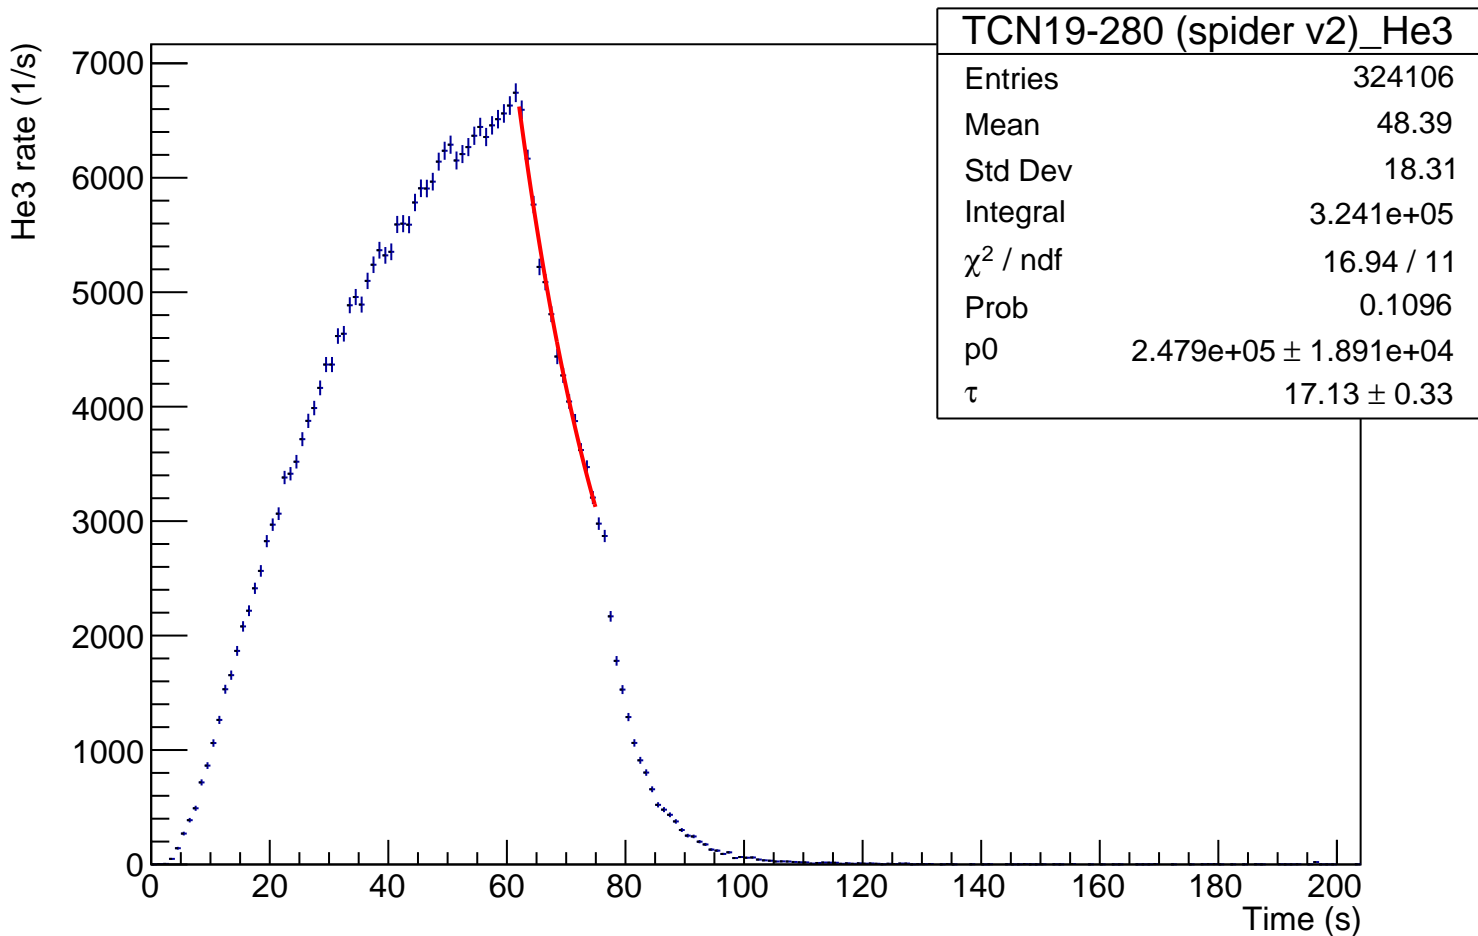


Li6 rate (1/0.05s)

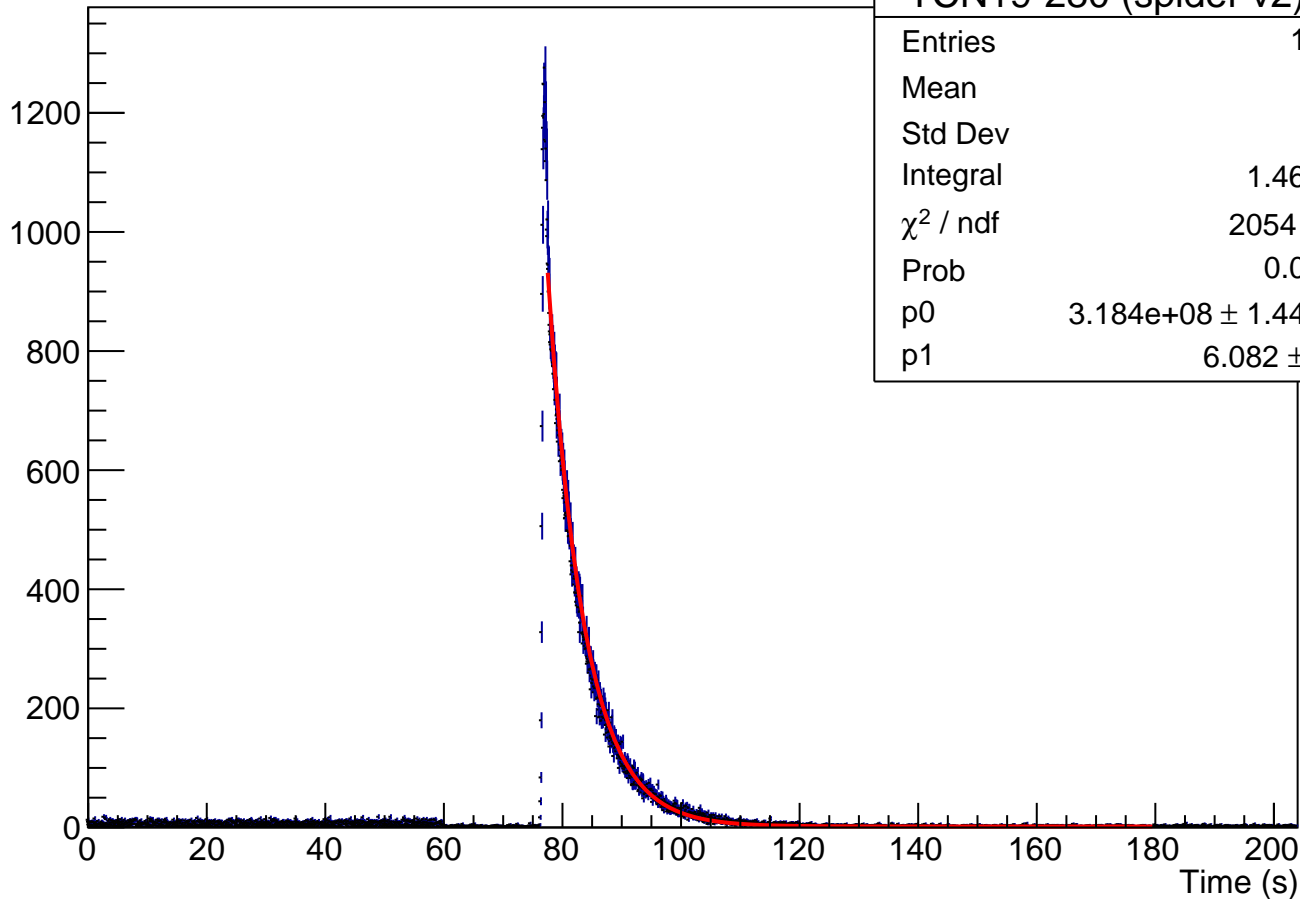

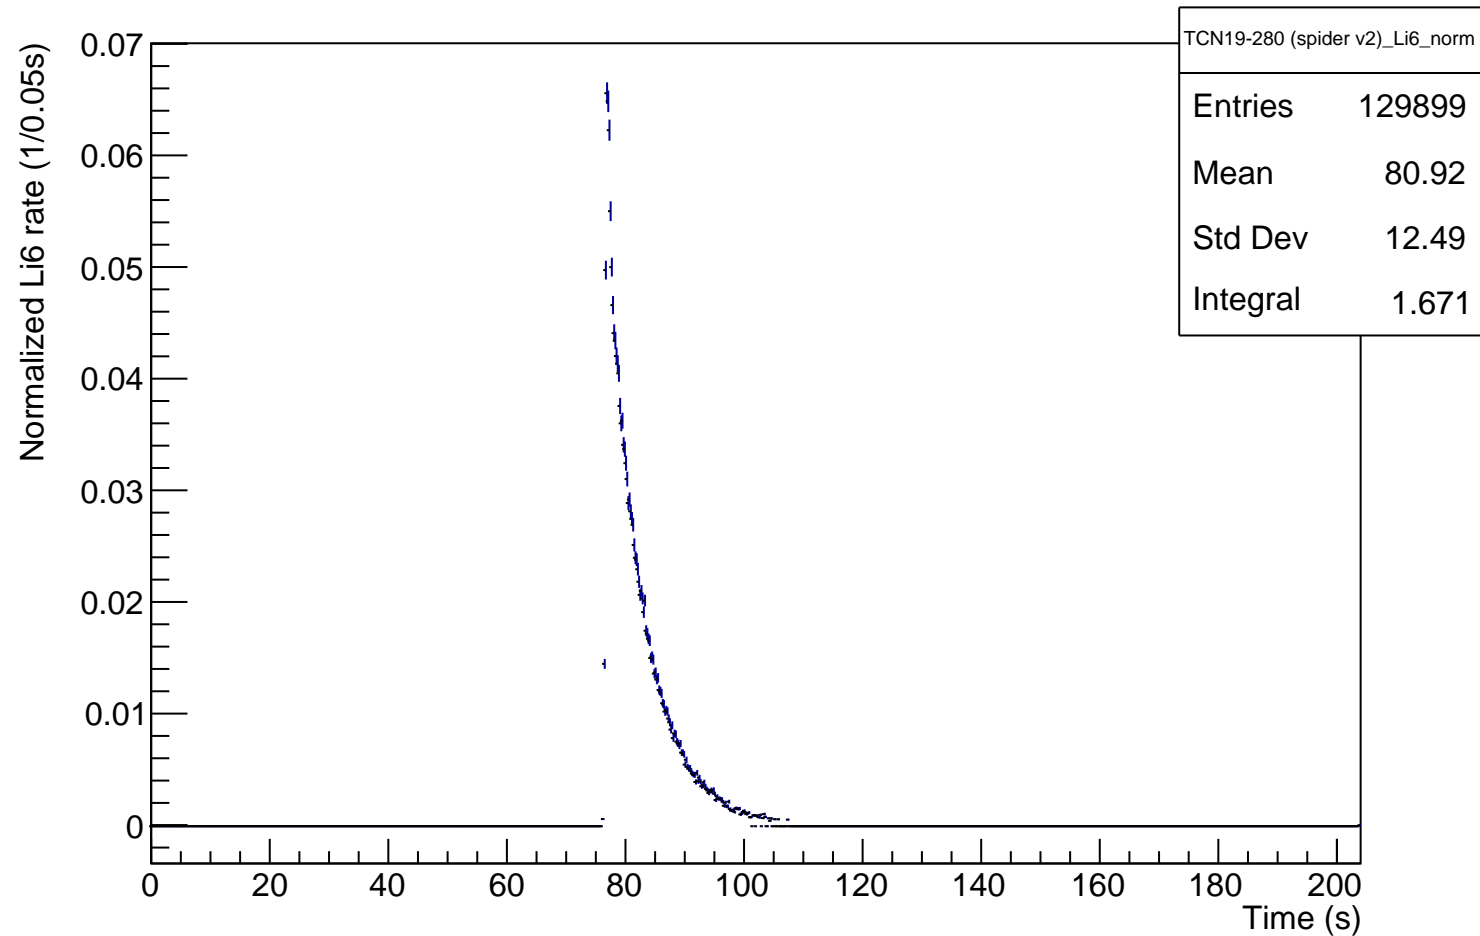



Ratio of cumulated rates

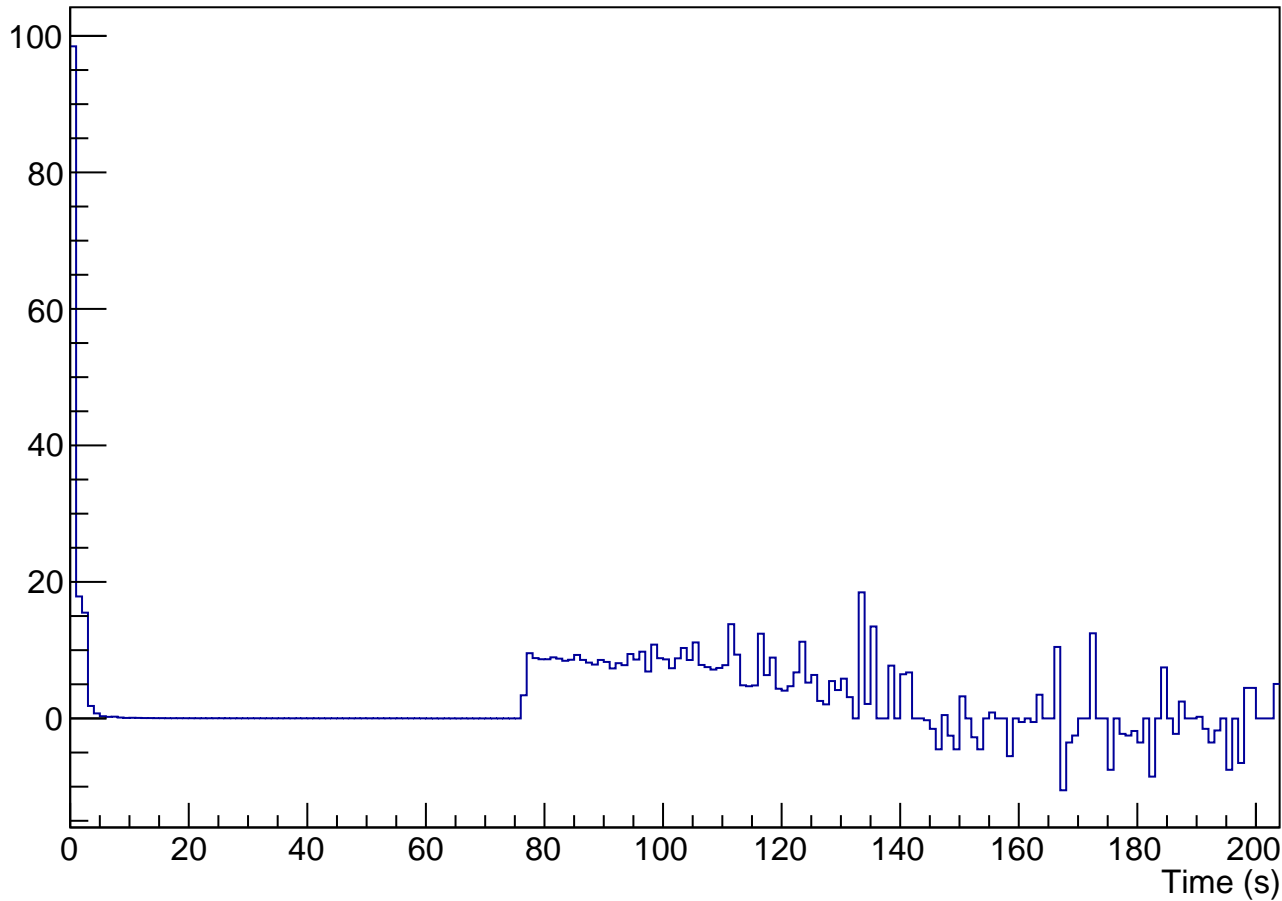

Average rate ratio


TCN19-280 (spider v2)\_ratio

Entries 295

Mean 104.3


Std Dev 19.54

Integral 35.46

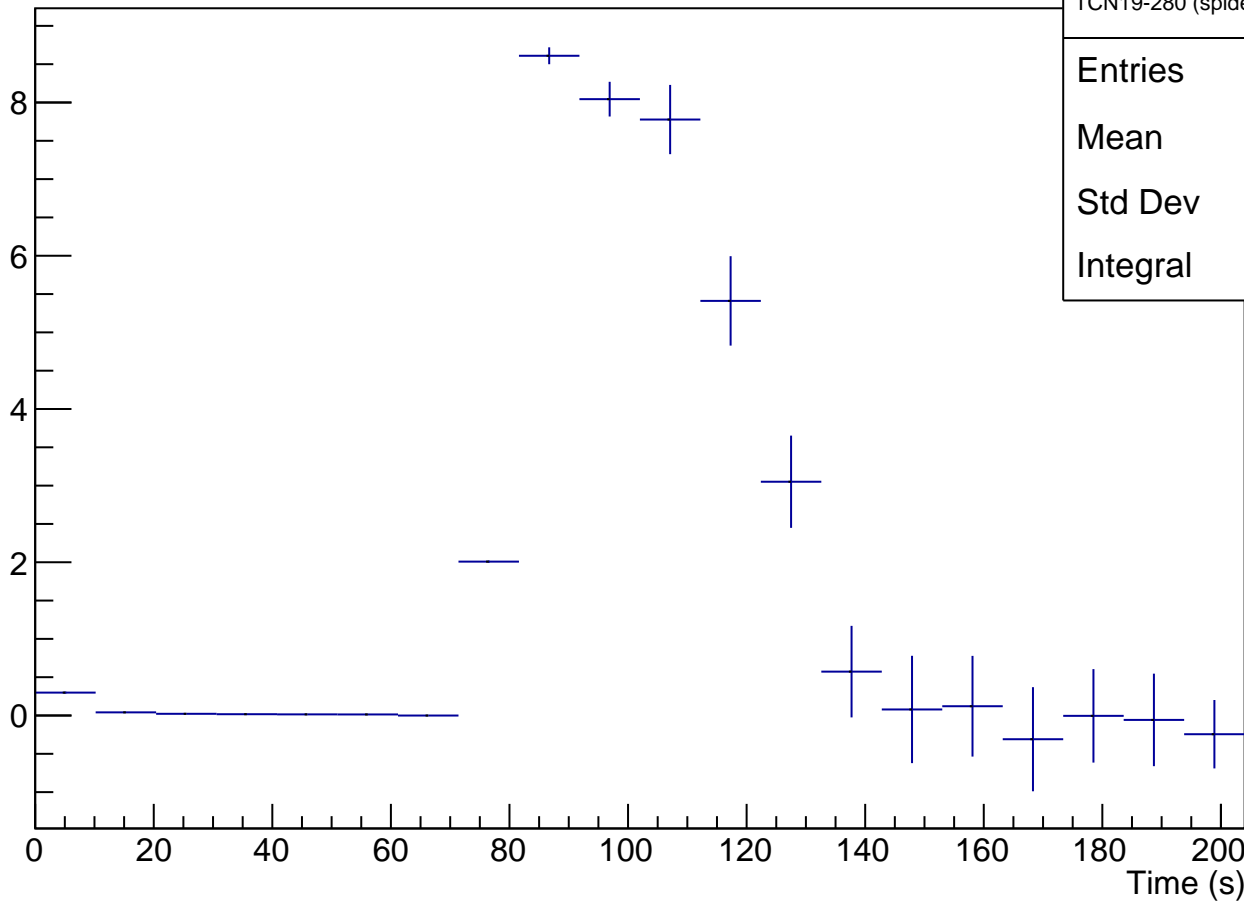

# TCN19-280 (spider v2)

Count

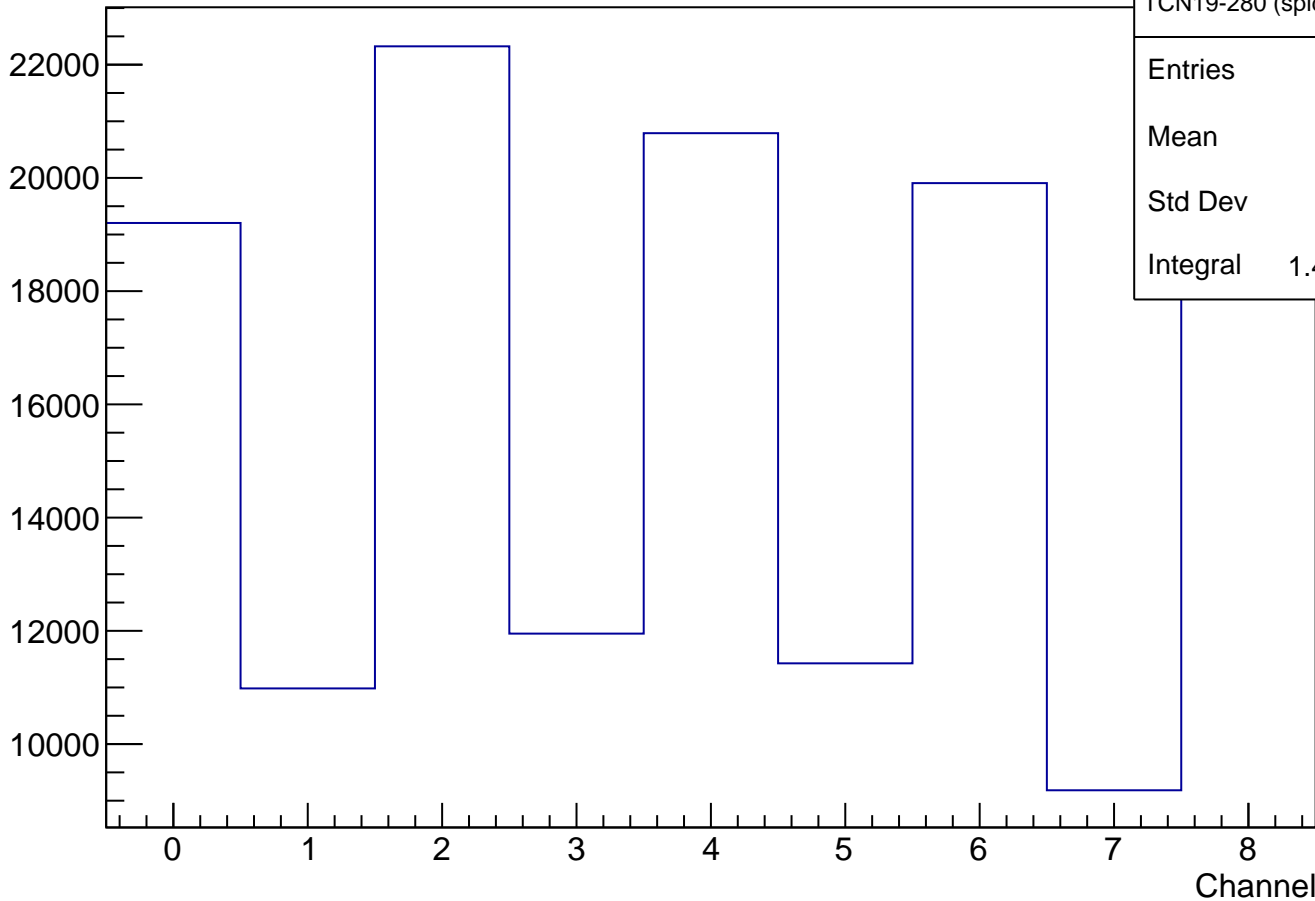

TCN19-280 (spider v2)\_ch

Entries 146516

Mean 3.969

Std Dev 2.629

Integral 1.465e+05

# Li6 window

Frequency

1  
0.8  
0.6  
0.4  
0.2  
0

0 0.5 1 1.5 2 2.5 3 3.5 4 4.5 5

Time after valve opened (s)

li6window

Entries 20

Mean 0

Std Dev 0

Integral 0