




TCN19-280 (spider v3), transmission normalized during prestorage


UCN-count-to-monitor ratio

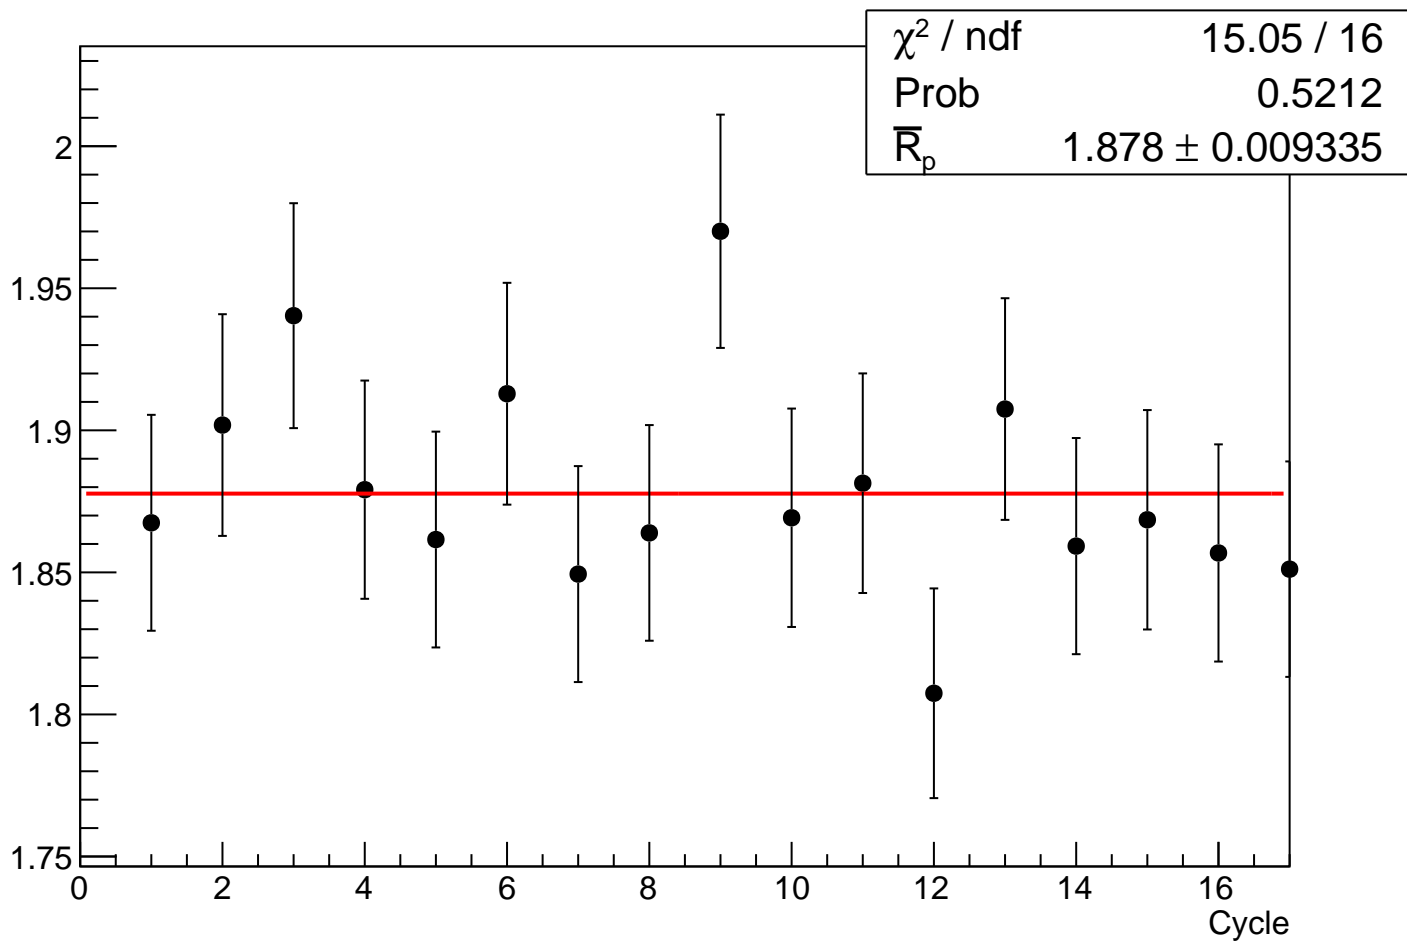



# Graph

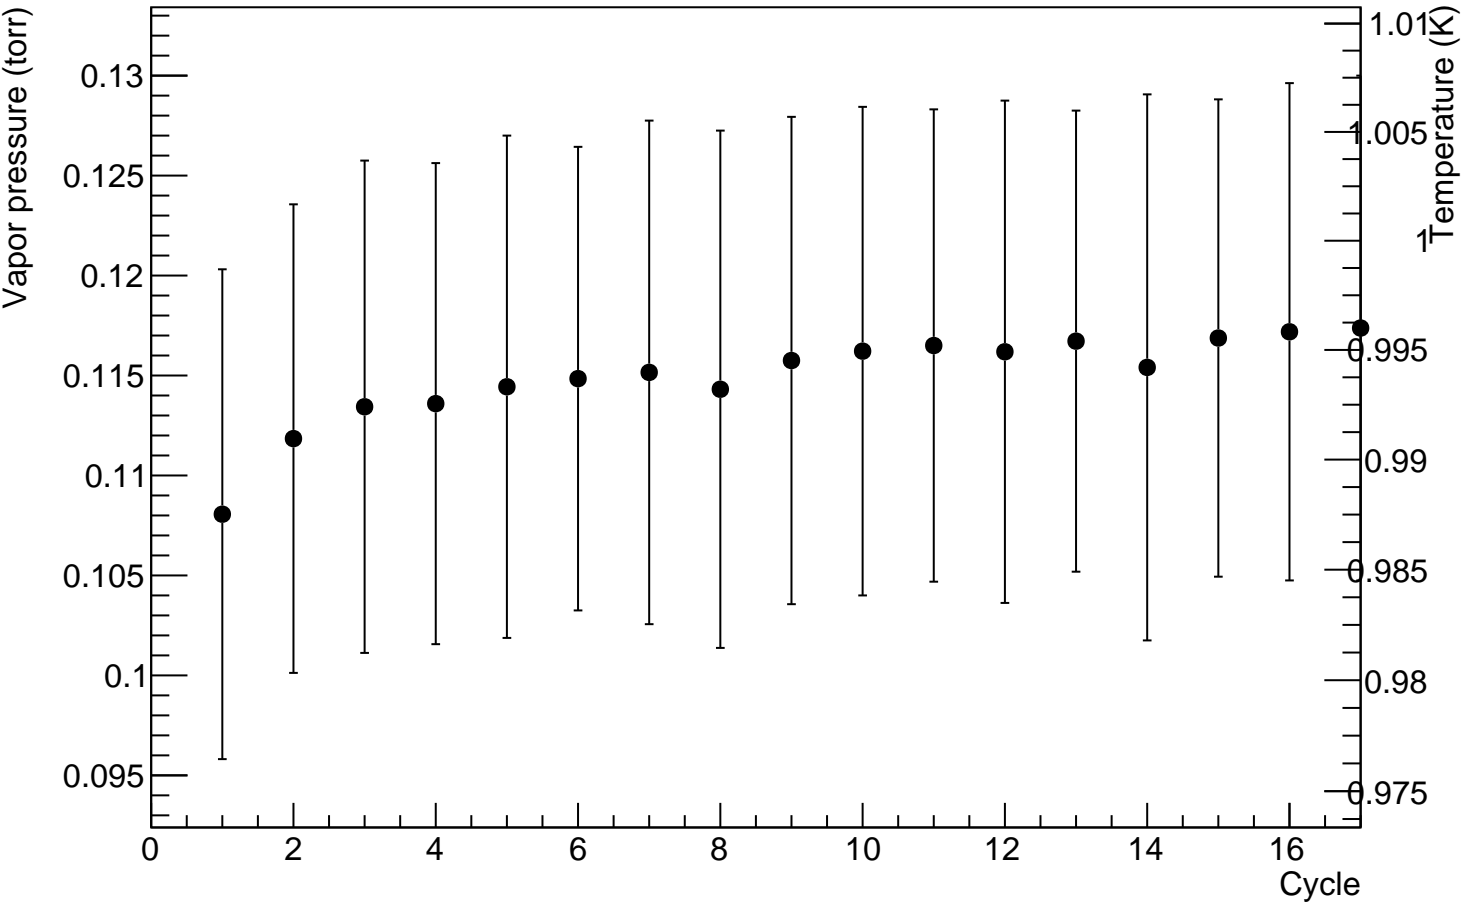

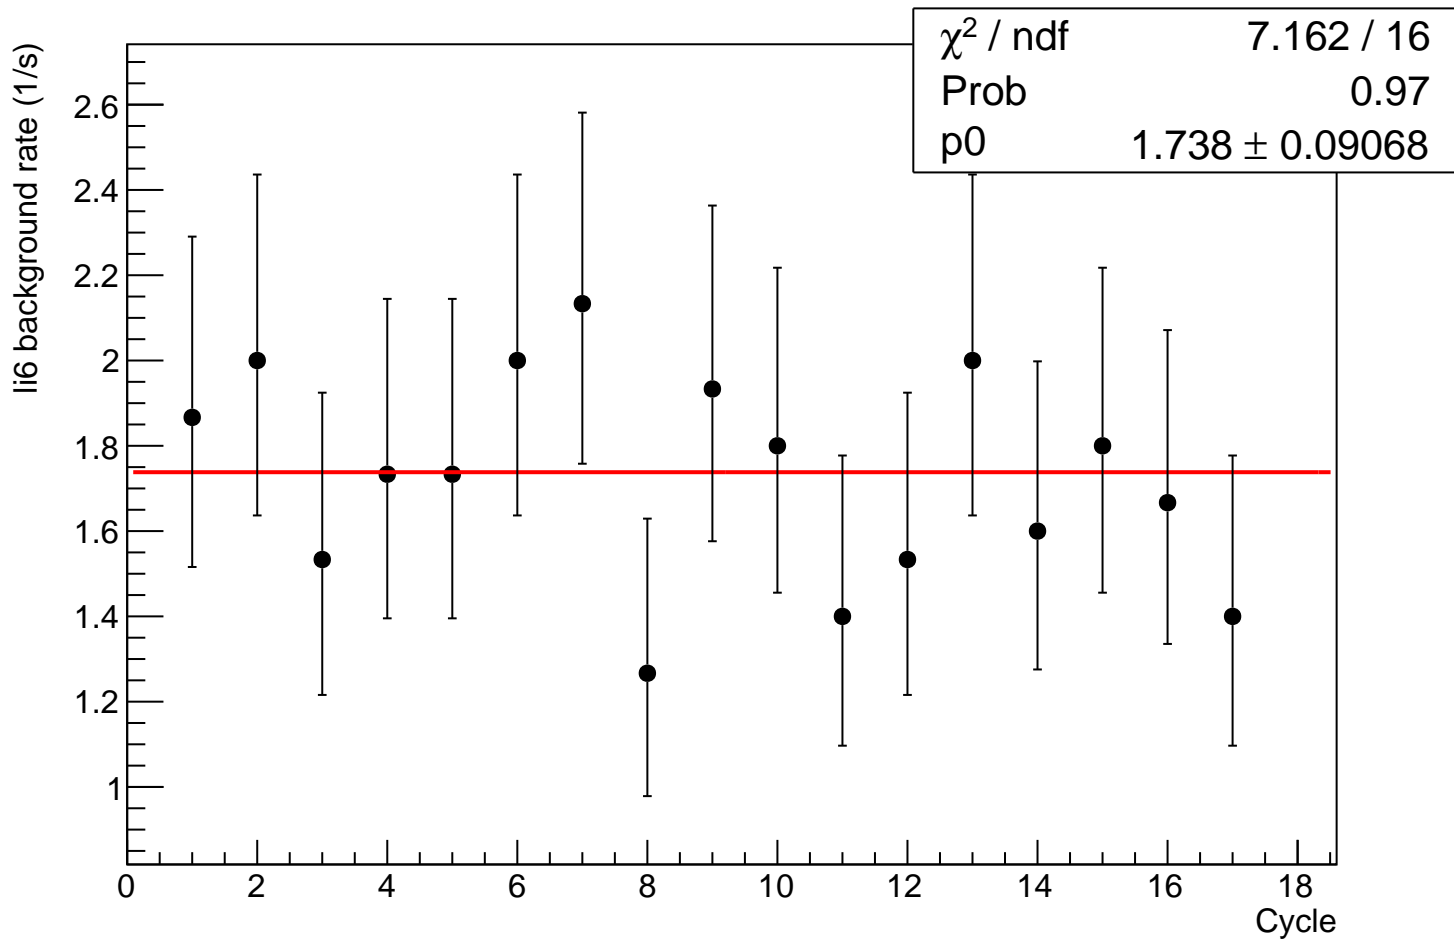


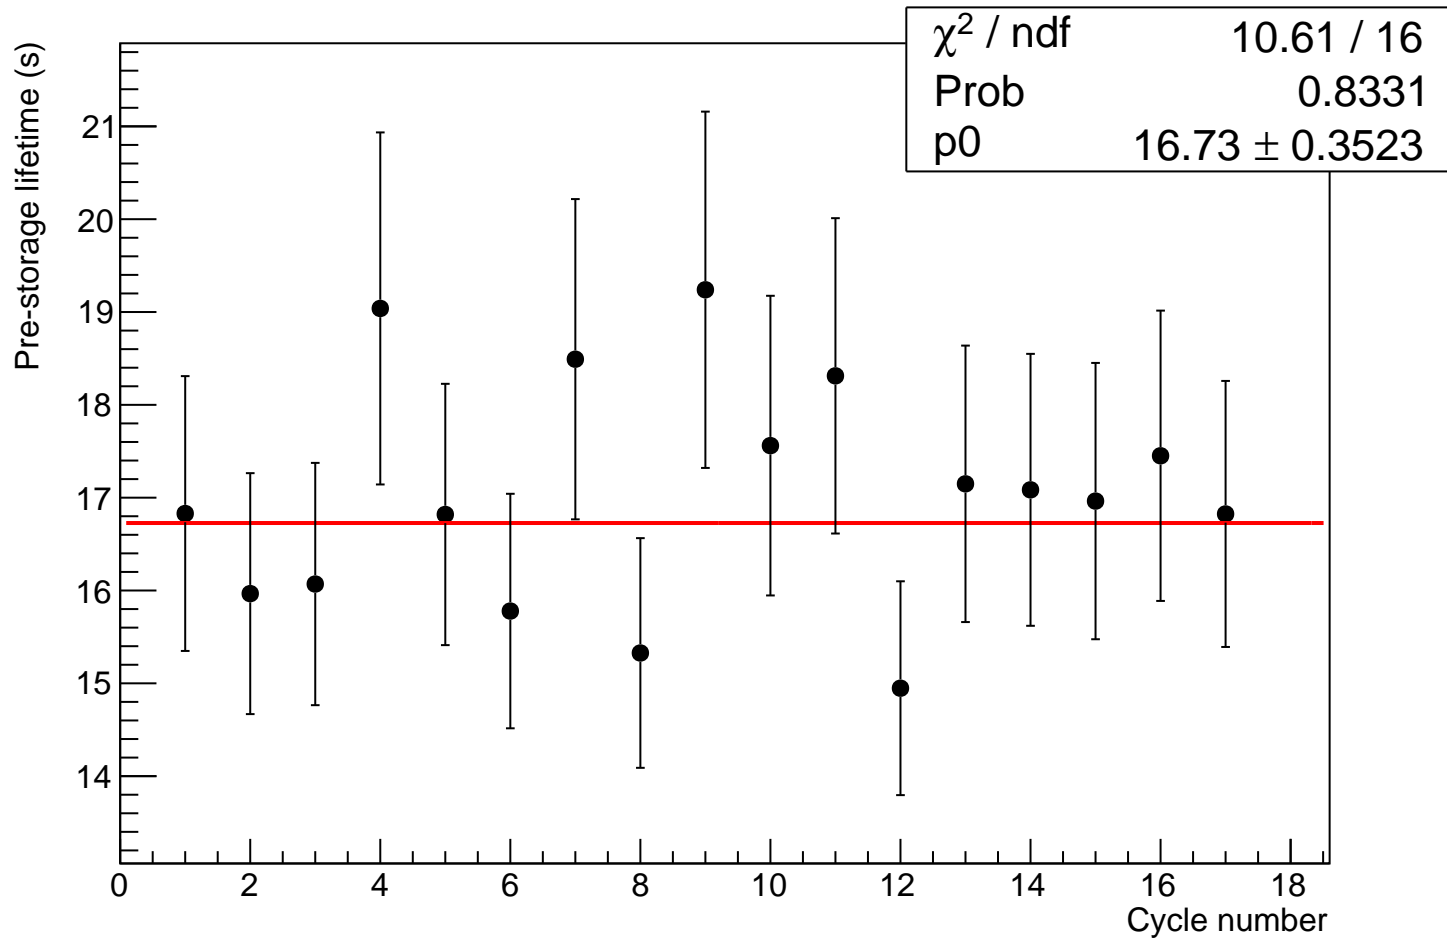

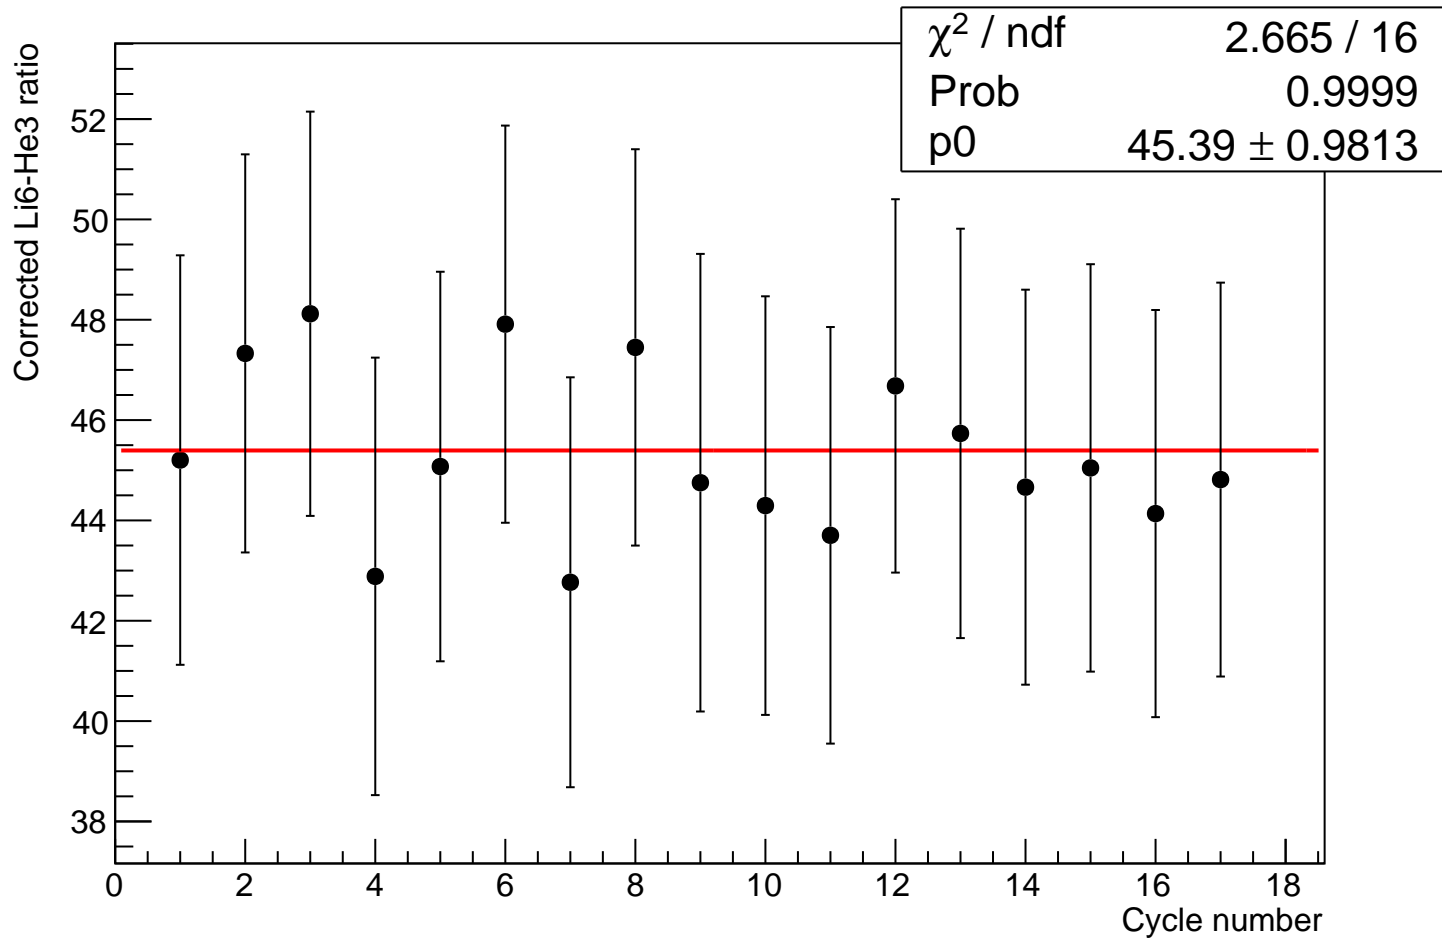

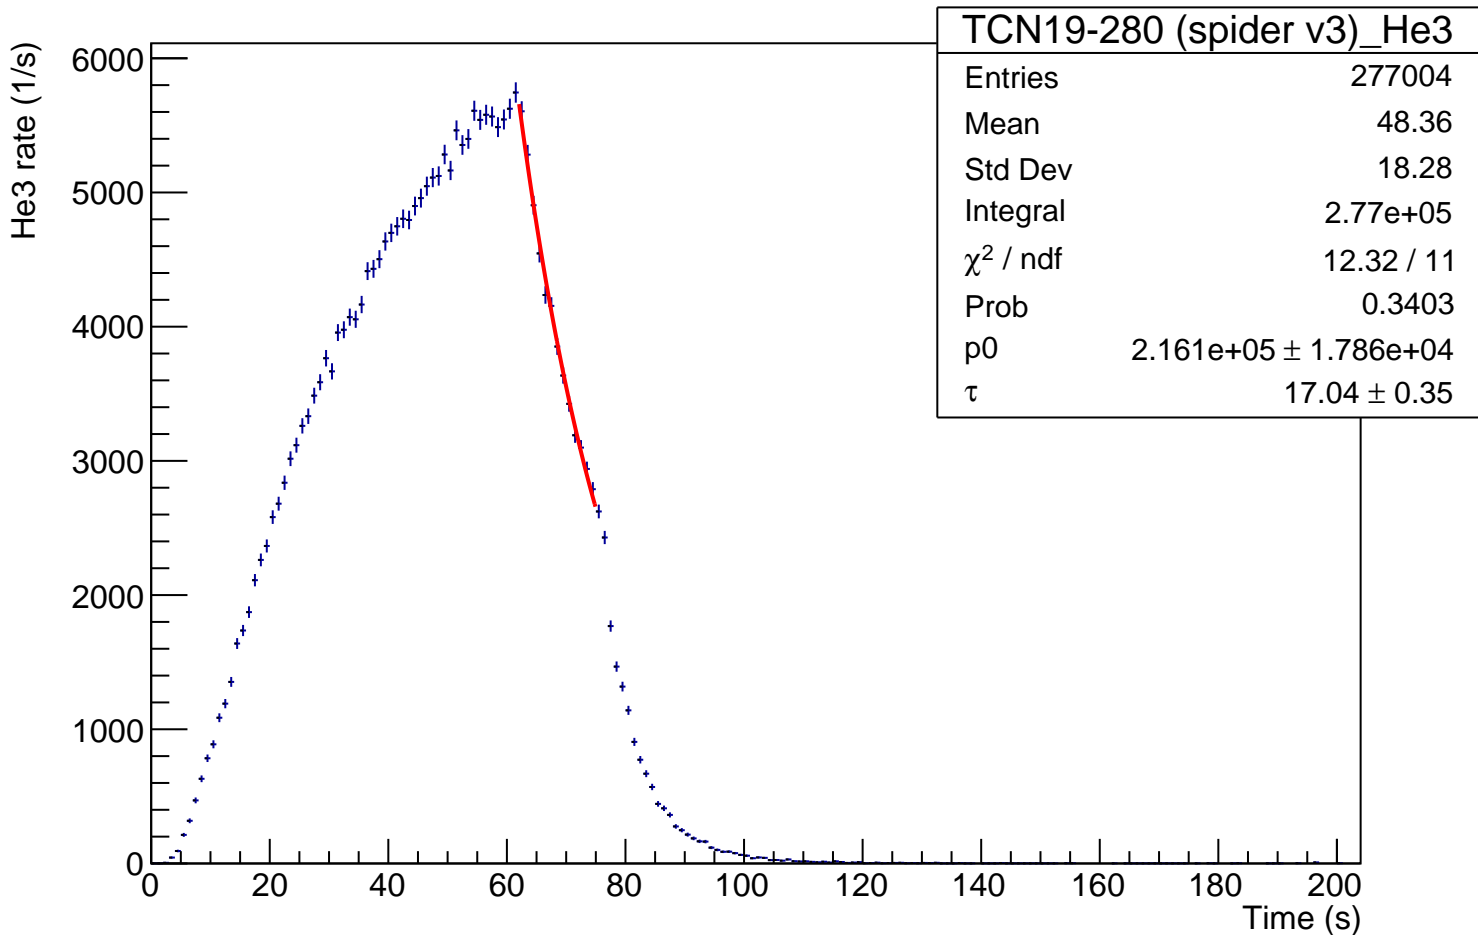


Li6 rate (1/0.05s)

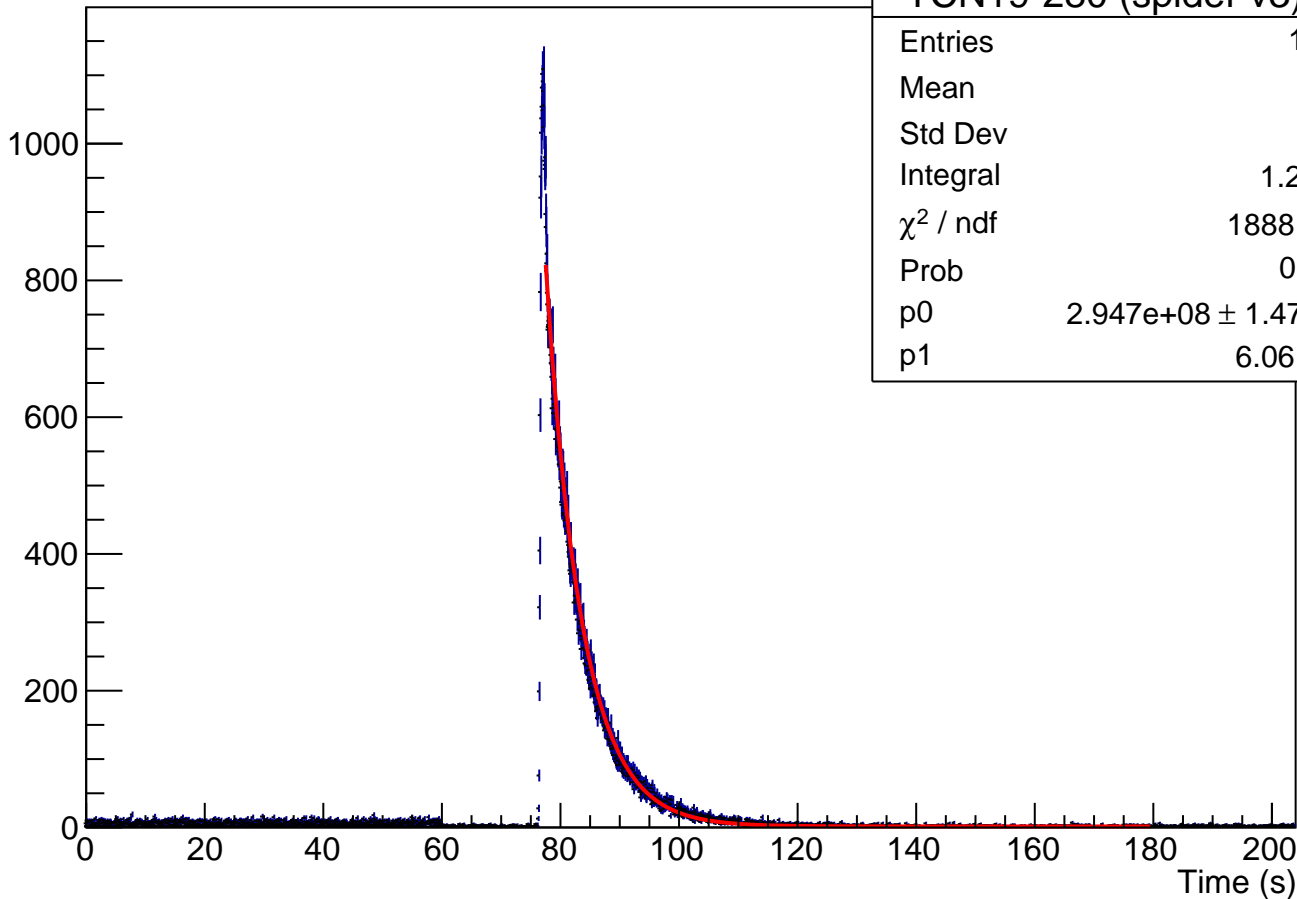

### TCN19-280 (spider v3)\_Li6


Entries	129009
Mean	81.83
Std Dev	18.03
Integral	1.29e+05
$\chi^2$ / ndf	1888 / 1799
Prob	0.07037
p0	$2.947\text{e}+08 \pm 1.474\text{e}+07$
p1	$6.06 \pm 0.02$

Normalized Li6 rate (1/0.05s)

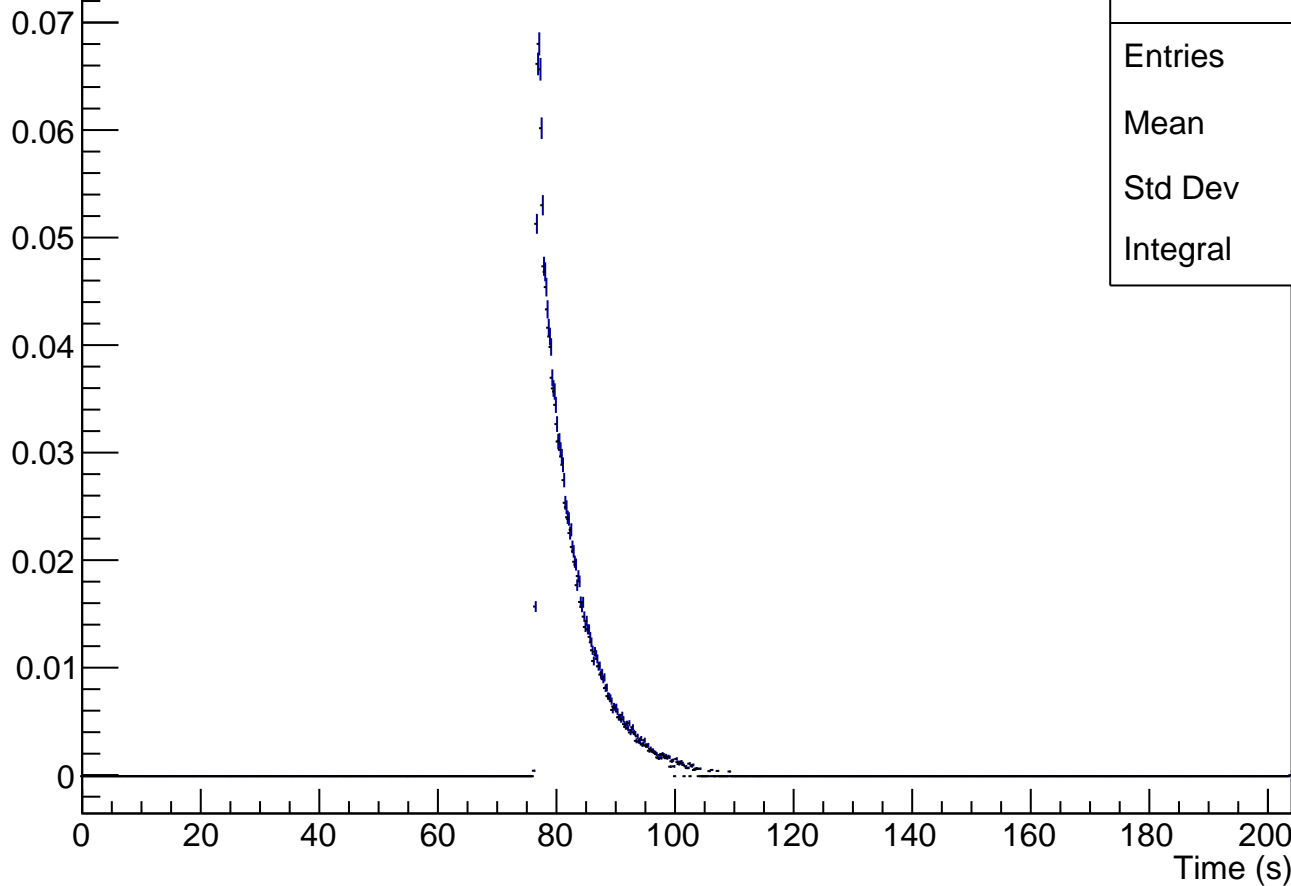



Ratio of cumulated rates

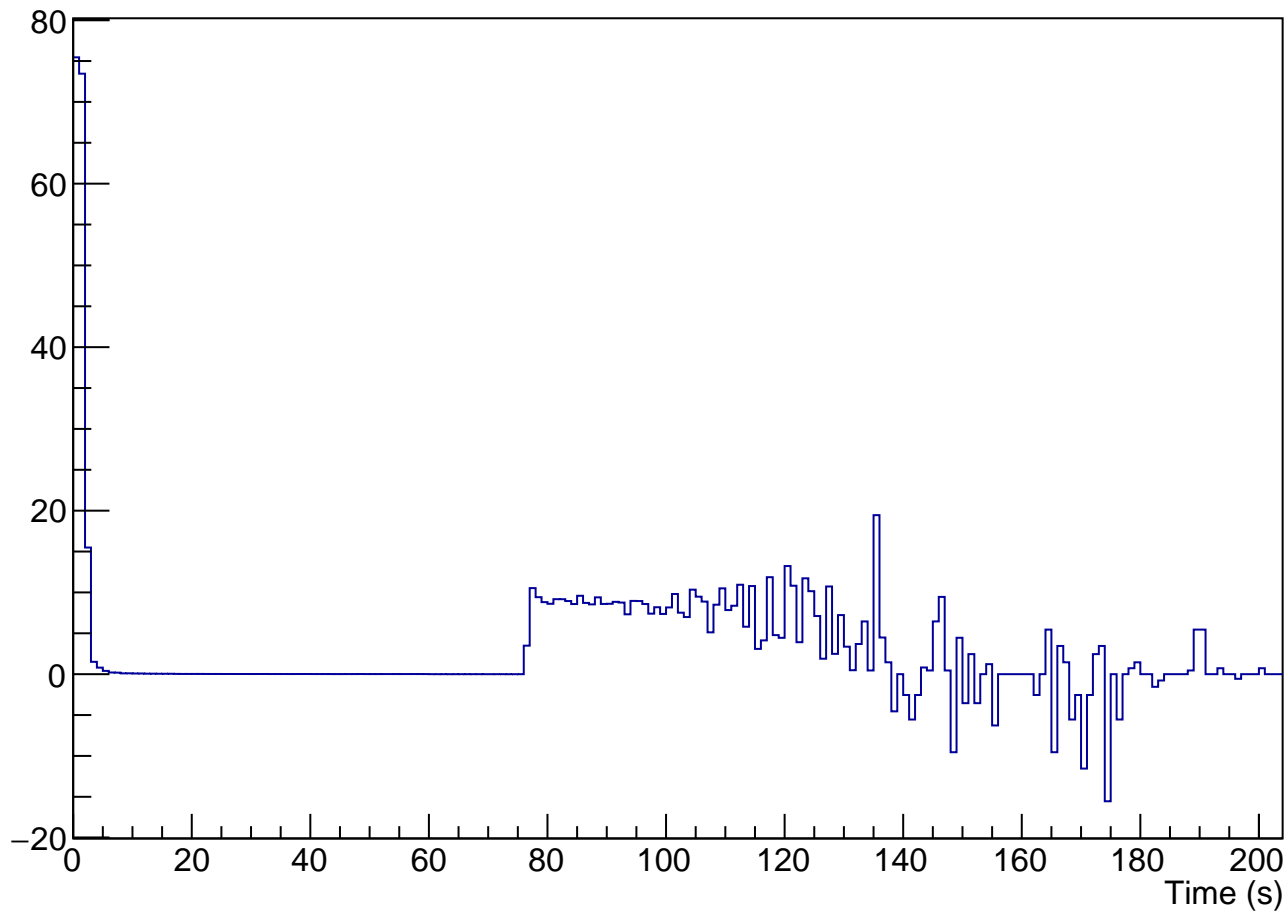

Average rate ratio


TCN19-280 (spider v3)\_ratio

Entries 227


Mean 98.14

Std Dev 7.542

Integral 34.55

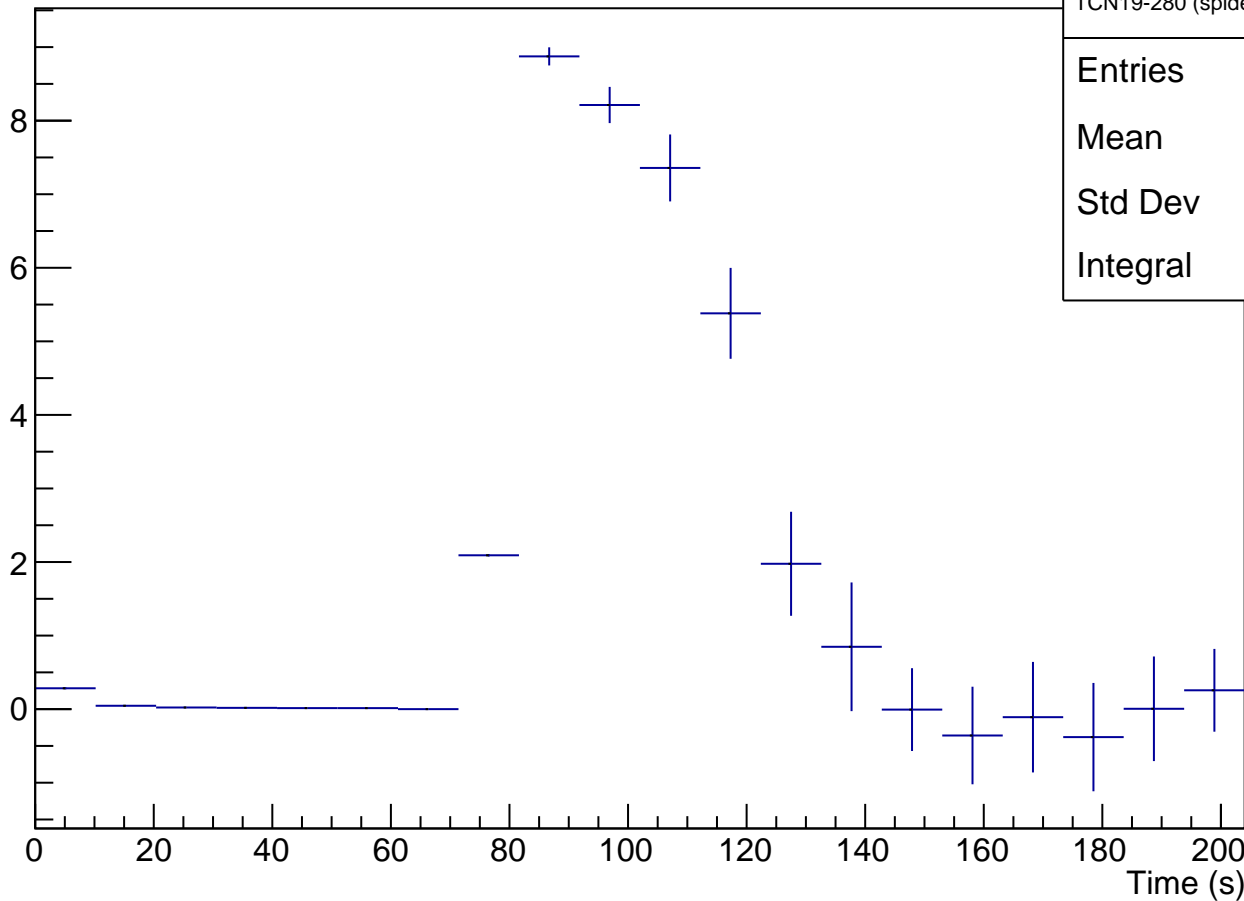

# TCN19-280 (spider v3)

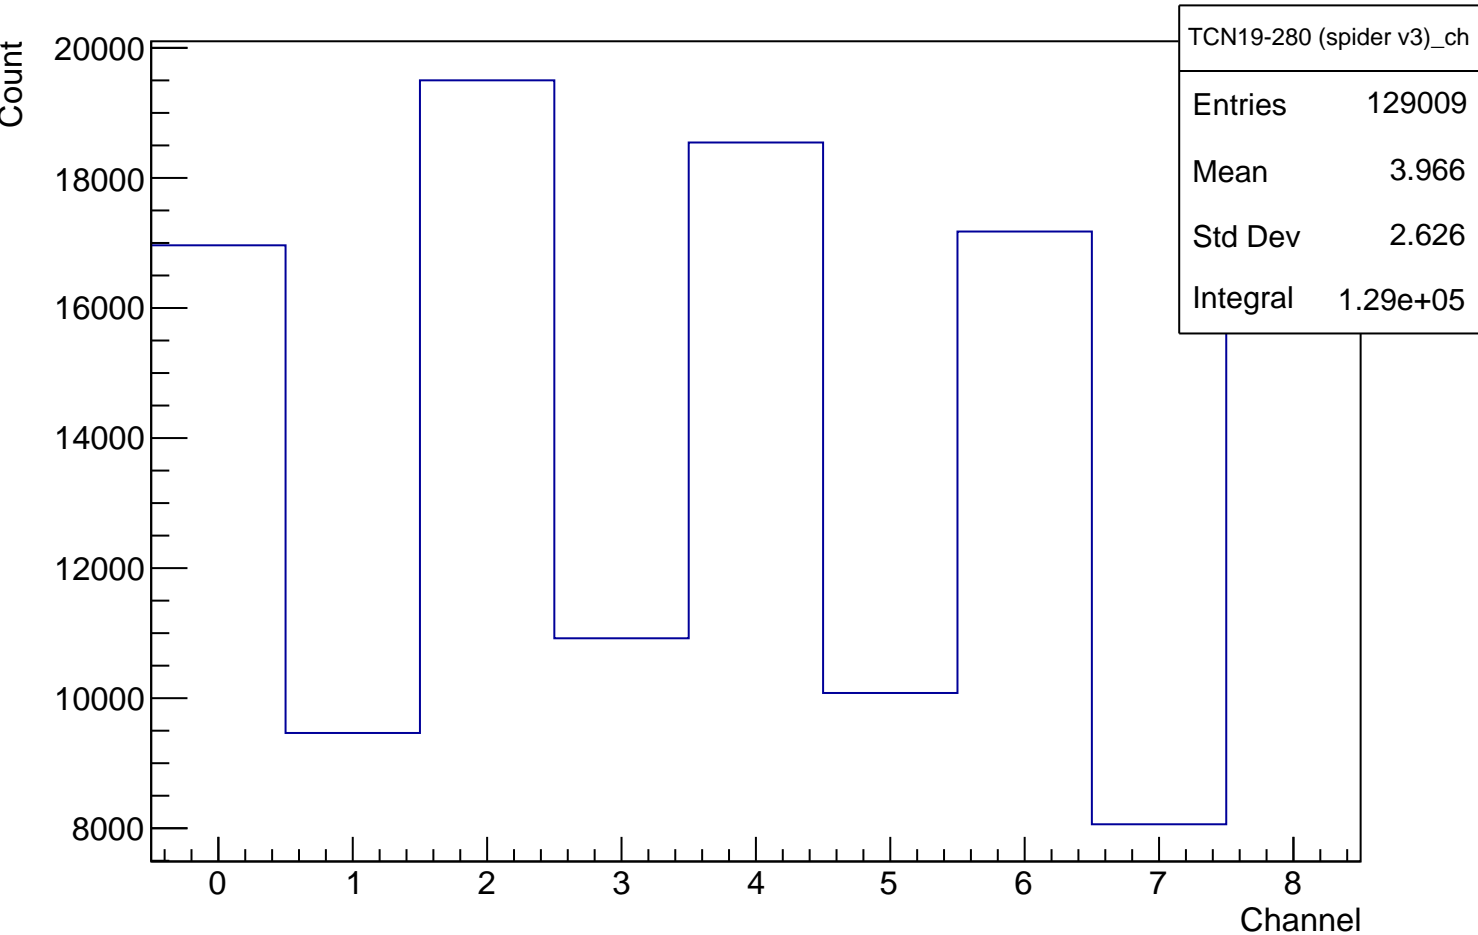

# Li6 window

Frequency

1  
0.8  
0.6  
0.4  
0.2  
0

0 0.5 1 1.5 2 2.5 3 3.5 4 4.5 5

Time after valve opened (s)

li6window

Entries 17

Mean 0

Std Dev 0

Integral 0