





TCN19-193 (DRex Cu, 10cm), transmission normalized during prestorage

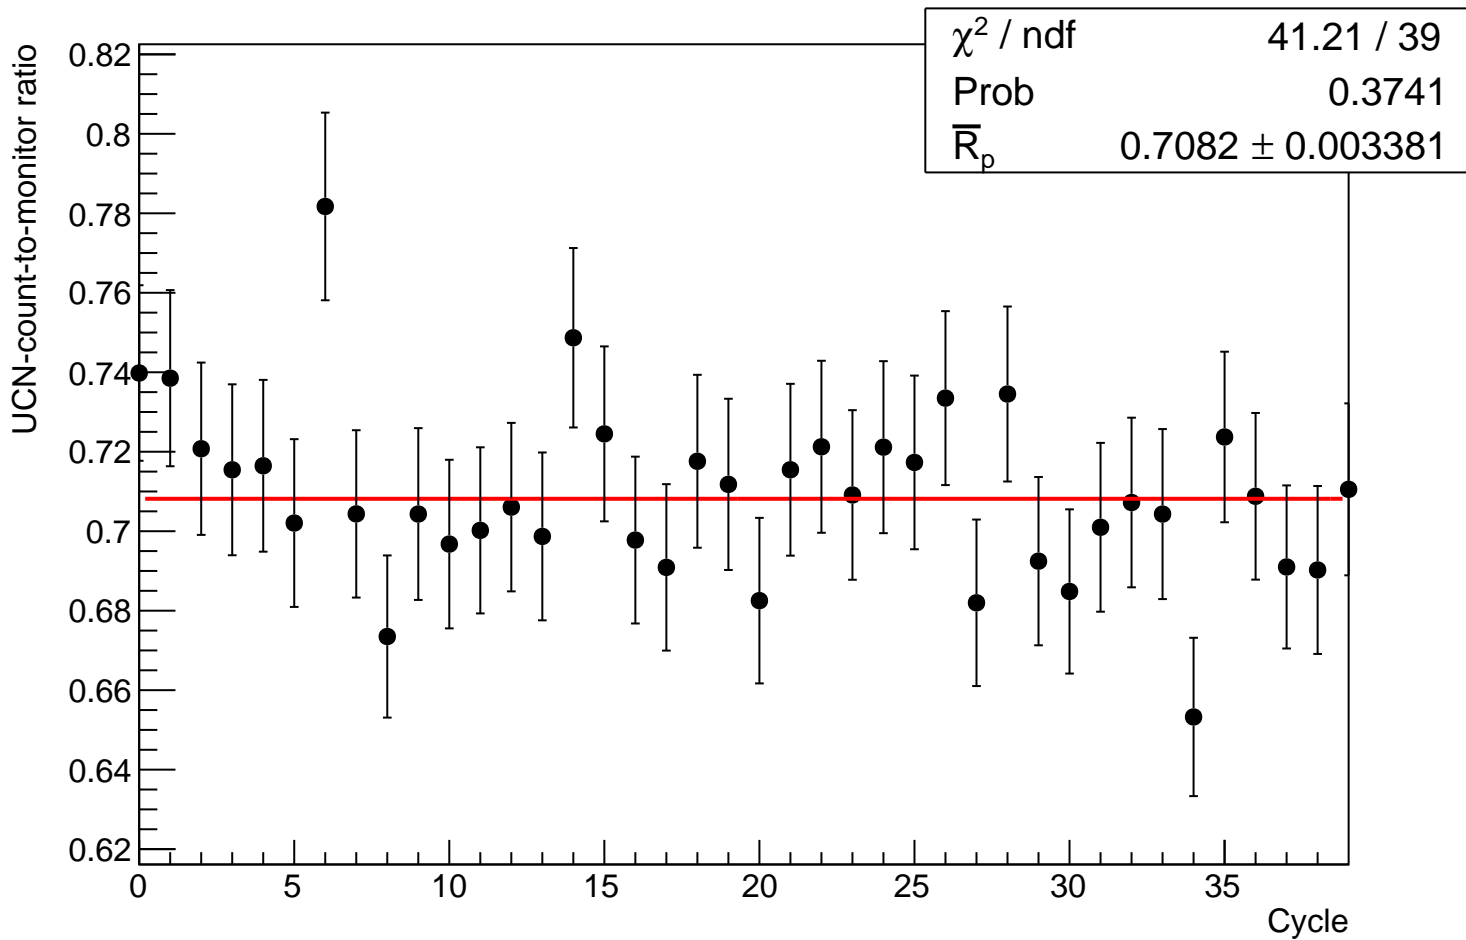



# Graph

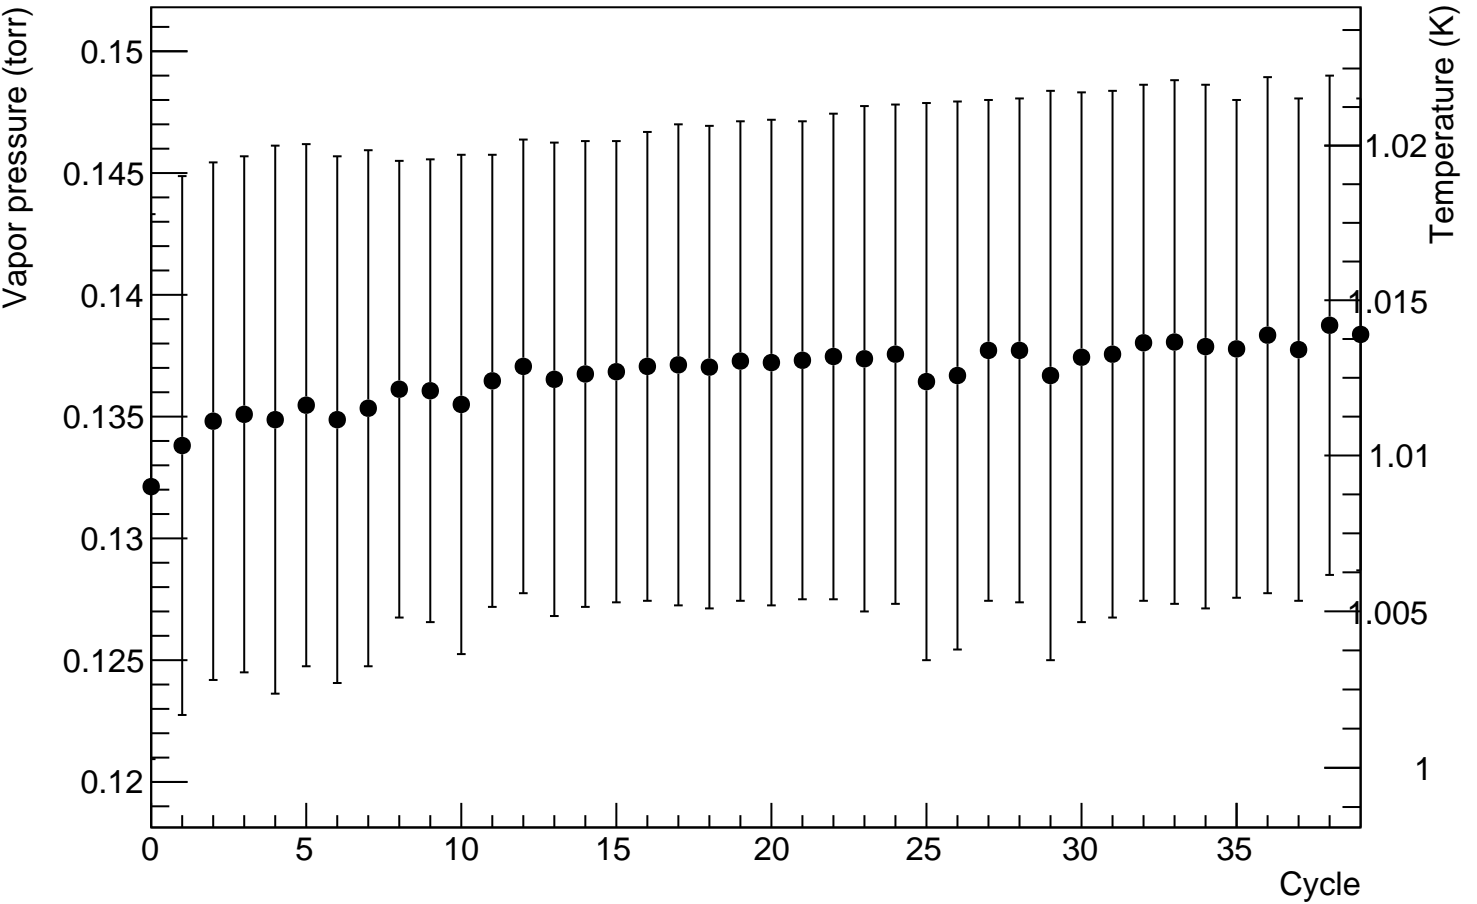


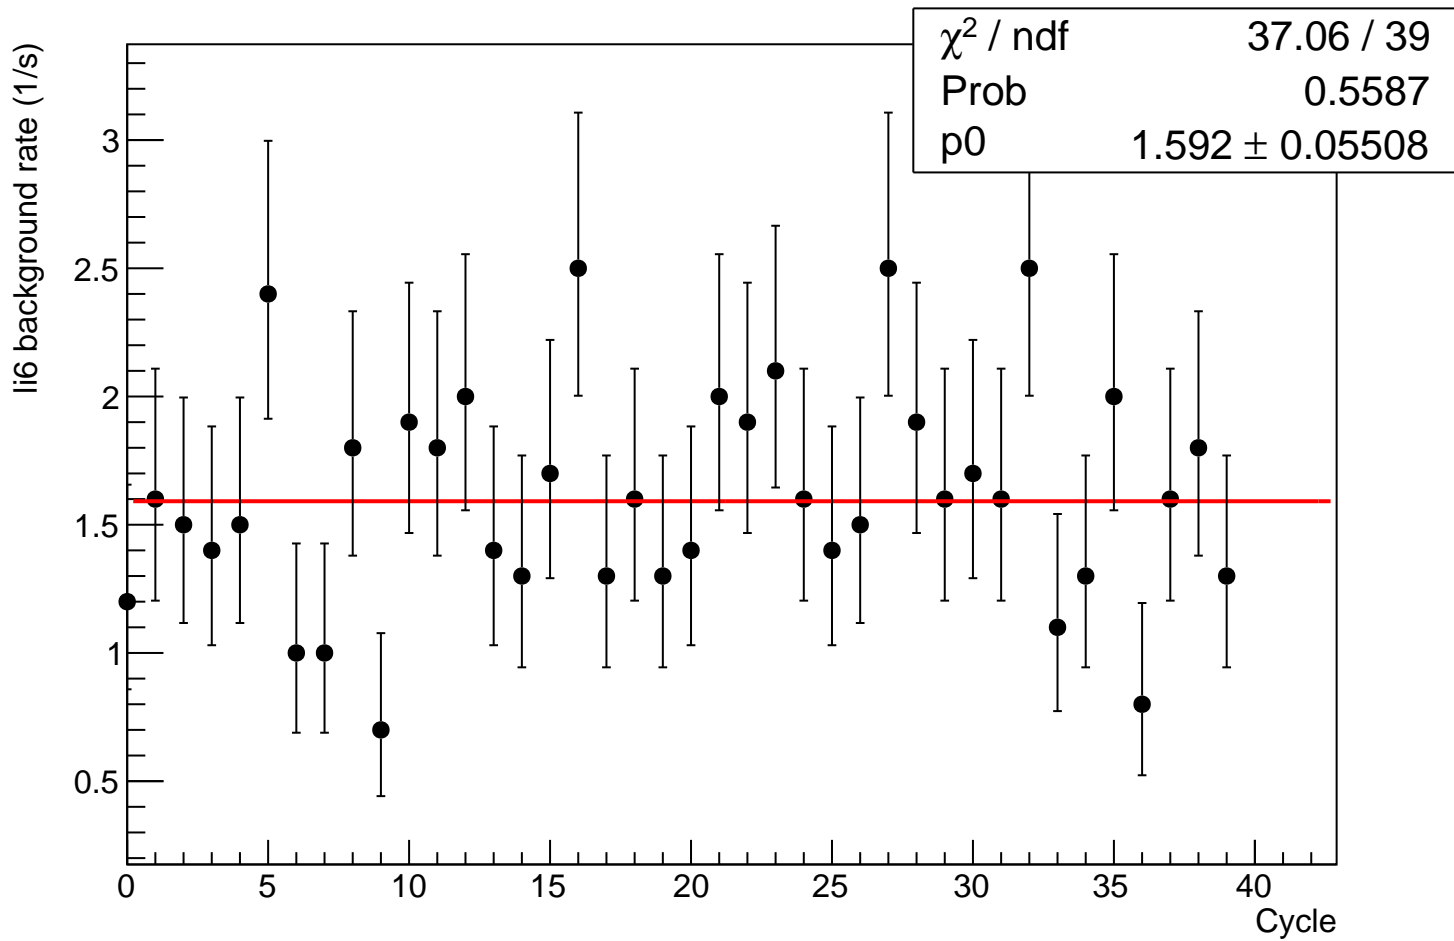

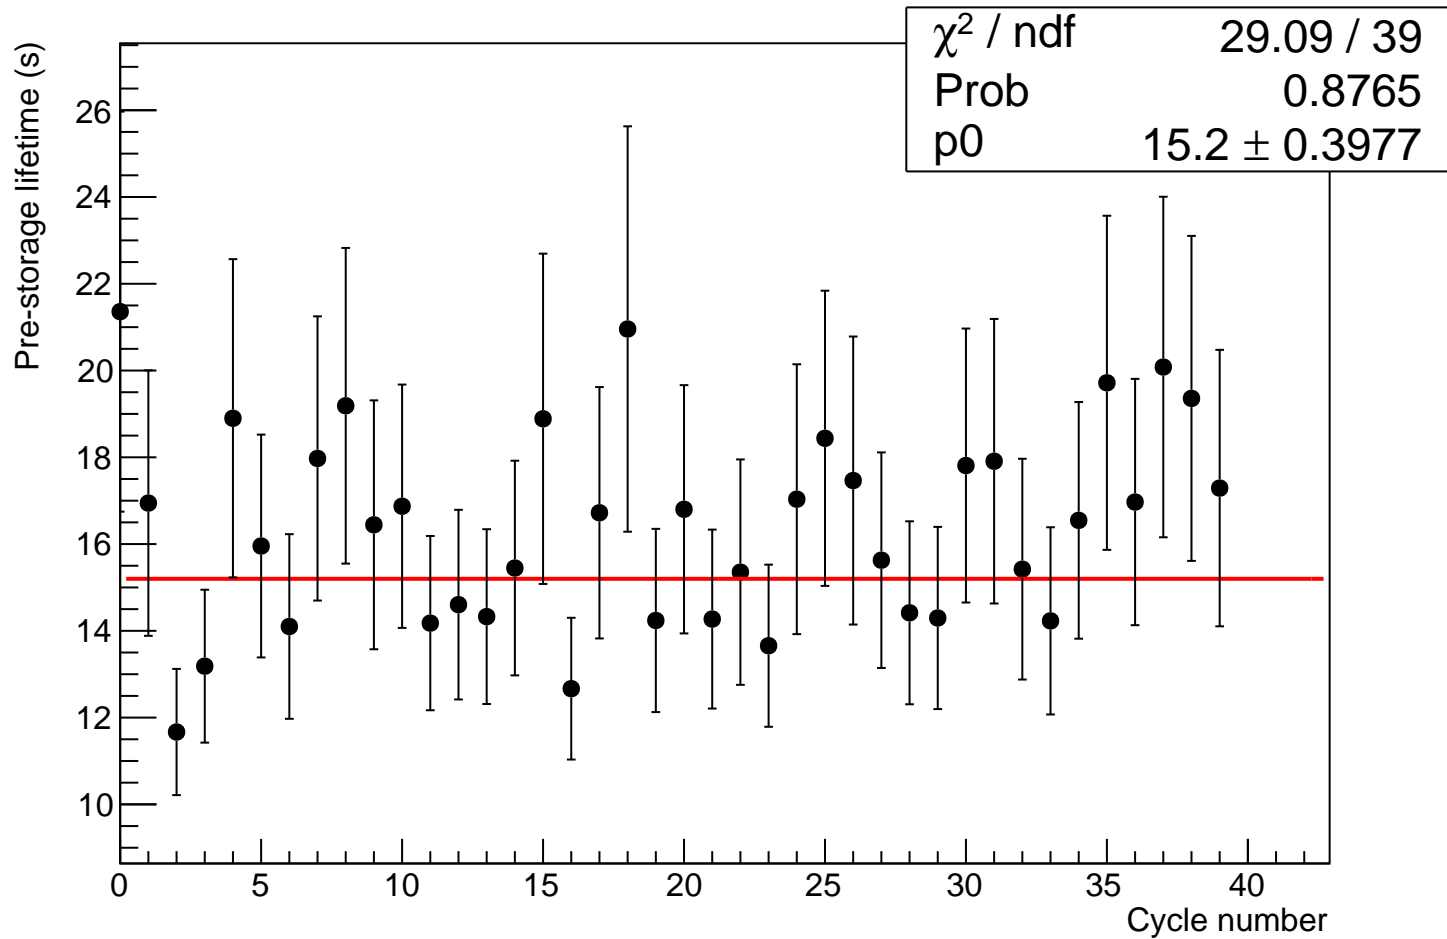


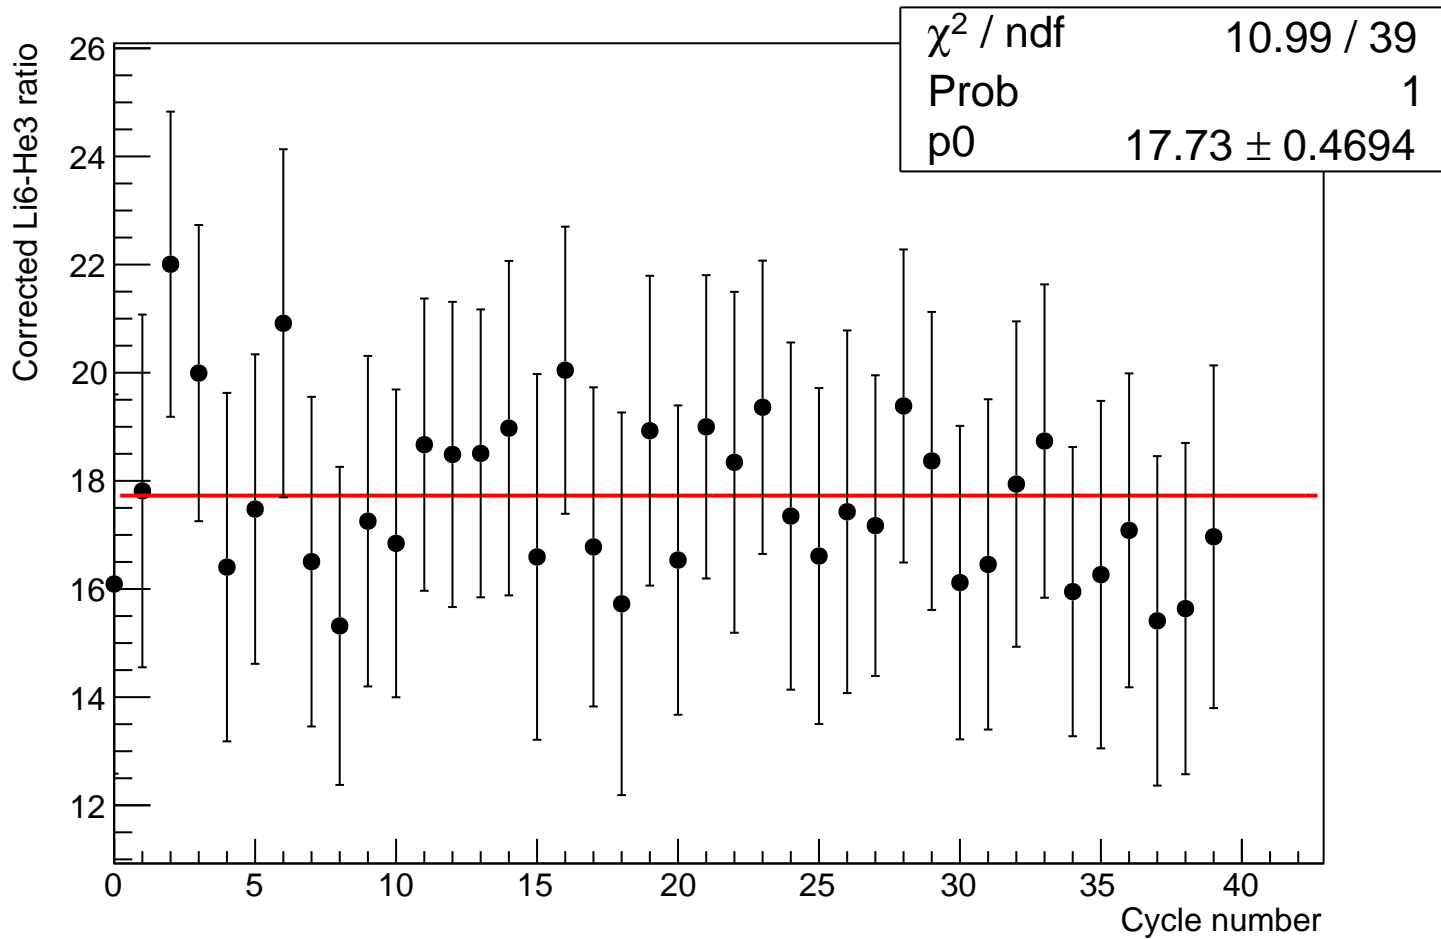

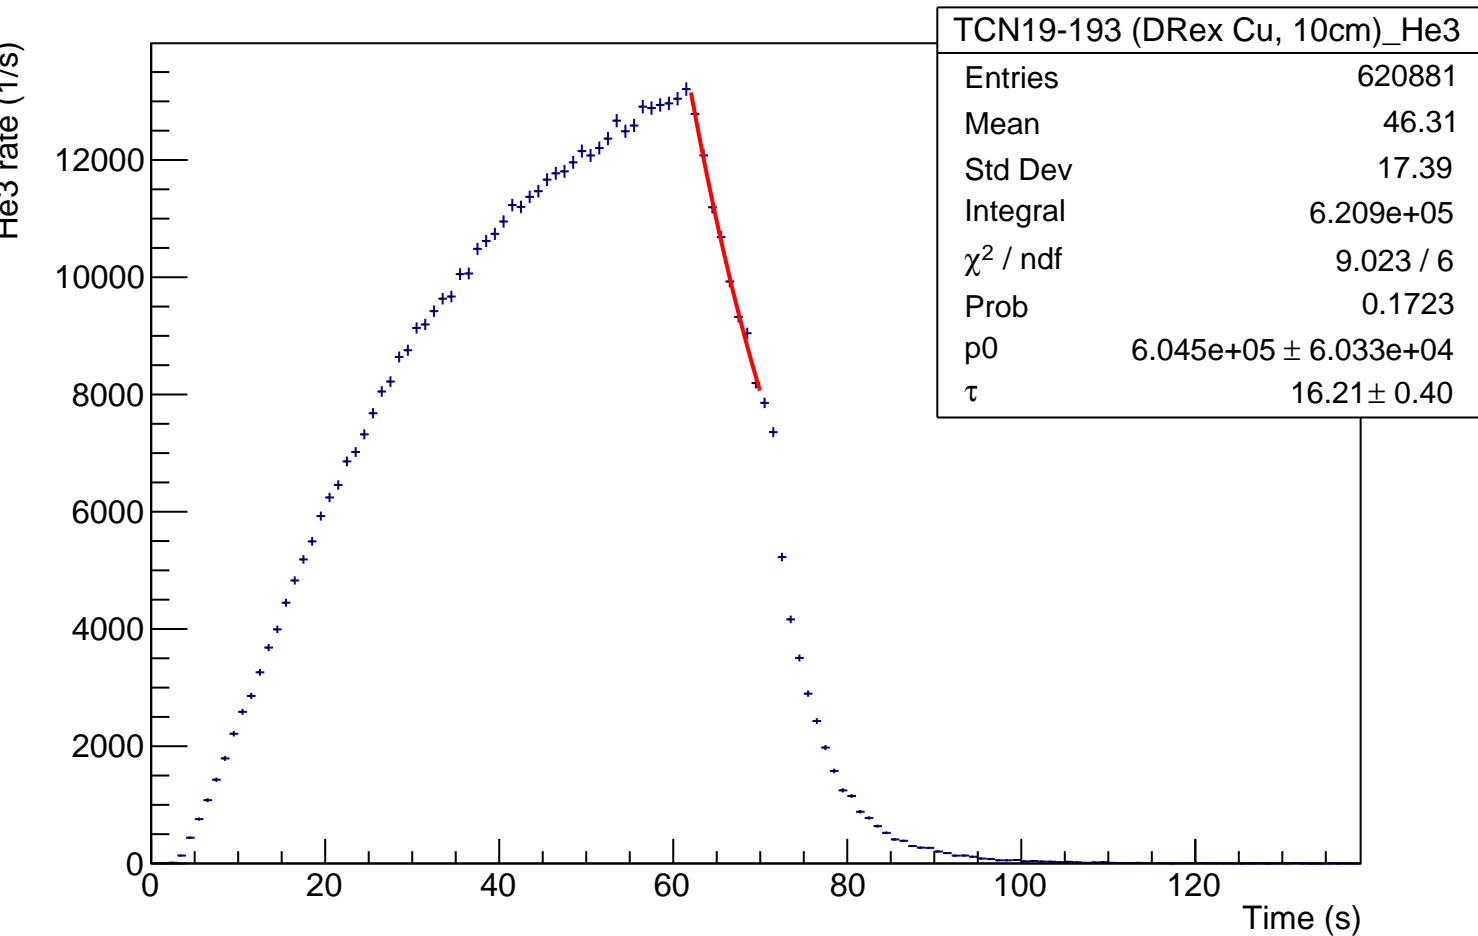

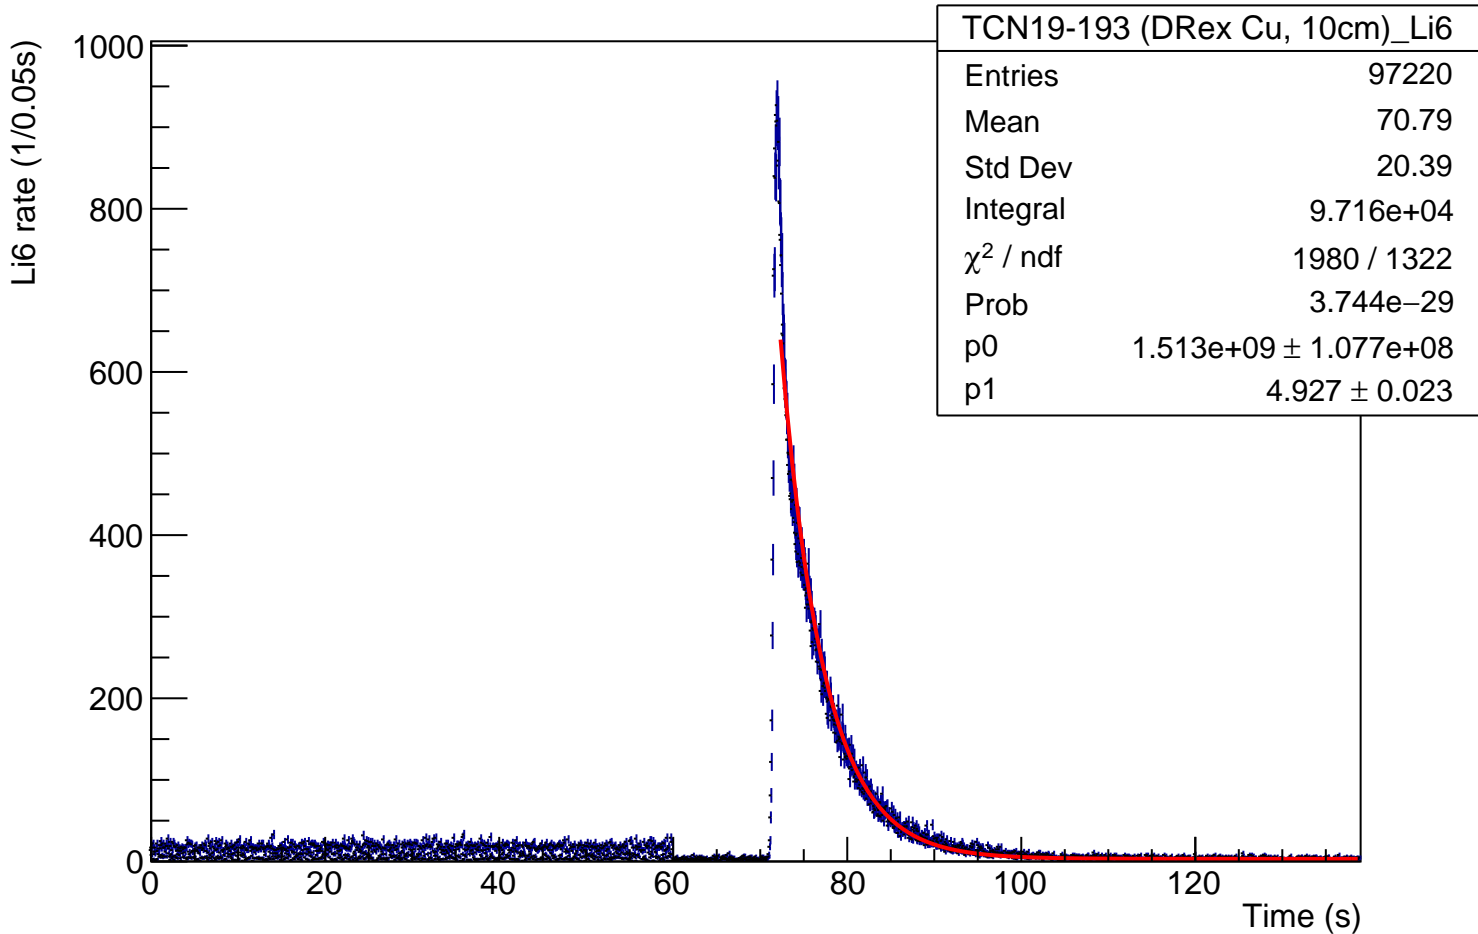

Normalized Li6 rate (1/0.05s)

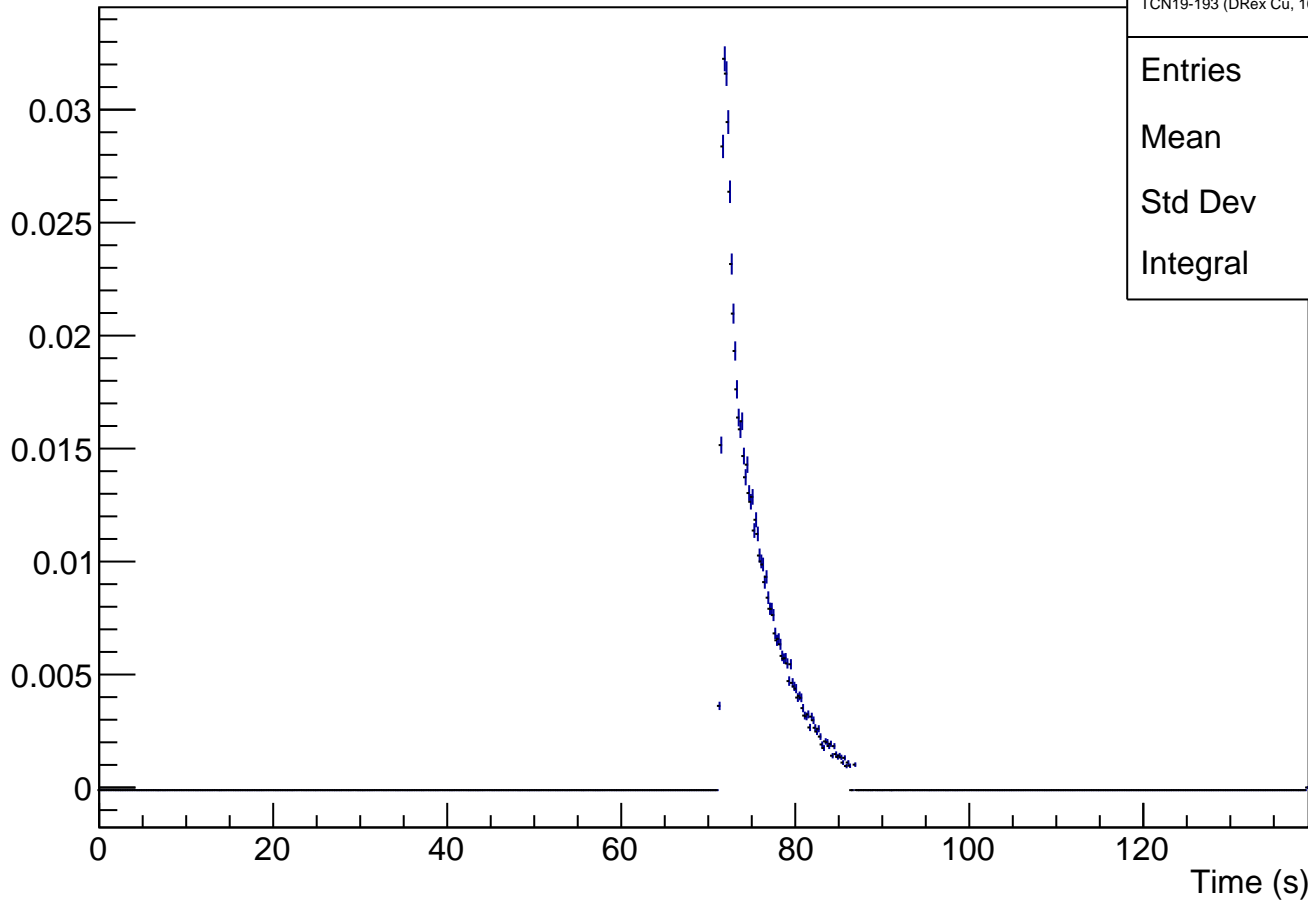

TCN19-193 (DRex Cu, 10cm)\_Li6\_norm


Entries 79310

Mean 70.92


Std Dev 17.2

Integral 0.5639



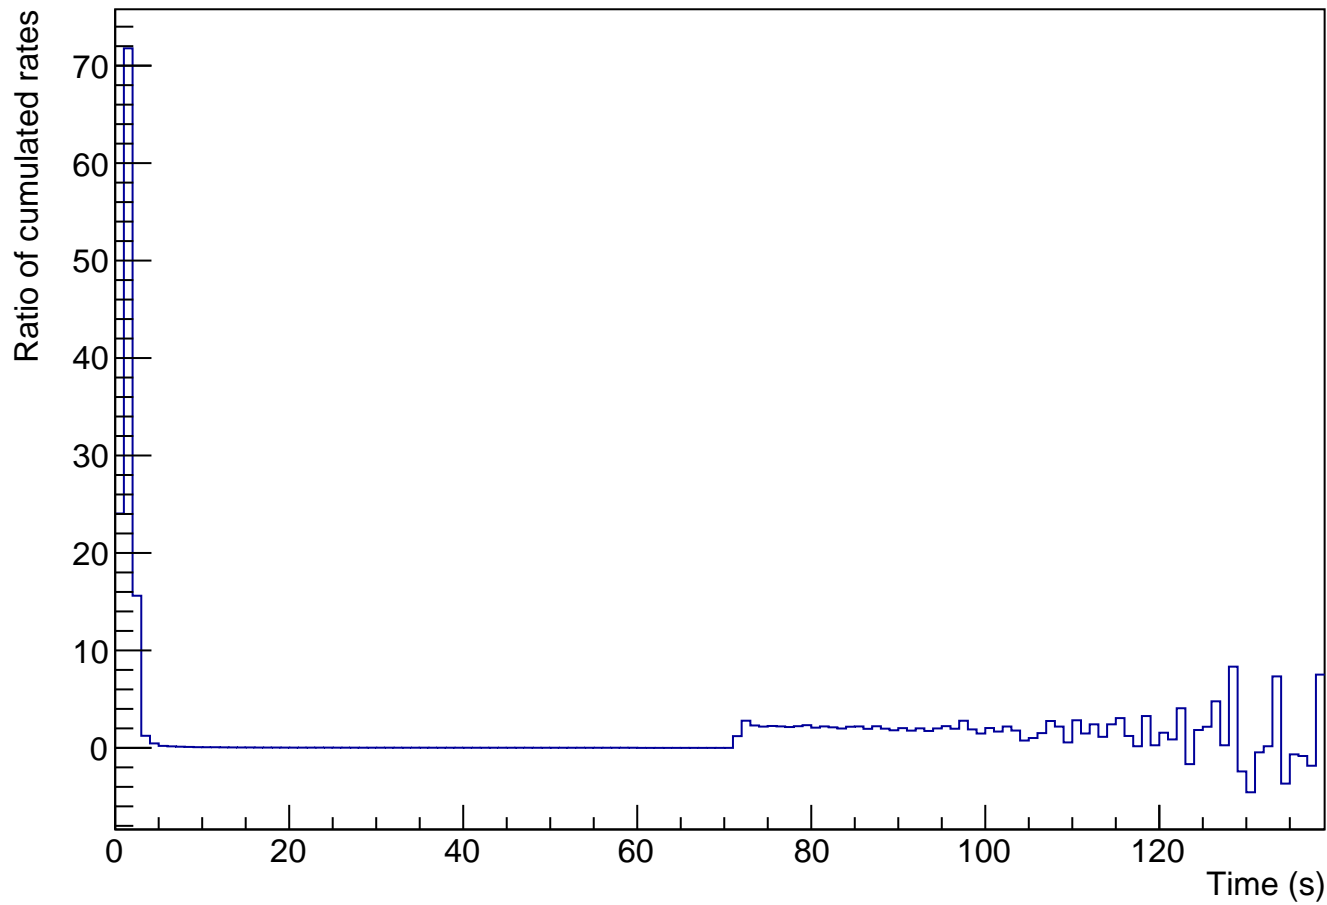


Average rate ratio

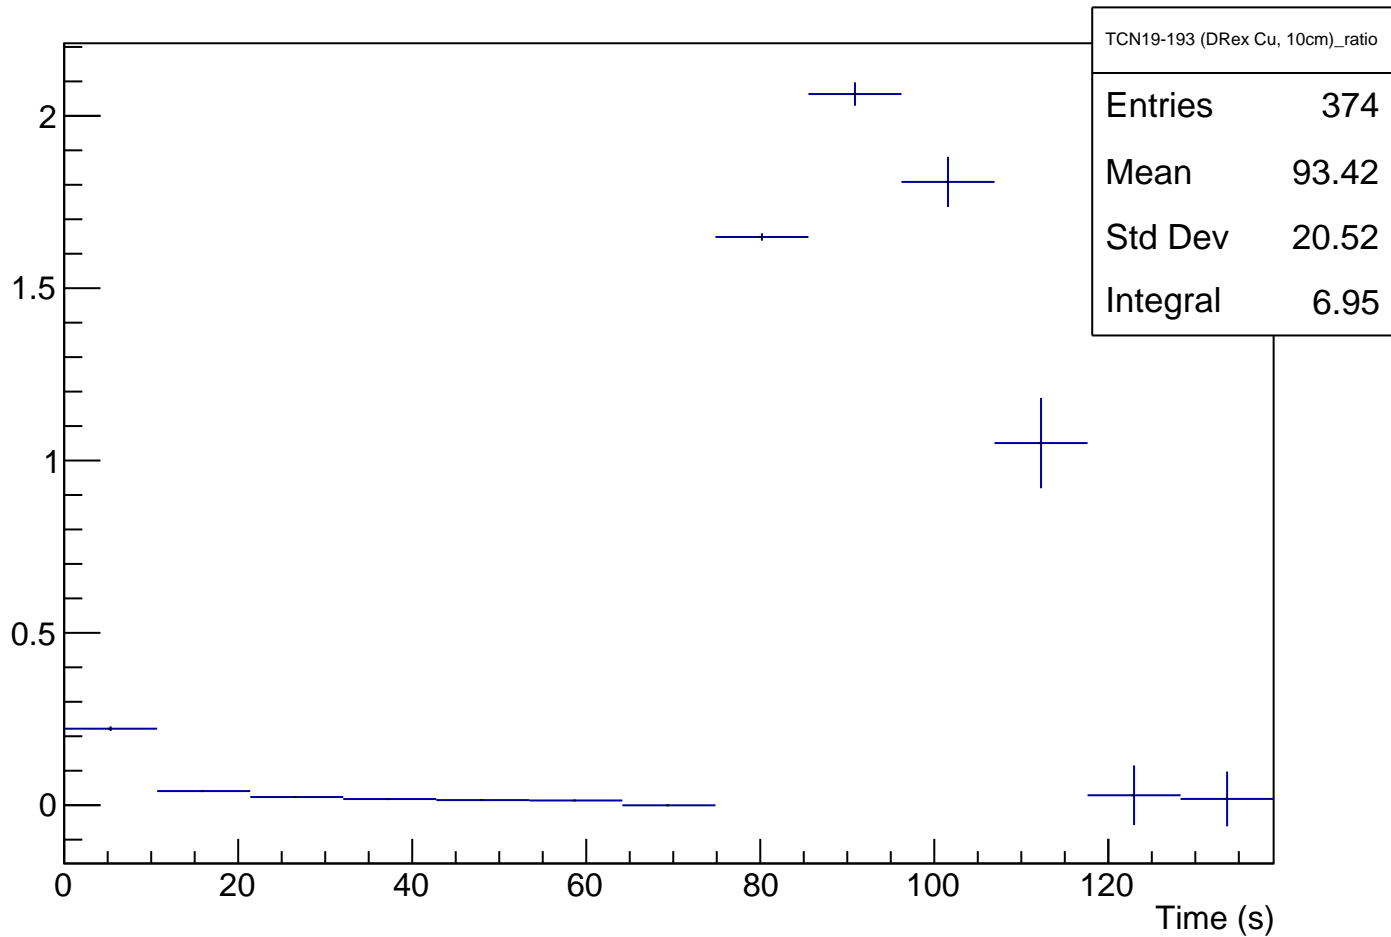

# TCN19-193 (DRex Cu, 10cm)

Count

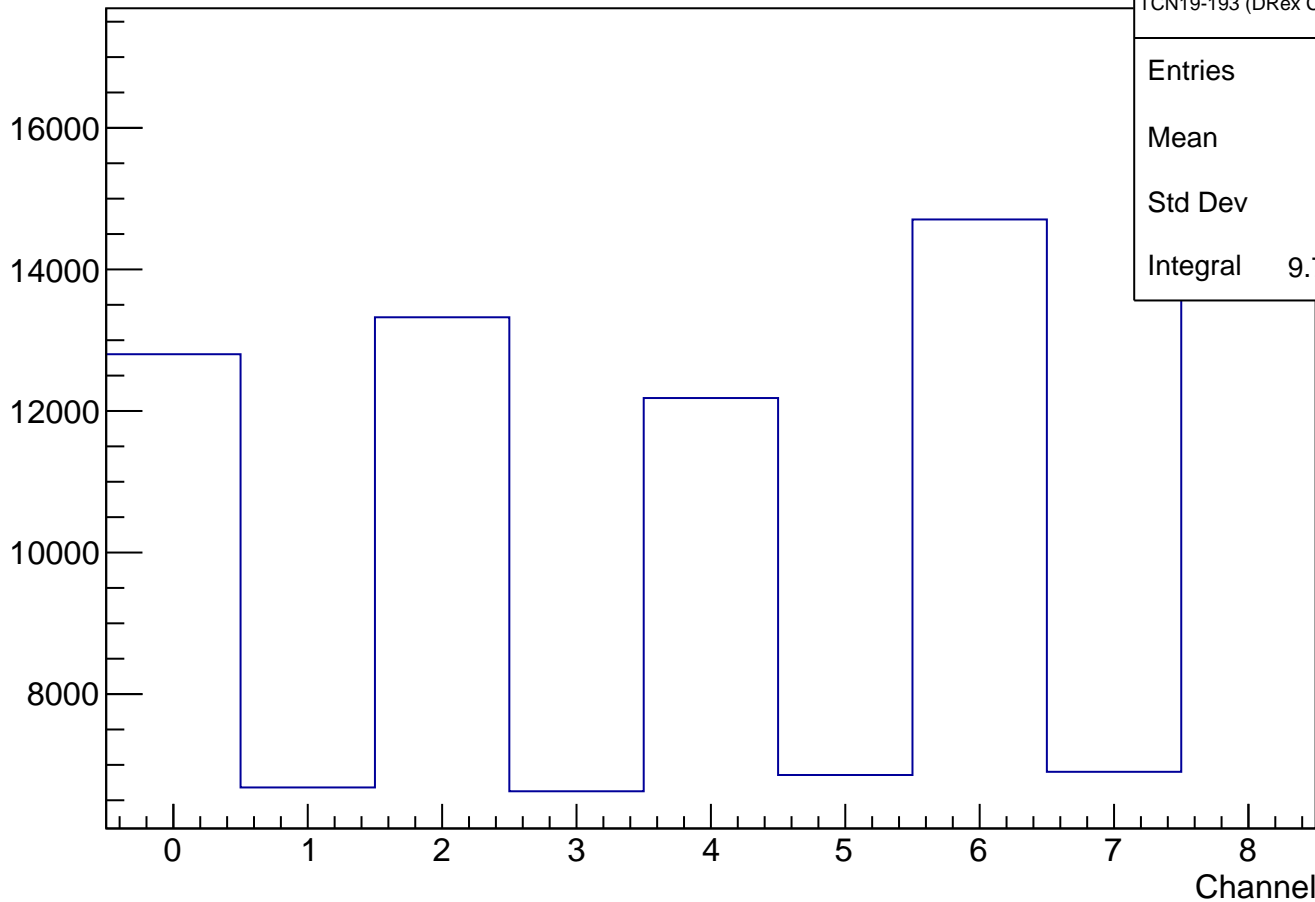

TCN19-193 (DRex Cu, 10cm)\_ch

Entries 97220

Mean 4.216

Std Dev 2.726

Integral 9.722e+04

# Li6 window

Frequency

1  
0.8  
0.6  
0.4  
0.2  
0

0 0.5 1 1.5 2 2.5 3 3.5 4 4.5 5

Time after valve opened (s)

li6window

Entries 40

Mean 0

Std Dev 0

Integral 0