





TCN19-010B, transmission normalized during prestorage

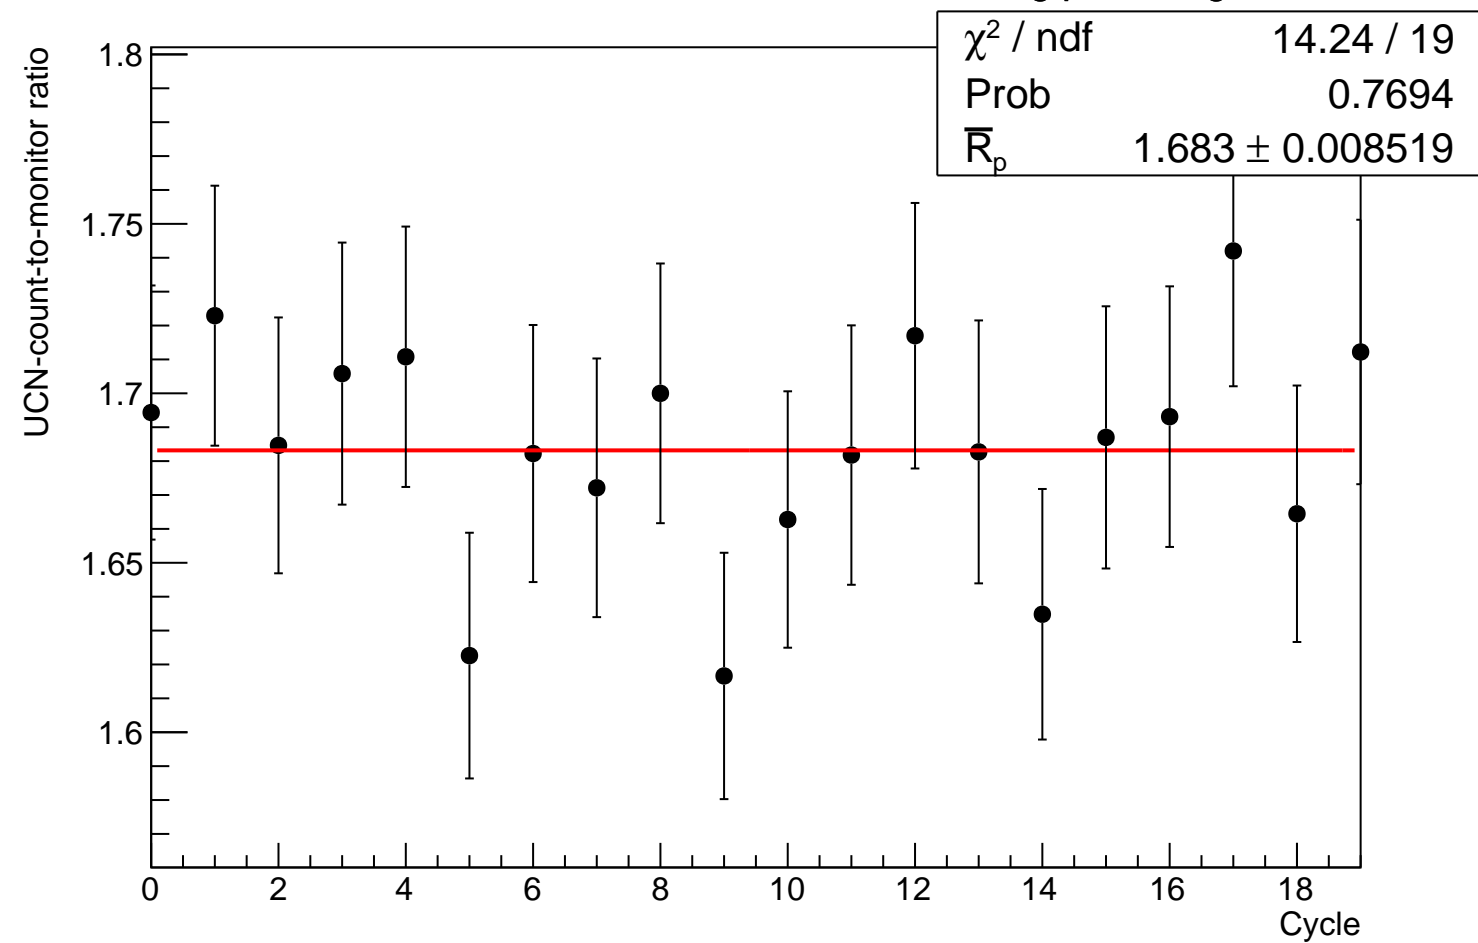



Graph

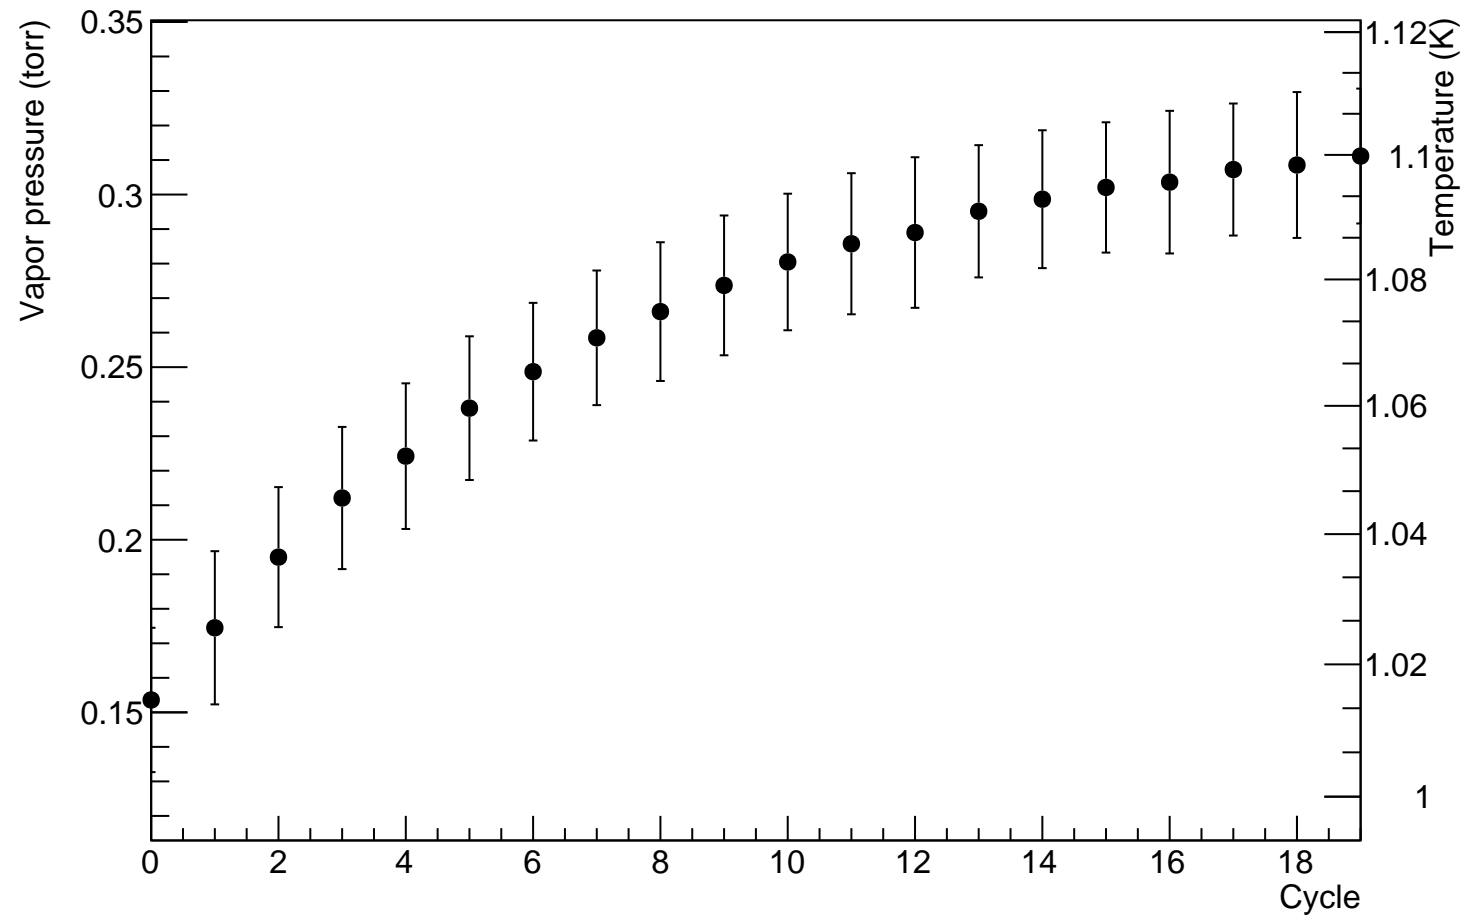

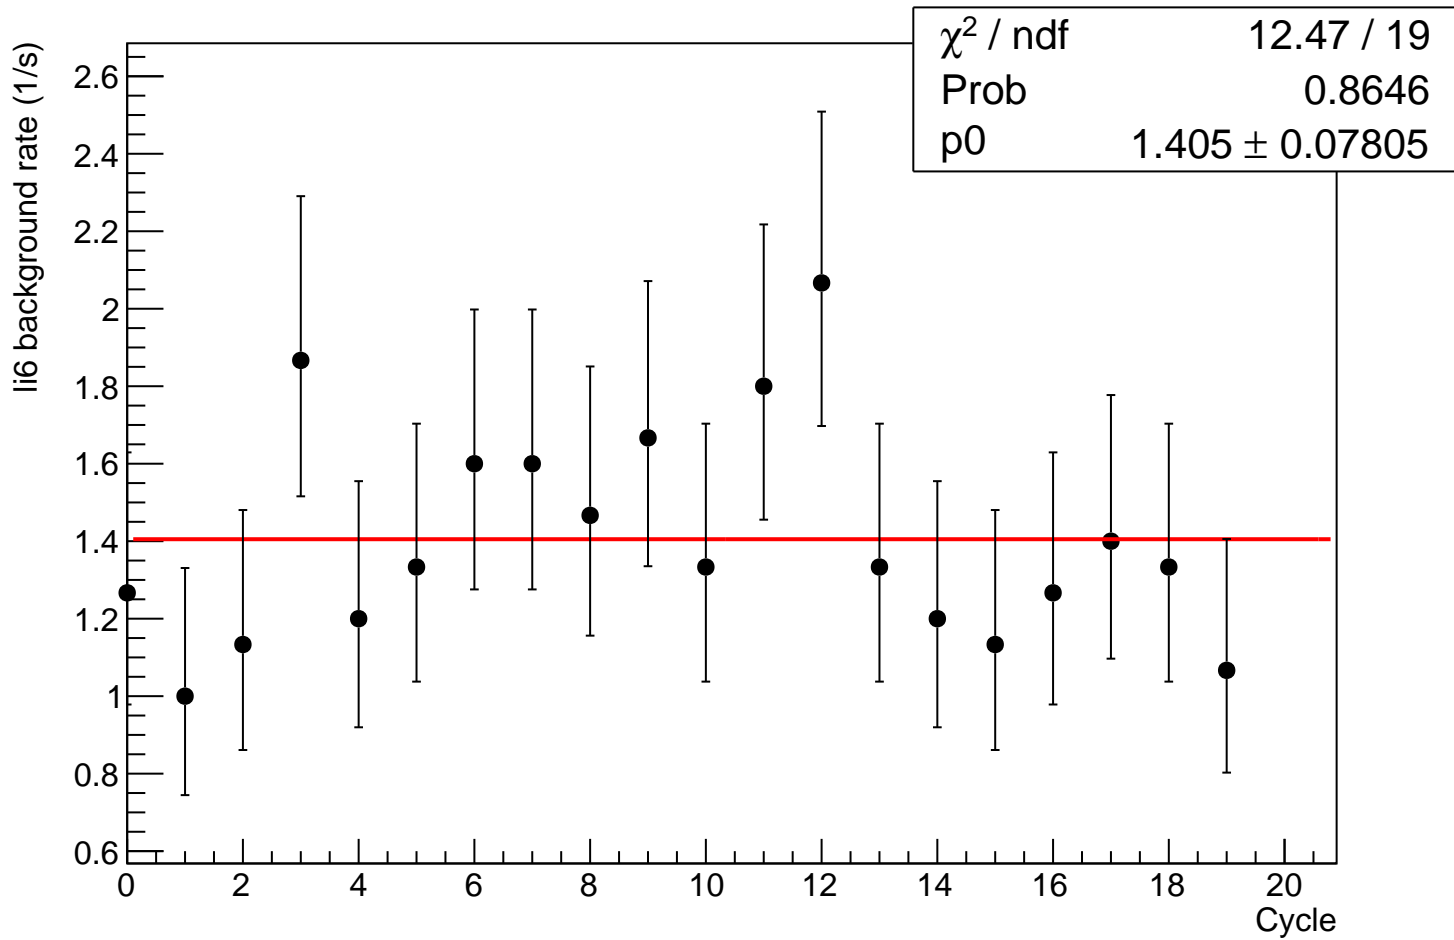


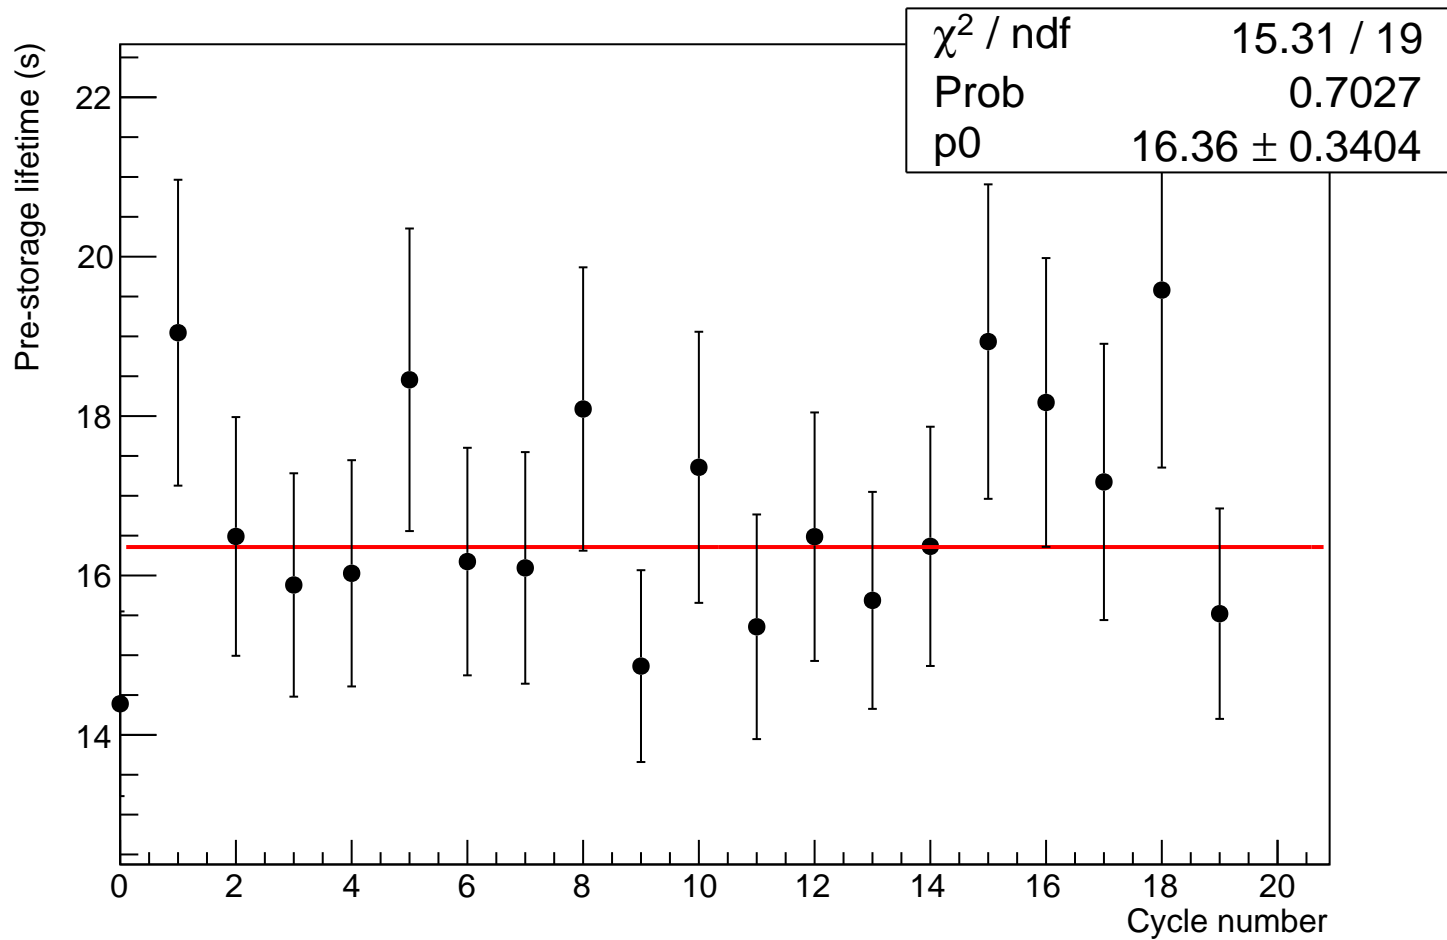

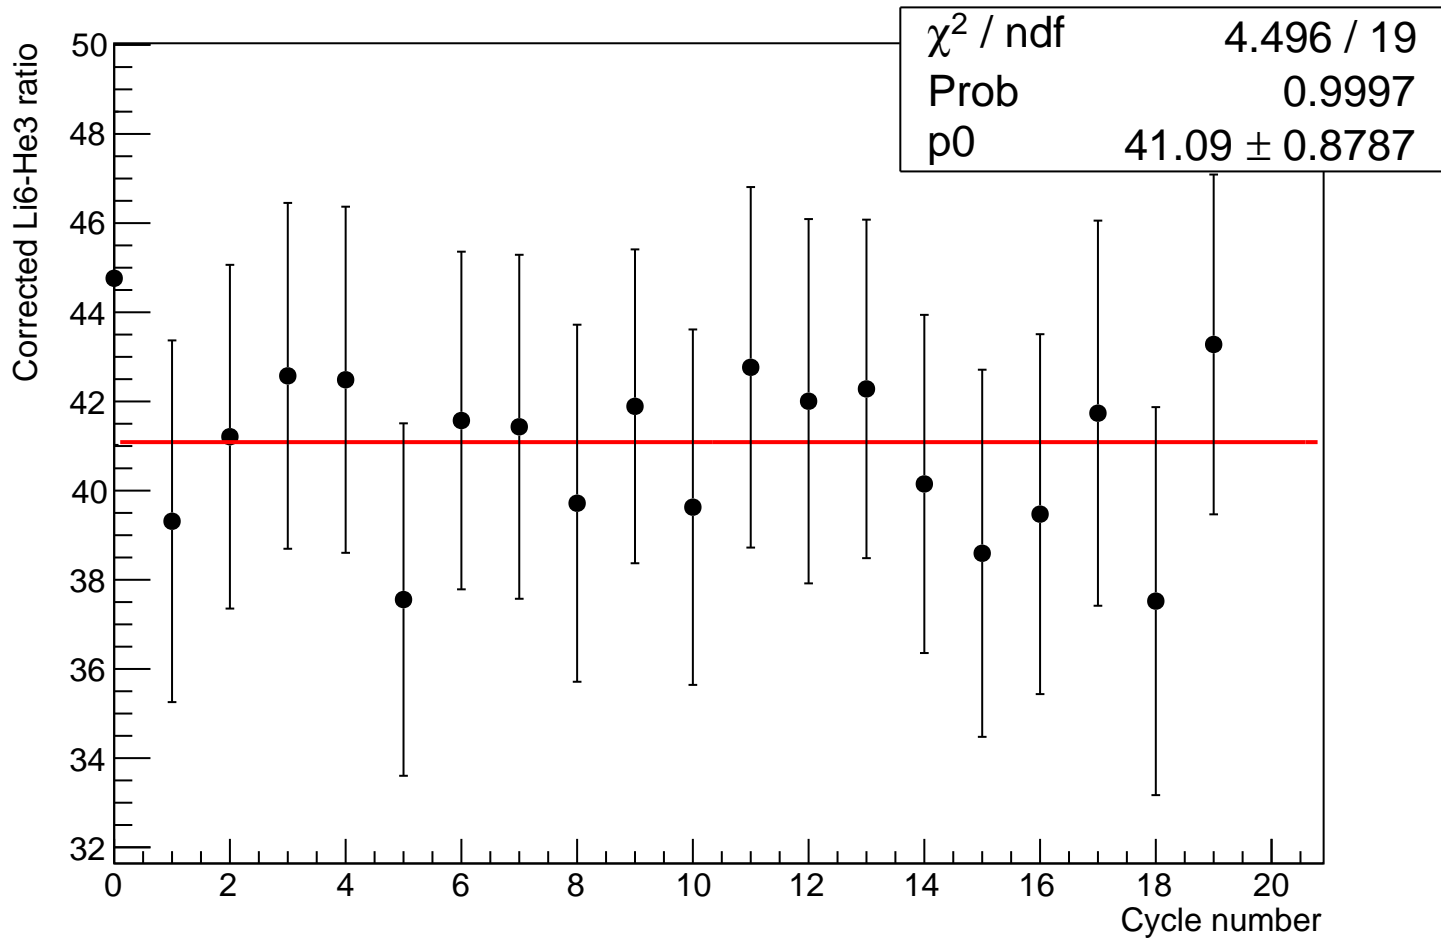


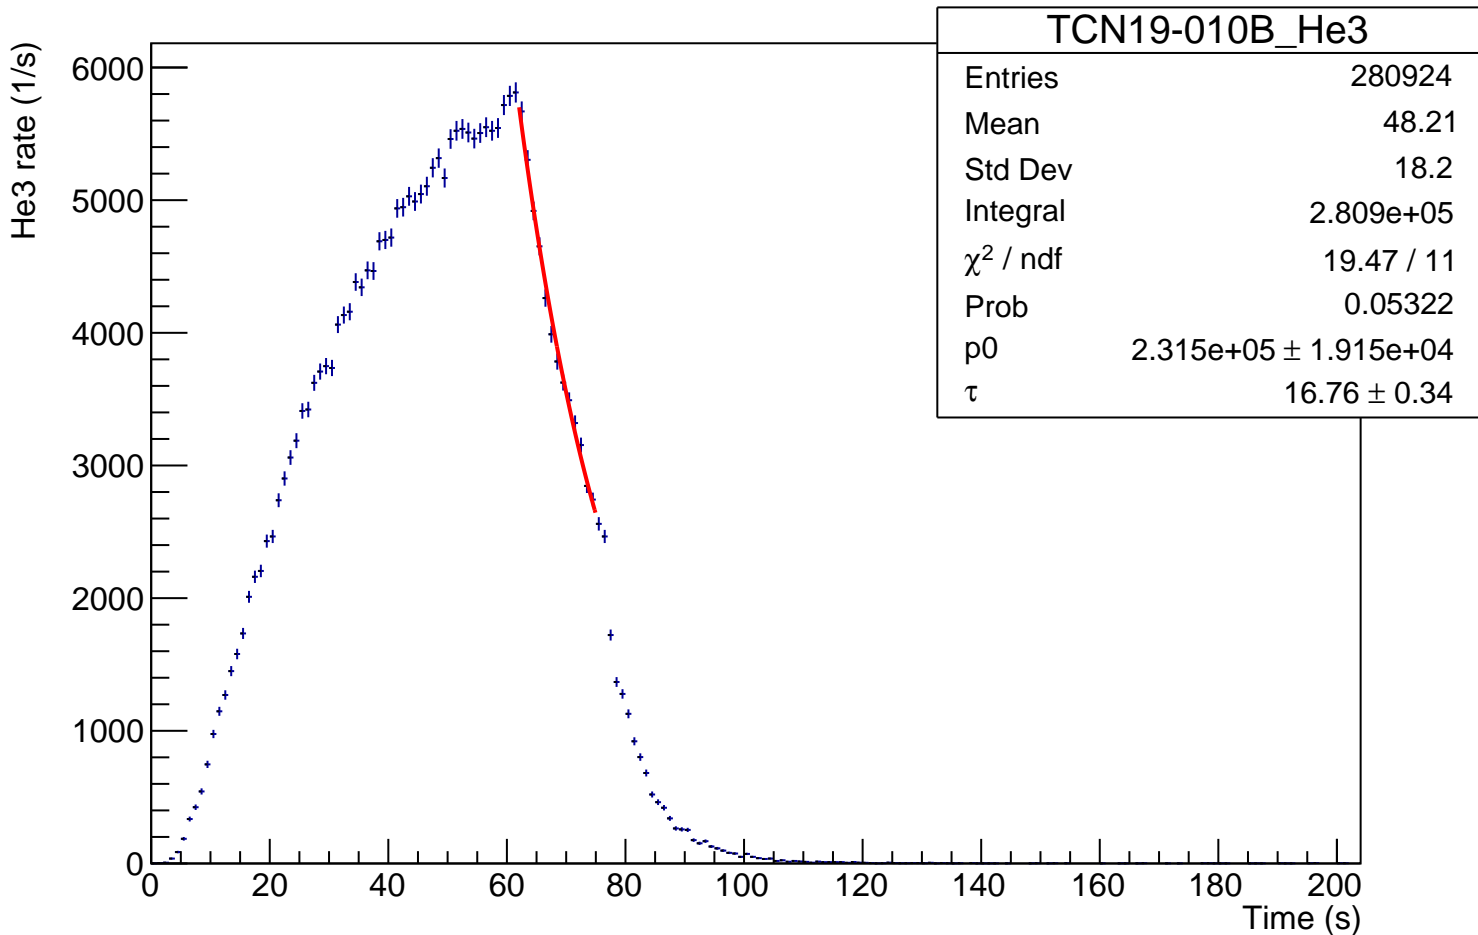


Li6 rate (1/0.05s)

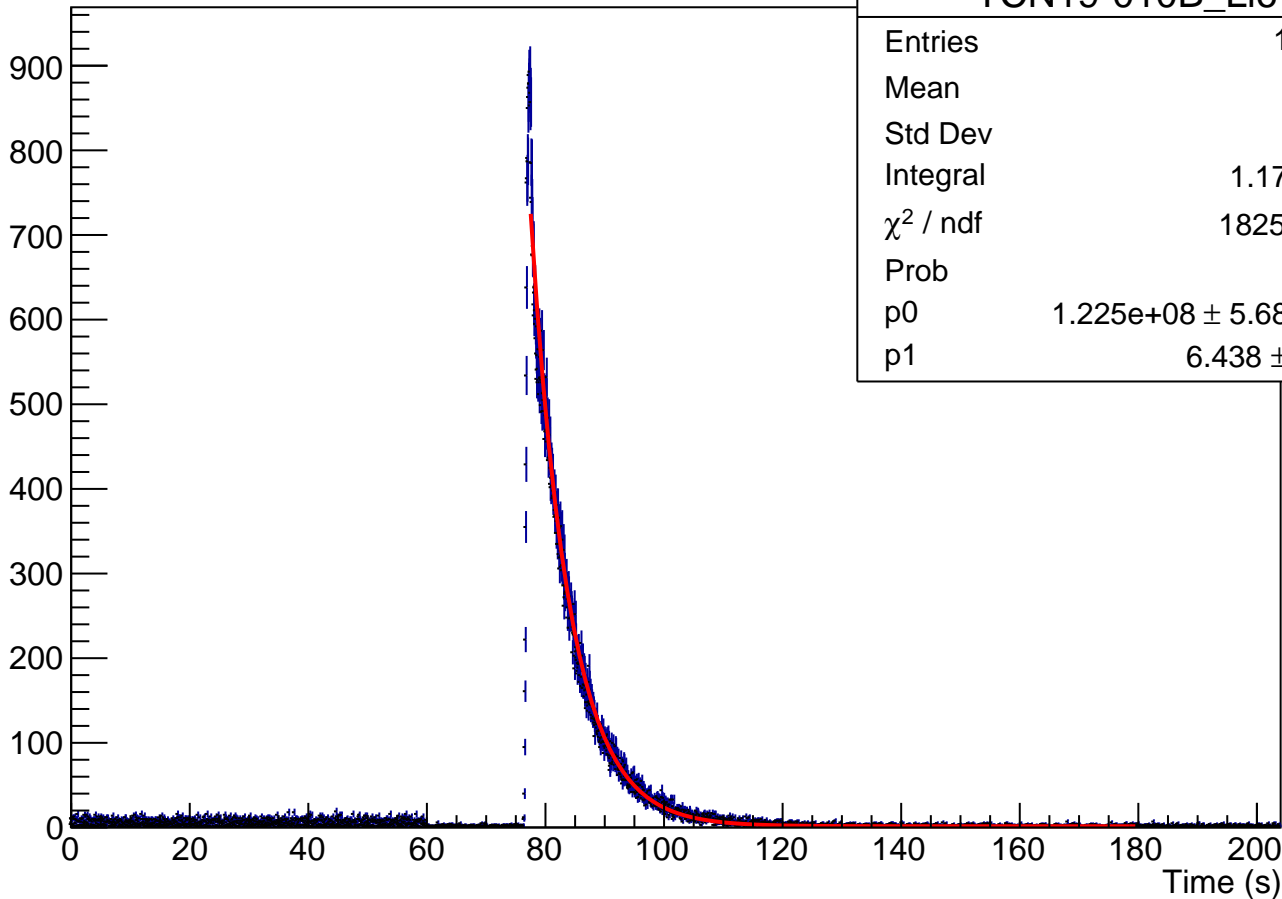


Normalized Li6 rate (1/0.05s)

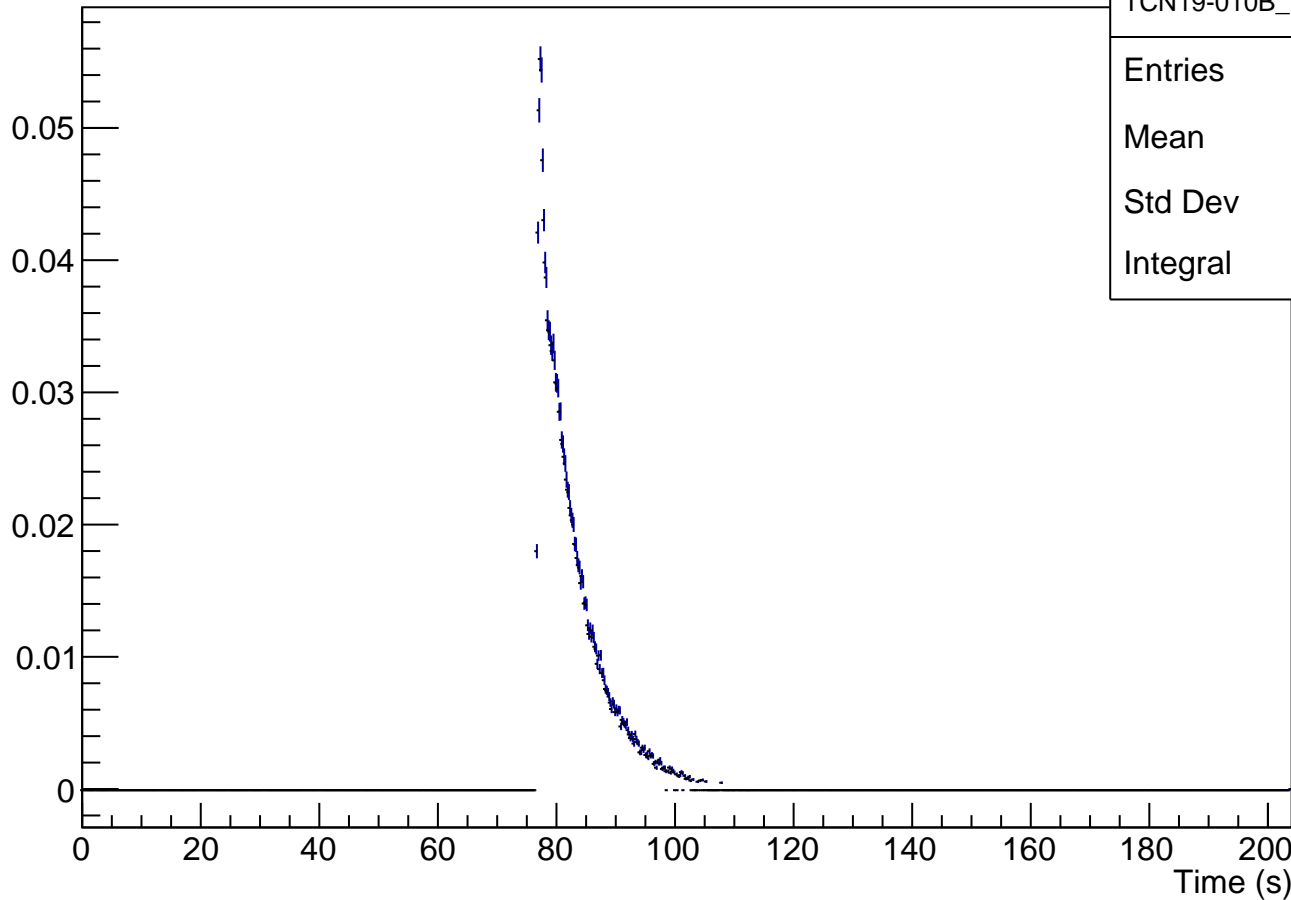

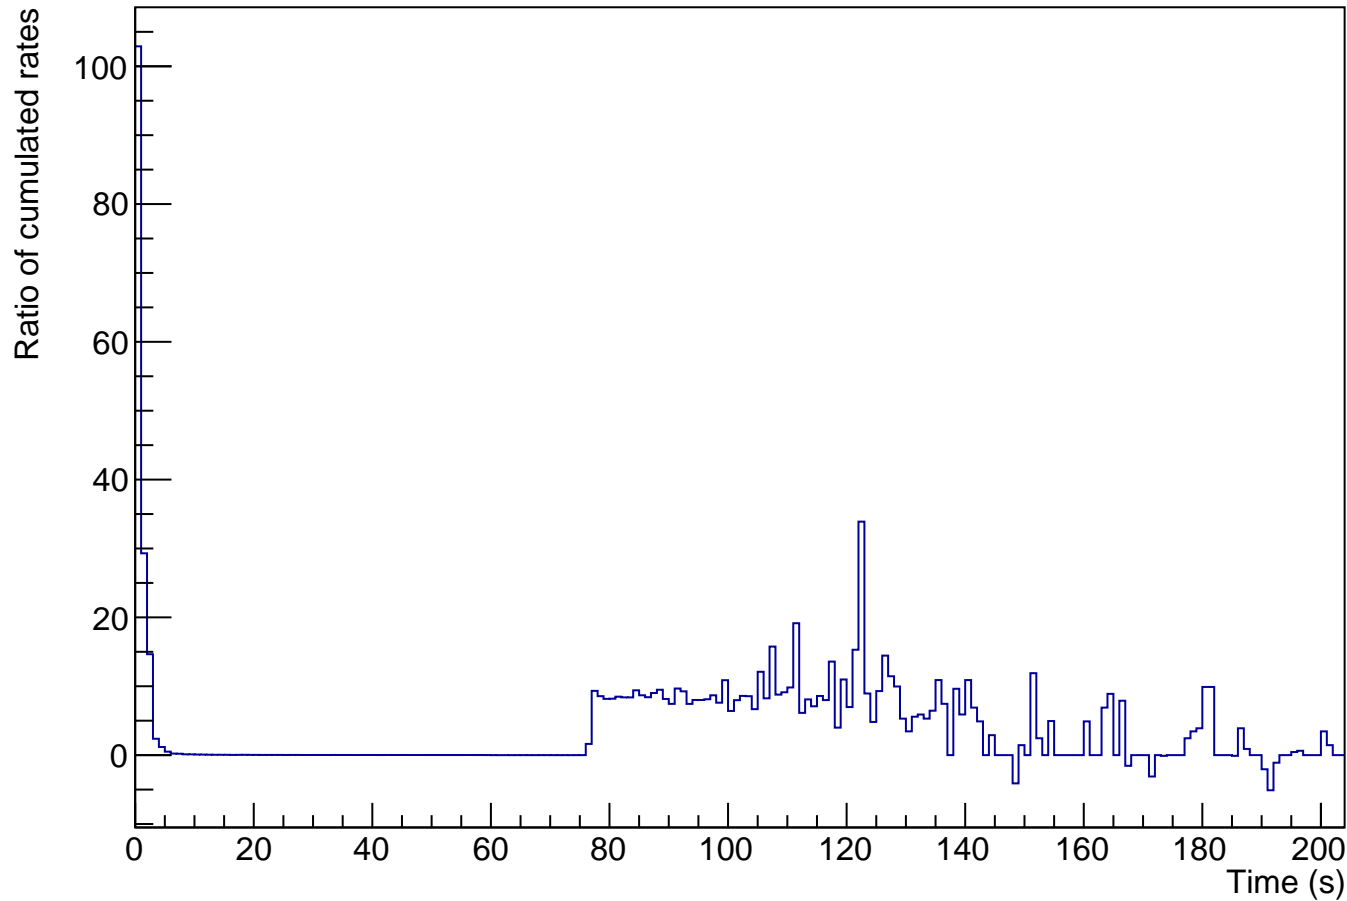


Average rate ratio

TCN19-010B_ratio	
Entries	309
Mean	105.8
Std Dev	18.92
Integral	35.62

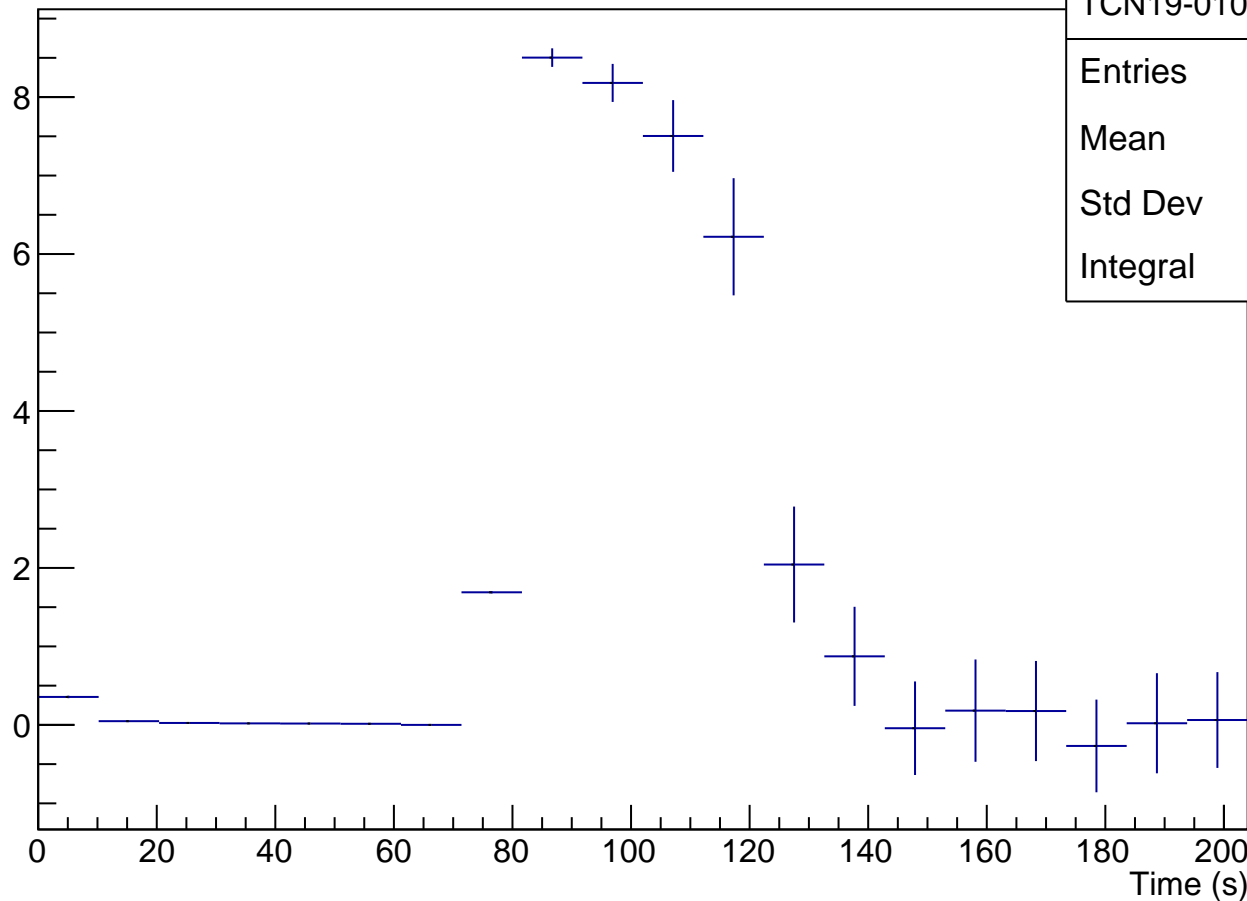

TCN19-010B

Count

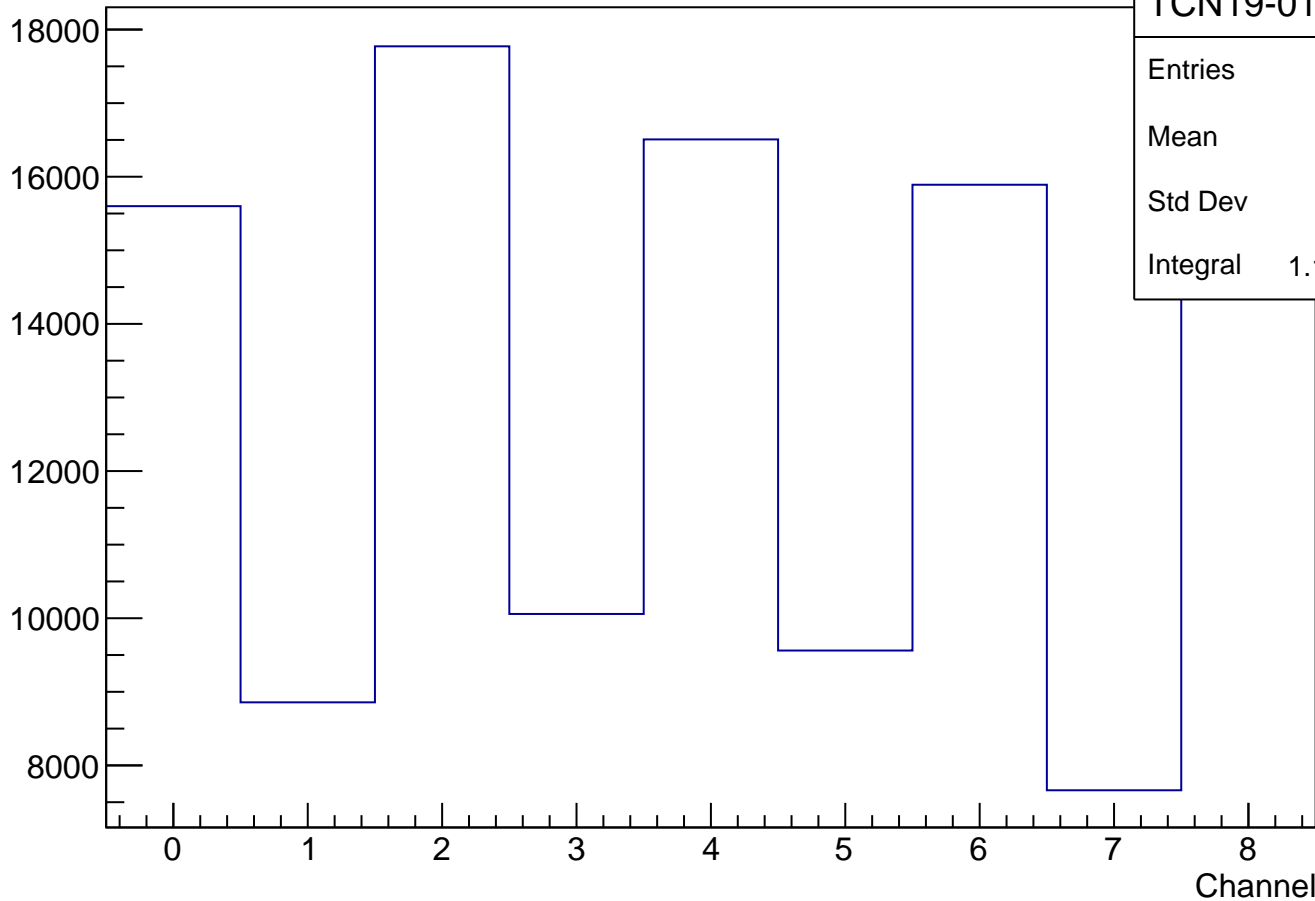

TCN19-010B_ch

Entries 117548

Mean 3.935

Std Dev 2.612

Integral 1.175e+05

Li6 window

Frequency

1
0.8
0.6
0.4
0.2
0

0 0.5 1 1.5 2 2.5 3 3.5 4 4.5 5

Time after valve opened (s)

li6window

Entries 20

Mean 0

Std Dev 0

Integral 0