





Input Connectors

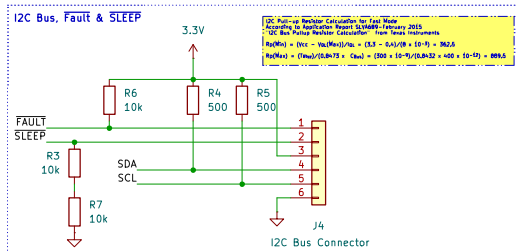

Isense Resistors

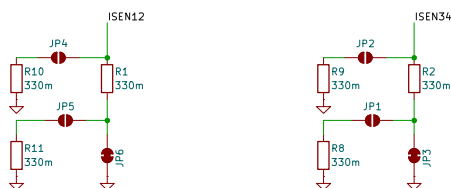


Isense resistors must rated for the power at peak load.

Holes

M3 3.2D
ISO 14580





Motor Outputs

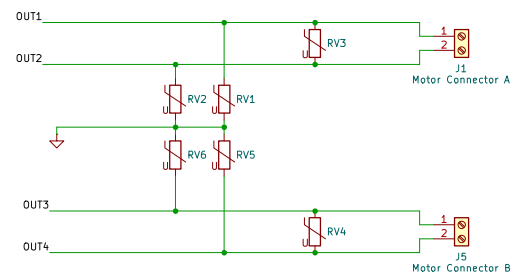

Varistor used is RL0603A330K by Ruilongyuan Electronics.
It can be replaced with any varistor with the maximum AC working voltage of 20V.

Motor Driver

DRV8847S



udaycyborg@gmail.com

Made by Uday Vivek Singh SHARDA

Sheet: /
File: DRV8847S_Breakout_Board.kicad_sch

Title: DRV8847s Breakout Board

Size: A4 Date: 2025-10-14

KiCad E.D.A. 8.0.5

Rev: 1.0
Id: 1/1

