

Car Automation Using Voice

By

MADDUKURI NIVAS (19BCE1010)
KOVVURI UDAY SURYA DEVESWAR REDDY (19BCE1253)

A project report submitted to
Dr. Neela Narayanan V

School of Computer Science Engineering (SCOPE)

in partial fulfilment of the requirements for the course of
CSE1901 - Technical Answers for Real Word Problems

In

**B. Tech. COMPUTER SCIENCE AND ENGINEERING
SCHOOL OF COMPUTER SCIENCE AND ENGINEERING**



**VELLORE INSTITUTE OF TECHNOLOGY
CHENNAI - 600127
June 2021**

Table Of Contents

S.No	Title	Page No
1	Bonafide Certificate	3
2	Abstract	4
3	Acknowledgements	5
4	Introduction	6
5	Literature Review	7 - 8
6	Design/Implementation	8 - 13
6.1	Block Diagram	8 - 9
6.2	Hardware Requirements	9 - 12
6.3	Software Requirements	12 - 13
7	Proposed Work	13 - 14
8	Results and Discussion	15 - 16
9	Conclusion	16
10	References	17
11	Appendix	18 - 19

1. BONAFIDE CERTIFICATE

Certified that this project report entitled “**Car Automation Using Voice**” is a bonafide work of **MADDUKURI NIVAS (19BCE1010)** and **KOVVURI UDAY SURYA DEVESWAR REDDY (19BCE1253)** who carried out the Project work under my supervision and guidance.

Dr. Neela Narayanan V

Associate Professor

School of Computing Science and Engineering (SCOPE),

VIT University, Chennai

Chennai – 600127.

Abstract

Technology has progressed to the point where things may happen organically, allowing humans to make things as simple as possible. Voice recognition improves the quality and effectiveness of productivity. In this project, we are designing an automatic car which works on the authority to voice commands of personage through Bluetooth and integrated into mobile applications for commanding the moves. It was very useful for the decrease in traffic passings, enhancement in fuel economy, decrease in travel time, additionally for individuals with disabilities. Car automation using voice works on human voice commands. This was just like a professor instructing students to do the work based on the rules and regulations. In this work, we will connect the circuit with the mobile application through medium communicators. The car can be controlled by remote voice commands straightforwardly from the client. The car can move frontward, in reverse, left, right, halt, moderate, quick, turn. These actions will be performed by the car according to the given instruction. If the user turns right, it changes its current direction and it travels in the right direction.

Keywords: Automation, Voice recognition, Bluetooth, commands

3. ACKNOWLEDGEMENT

We are thankful to **Dr. Ganesan R**, Dean of the School of Computer Science Engineering, VIT Chennai, for extending the facilities of the School towards our project and for his beneficent support.

we respect and thank **Dr. Neela Narayanan V**, School of Computing Science and Engineering for providing us an opportunity to do the project work and giving us all support and guidance which made us complete the project duly. We are extremely thankful for providing such nice support and guidance, although he had a busy schedule managing the corporate affairs.

We are thankful to and fortunate enough to get constant encouragement, support and guidance from all Teaching staff of School of Computer Science and Engineering which helped us in successfully completing our project work. Also, we would like to extend our sincere esteems to all staff in the laboratory for their timely support.

Secondly, we would also like to thank my parents and friends who helped me a lot in finalizing this project within the limited time frame.

MADDUKURI NIVAS

KOVVURI UDAY SURYA DEVESWAR REDDY

Introduction

Advanced technology has gotten to be an add up to wonder for civilization, the characterizing constraint of a modern social arrangement in which productivity is not an alternative but a need forced on all human movement. Within the past decade, voice-based solutions were for the most part utilized in managing an account and telecom call centers as well as in healthcare, but this was to great extent experimentation organized, considering the issues of accuracy and trade significance. Within the past few a long time, it makes a critical increment in requests and readiness for discourse advances in money-related administrations, protections, and other segments. There are numerous positive usage illustrations for different businesses. Numerous progressions in speech acknowledgment have been driven by the need to keep the open secure while still recognizing a device-dependent culture. That's particularly genuine when it comes to vehicles. Whether it's a text message or utilizing Google Maps, the motivation to require our eyes off the street has ended up moment nature. Speech acknowledgment frameworks have ended up a vital highlight. But even though secure driving behaviors (and in numerous places, the law) require us to disregard the steady phone calls, emails, and content messages whereas behind the wheel, that kind of disconnectedness isn't very the reality.

The most objective of Web technology is to increase productivity and diminish human exertion. With the presentation of the Internet of Things (IoT) within the final decade, we have been pushing for omnipresent computing in all circles of life. Physically challenged individuals are moreover utilizing the Internet with the assistance of Speech commands (SC) [1].Arrangement of Artificial Insights (AI) in the standard of living will appear a better approach to the long run the complex errand will be gotten to be simple. One such advancement of AI innovation is the creation of Self-Driving cars [6]. Driver diversion could be a developing and inescapable issue that requires different arrangements. Voice-recognition frameworks may diminish the visual-manual requests of a wide extent of in-vehicle frameworks and smartphone intuitive [2]. An intelligent parking aid is to back the driver exterior of a car whereas stopping in swarmed areas. Voice-controlled change based on the asset utilization of the Framework on-chip biological system is altered to command moving vehicles [3]. An application of vehicle robotization can be utilized to convey fundamental commodities to high-risk ranges amid catastrophes just like the later COVID 19 episode [4]. Voice recognition implementation in vehicles can be very useful in emergency situations when irrefutable services are must and should [5]. Voice command integration with the vehicles can make the system more efficient and also helps in security enhancement [7,8].

72% of individuals who utilize voice look gadgets claim they have gotten to be a portion of their day-by-day schedules. This study worked on car automation using voice with the help of arduino. The objective of the project is to permit people to control vehicles utilizing voice commands. It was exceptionally valuable within the circumstance when there is hectic traffic on the street. For an occasion, when we switch a vehicle to stop, it makes a difference to control the vehicle without taking our eyes off the street. Individuals who have challenges with driving, such as disabled, senior citizens would be able to drive without any faltering. It

can also be utilized to decrease manual work. By designing an automated voice recognition vehicle model, the software can spell the same capacity as any other composing device and it can offer assistance to extend efficiency in numerous businesses, such as in the healthcare industry.

Literature Review

[1] The study's major goal is to make living easier using a home automation system. Because of their user-friendly interface and portability, mobile devices are immensely popular among everyone. The goal of their work is to use Android voice commands to operate electrical home appliances utilizing Wi-Fi as the communication mechanism between the Raspberry Pi and the Android handset. Their solution allows users to make decisions and control household appliances via an Android application, making life more convenient while also being remotely accessible via portable devices such as Android phones.

[2] Their study covers the research to meet study consideration criteria, drivers had to associate with a Voice Recognition framework whereas driving and doing ordinary Voice Recognition errands such as dialing, starting a call, texting, emailing, goal passage, or music choice. Coded subordinate factors included discovery, response time, sidelong position, speed, and progress.

[3] The author displays the thought of a low-cost independent vehicle, which can be controlled by voice commands, given by the client. The client may be found in a few farther areas, but as long as he/she is associated with the Web, the vehicle will take after voice enlightening.

[4] The study presents a technique that proposes to utilize human speech as a ceaseless mode of control to drive a straightforward vehicle. The voice is bolstered into an Android application that transmits the flag to the collector onboard the vehicle. An Arduino which can interface with the Bluetooth module on board the vehicle will give the communication channel to compare with the android gadget. The most advantage of this setup is it is long-range, so it can be worked from a secure remove without gambling advance presentation to infection or any other conceivable threat.

[5] Their research framework is divided into three subsystems: a speech recognition system, a transmitter area, and a collector segment (on vehicle). Their results show that the proposed robot is capable of directing flame, avoiding obstacles, and comprehending the significance of verbal commands. They discovered that alterations based on articulation semantics have an infinite amount of words and phonemes that can be altered, implanted, or eliminated. A model of the framework for Voice Operated Fire Extinguisher Robot has been created based on the plan criteria and prerequisites.

[6] The study's main focus is on the creation of self-driving cars employing Convolutional Neural Networks (CNN), as well as their disadvantages and solutions. The Self-Driving Car CNN model was trained using data from the Asphalt-8 game, while the Voice command prediction CNN model was trained using the voices of three different people (1-Kid, 1-Man, and 1-Woman). Both CNN models were 99 percent accurate, and they were evaluated on the same game to see which one generated the greatest results.

[7] The study presented a pick and put mechanical arm vehicle utilizing an android application to control the robot through voice commands. Arduino programming dialect, which is an open-source and rearranged adaptation of C++ known for its neighborly engineering, was utilized to program the controller(ATMEGA328P). The integration of the control unit with a blue-tooth gadget was done to capture and study the voice commands.

[8] The research describes applications that implement interactions between the driver and their smart car in a continuous interaction space defined by the vehicle's physical distance and the smart devices that execute those interactions. The principles of smart vehicle proxemics are demonstrated using smart rings, smartwatches, smartphones, and other devices to interact with the in-vehicle infotainment system while the driver travels through five distinct zones, from inside the vehicle to the personal, proximal, distant, and covert zones outside the vehicle.

Design / Implementation

Block Diagram:

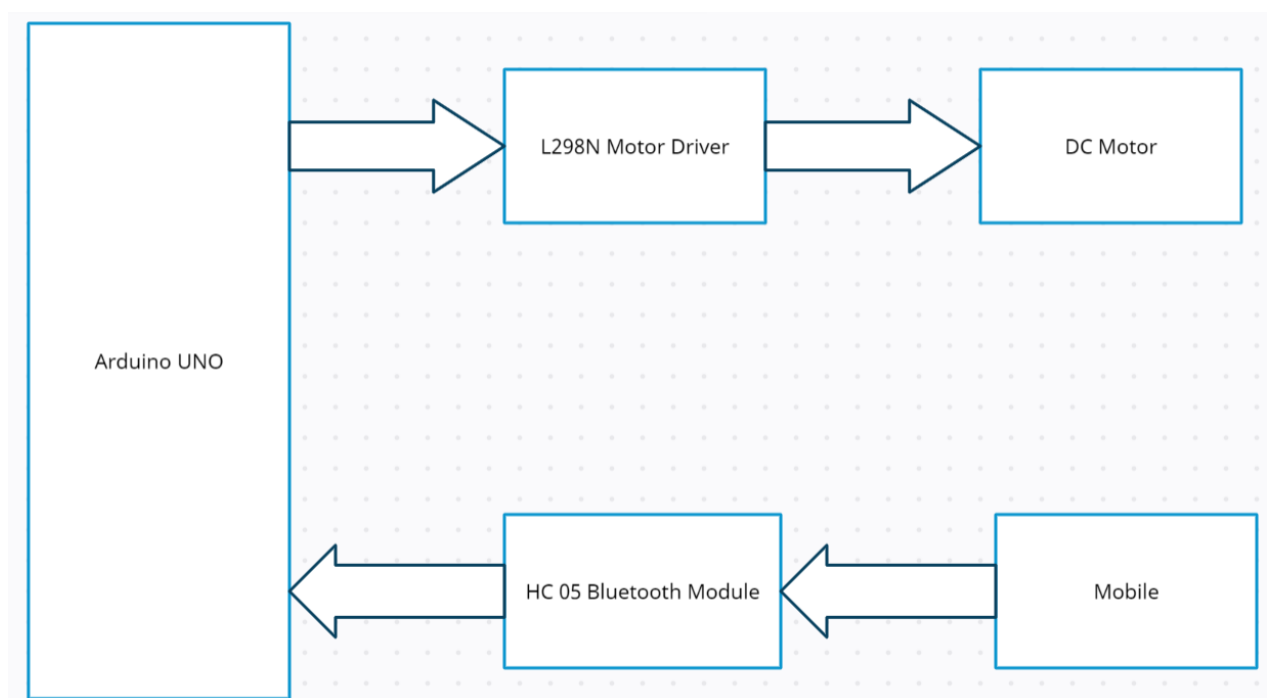


Figure - 1: Block Diagram

Figure - 1 Represents the block diagram of the Voice controlled car using Arduino UNO where the mobile will send the voice control to the Bluetooth module connected to arduino UNO and then arduino UNO will process the command and then give respective order to L298N Driver to which the DC motors were connected and the wheels will rotate accordingly

Hardware Requirements

Plywood:



Figure - 2: Plywood

Plywood is a built wood from the made sheets family which incorporates particleboard and situated strand board (OSB). It is made from lean sheets of lacquer peeled from debarked wood. These lean layers too called handles, are stuck together at rotating right points to form a cross-grain design. We used Vortex- RC 2 MM, 12 x 6 plywood sheet. The whole circuit laid on plywood.

L298N Motor:

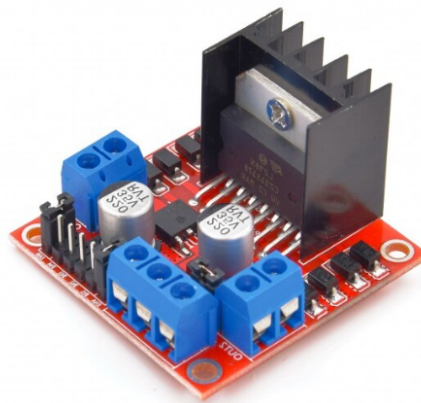


Figure - 3: L298N Driver

The L298N could be a double H-Bridge engine driver which permits speed and heading control of two DC engines at the same time. The module can drive DC engines that have voltages between 5 and 35V, with a top current up to 2A. It acts as an interface between the engines and the control circuits. The function of engine drivers is to require a low-current control flag and after that turn it into a higher-current flag that can drive an engine.

12v Battery:



Figure - 4: 12V Battery

A 12v battery is used to generate power to the circuit primarily to the wheels, to rotate. A battery could be a gadget that stores vitality and after that releases it by changing over chemical vitality into power. In this particular device we are using a 12v battery to generate power to the car.

Arduino Uno:



Figure - 5: Arduino UNO

The Arduino Uno board may be a microcontroller based on the ATmega328. It has 14 advanced input/output pins in which 6 can be utilized as PWM yields, a 16 MHz ceramic resonator, an ICSP header, a USB association, 6 analog inputs, a control jack, and a reset button. This contains all the specified back required for the microcontroller. Arduino UNO could be a low-cost, adaptable, and easy-to-use programmable open-source microcontroller board that can be coordinated into an assortment of electronic projects. This board can be interfaced with other Arduino sheets, Arduino shields, and Raspberry Pi sheets and can control transfers, LEDs, servos, and engines as a yield.

Ultrasonic Sensor:



Figure - 6: Ultrasonic Sensor

Ultrasonic sensors can measure the separation of a wide run of objects in any case of shape, color or surface surface. They are moreover able to measure a drawing nearer or retreating object. It is an electronic device that measures the separation of a target object by transmitting ultrasonic sound waves and changing over the reflected sound into an electrical flag. Ultrasonic waves travel speedier than the speed capable of hearing the sound. They are mostly used to detect the nearby objects.

HC 05 Bluetooth Module:

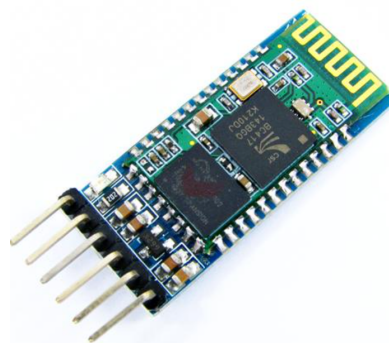


Figure - 7: HC 05 BLuetooth Module

HC-05 Bluetooth Module is an easy-to-use Bluetooth SPP (Serial Harbor Convention) module, planned for a straightforward remote serial association setup. Its communication is by means of serial communication which makes a straightforward way to interface with the controller or PC. It was used as a medium to transmit the voice commands to the device. The speed of HC 05 is 2.1Mbps maximum /160 kbps and it also has security features like authentication and encryption in the design.

DC 12v 300rpm geared Motors:



Figure - 8: DC 12V Motor

A geared DC Engine encompasses an equipment gathering joined to the engine. The speed of the engine is tallied in terms of turns of the shaft per diminutive and is named RPM. The adapt get-together makes a difference in expanding the torque and lessening the speed. DC gear motors are utilized basically in-car applications such as control winches on trucks, windshield wiper engines, and control situate or control window engines. Jacks, cranes, lifts, clamping, mechanical technology, movement, and blending are a few of the applications gearmotors are utilized for in the industry.

Software Requirements:

Arduino Uno:



Figure - 9: Arudino Logo

The Arduino Software (IDE) includes a text editor for writing code, a message area, a text console, a toolbar with buttons for basic functions, and a series of menus. It connects to the Arduino hardware, allowing it to upload and communicate with programs. C++ is the programming language for the Arduino. C++ is a superset of C, with additional classes and slight changes to struct behavior.

Bluetooth APP:

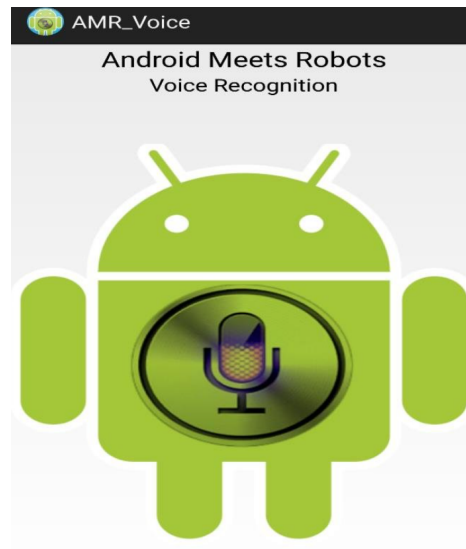


Figure - 10: AMR_Voice App

AMR_Voice is an android application used to transfer our words to the robot that has bluetooth. This takes the use of Google speech recognition for understanding the command read by the user.

Proposed Work:

The idea behind this project is to combine secure driving with voice recognition which will be helpful at situations like parking a car or traveling in a hectic traffic road and it helps us to relax on long journeys. The system uses the microcontroller called the arduino which controls the voice commands and the automation of the car. Basically, the bluetooth module (HC 05) is used to collect the voice command from the app to which the user will instruct the command. Then, based on the respective commands, the arduino will check the possibility of the command using an ultrasonic sensor. Based on the possibility, the arduino will instruct the L298N driver. Which allows the speed and direction control of wheels at the same time.

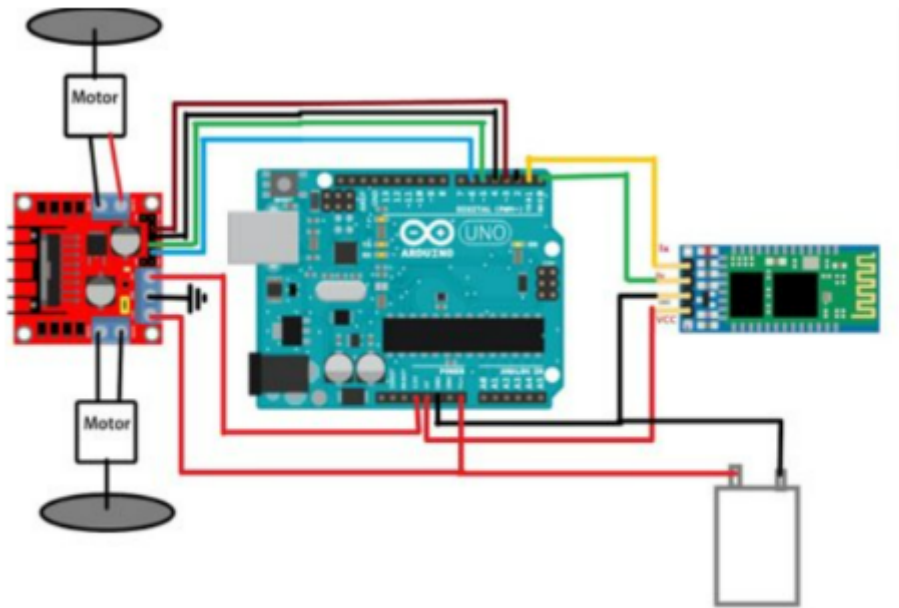


Figure - 11: Circuit Diagram Of Car

To generate power to rotate wheels, we will be using a 12v rechargeable sealed lead acid battery and The framework is designed keeping in view that the ultrasonic sensors on the car have to be mounted over the servo motor to rotate and have enough space to install Bluetooth. The sensor works synchronously with each other and makes a difference to the gadget in its operation and to explore its way by keeping up a particular separate from the individual and his commands. The choice is made on the premise of data gotten from all over sensors. This ultrasonic sensor is put at the top of the gadget to preserve exactness in measuring separation between the gadget and the user. The similar system can also be used for the voice controlled wheel chair for physically limited people.

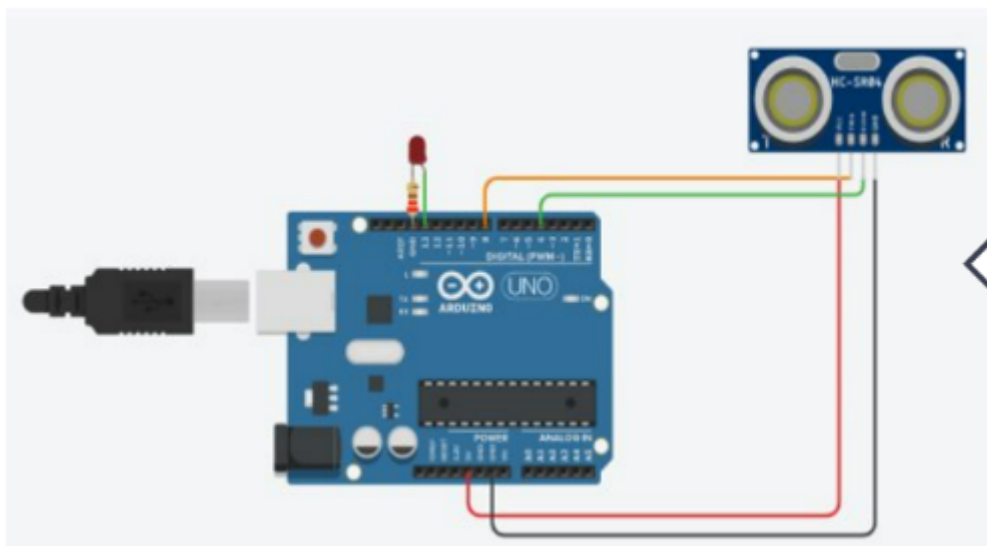


Figure - 12: Object Detection Circuit

Results and Discussion:

The main aim of our work is to implement voice recognition in cars which leads to car automation using voice. To design the device we used tinkercad tool to simulate the designs. After corroboration of design. We worked on implementation of our design. Primary work involved in Circuited is to connect L298N which allows us to help in mobility of cars. For instance, if we are about to move a car in a forward direction, we will give high current to the positive end of the motor. Similarly if we want to change direction to backwards we will pass high current to the negative end of the motor, which allows the car to reverse its direction. Hc 05 Bluetooth module is a device which acts as a medium between to transmit and receive the voice commands. The transmitter of HC 05 is connected to the receiver end in arduino uno and the receiver of hc 05 module has been connected to the transmitter of the arduino uno. The routing of L298N , HC 05 Bluetooth module and arduino uno will play a major role to lead in successful manner.

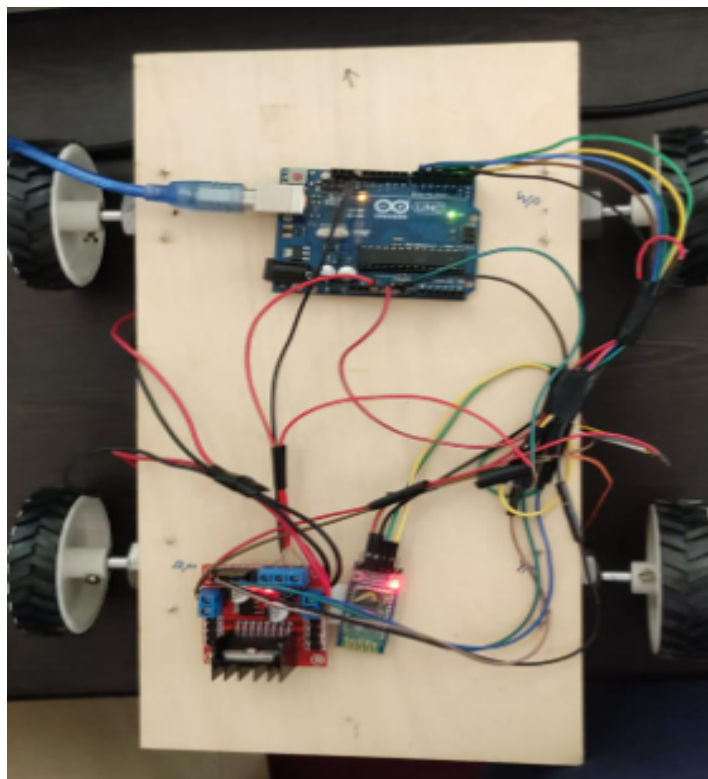


Figure - 13: Voice Controlled Car

To pass the voice commands and to connect HC 05 module with the car we utilized arduino ide is a open source software, used to implement speed operations and to specify the operations for a particular voice command. The future scope of this work can include integrating ultrasonic sensors to detect the objects and esp32 cameras can be used to enhance the security of the device. The analogWrite Arduino command is used to update the status of analogue pins and address the board's PWM pins. The digitalWrite function allows you to control the output of Arduino pins. It may be used to control ICs, LEDs, and relays, among other things. The SoftwareSerial library was created to provide serial communication on other Arduino digital pins by simulating the functionality with software.

Device	Cost
Amptek 12v Battery	1200
HC 05 Bluetooth Module	270
12V 300 RPM DC Motors	600
L298N Driver	120
Arduino Uno	800
Total	2990

Table 1: Cost of Device

The total cost of our device is 2990, which is plausible. It provides more viability in vehicles and when this method was implemented in the vehicle it tends to decrease the price since the vehicle will have a battery and motors we just had connected to the other components. So, the final price when it was implemented in automobiles will be approximately 1200.

Conclusion:

Command recognition using voice has been designed with the utilization of Arduino Uno, L298N driver, HC 05 Bluetooth module, DC motors with 300 rpm and 12v battery. The main functionality of our work is the car will move according to the instructions given by the user. If the user instructs to move forward it will move in the forwarding direction. If we instruct it to move backward. If we instruct it to stop it will halt in its current position. In addition, we added speed operations. For instance, if we are instructed to move "Forward 40" it will move in a forward direction at 40 km/h speed. If we instruct it to move "backward 40" it will move in the reverse direction. The future scope of our work is that ultrasonic sensors can be integrated to detect nearby objects and we can use cameras to enhance the security levels.

References:

- [1] Rajput, H., Sawant, K., Shetty, D., Shukla, P. and Chougule, A., 2018. Implementation of Voice Based Home Automation System Using Raspberry Pi. *International Research Journal of Engineering and Technology*, 5(5), pp.2771-2776.
- [2] Simmons, S.M., Caird, J.K. and Steel, P., 2017. A meta-analysis of in-vehicle and nomadic voice-recognition system interaction and driving performance. *Accident Analysis & Prevention*, 106, pp.31-43.
- [3] Sachdev, S., Macwan, J., Patel, C. and Doshi, N., 2019. Voice-controlled autonomous vehicle using IoT. *Procedia Computer Science*, 160, pp.712-717.
- [4] Jolad, B., Arora, M., Ganu, R. and Bhatia, C., 2017. Voice controlled robotic vehicle. *International Research Journal of Engineering and Technology (IRJET)*, 4(06).
- [5] M. Meena Kumari and S. Shimi, "Voice Operated Intelligent Fire Extinguisher Vehicle", *International Journal of Emerging Engineering Research and Technology*, vol. 5, no. 8, pp. 14-16, 20
- [6] Totakura, V., Vuribindi, B.R. and Reddy, E.M., 2021. Improved Safety of Self-Driving Cars using Voice Recognition through CNN. In *IOP Conference Series: Materials Science and Engineering* (Vol. 1022, No. 1, p. 012079). IOP Publishing.
- [7] Alka, N.U., Salihu, A.A., Haruna, Y.S. and Dalyop, I.A., 2017. A voice controlled pick and place robotic arm vehicle using an android application. *American Journal of Engineering Research (AJER)*, 6(7), pp.207-215.
- [8] Bilius, L.B., Vatavu, R.D. and Marquardt, N., 2021, August. Exploring application opportunities for smart vehicles in the continuous interaction space inside and outside the vehicle. In *IFIP Conference on Human-Computer Interaction* (pp. 140-149). Springer, Cham

Appendix:

Code:

```
#include <SoftwareSerial.h>

SoftwareSerial BT(0, 1); //TX, RX respectively
String readvoice;
String readvoice1;

void setup() {
  BT.begin(9600);
  Serial.begin(9600);
  pinMode(4, OUTPUT); // Initializing Output Pins
  pinMode(3, OUTPUT);
  pinMode(5, OUTPUT);
  pinMode(6, OUTPUT);

}
//-----//
void loop() {
  while (BT.available()){ //Check if there is an available byte to read
    delay(10); //Delay added to make thing stable
    char c = BT.read(); //Conduct a serial read
    readvoice += c; //build the string- "forward (value)", "back (value)", "left" and "right"
  }
  if (readvoice.length() > 0) {
    Serial.println(readvoice);
    if(readvoice.indexOf("forward")==1){//Check forward present in the sentence or not
      //digitalWrite(3, HIGH);
      String speed1 = readvoice.substring(9,11);/*forward 40#
      int speed2 = speed1.toInt();// Converting to Integer
      speed2 = speed2 + 100;//add 100 rpm to the value mentioned
      analogWrite(3, speed2);//Give the respective speed
      digitalWrite (4, LOW);
      digitalWrite(5,LOW);
      //digitalWrite(6,HIGH);
      analogWrite(6, speed2);
    }
    else if(readvoice.indexOf("back")==1)
  }
  //check if there is back in the sentence or not
  String speed3 = readvoice.substring(6,8);/*back 50#
  int speed4 = speed3.toInt();// Converting into integer
  speed4 = speed4 + 100;// adding 100 to the mentioned value
  digitalWrite(3, LOW);
```

```

//digitalWrite(4, HIGH);
analogWrite(4, speed4);//Giving the respective RPM
//digitalWrite(5, HIGH);
analogWrite(5, speed4);
digitalWrite(6,LOW);
delay(100);
}
else if (readvoice == "*left#")
{
    digitalWrite (3,HIGH);//Only right side wheels will rotate
    digitalWrite (4,LOW);
    digitalWrite (5,LOW);
    digitalWrite (6,LOW);
}

else if ( readvoice == "*right#")
{
    digitalWrite (3, LOW);
    digitalWrite (4, LOW);
    digitalWrite (5, LOW);
    digitalWrite (6, HIGH);//Only left side wheels will rotate
}
else if (readvoice == "*stop#")
{
    digitalWrite (3, LOW);
    digitalWrite (4, LOW);
    digitalWrite (5, LOW);
    digitalWrite (6, LOW);// All will stop
    delay (100);
}
readvoice="";}} //Reset the variable

```