
DAY 5 • REVIEW AND PRACTICE

Task-1 Open Cisco Packet Tracer and create a new project named "HomeWiFiNetwork.pkt" with three PCs and one wireless router connected appropriately. Assign static IP addresses to all PCs on the same subnet (for example, 192.168.10.x), configure the default gateway to the router's IP address, test connectivity using ping, and document the topology and each PC's IP configuration with screenshots.

Network Diagram

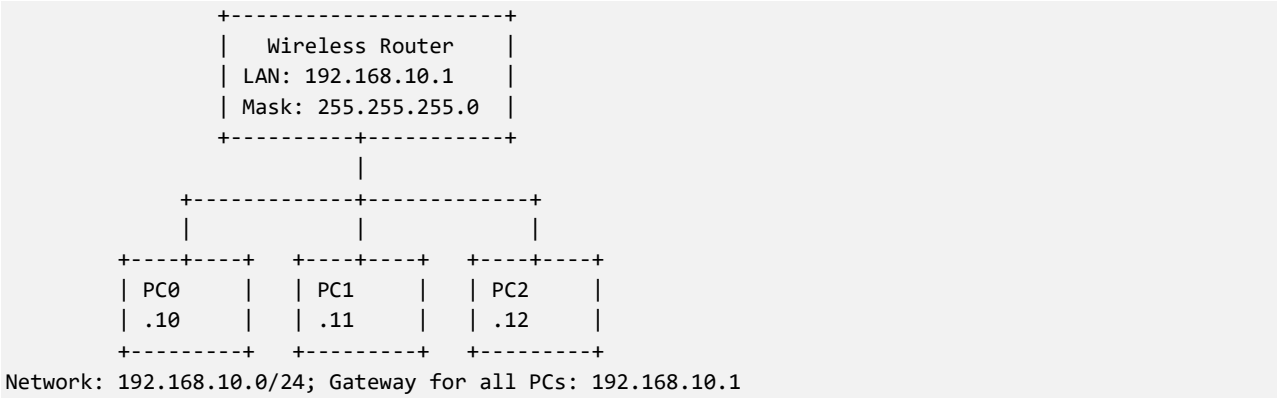

Device	IP address	Subnet mask	Default gateway
Wireless Router LAN	192.168.10.1	255.255.255.0	—
PC0	192.168.10.10	255.255.255.0	192.168.10.1
PC1	192.168.10.11	255.255.255.0	192.168.10.1
PC2	192.168.10.12	255.255.255.0	192.168.10.1

Task 1: Create Project and Add Devices

1. Open Cisco Packet Tracer and select File → New.
2. Drag three PCs from End Devices into the workspace and label them PC0, PC1, and PC2.
3. From Network Devices / Wireless Devices, add one wireless router (for example, WRT300N if available).
4. Arrange the devices clearly, with the router above the three PCs.
5. Choose File → Save As and save the project as HomeWiFiNetwork.pkt.

DAY 5 • REVIEW AND PRACTICE

Task 2: Connect Devices and Configure Static IPs

A. Connect devices

6. Click Connections (lightning icon).
7. For a wired setup, choose Copper Straight-Through or Automatically Choose Connection Type.
8. Connect each PC to a separate LAN/Ethernet port on the wireless router. Do not connect PCs to the Internet/WAN port.
9. Wait for the link indicators to become active. For wireless connections, ensure the PC supports wireless and joins the router's SSID.

B. Configure router LAN address

10. Click the wireless router and open its GUI or Config tab (depending on model).
11. Find LAN / Local IP settings and set the LAN IP to 192.168.10.1 and subnet mask to 255.255.255.0, if configurable.
12. Apply or save the settings. Router menus may vary by model.

C. Configure PC0

13. Click PC0 → Desktop → IP Configuration.
14. Select Static.
15. Enter IP Address 192.168.10.10.
16. Enter Subnet Mask 255.255.255.0.
17. Enter Default Gateway 192.168.10.1.

D. Configure PC1 and PC2

Repeat PC → Desktop → IP Configuration → Static and use the values below.

PC	IP address	Subnet mask	Gateway
PC1	192.168.10.11	255.255.255.0	192.168.10.1
PC2	192.168.10.12	255.255.255.0	192.168.10.1

DAY 5 • REVIEW AND PRACTICE

Task 3: Test Connectivity Using Ping

Method A: Command Prompt

18. Click PC0 → Desktop → Command Prompt.
19. Type ping 192.168.10.11 and press Enter to test PC1.
20. Type ping 192.168.10.12 and press Enter to test PC2.
21. Type ping 192.168.10.1 and press Enter to test the router, if the model responds to ping.
22. Repeat a failed ping once; the first request may time out while address resolution occurs.

```
PC0> ping 192.168.10.11
PC0> ping 192.168.10.12
PC0> ping 192.168.10.1
```

Method B: Simple PDU

23. Select Add Simple PDU (envelope icon).
24. Click the source PC and then the destination PC.
25. Check the PDU result in the Simulation/Event List.
26. Repeat tests between PC0 and PC1, PC0 and PC2, and from a PC to the router if supported.

Screenshot 5: Insert successful ping replies or Simple PDU results here.

Task 4: Document the Configuration

Troubleshooting

- Give each PC a unique IP address; do not reuse an address.
- All devices must be in the same subnet: 192.168.10.0/24 with mask 255.255.255.0.
- Set each PC's default gateway to 192.168.10.1.
- For wired connections, use LAN ports rather than the router's WAN/Internet port.
- Check cable type, link lights, router LAN address, and wireless association if applicable.
- If ping fails, recheck IP settings and retry after the links are active.

Result

The expected result is a Packet Tracer project named HomeWiFiNetwork.pkt containing three PCs and one wireless router. The PCs use static addresses in the 192.168.10.0/24 network and the default gateway 192.168.10.1. Connectivity is verified with ping or Simple PDU, and screenshots document the topology and IP settings.

Note: Confirm the actual ping results in Packet Tracer before submitting; do not report successful connectivity unless the test passes.