

Firmware upgrade method

The following steps take the upgrade of WTVB02-485 from version 1 00 59 1.10 to version 10059.1.11 as an example. You need to select the corresponding model on the host computer according to the sensor you have.

1. Open the PC software and connect the sensor


①Select sensor model **WT-VB02-485**

②Search **device**

③After searching, **check the serial port number**

④Click the **tool** button

⑤Select the **firmware upgrade** button

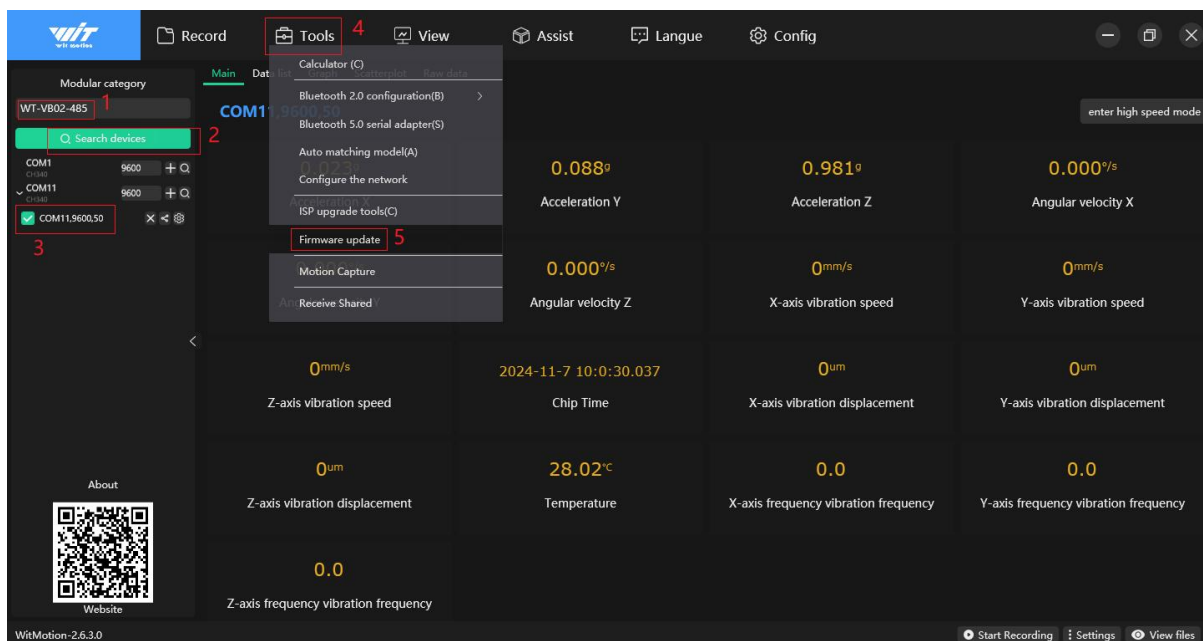


2. Select **the bin file** provided by the technical support engineer on the PC software

①Click the Select **File** button


②Select the **bin format** file provided by technical support


③Click **the** open button

④Click the **Upgrade** button

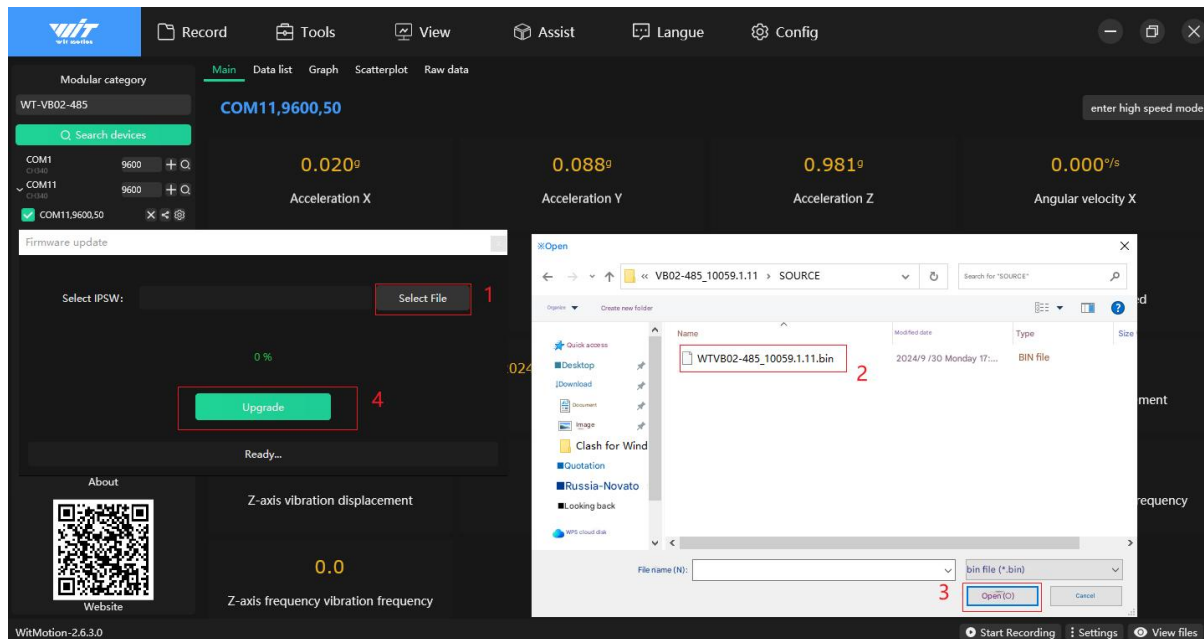


3. Upgrade Successfully

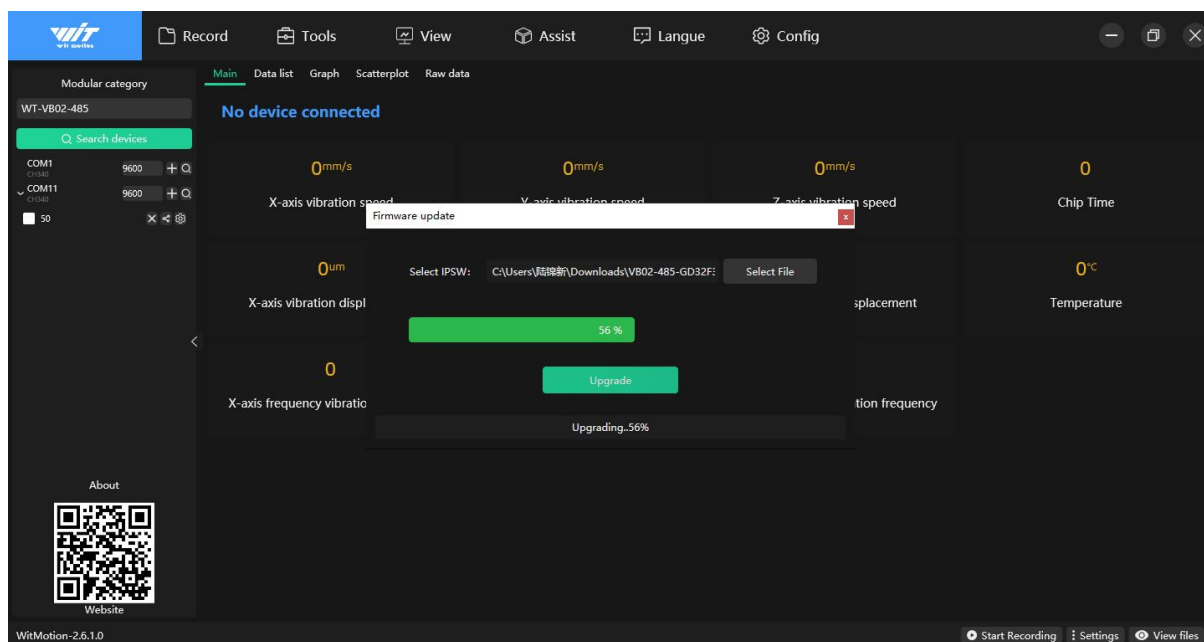


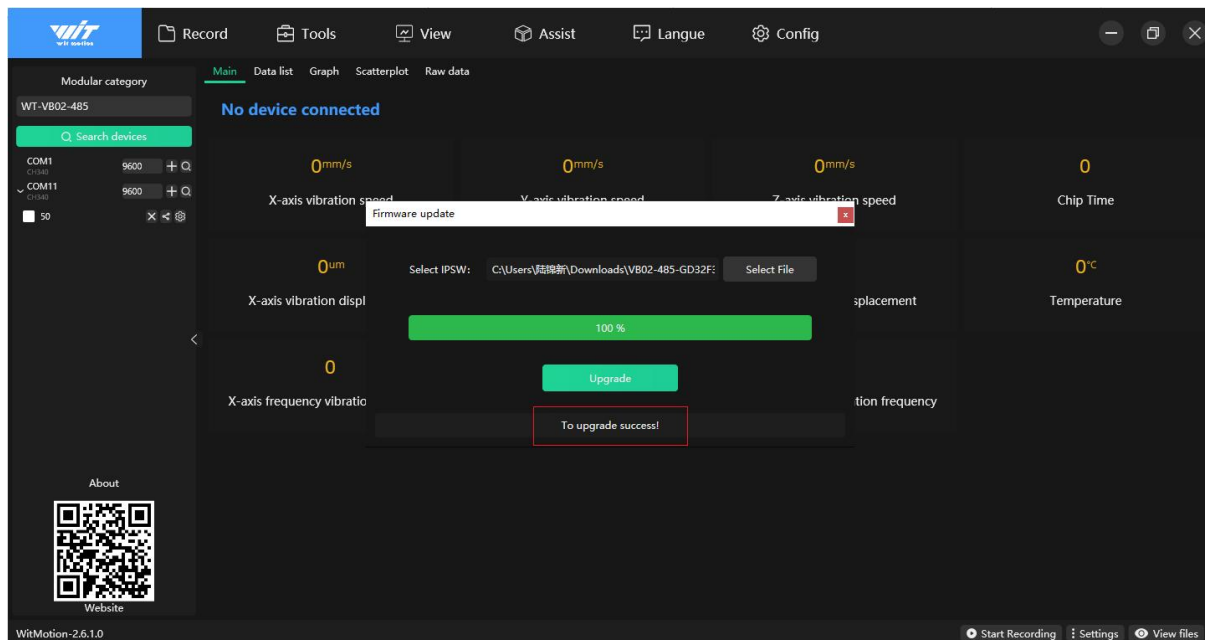

4. During the upgrade process, you may encounter the prompt " **Send $\$(ADDR) 06 00 00 00 FF \$(CRC16)$, restart the sensor. If the sensor does not restart, please power on the sensor again .** " At this time, you can directly **disconnect the VCC of the sensor and then reconnect it** , and the upgrade will begin.

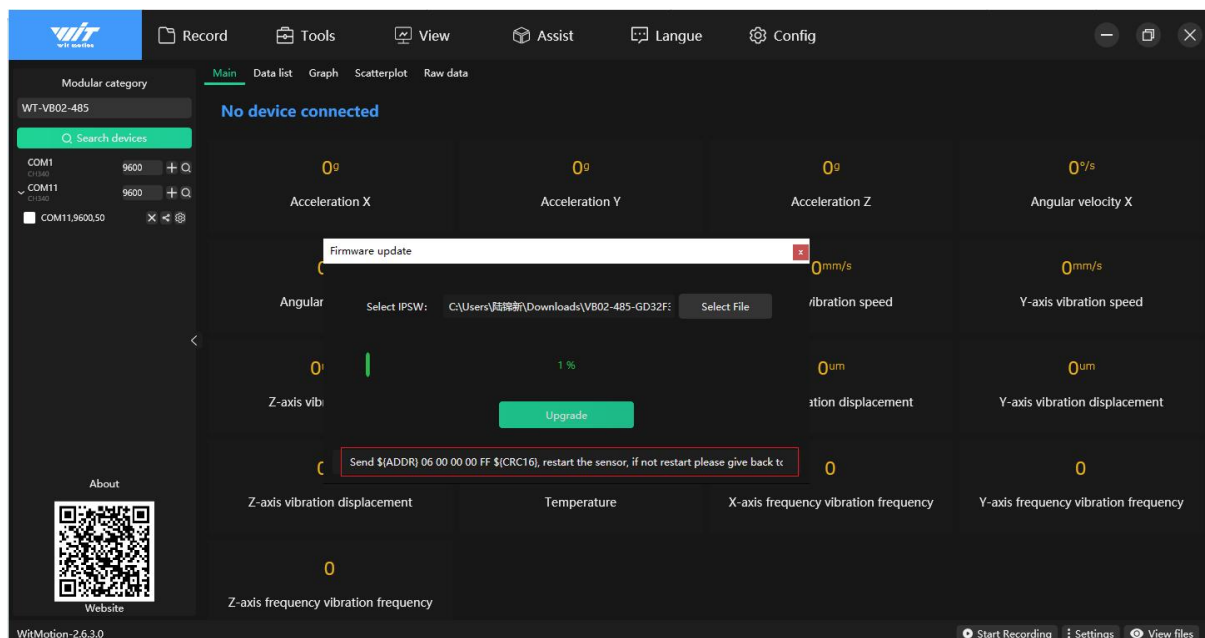

Upgrade failed " halfway through , or directly prompts " **Device restart not detected, upgrade failed** ", you can click Upgrade again.

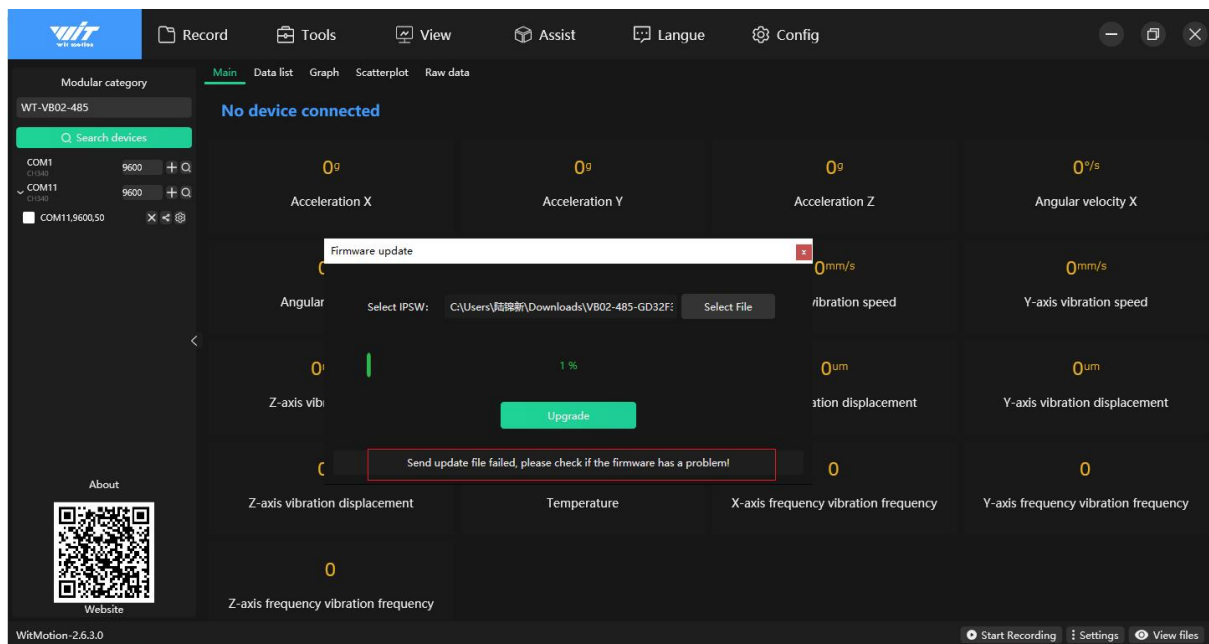

Upgrade Successfully

