






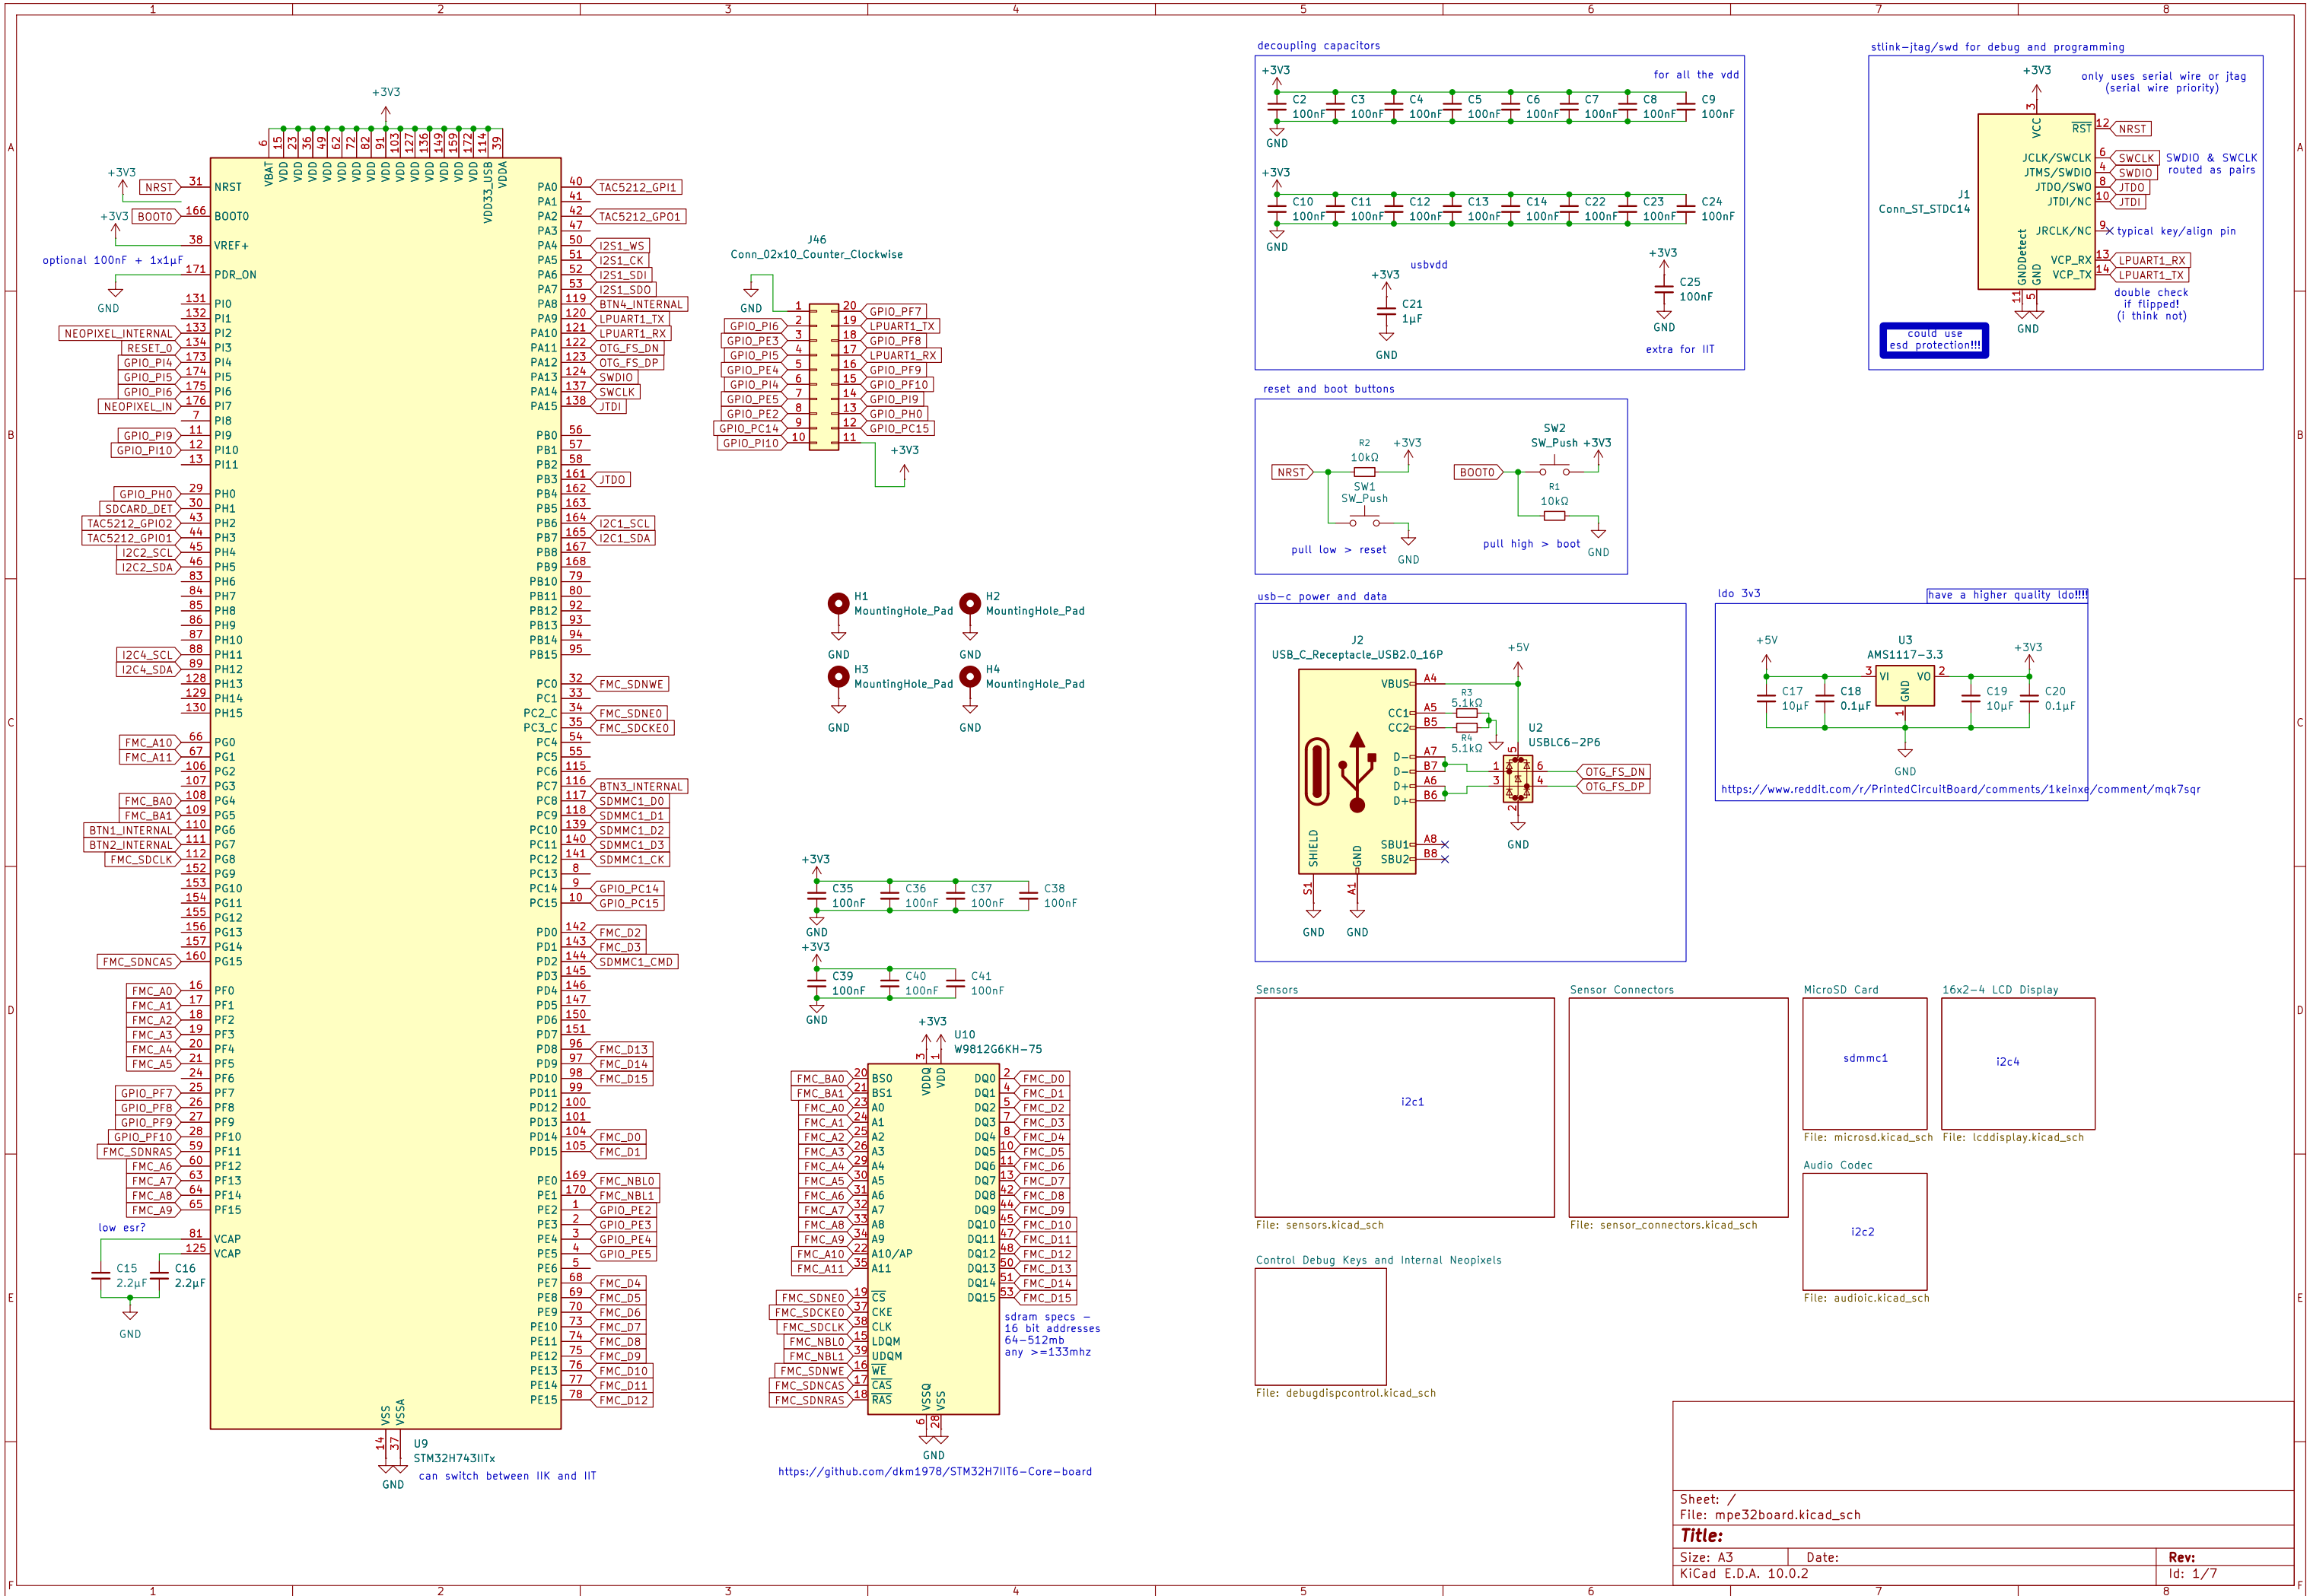

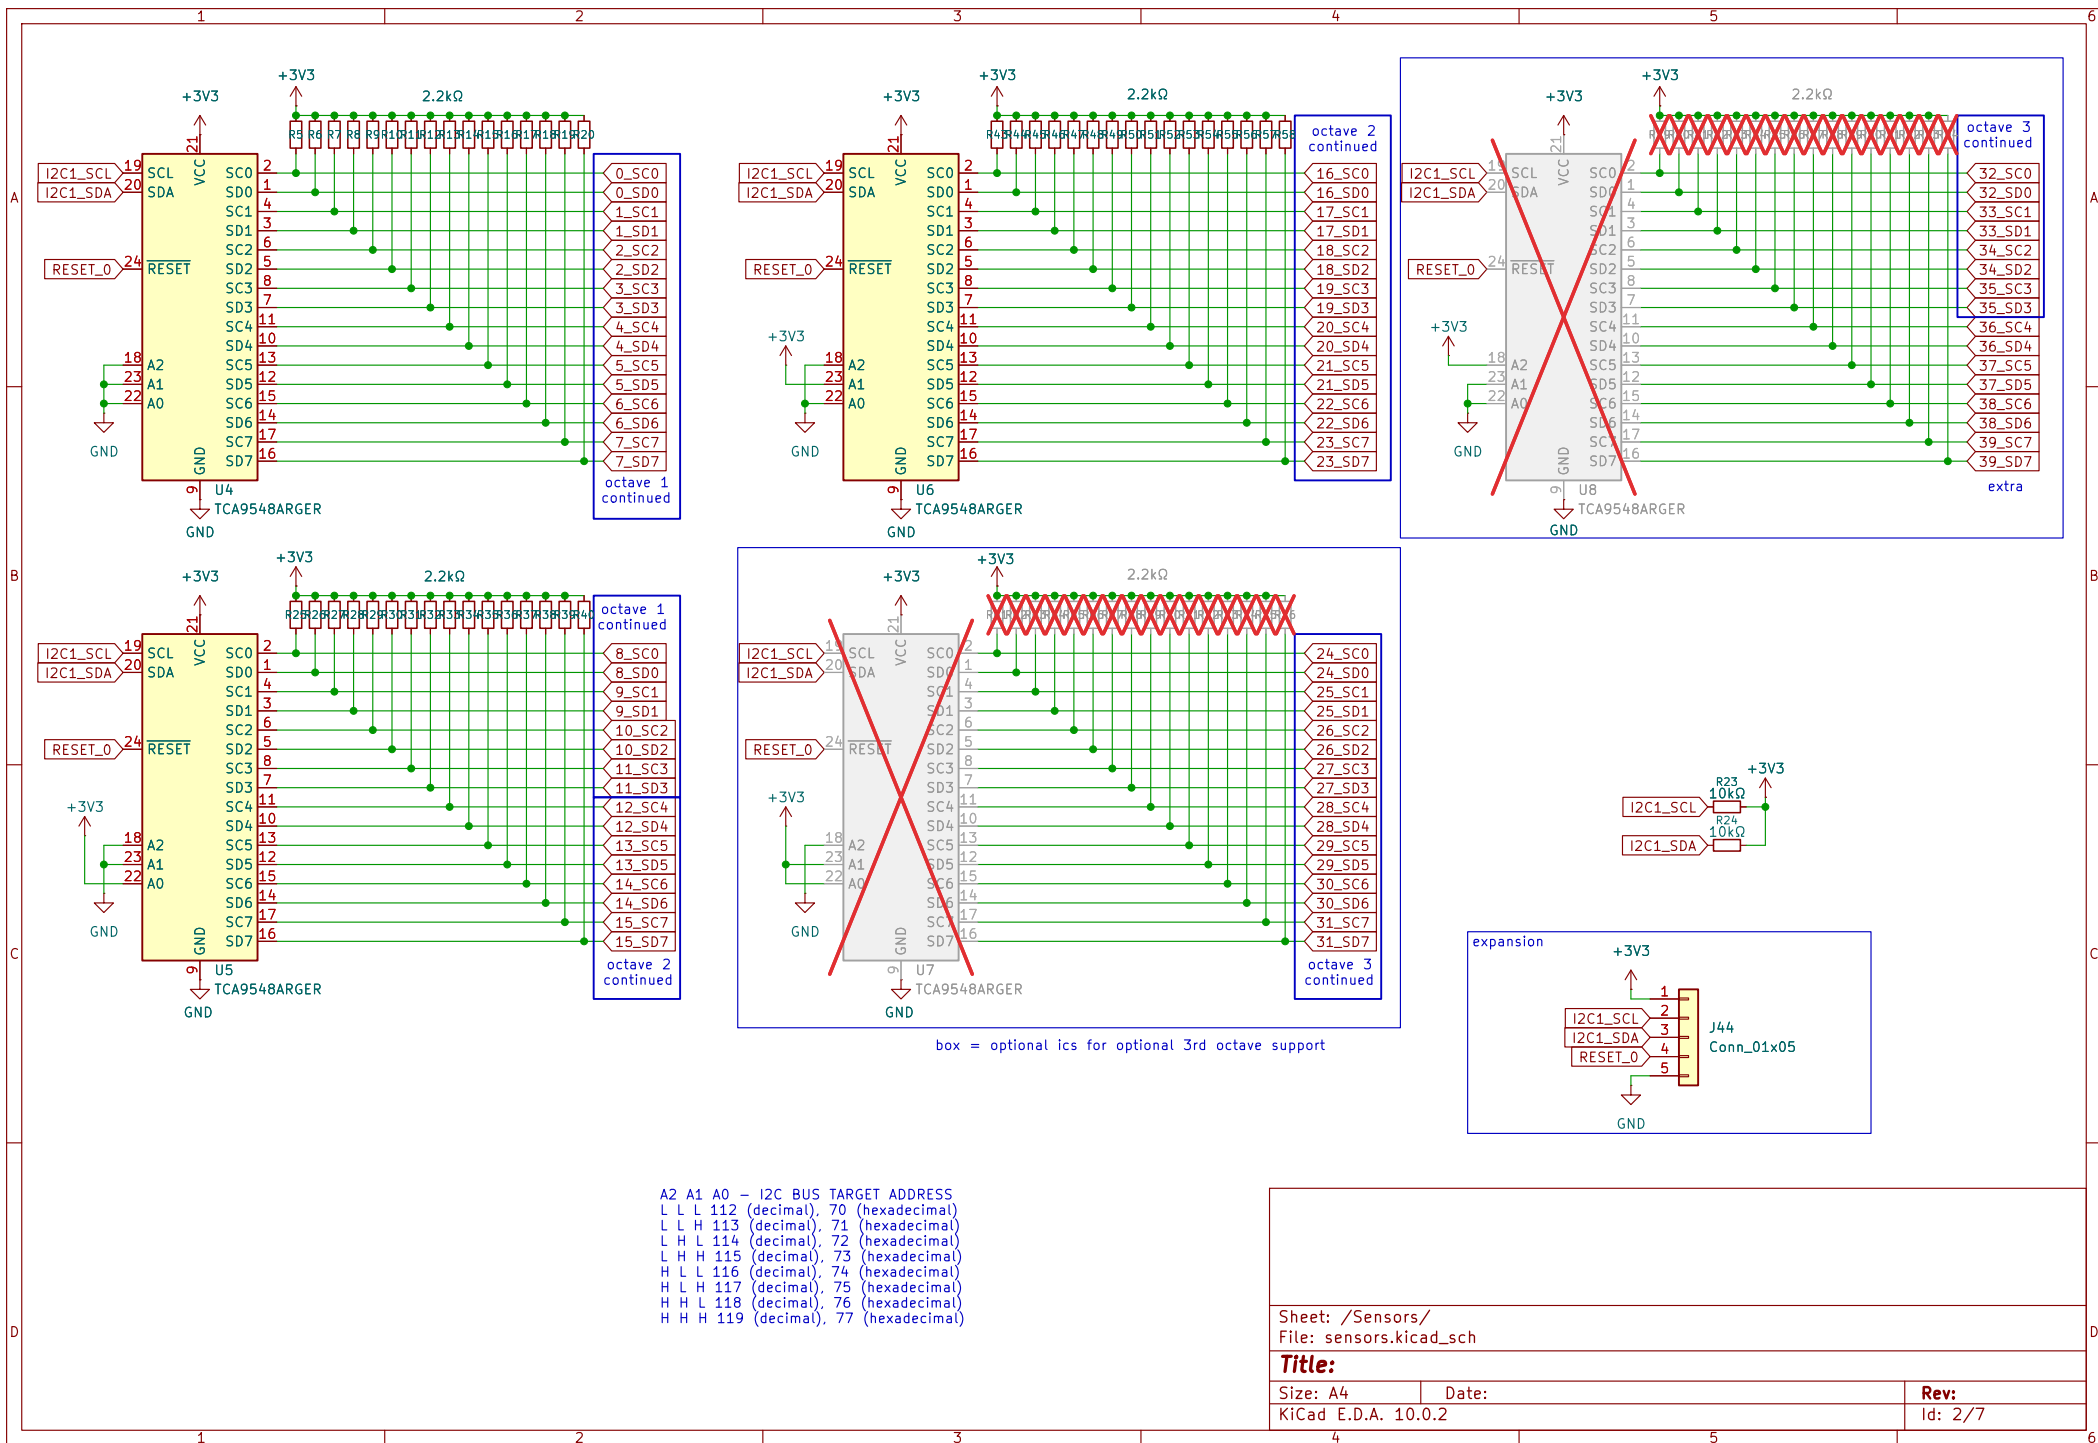

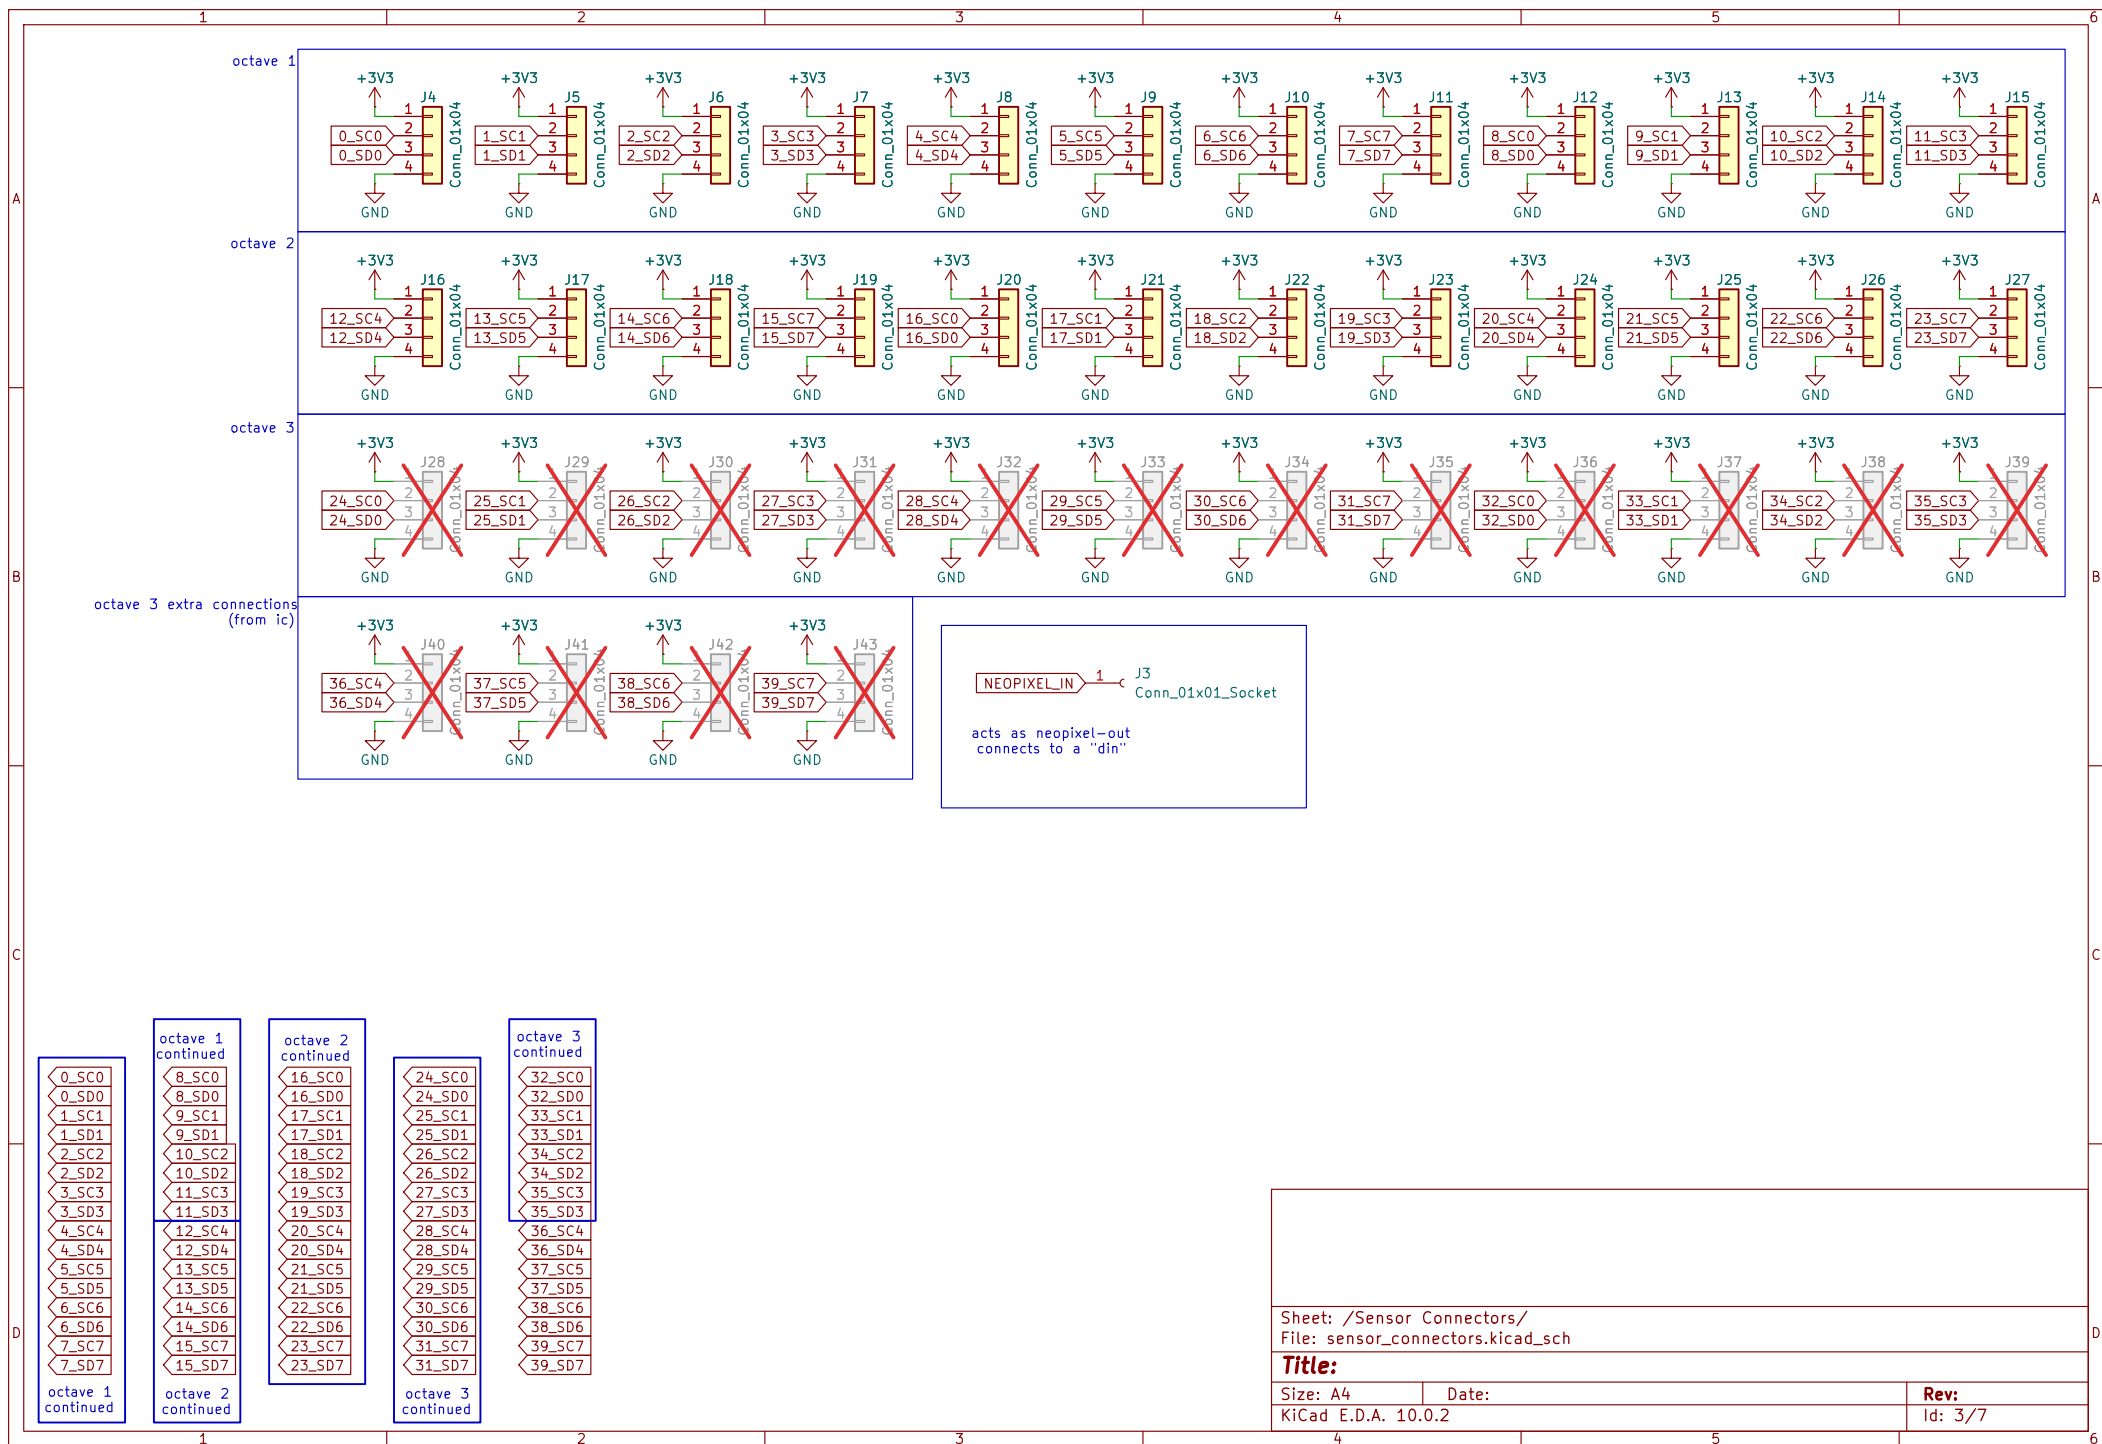

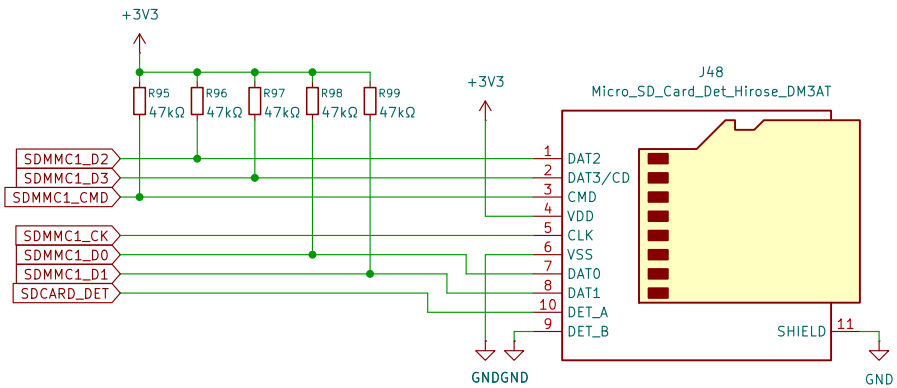

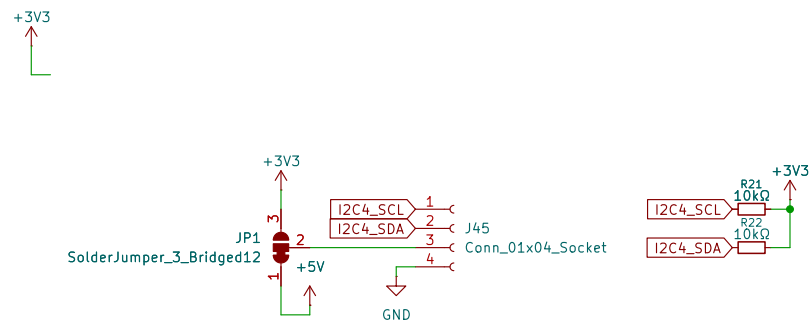

5v power is supplied to the i2c lcd display

it is expected there's support for 3v3 logic on i2c!!!!
(meaning no 5v pullups on the device side)
(if so, level shifters needed)
(if not present, the board is fried)

<https://www.digikey.com/en/products/detail/sunfounder/CN0295D/18668612>

Sheet: /16x2-4 LCD Display/
File: lcddisplay.kicad_sch

Title:


Size: A4

Date:

KiCad E.D.A. 10.0.2

Rev:

Id: 5/7

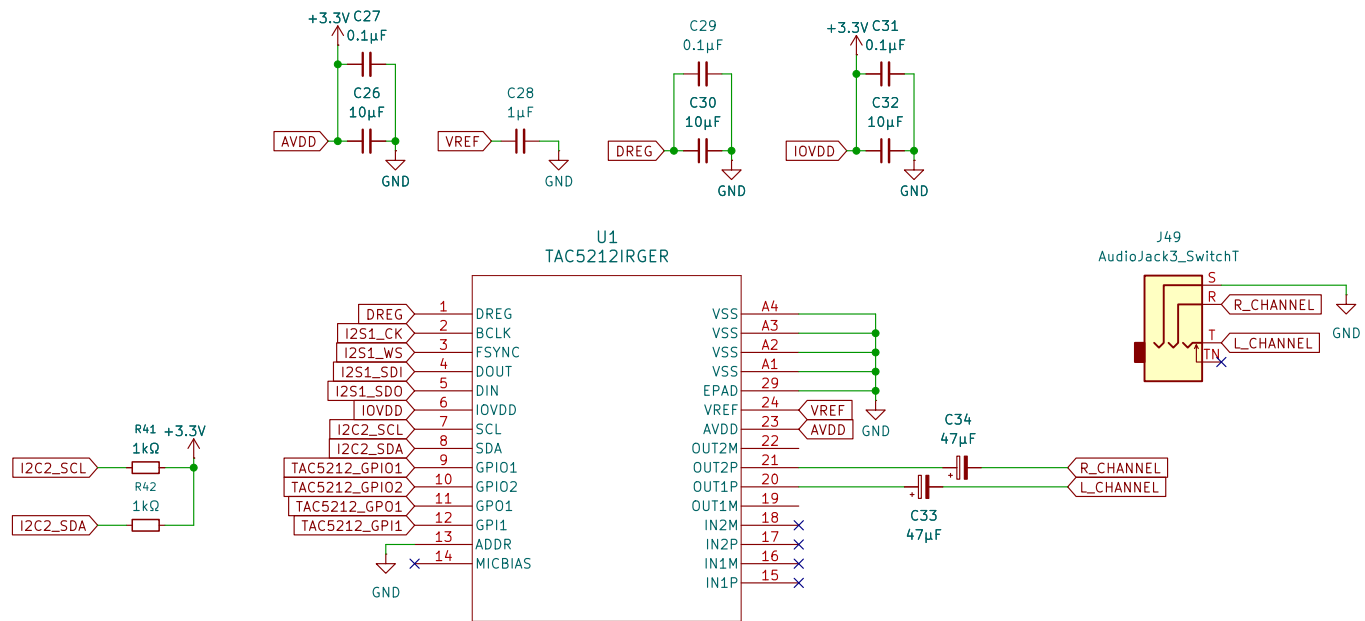

<https://www.ti.com/lit/ug/slau902a/slau902a.pdf> (pg 11)
https://github.com/t-dsp/t-dsp_tac5212_pro_audio_module/blob/main/documentation/t-dsp-tac5212-schematic.pdf

Sheet: /Audio Codec/
 File: audioic.kicad_sch


Title:

Size: A4 Date:

KiCad E.D.A. 10.0.2

Rev:

Id: 6/7

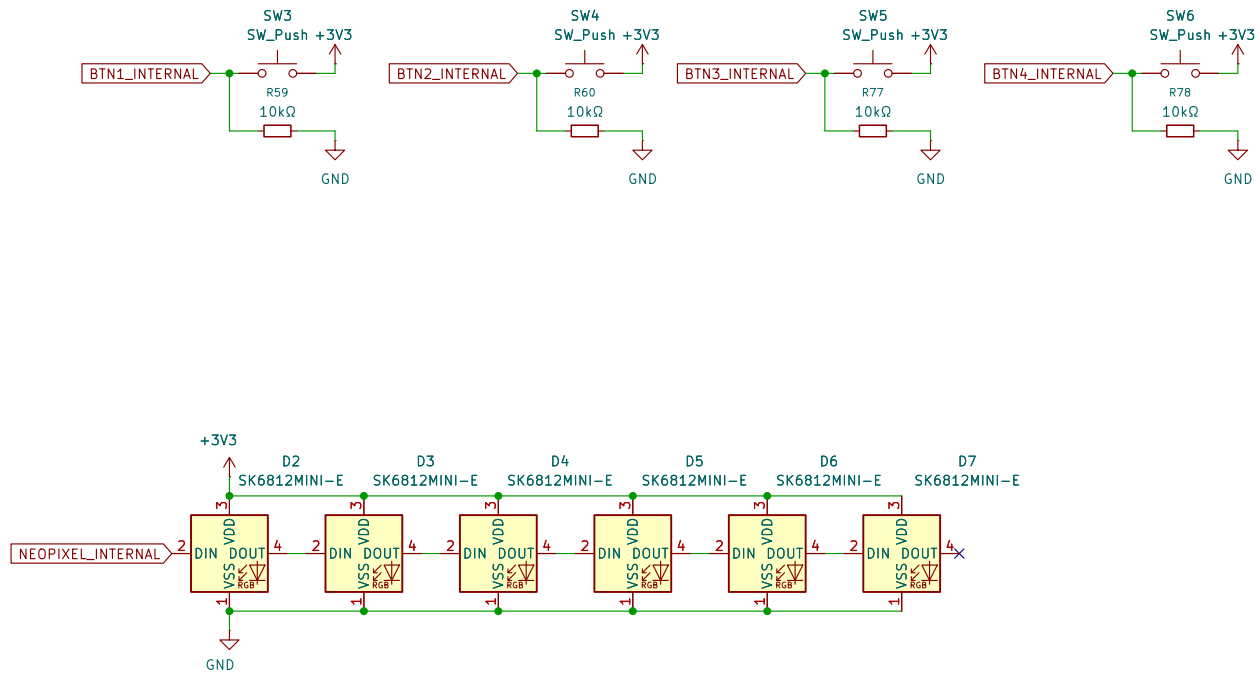

maybe add decoupling caps

Sheet: /Control Debug Keys and Internal Neopixels/
File: debugdispcontrol.kicad_sch

Title:

Size: A4

Date:

KiCad E.D.A. 10.0.2

Rev:

Id: 7/7