3S-COM Testbed Scenario Report - Scenario 1 - Normal Load

Scenario	Algorithm	Requests	Accept	No safe	MSD viol	Decision ms	Service ms	Timeouts	Migrations	MSD drops
nario 1 - Normal	hybrid_runtime	34	100.0%	0.0%	0.0%	259.2	2.60	0	0	0
nario 1 - Normal	jo_vppm	34	100.0%	0.0%	0.0%	1588.0	4.72	0	0	0
nario 1 - Normal	heuristic	34	100.0%	0.0%	0.0%	27.5	1.32	0	0	0
nario 1 - Normal	greedy	34	100.0%	0.0%	0.0%	0.6	0.16	0	0	0
nario 1 - Normal	decoupled	34	94.1%	0.0%	5.9%	0.3	3.65	0	0	0

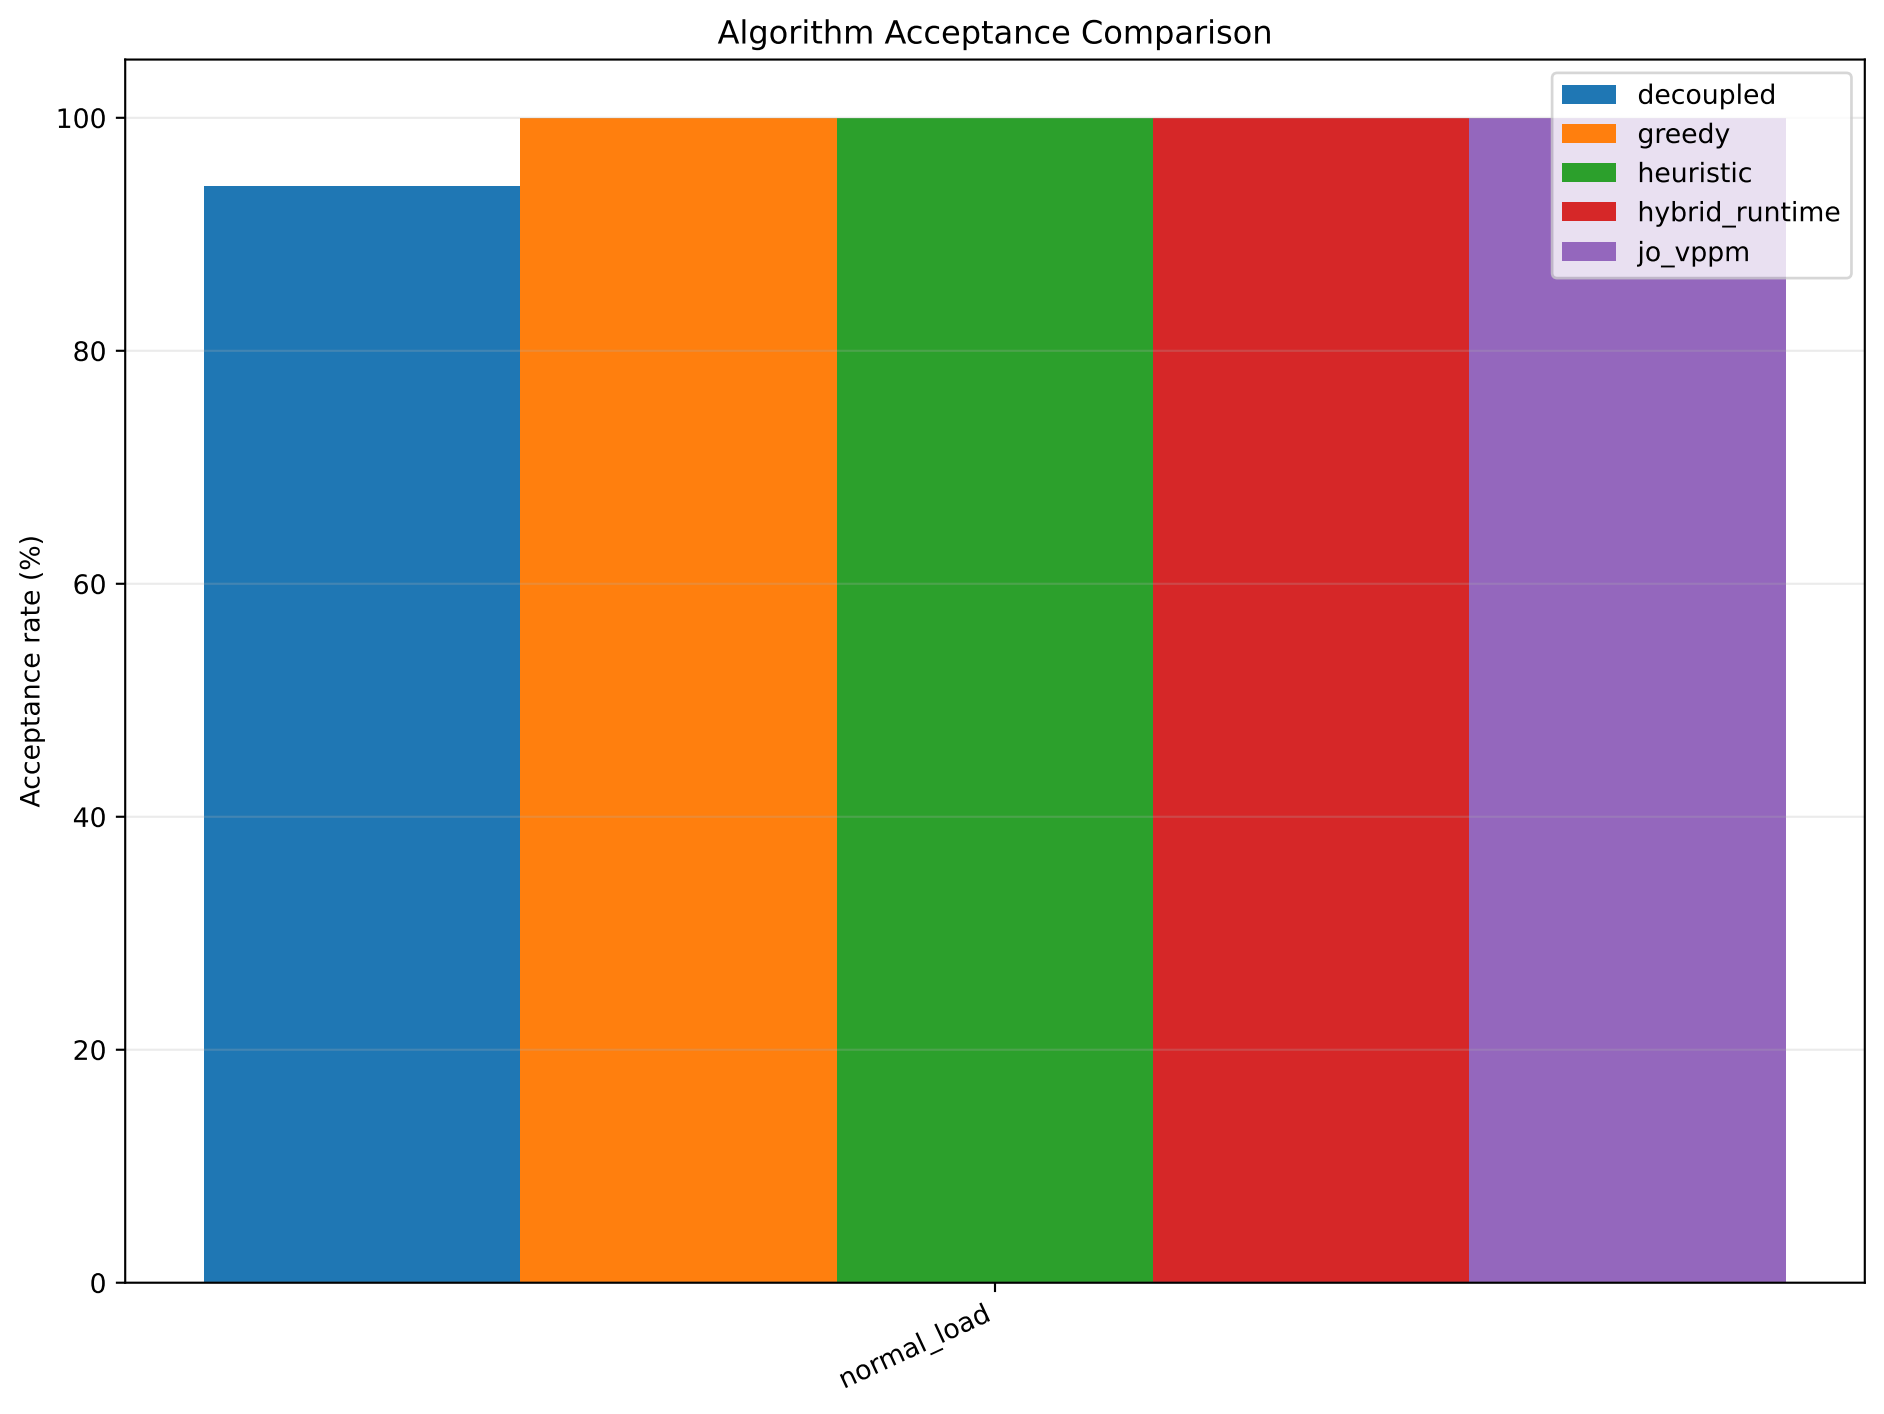
Algorithm Acceptance Comparison
Acceptance rate (%)
0
20
40
60
80
100
normal_load
decoupled
greedy
heuristic
hybrid_runtime
jo_vppm

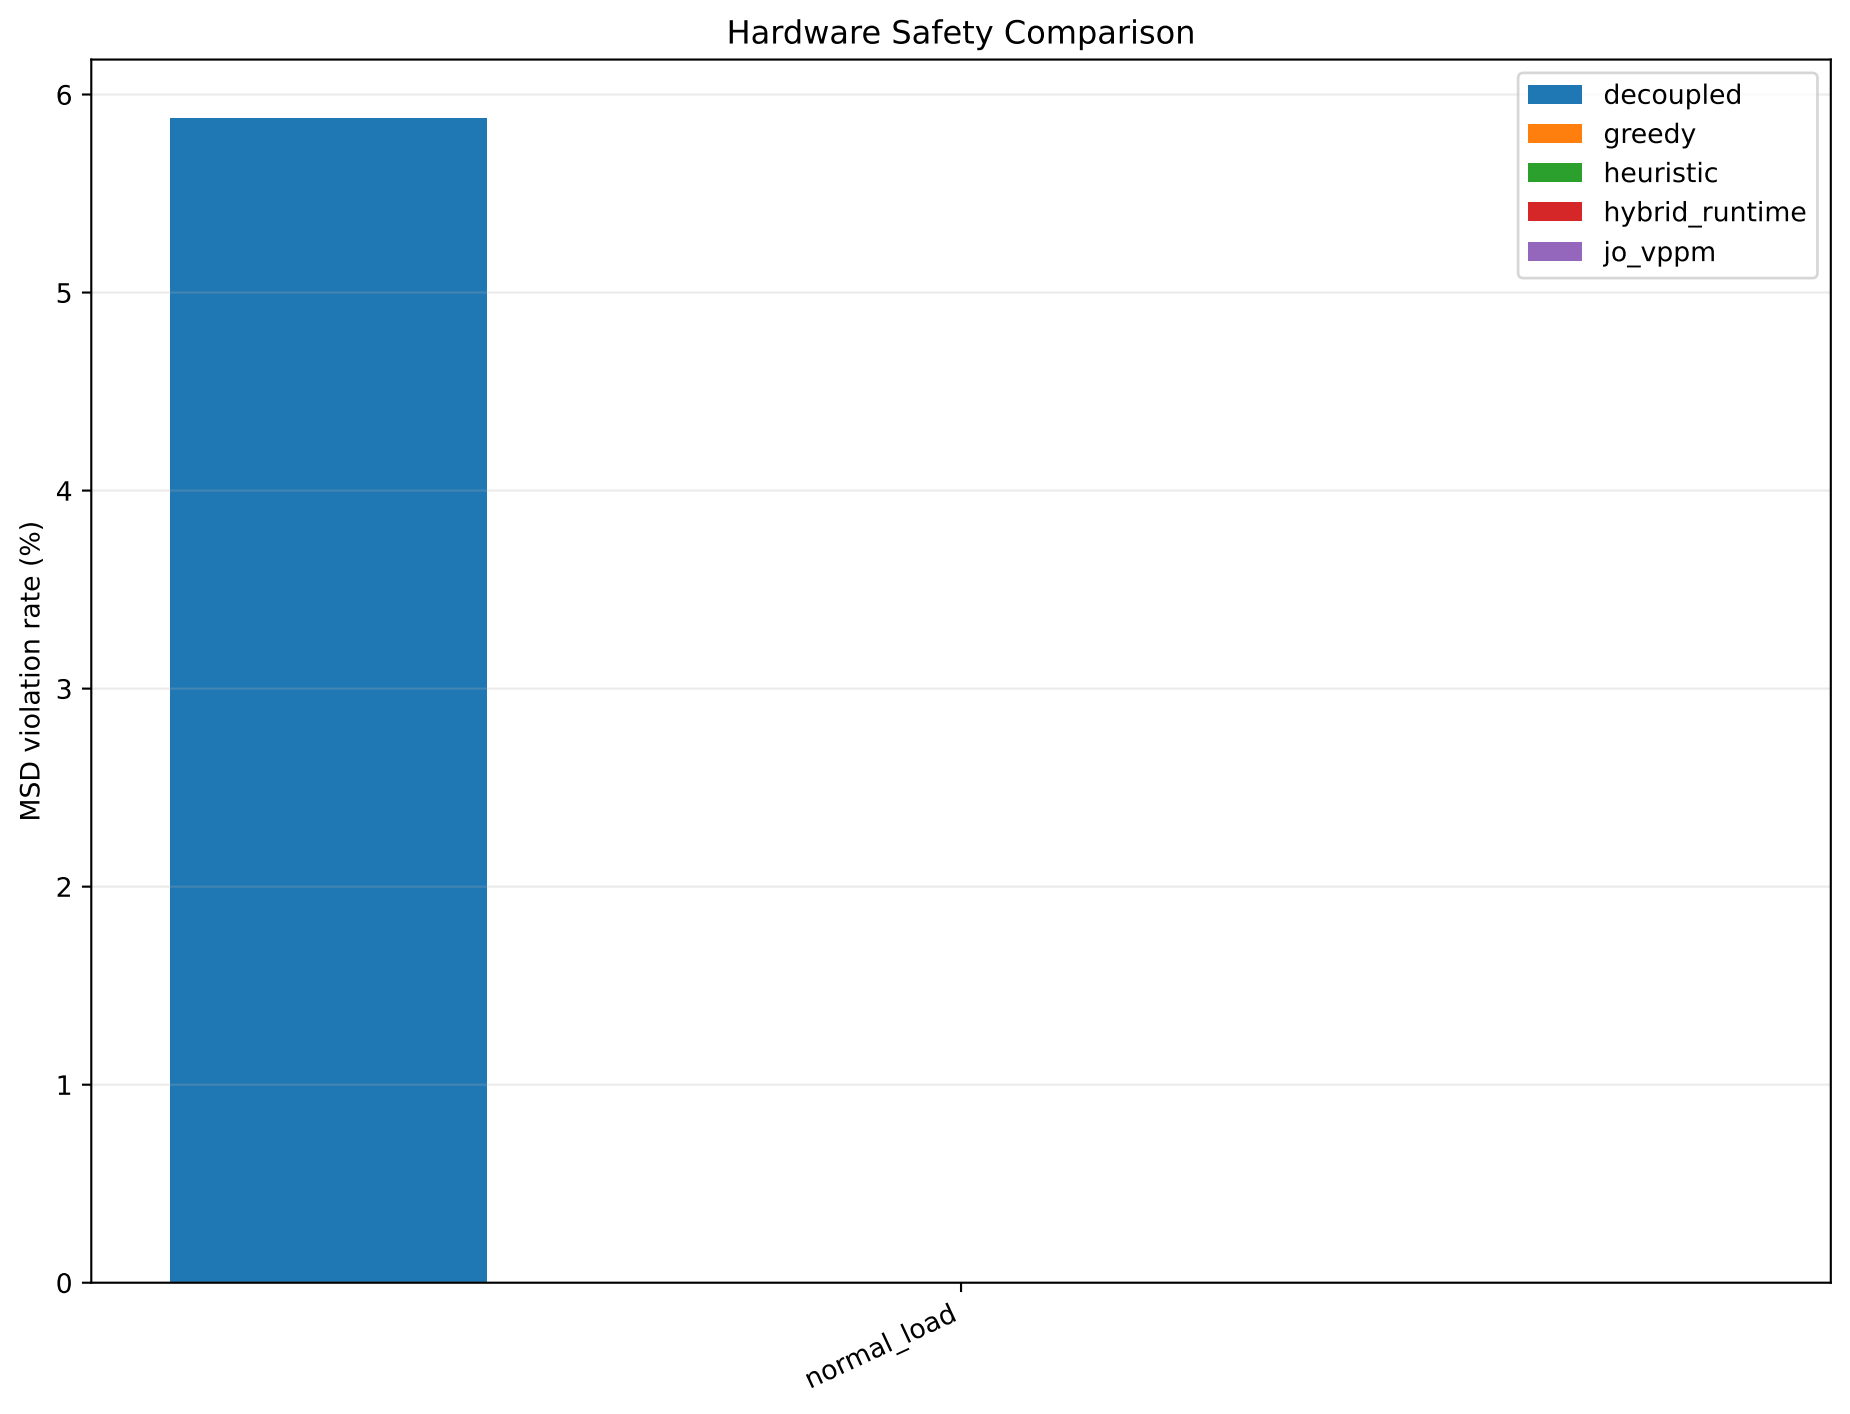
Hardware Safety Comparison
MSD violation rate (%)
0
1
2
3
4
5
6
normal_load
decoupled
greedy
heuristic
hybrid_runtime
jo_vppm

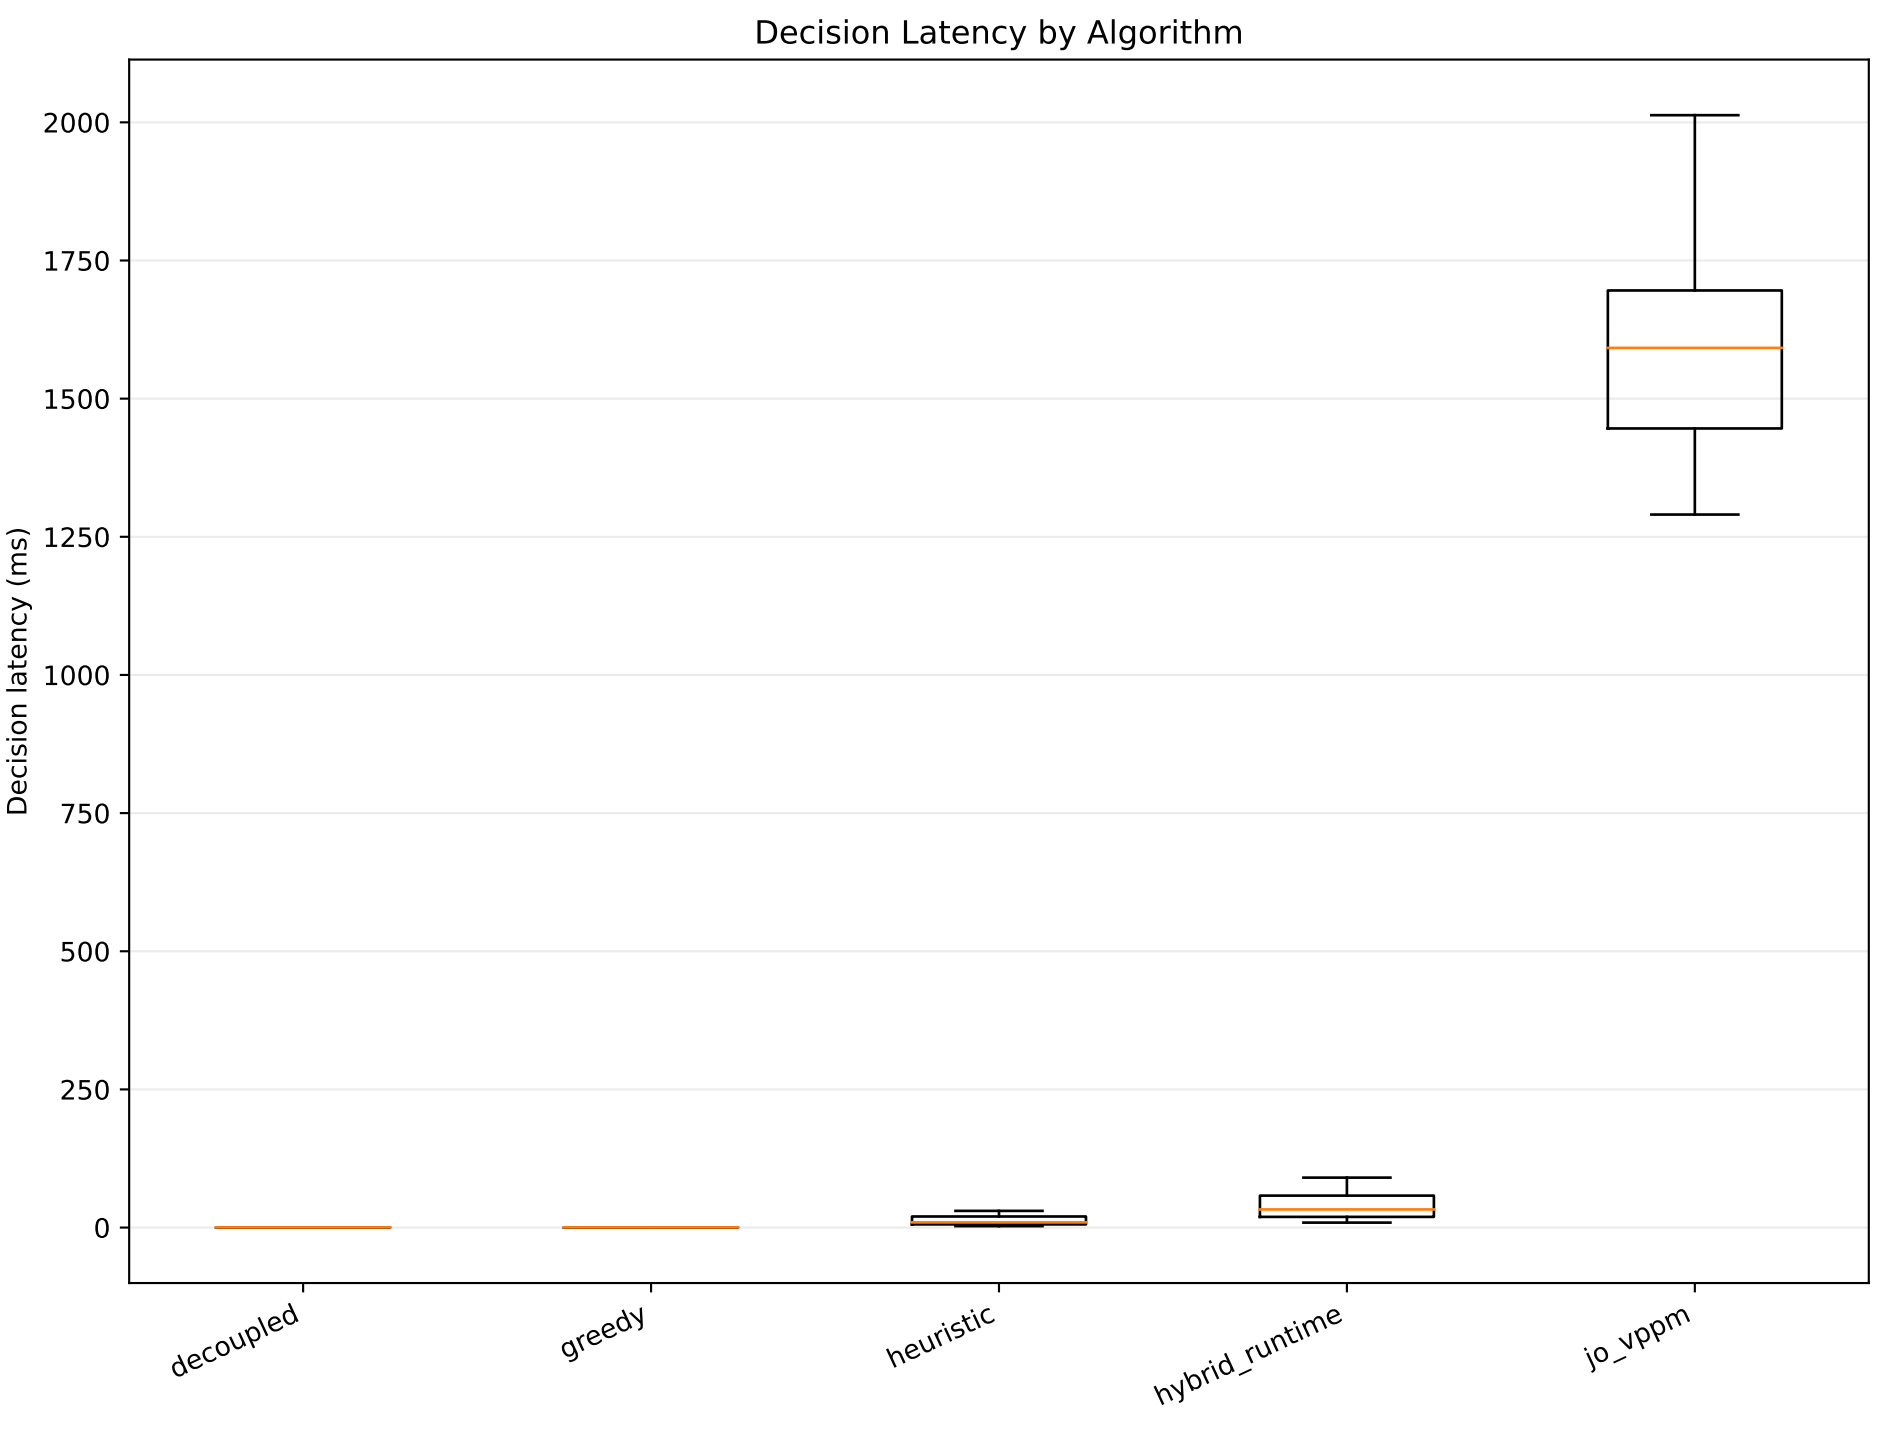
Decision Latency by Algorithm
Decision latency (ms)
2000
1750
1500
1250
1000
750
500
250
0
decoupled
greedy
heuristic
hybrid_runtime
jo_vppm

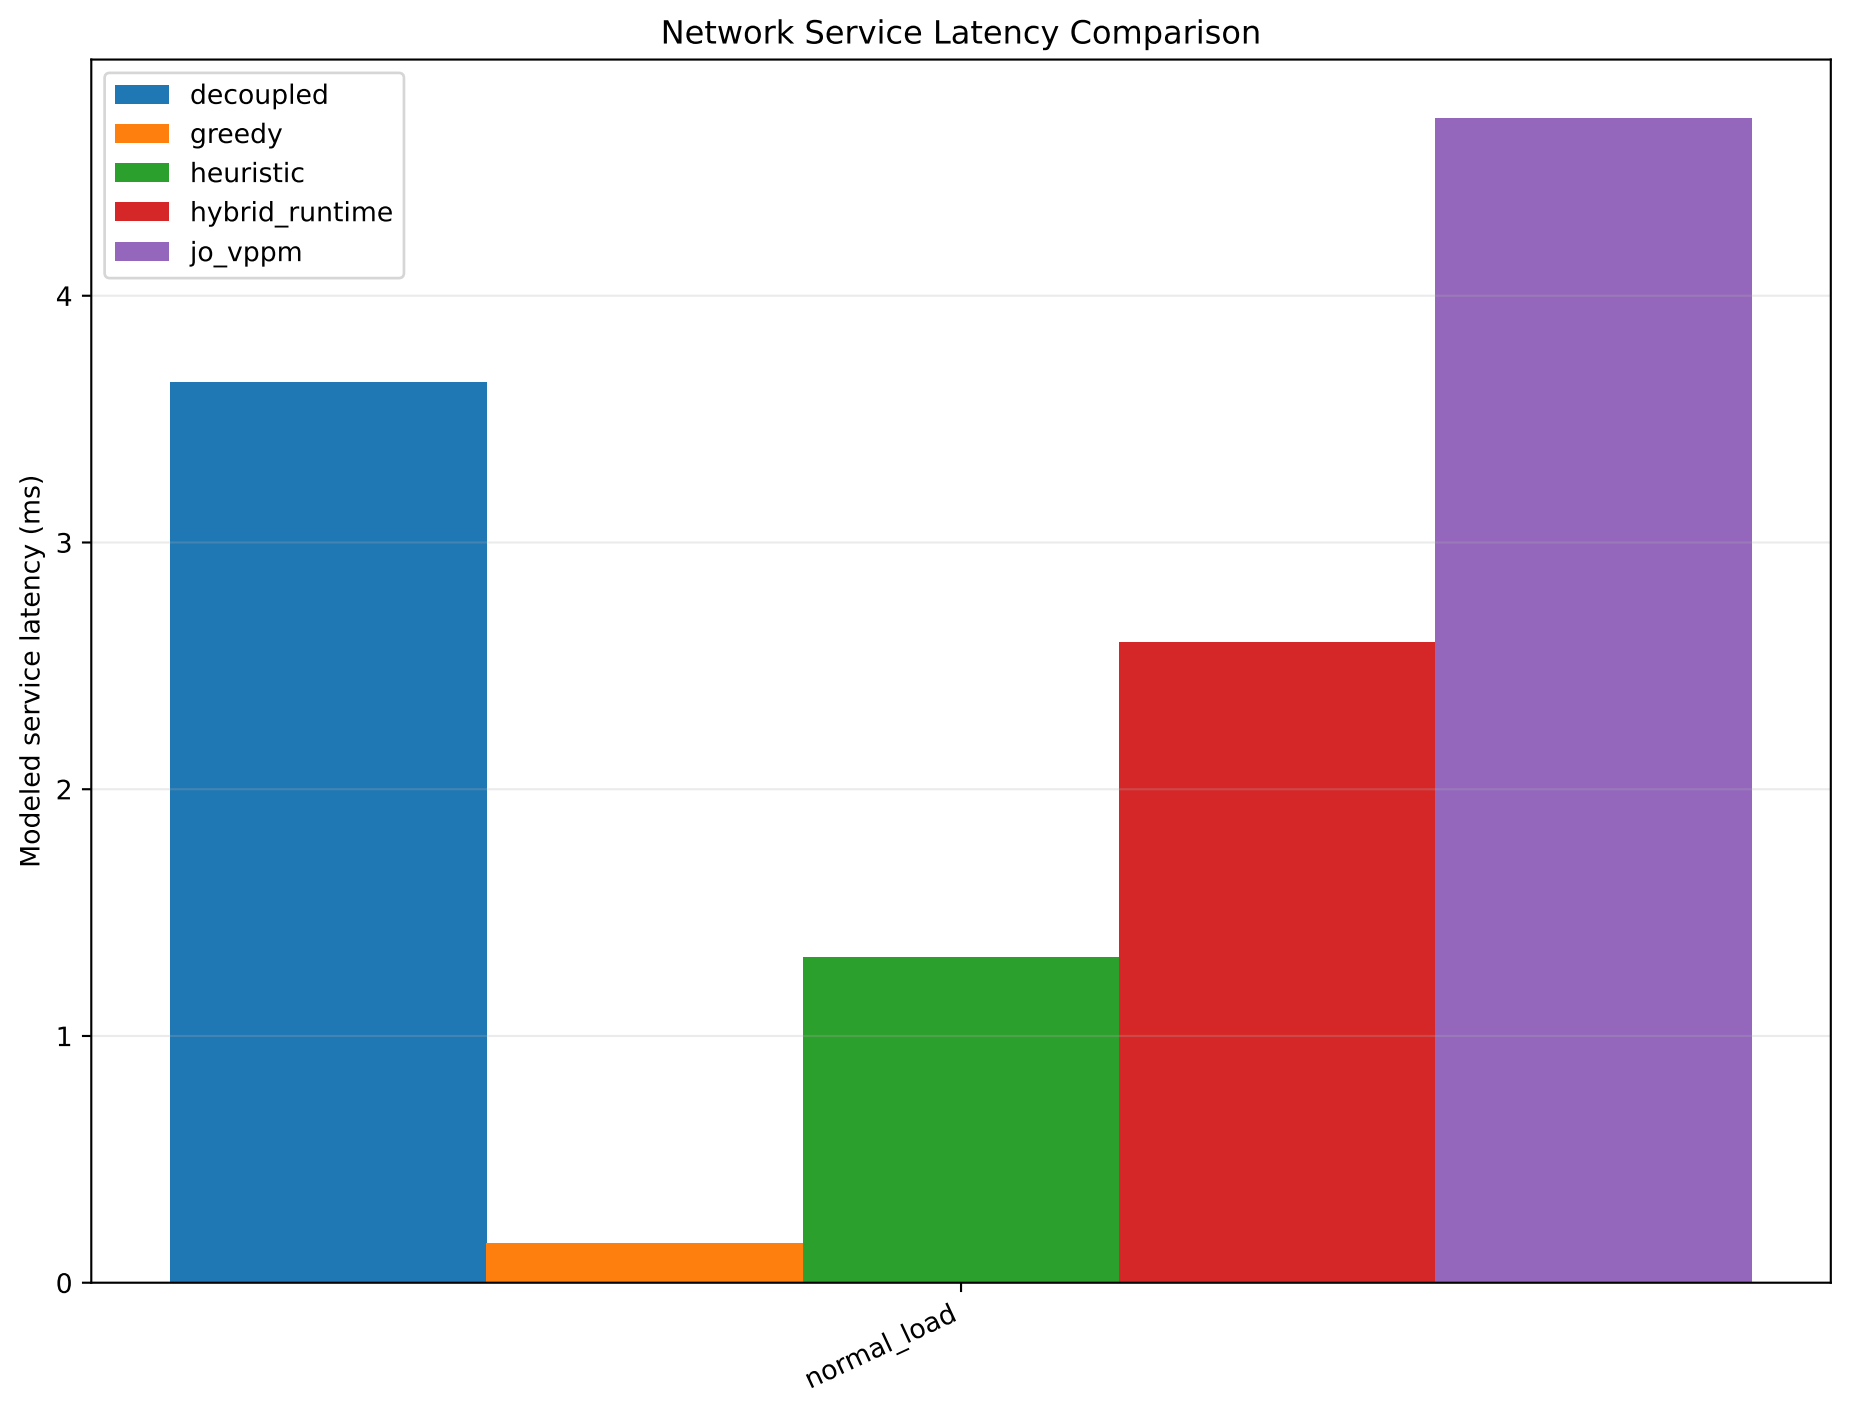
Network Service Latency Comparison
decoupled
greedy
heuristic
hybrid_runtime
jo_vppm
Modeled service latency (ms)
0
1
2
3
4
normal_load

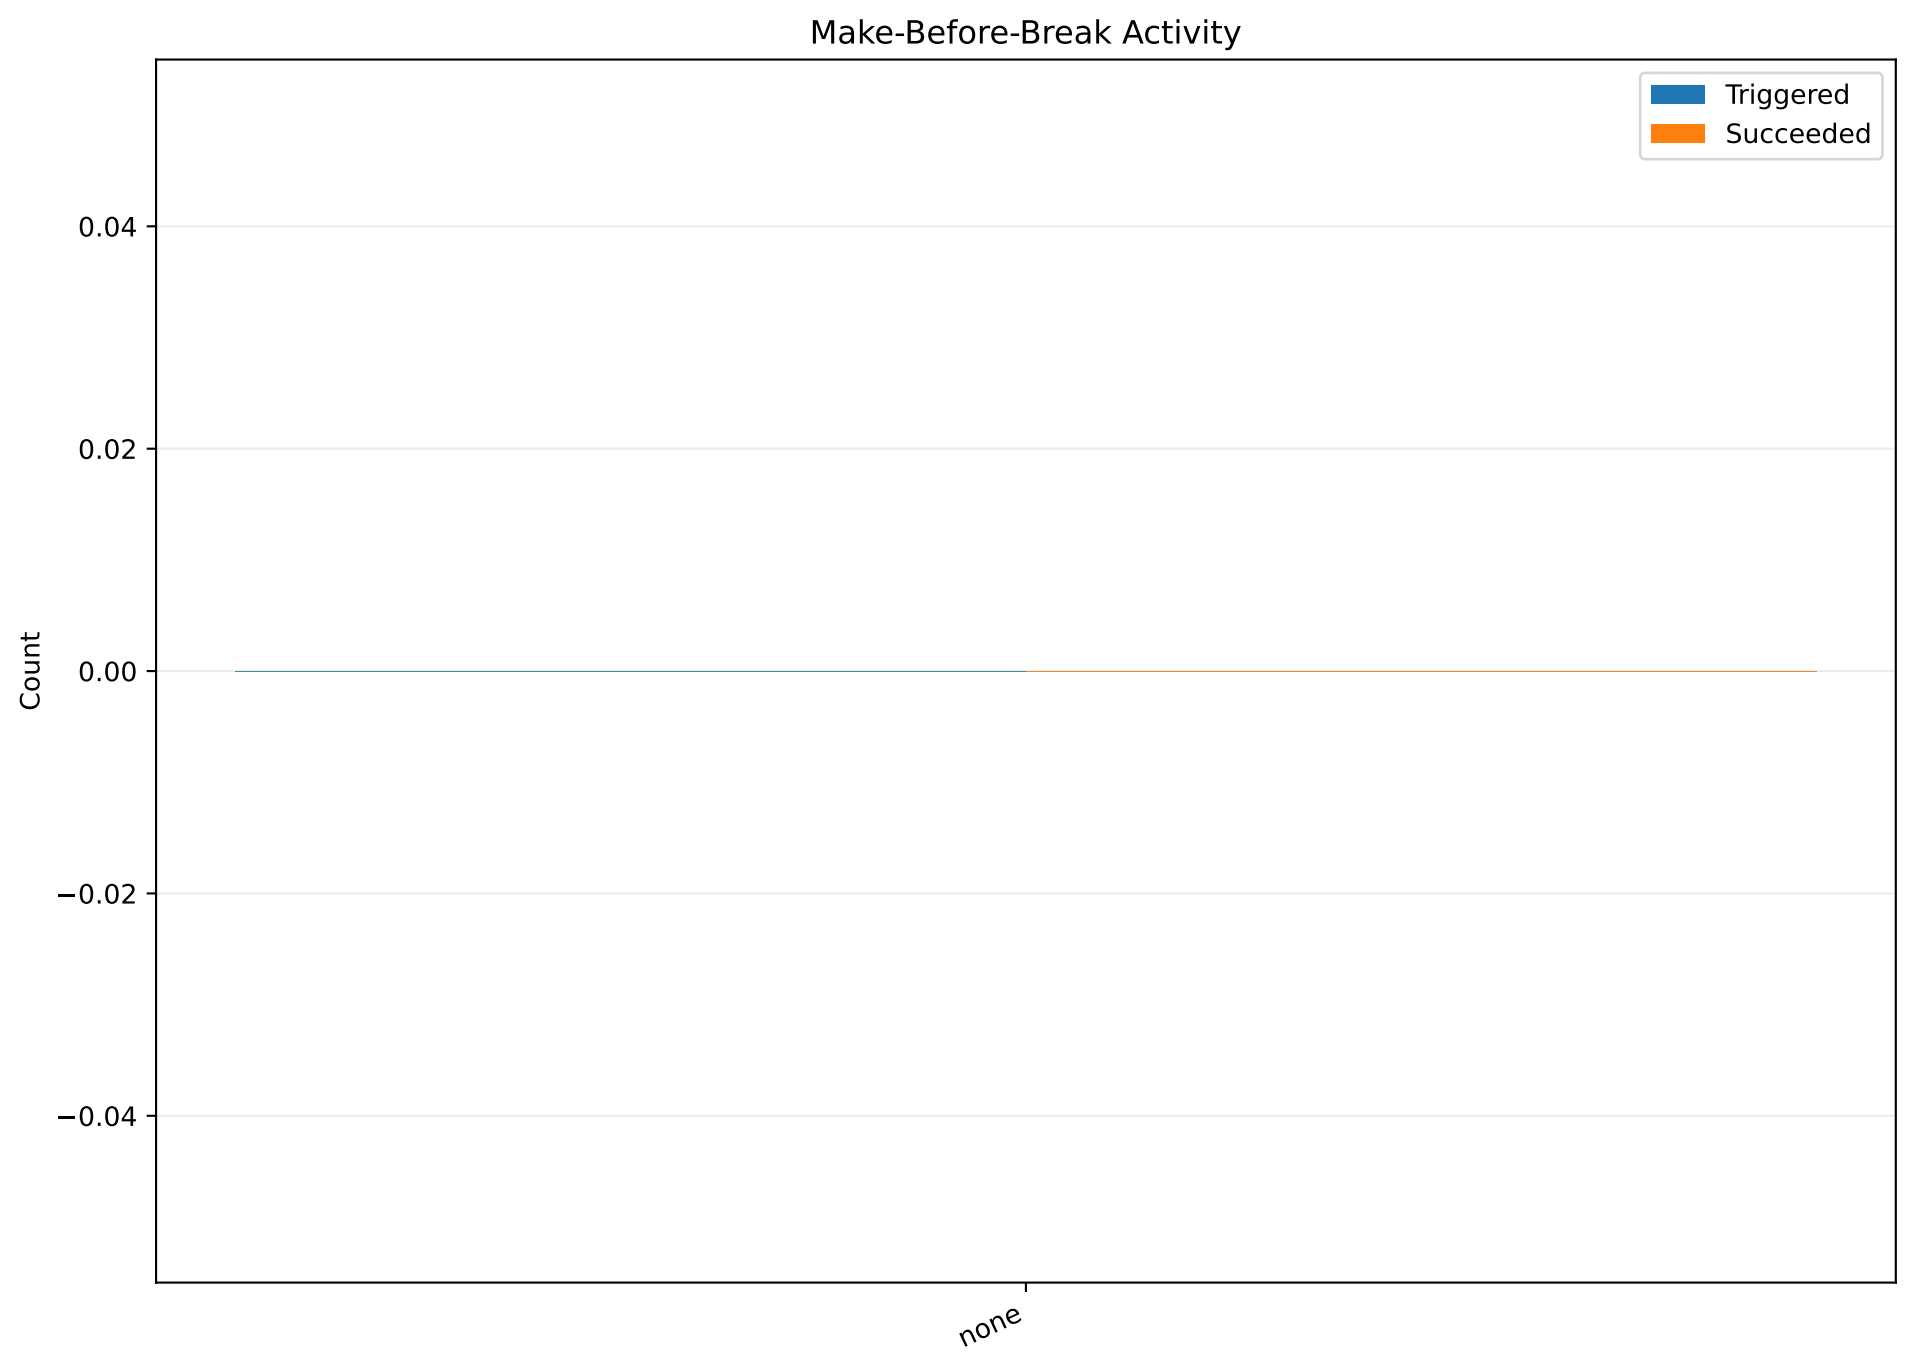
Make-Before-Break Activity
Triggered
Succeeded
0.04
0.02
0.00
−0.02
−0.04
Count
none