



Relaxure

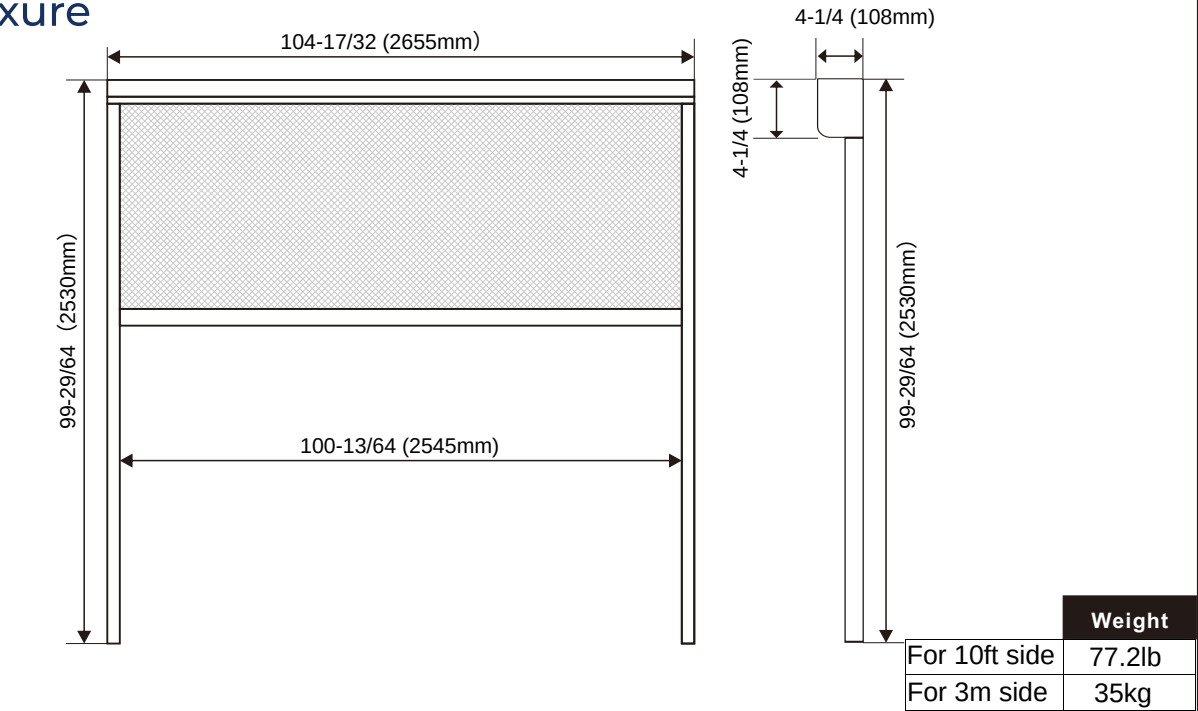

Relaxure

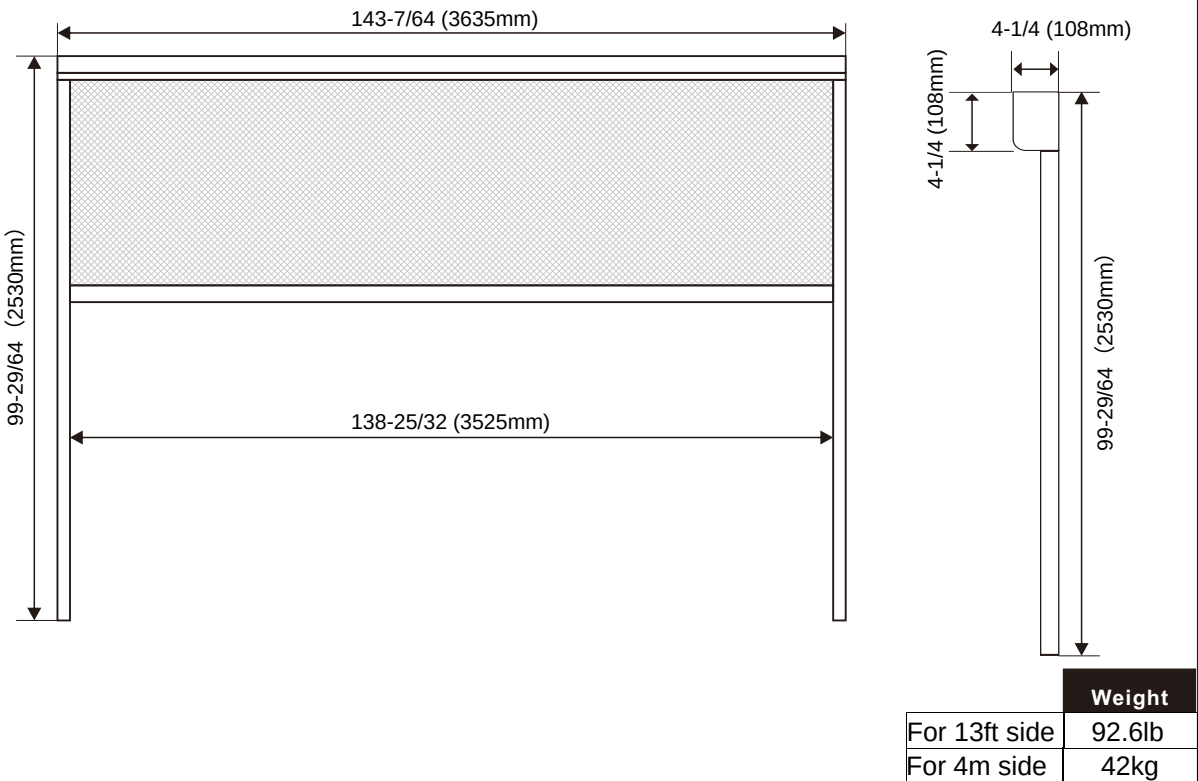

Relaxure Sunshade Specifications

| Shade Fabric           |                                                                            |
|------------------------|----------------------------------------------------------------------------|
| Parameter              | Description                                                                |
| Material               | Glass Fiber Nano-Textile                                                   |
| Thickness              | 0.68mm ± 5%                                                                |
| Density                | 14x14 threads/cm                                                           |
| Tensile Strength       | 2523N/5cm                                                                  |
| Flame Resistance       | NFPA 701 certified, ensuring safety even during BBQs or high-heat exposure |
| Open Rate              | ≤5%, for privacy                                                           |
| UV Protection          | ≥97%, blocks UV rays                                                       |
| Water Resistance       | Prevents rain from entering, even in strong winds                          |
| Aging & Color Fastness | ASTM D3691/D3691M                                                          |

| Frame & Track        |                                                   |
|----------------------|---------------------------------------------------|
| Parameter            | Description                                       |
| Material             | Aluminum Alloy 6063-T6                            |
| Coating              | AAMA2605 Powder Coating                           |
| Weather Resistance   | ASTM G154                                         |
| Corrosion Resistance | ASTM B117                                         |
| Track                | Thick, one-piece dual-layer for smooth operation  |
| Adjustable System    | Infinitely adjustable height for flexible shading |