

WHITESQUARE
Upvc windoor

PROMINANCE
UPVC WINDOW SYSTEMS

White Square UPVC WINDOOR



About Us

Your Trusted Partner in Construction

J B Group, founded in 2007, is a leading supplier of construction materials based in Tamil Nadu, Coimbatore. Specializing in South India, Kerala, and Karnataka, we prioritize sustainability and environmental harmony in our innovative building materials. Our mission is to deliver high-quality products tailored to customer preferences while continuously introd ucing innovations. We use eco-friendly UPVC Technology in partnership with Prominance, ensuring our products are both customer-friendly and environmen tally conscious. We believe in building a sustainable future for generations to come!



Our Vision

Our commitment is to innovate in building materials, adapting to changing needs while prioritizing sustainability. We aim to earn trust by delivering high-quality products tailored to your preferences.

Our Mission

At J B Group, we strive to constantly innov ate construction materials, catering to the needs of every new generation. We provide the facilities needed to satisfy each new generation's demands.

Precision crafting for
the finest structures





Built for Prominance

Cutting edge manufacturing processes on par with the world's finest.

Strenuous Indian conditions demand that UPVC installations are robust enough. Prominance window systems are aimed to accomplish that through state of the art manufacturing processes overseen by top-tier talent and ensuring best practices..

Quality raw materials for world class products

In line with our quality policy, only the best inputs can give us the best outputs, thus quality construction begins with quality choice of materials. The finest grades of additives arrive from across the world which are widely considered as World's Best Grade for uPVC profiles.

Testing for strength and longevity

Quality control processes and tests


Research and testing that adheres to international standards is one of our key features. A fact that enables us to consistently maintaining the set benchmarks. Internal quality compliances have been met as per EN 12608 Standards.

Following aspects were closely checked to ensure fine quality

- Dimensional Accuracy
(Face flatness, squareness, angle & radius)
- Colour
- Determination of the Appearance
- Determination of Profile Mass
- Straightness
- Heat Reversion (EN 479)
- Heat Ageing (Behavior after heating) (EN 478)
- Resistance to Impact by falling mass (EN 477)

Tested by Standards
Certified by Quality

White Square uPVC WINDOWS

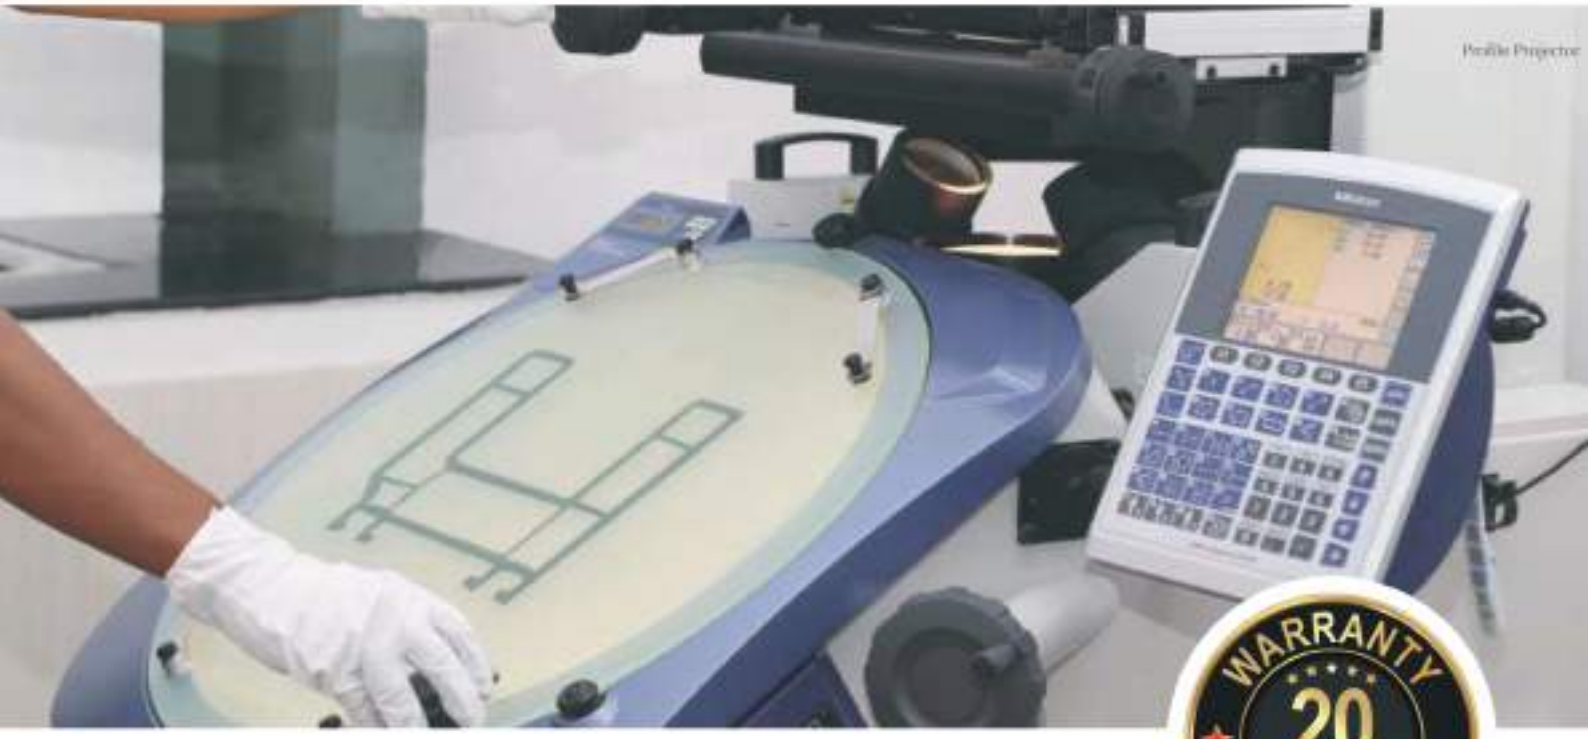



Accreditation from renowned organizations from Europe, for Accelerated Weatherability Test (Artificial weathering up to 25000 hours) and Mechanical properties & Chemical composition of our formulation.

Properties as per European and Indian Standards (EN 12608-1:2016)	Range	Result	Accreditations from
Charpy impact strength (BS EN ISO 179 - 2 : 1999)	Not less than 20 Kj/m²	74.5 Kj/m²	SKZ - Germany/BSI - UK
Vicat Softening Temperature (BS EN ISO 306 : 1997)	Not less than 75°C	80°C	SKZ - German /BSI - UK
Flexural Modulus of Elasticity (BS EN ISO 178 : 2003)	Not less than 2200 Mpa	3070 Mpa	SKZ - Germany/BSI - UK
Tensile Impact stength (BS EN ISO 8256: 1997)	Not less than 600 Kj/m²	934 Kj/m²	SKZ - Germany/BSI - UK
Weld Strength (BS EN 514 : 2000) - Individual Specimen	Not less than 20 Mpa	25.32 Mpa	BSI - UK
Accelerated Weathering (DIN EN 12608-1:2016-08)	Δ E not more than 5	1.6	SKZ - Germany/BSI - UK
Heat Reversion, Resistance to Impact, Behaviour after 150°C,	To comply as per EN 12608 - 1 : 2016	Pass	BSI - UK
RoHS (Directive 2011/65/EU)	Lead should not be detected	Not detected	SGS
Flammability (UL94)		V0	CIPET
Thermal Conductivity (ASTM E - 1530)		0.137 W/mk	CIPET
Density (ASTM D 792)	Not to Exceed 1.5 g/cc	1.46 g/cc	CIPET

Accredited by bsi. SKZ | ift | ASTM | SGS | RoHS COMPLIANT | Pb | MEMBER UWDMA | ISO 9001:2015

Why 20 Years Warranty?


EXTREME WEATHER RESISTANT

Complied with EN 12608 and EN513. Prominance Profiles complied accelerated artificial weathering test with severe climate (Climate Zone S) Conditions to the equivalent of 25,000 Hours @ 50 GJ/m2 in the wave length range between 300 nm to 800 nm according to EN 12608-1:2016 Standards.

EUROPEAN STANDARD (EN12608)	PROMINANCE
ΔE <=5 MAX.LIMIT	ΔE 1.6 Competent : 212%
Δb <=3 MAX.LIMIT	Δb 1.4 Competent : 114%

White Squire Weathering competency & Duration

wave length range 300 to 800 nm

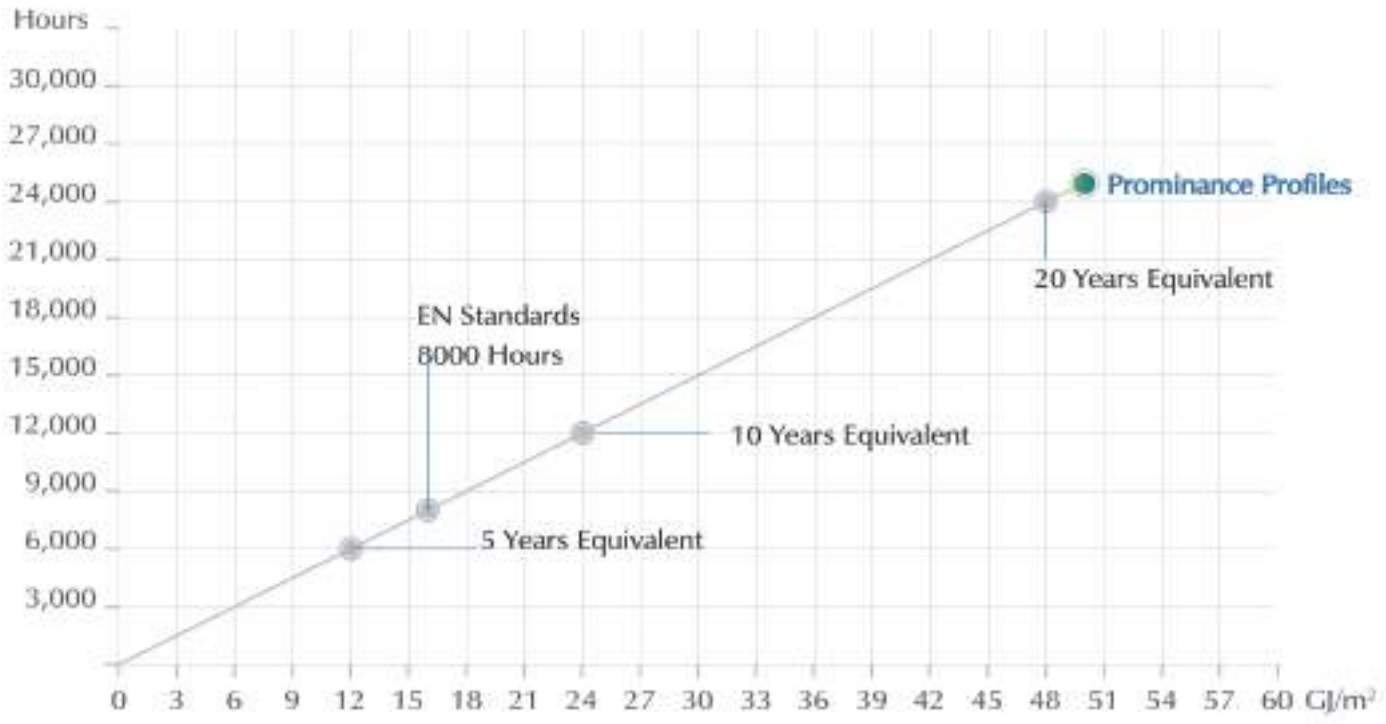

Hence White Squire ensures 20 years of warranty against colour degradation through scientific test result compliance of radiant dosage of 50 GJ/m2 @ 25,000 Hours at the wave length range between 300 to 800 nm by using Xenon Arc source (1=550 W/m2) with AE less than 5 & Ab less than 3.

Wind load

Strength against the storming winds
India is divided into 6 zones based on the wind speed data maintained at various weather stations across the country. The wind speed data is available for the 3 second short durations and long duration as well which is collected over last 50 years. Normally this short duration wind speed is called as basic wind speed and have a probability of once in 50 years.

Some of the factors that determine wind load are:
a. Basic wind speed as per the geographic location. b. Height of the structures.
c. Geometric shape of the building.
d. Slope of the ground near structure.
e. Life of glazing / structure desired.
Keeping these factors in mind we design and develop the profile to offer maximum stability and durability.

Below is a list of Main Indian cities along with tentative different wind loads at different heights. These are assumed at middle of city.

	Upto 5th floor	5th to 10th floor	10th to 15th floor	15th to 30th floor
Delhi	1559 Pa	1862 Pa	2078 Pa	2386 Pa
Mumbai	1366 Pa	1631 Pa	1821 Pa	2091 Pa
Kolkatta	1764 Pa	2107 Pa	2352 Pa	2700 Pa
Bangalore	768 Pa	918 Pa	1025 Pa	1176 Pa
Chennai	1764 Pa	2107 Pa	2352 Pa	2700 Pa

Sound Reducing Windows

Effective Sound Insulation

Keep unwanted noise at bay with our prominance window systems. Specially designed to reduce the amount of sound entering or escaping from your home, they also add an additional layer of security. These windows are ideal for the preset busy lifestyle - or simply if you want to enjoy a quiet life!

Prominance windows are engineered to reduce sound transmission. The Multi chambered profiles, fusion Welded joints, Multipoint locking mechanism, and dual compression gaskets ensure that there is no sound infiltration. When combined with recommended Glazing & Hardwares, Prominance window system can insulate your indoors from unwanted sounds upto 40 db.




Recommended interior noise levels	
Environment	dB
Library	30-40
Bedroom	30-40
Classroom	35-40
Living room	40-45
Private office	40-45
Open office	45-50

Casement Windows & Doors

This system is designed for more strength and better performance with twin gasket sealing. The gasket sealing coupled with multi point lock ensures tight closure with no gaps for proper sealing, thermal and acoustic performance. Thicker Mullion profiles with reinforcements ensures sturdiness against heavy wind load. Our mullions & transoms with external strengthening bars ensures that we can design large size windows with required wind load resistance.



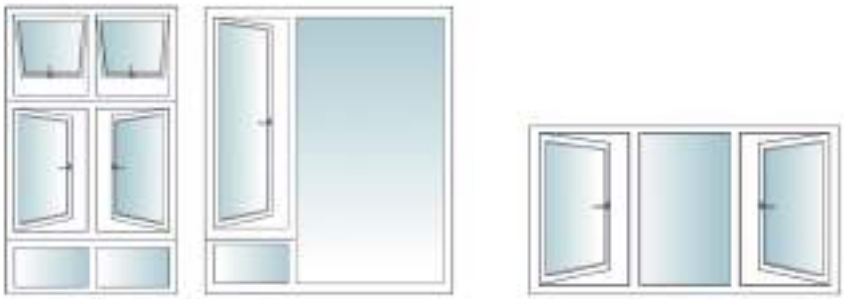



Inventa Series
for large opening windows.




Optima Series
for smaller opening windows




Inventa
Casement Door

Sliding Windows & Doors

Sliding Windows work with the 'ride over' mechanism. Made up of two (or more) shutters that slide to the left and right horizontally on tracks, the windows can be made wider and taller with the addition of shutters. Sliding windows comes with an option of bug screen in a separate track.

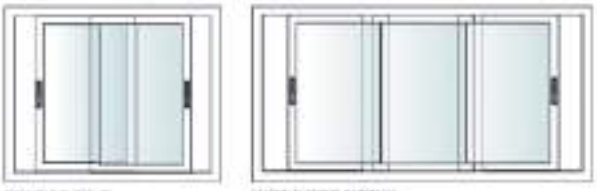

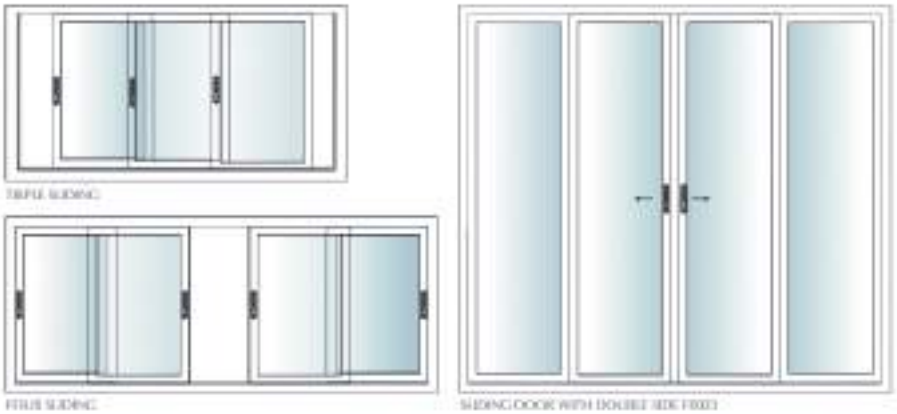



Inventa Sliding
for opening windows.



Optima Sliding
with Bug mesh



Sliding Door

FEATURES
The finest in form & functionality

Casement windows



FUSION WELDED JOINTS

The corners and joints are welded together for close packing and greater strength.



EPDM-WEATHER BLACK BEADING

The window seals ensure tight sealing and enhance airtight packing. They arrest noise and water leakage.





MULTI POINT LOCKING

To hold the windows strongly with increased security, preventing noise, air and water leakage



GLAZING SYSTEM

Single, double and triple glazing options for arresting noise & energy loss along with air tight sealants with suitable space-bar.



FRICTION STAY

It is the connection mechanism between sash & outer frame and enables opening of the window to the desired size.

White Square uPVC WINDOWS

Sliding windows




MULTI CHAMBERED

Impact strength and durability of the windows are ensured with a number of multi-chambered sections.



STEEL RENFORCEMENT - RED COLOUR

Hot dip galvanized to 125 GSM and corrosion free, the steel reinforcement adds strength to the windows

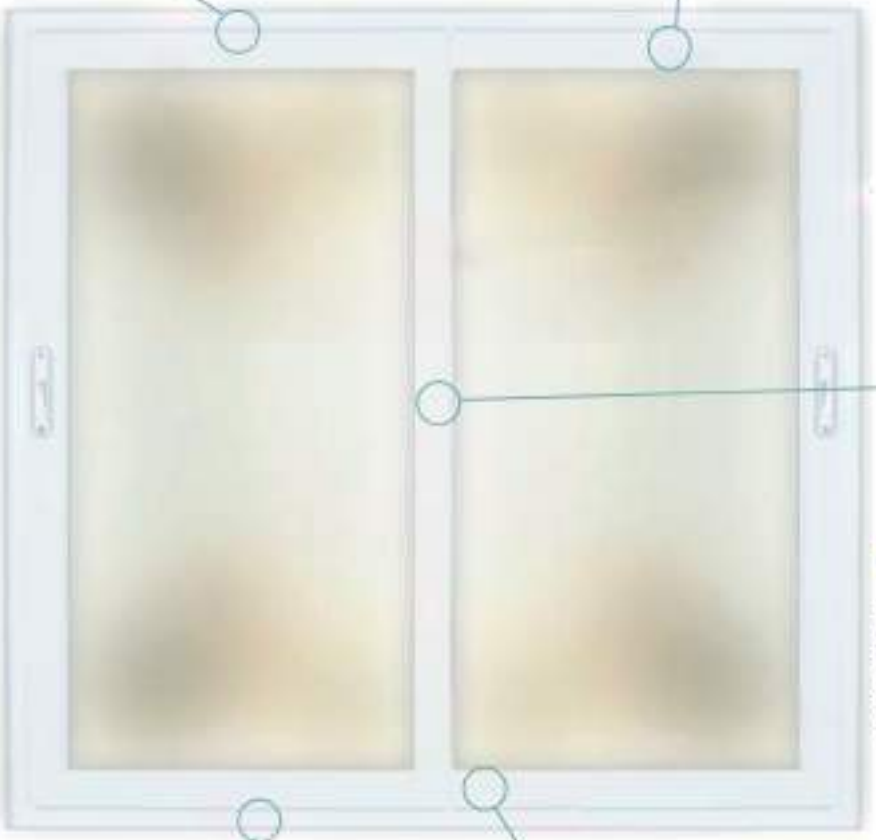



WEATHER SEAL

Helps to provide a water tight sealand also provides a wind and draught tight seal.



DRAIN HOLES

It prevents water spilling inside by providing seperate drainage chambers to drain out the water



SLIDING ROLLER


The windows come equipped with slider rollers that ensure smooth manoeuvrability as well as durability.

Inventa Sill
Grill



White Squire has taken this very internal sills that's magnificent and has now turned it to something exemplary. We have come up with something called the Sill Grill. The Sill Grill does not only give your house an extraordinary look but also protects you from danger. The innovation of built-in grills in the internal sills has taken the age-old design into a completely different dimension of utility. Worrying about the wall embedded grills that made your house look a bit off will now be a thing of the past with our new Sill grill in the market. The Sill Grill system can be installed in our both casement and sliding system.

With all the good news, we're also proud to announce that this Prominance original has also earned itself a patent **(Patent application number: 201941039278)** by exhibiting its unusual problem-solving abilities in the most unique of ways.

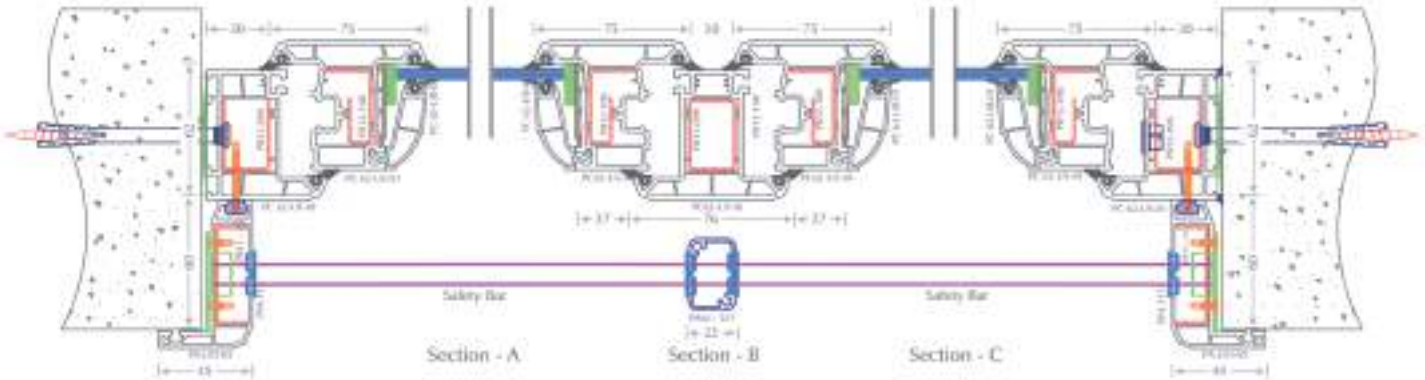

Low Threshold


uPVC threshold been a huddle for big size casement and sliding doors, were you have to jump over every time when crossing it, so Prominance have come up with smart design solution called Low threshold for both casement and sliding system. It's a complete concealed system, manufactured in Aluminum to withstand heavy load.




Advantages

- Easy installation.
- Can be installed in commercial buildings to roll over trolley.
- Airtight fit to prevent dust particles from entering.
- Concealed and compact design.



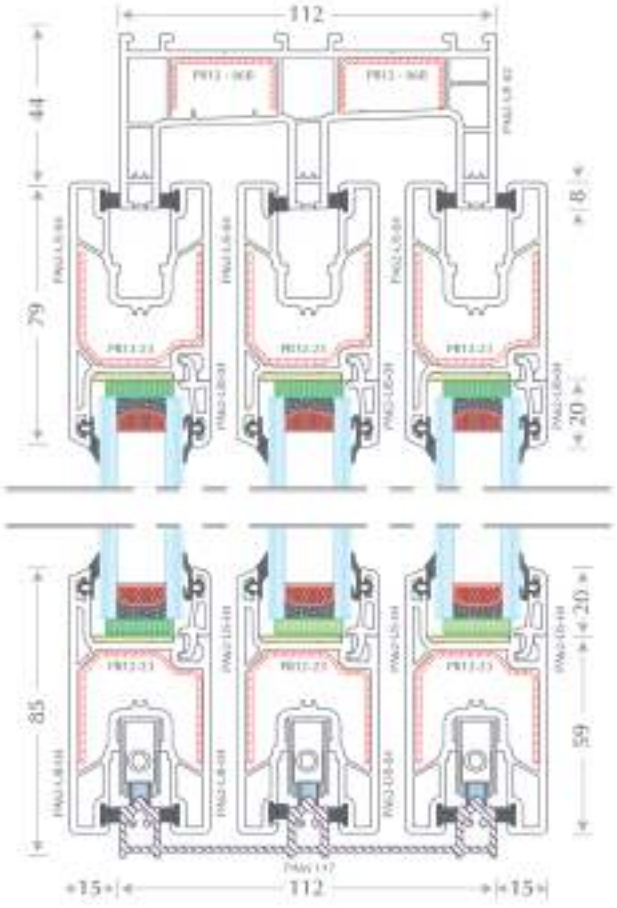

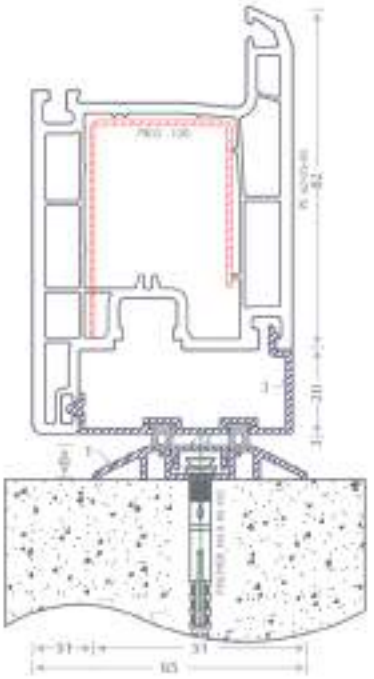



PAM 117 PAM 124

1. PAM 124 Inventa Casement Door Low Threshold
2. PAM 125 Low Threshold Cap
3. PAM 126 Inventa Casement Door Threshold


Georgian Bar



White Squire have not only answered your quality of windows and doors, but we also care about its aesthetics of our products. So far only wooden windows have solutions of elegant finish with its wooden separator strips for windows, but now we have made it possible and practical for uPVC windows and doors. Our Georgian bar will enhance that look of windows and door.

Advantages

- Easy fit with weather seal co-extrude gasket.
- Multiple shaped clips used to fit different glazing size.
- Retro fit for quick installation.
- Can be installed in both Sliding and Casement system.
- Special grinding wheel are designed to fit different bead design.

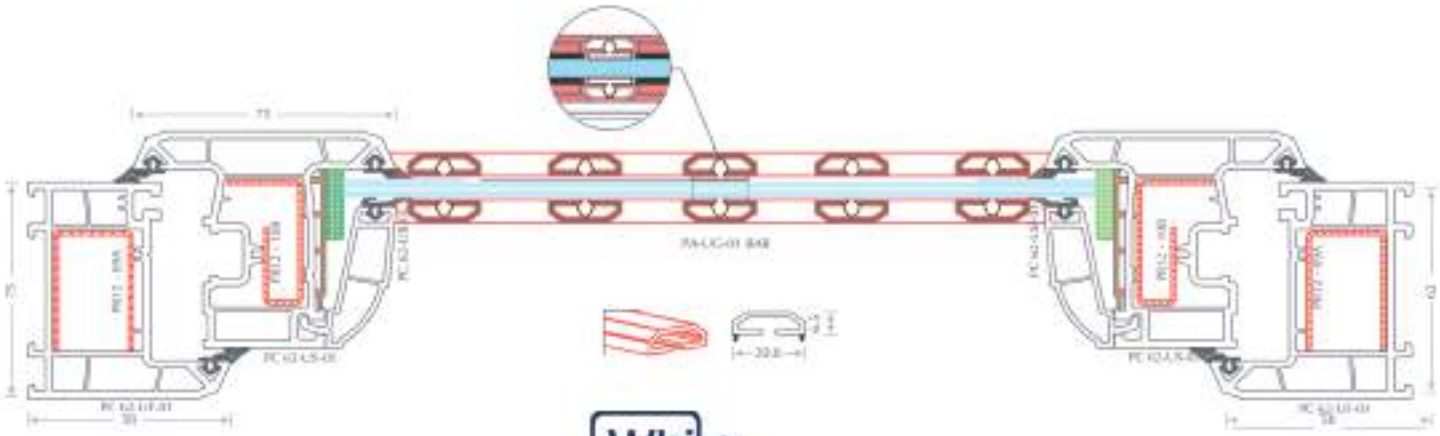

White Square UPVC WINDOWS

Consider These Points Before Choosing

Points to check	Consequences	What to ask	Prominance
Weather Protection	ΔE value beyond 5 leads to discoloration and can not comply any warranty commitment	As per the EN12608-1:2016 standard to provide 10 years of warranty against discoloration, UPVC profiles have to be tested for 12,000 Hours at the irradiation of 24 GJ/m^2 when the E value not to Exceed 5.	Prominence's profiles were Tested for 25,000 Hours at the irradiation of 50 GJ/m^2 and the ΔE value is 1.6(Warranty for 20 years based On this test 0.
Elasticity	Poor Elasticity results into moreBrittleness and vulnerability.	As per the EN ISO 178 standard,UPVC profile should withstand a pressure of 2200 Mpa.	prominence's Profiles passed the test with 3070 Mpa which is 40% higher than the required parameterfixed by EN ISO 179 standard.
Impact Strength	Poor Impact Strength Results to brittle failure.	As per the EN ISO 179 standard UPVC Profile must withstand a force of 20KJ/m^2 when performing the Impact Strength test.	prominence's Profile passed the Impact strength test with 74.5 KJ/m^2 which is 272% higher than the required parameter fixed by EN ISO 179 standard.
Weld Strength	Low Weld strength leads to weld cracks and panel cracks during transit and installation of windows.	As per the EN 514 standard, UPVC Profile must withstand a pressure of 20 Mpa.	prominence's profiles passed the weld strength test with 26Mpa. Which is 32%higher than the required parameter fixed by EN 514 standard.
Lead Free (RoHS Compliance)	Extremely hazardous to both the environment and landfills.	Where RoHS compliance has beenaccreditated ? As per DIRECTIVE2011/65/EU, Hazardous substance like Cadmium (Cd),Lead (Pb), Mercury (Hg) and Hexavalent Chromium must not be detected inUPVC Profile.	prominence's profiles are compilingwith RoHS and it's been Accrediated from SGS.
Thermal Transmittance	Windows which have high thermal transmittance value have the tendency for low energy efficiency.	What range of thermal transmittance value has a window obtained? From where the window has been accreditated for thermal transmittance value?	prominence's Windows have got the U-Value of 1.6 &1.7 W/(m^2K) For Thermal transmittance value Prominence has got accreditated From IFT-Germany which is one of the top notch organisation.
Hardware Quality	Low grade leads to rust and Breakage.	Handles made from Zinc alloy andfriction stay must be SS304 Grade.	Ensure Quality hardware as per Standard grade of hardware.
Windload Resistance	Low reinforcement thickness windows bend during high wind pressure and lead to glass breakage & shutter fall from the building.	Wind pressure test (Resist upto how much Km/hr).	Windows tested and resist upto 350 Km/hr in sliding system and 450 Km/hr in casement system.

Importance Components in a Proper UPVC Windows

Erection Cap with EPDM O - Ring	
Usage	**Consequences if not used**
Prevents water to enter into reinforcement chamber and water seepage	Risk of water penetration into reinforcement chamber leads to reinforcement corrotion and water seepage to the walls.

Anti Rattle Stopper	
Usage	**Consequences if not used**
A component used as antitheft piece and Limits the sash rattling.	Risk of Theft (Easy to remove sash), and Odd rattling and whistling noise.

Dust Arrester	
Usage	**Consequences if not used**
Dust Arrester conceals the gap between sash and frame, preventing entry of dust particles & insects from environment	Absence of Dust arrester – Risk of dust and Insects entering into house.

Frame Raiser Block	
Usage	**Consequences if not used**
A component attached to frame used to restrict the sash sagging.	Absence of Frame Raiser Block – Leads to Sash sagging over a period of time.

Sash Raiser Block	
Usage	**Consequences if not used**
A component attached to sash which takes support from frame raiser block used to restrict the sash from sagging.	Absence of sash Raiser Block – sash tends to sagg and will not slide function.

Touch Bead Spacer	
Usage	**Consequences if not used**
Maintains the sash to frame overlap equally all over the window.	Absence of Touch Bead – Misalignment of Sash and frame & trouble in locking the window

Importance Components in a Proper UPVC Windows

White Square UPVC Windows

Bump Stopper

Usage	Consequences if not used
Restricts the sash travel over the wrong side	Absence of Bump Stopper – Uncontrolled Sash movement & it leads to each sash Handle hitting together



Drainage Cap

Usage	Consequences if not used
When heavy rain falls, this cap directs the Water outside through a drainage hole	Risk of blockage by insects, dust particles In the drainage path &leads to water Stagnation.



Reinforcement

Usage	Consequences if not used
Acts as the skeleton to the window, which gives structural stability & resistance to wind loads such as hurricanes.	Windows will deform & bend easily & it's resulting in poor strength & low wind resistance.



Glass Packer

Usage	Consequences if not used
Used to align the glass inside sash , as well balance the glass weight for proper operation.	Improper weight distribution, poor alignment of the glass ,sagging shutters and resulting in poor functionality and failure.



Wool Pile

Usage	Consequences if not used
Used all around the sash acts a concealer between sash and frame , prevents from dust and insects entering into the house	Risk of Dust and insect invasion into house.



Internal And External Sealant

Usage	Consequences if not used
Two grades of sealant to conceal the gap. Between the window and wall. External -UV resistance internal - paintable grade	Without UV Resistance outer sealent will Crack due to extreme climatic condition Hence rainwater leaking through wals



Look out for a World of benefits.



DURABILITY

White Squire windows do not warp, twist or split. Impact modifers in our proles are treated with special additives making them long lasting.



SOUND INSULATION

Not only do they provide thermal insulation but also special sound insulation. Double glass units can help in sound reduction up to 30 Db.



IAQ

Indoor Air Quality (IAQ) can be maintained by avoiding interior energy loss. Prominance windows reduce energy loss by over 30% thereby reducing energy costs.



IMPACT RESISTANCE

White Squire windows are uniquely designed and specially formulated to withstand high impacts during handling and installation.



AESTHETICS

White Squire windows are adaptable to develop attractive designs, ranges and wooden finish laminated proles.



UV RESISTANCE

White Squire windows offer 100% UV resistance with the right amount of TiO2, which helps in retaining whiteness against exposure to the sun.



TERMITE & CORROSION RESISTANCE

White Squire windows are termite and corrosion resistant. Salts, acids, alkali and waste gases cannot corrode the window systems.



MAINTENANCE FREE

White Squire windows are virtually dirt resistant and easy to maintain with normal soap water.



BUG MESH OPTIONS

Mosquitoes and other bugs are a big menace. To Protect against Insects, We have bug mesh option available for our sliding systems.



FIRE RETARDANT

White Squire windows are fire retardant. During fire, once source of re is removed, a carbonaceous layer is formed stoping the spread.



EXCELLENT COST BENEFIT RATIO

uPVC proles save a lot of costs in terms of maintenance & saving energy when compared to Timber frames which are approximately 40% - 50% more expensive.



DESIGN FREEDOM

A creative assortment of proles mix-matched with a combinations like bays, coupled windows, combination windows, etc. is our forte.

White Square

GO GREEN, SAVE MORE...

SAVE YOUR ELECTRICITY COST BY

30%




Advantages

Windows typically occupy about 15 to 20 percent of the surface area of the walls. Windows not only add aesthetic looks and often a very important aspect of a home, but also a very significant component of home heating and cooling costs. Poor windows lose more heat per square foot of area in winter and gain more heat in summer than any other surface in the home.



Today, White Squire have changed the energy performance of windows in a radical way. White Squire energy efficient window systems will make your home more comfortable, dramatically reduce your energy costs and help to create a brighter, cleaner, healthier environment by reducing your carbon footprint.

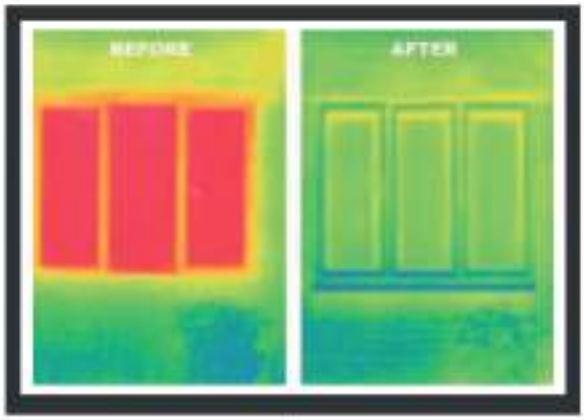

Thermal image of house window showing large heat loss as indicated in red.

Same window fitted with new uPVC window showing no heat loss in green.

DID YOU KNOW?

That poorly insulated windows and skylights can cause a loss of up to 30% of your home's cooling cost during the summer?


Installation & Services





Efficiency that Exceeds your expectations...

The process of installation starts from the site survey during plasting work of the building. Measurements are taken in height, width and diagonal with the advice of the site engineers.
The sizes and designs of windows with the appropriate placements are confirmed with the engineer. The installation windows are positioned exactly with the tube level and plumb level. They are perfectly screwed with hanger fastener screws using hammering machines so that the windows hold on strongly to the walls. They are then sealed properly with silicon sealant that ensures tight packing, without any clearance.

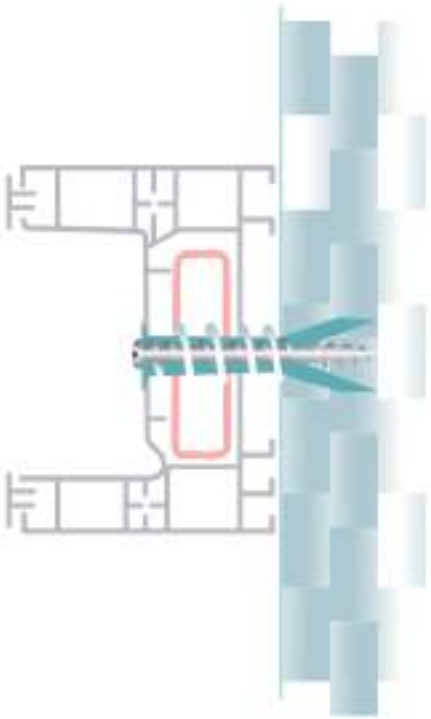

USAGE OF ANCHOR FASTENER

SERVICE & SUPPORT

Our relationship with our customers doesn't stop with the sales & installation process; in fact, it is then that it begins. We understand the paramount importance of after-sales service and the impact it has on building a long-term customer rapport. Hence to deliver timely and prompt services, we have an experienced and efficient service team for post-sales services.

Our Other Services

Interior Design

We craft personalized interior design solutions that match your style and bring your vision to life.



Custom Interior Work

From detailed carpentry to tailored finishes, we ensure every element of your space is perfectly executed.



Glass Work

Our sleek and modern glass installations enhance the beauty and functionality of your interiors and xteriors.



Custom Stairs

We design and build elegant stairs that add character and functionality to your space.



Handrails

Our durable and stylish handrails are crafted to perfectly complement your stairs and interiors while ensuring safety.



White Square

A Friend to the Planet


And an angel to your dream home

100% Lead-Free

Our windows are 100% lead-free, which gives us an edge over others. We are one of the handful lead-free manufacturers of profiles.

Reduce your Carbon Footprint

Prominance windows are designed to save energy. Hence we help you save your electricity bills, CO2 emissions and eventually save our planet too.

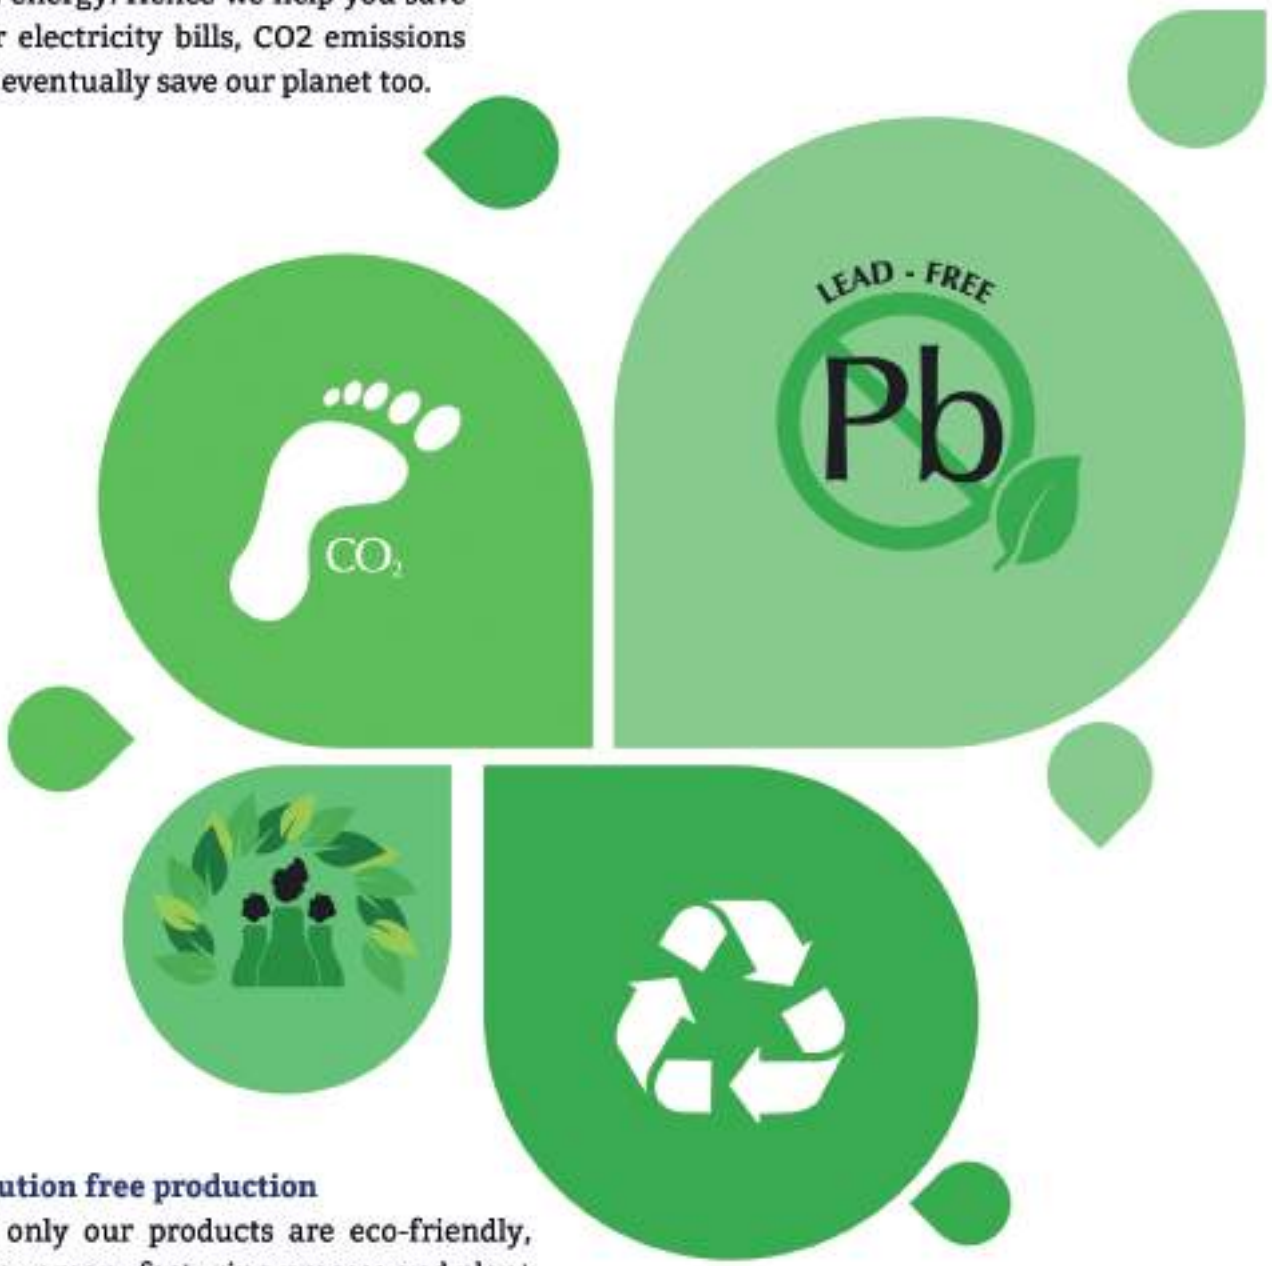

Pollution free production

Not only our products are eco-friendly, but our manufacturing process and plant is eco-friendly too. We ensure optimal use of resources like water and electricity. uPVC avoids smoke emission, hazardous chemical waste and non-biodegradable garbage.

Promise to Recycling

uPVC windows are 100% recyclable thereby contributing to the eco-friendly concept of Prominance.



The Window Quality Determines the

Safety of your Home
Scan for Certification
Safety of your Family
Quality of your Walls
Save Electricity Bill
Visual Appeal of your House
Protection of Interiors and Furniture
Protection from Dust and Unwanted virus
Entering your House

White Square UPVC WINDOOR

WHITESQUARE Upvc windoor

Tirur, Malappuram Kerala
+91 9072900024, +91 9072000006
Sales@jbwhitesquare.com Info@jbwhitesquare.com

www.jbwhitesquare.com