


1 SR420

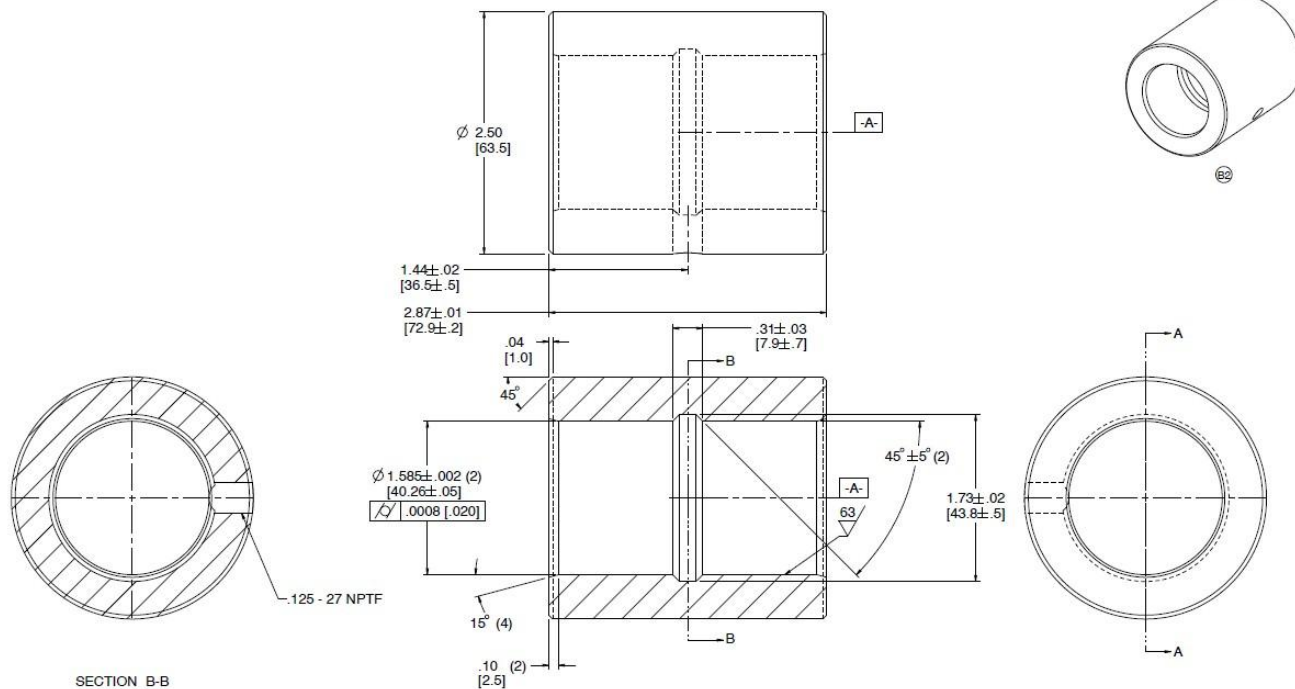

SECTION B-B

B		INCH[MM]	TOLERANCES:	
UNLESS OTHERWISE SPECIFIED MACHINED SURFACE MAX. ROUGHNESS 125 μ in / 3.2 μ m			UNLESS OTHERWISE SPECIFIED	
 THIRD ANGLE PROJECTION		 WELD SYMBOLS PER ANSI/AWS A2.4	SEE BOBCAT STANDARD DE-L FOR SHEETMETAL BEND RADIUS TOLERANCE	
CHARACTERS OR <TEXT> PER BCT STD PR-AH			X.X [X] $\pm$.1 [2.5] X.XX [X.X] $\pm$.04 [1.0] X.XXX [X.XX] $\pm$.010 [.25]	
ECN	MB42496		ANGULAR $\pm$ 1° FILLETS & RADII $\pm$.06 [1.5]	
MATL	1		Bobcat Company	
TREAT			WEST FARGO, NORTH DAKOTA, USA	
HARD			TITLE	
S/A	30.26 in ²	195.24 cm ²	DWG. NO.	6811285
WT	1.66 lb	.75 kg	SHT 1/1	