




SECTION B-B

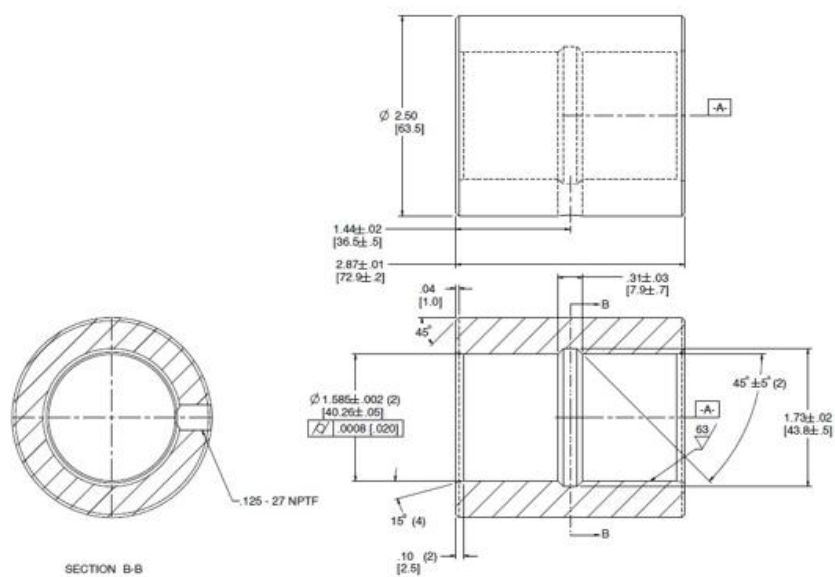

1 SR420

		C	
B	INCH[MM]		TOLERANCES: UNLESS OTHERWISE SPECIFIED
UNLESS OTHERWISE SPECIFIED MACHINED SURFACE MAX. ROUGHNESS 125 μin / 3.2 μm			SEE BOBCAT STANDARD DE-I FOR SHEETMETAL BEND RADIUS TOLERANCE
			X.X [X] ± .1 [2.5] X.XX [X.X] ± .04 [1.0] X.XXX [X.XX] ± .010 [.25]
THIRD ANGLE PROJECTION		WELD SYMBOLS PER ANSI/AWS A2.4	
CHARACTERB) OR <TEXT> PER BCT STD PRAH			ANGULAR ± 1° FILLETS & RADII ± .06 [1.5]
ECN	MB42496		Bobcat Company WEST FARGO, NORTH DAKOTA, USA TITLE BUSHING BOOM PIVOT
MATL	1		
TREAT			
HARD			
S/A	30.26 in²	195.24 cm²	DWG. NO.
WT	1.66 lb	.75 kg	SHT 1/1
			6811285

