
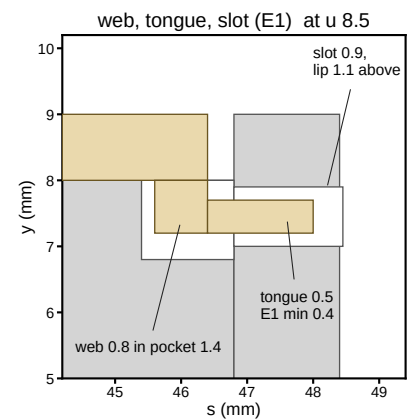
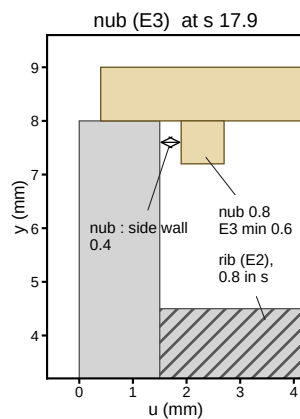
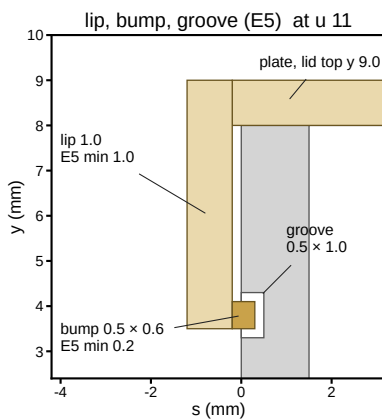


Elicio shell v2 — wearable body (round 5 winner) and lid

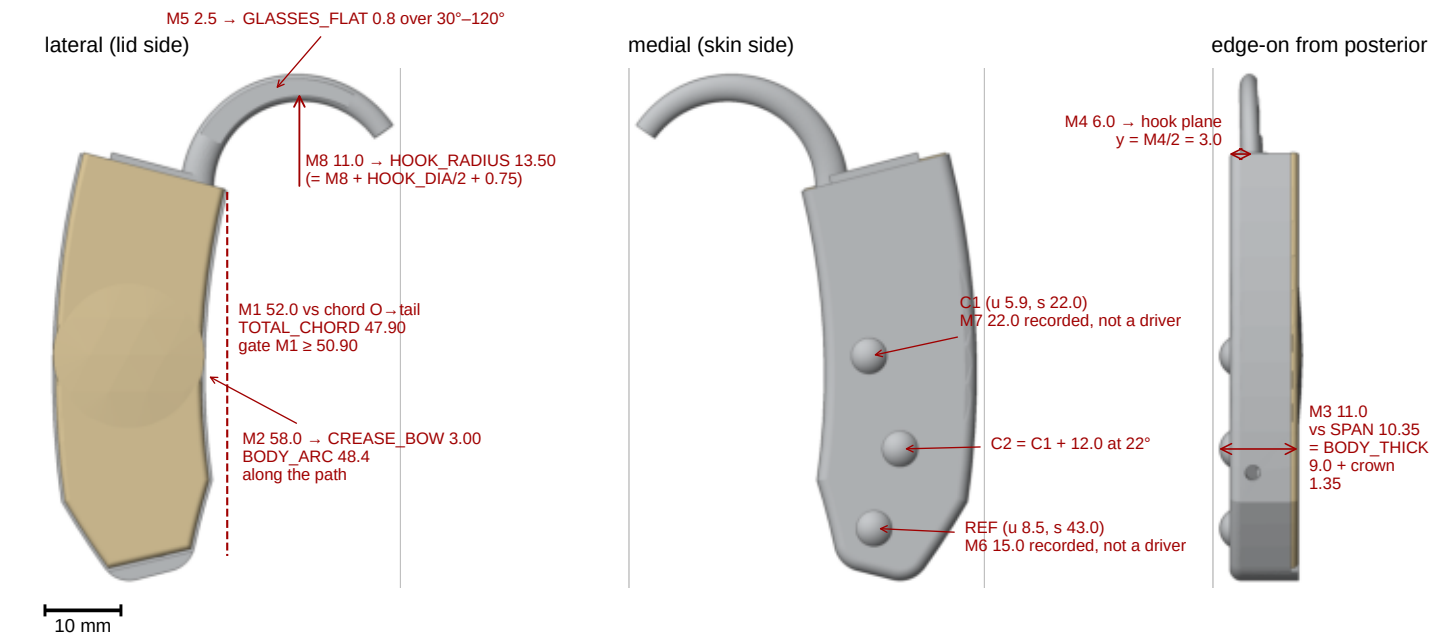

M1–M8 (defaults unless measured)

M	value	where it lands on the part
M1	52.00	gate M1 ≥ TOTAL_CHORD + 3 = 50.90
M2	58.00	CREASE_BOW 3.00, default (M1 and M2 not both measured)
M3	11.00	span report: SPAN 10.35
M4	6.00	HOOK_ROOT Y = M4/2 = 3.00
M5	2.50	GLASSES_FLAT 0.8 over 30°–120°
M6	15.00	recorded for WP7a; not a CAD driver
M7	22.00	recorded for WP7a; not a CAD driver
M8	11.00	HOOK_RADIUS 13.50

E1–E5 exceptions (plan §3.6), from manifest.json

id	feature	nominal	fitted min	note
E1	tongue	0.5	0.4	minimum fitted
E2	rib	0.8	0.8	locating only
E3	nubs	0.8	0.6	
E4	coupon rib	0.4	0.4	measurement
E5	lip cantilever	1.0	1.0	below JLC 1.5
E5	snap bump	0.5	0.2	below JLC 1.5

Winner A_501015_series_w20_y8_iII_s3 STAGE=shell provisional: true
params scripts/cad/params/shell_v2.toml sha256 f5882494c975...
Q34 M1=52.0 default.toml (blank). Interface II, standoff 3.0 mm.
VARIANT=full HOOK_PRELOAD=1.5
CREASE_BOW=3.00 TOTAL_CHORD=47.901 chord gate: M1 ≥ 50.901
solids commit 0c3ab06b79832cf1c99ecf99ef76a51173ff9ef8 date 2026-09-17
General tolerance: ±0.3 mm under 100 mm, JLC MJF PA12
Closure: hinge lip in the tail plus two cantilever snaps (see shell-v2.md).
USB-C on the hook-end end face. No text on the outside. Q59: packing-v2.md §5 REF_end_wall_slot.
body_full_p15: hook joint fillet 1.5: no radius builds; left sharp; lip root: not recorded
Rolf approves the two renders before any shell order. Nothing is ordered here.