
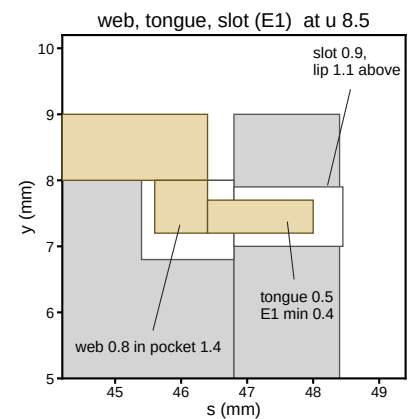
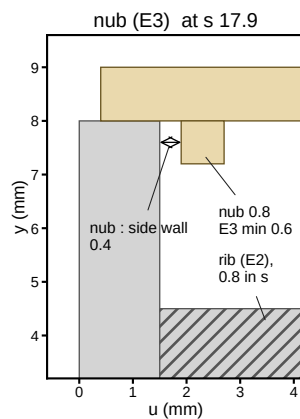
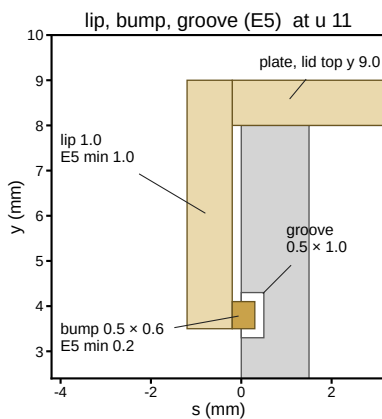


Elicio BTE fit gauge v1 — reference body (full p15) and lid

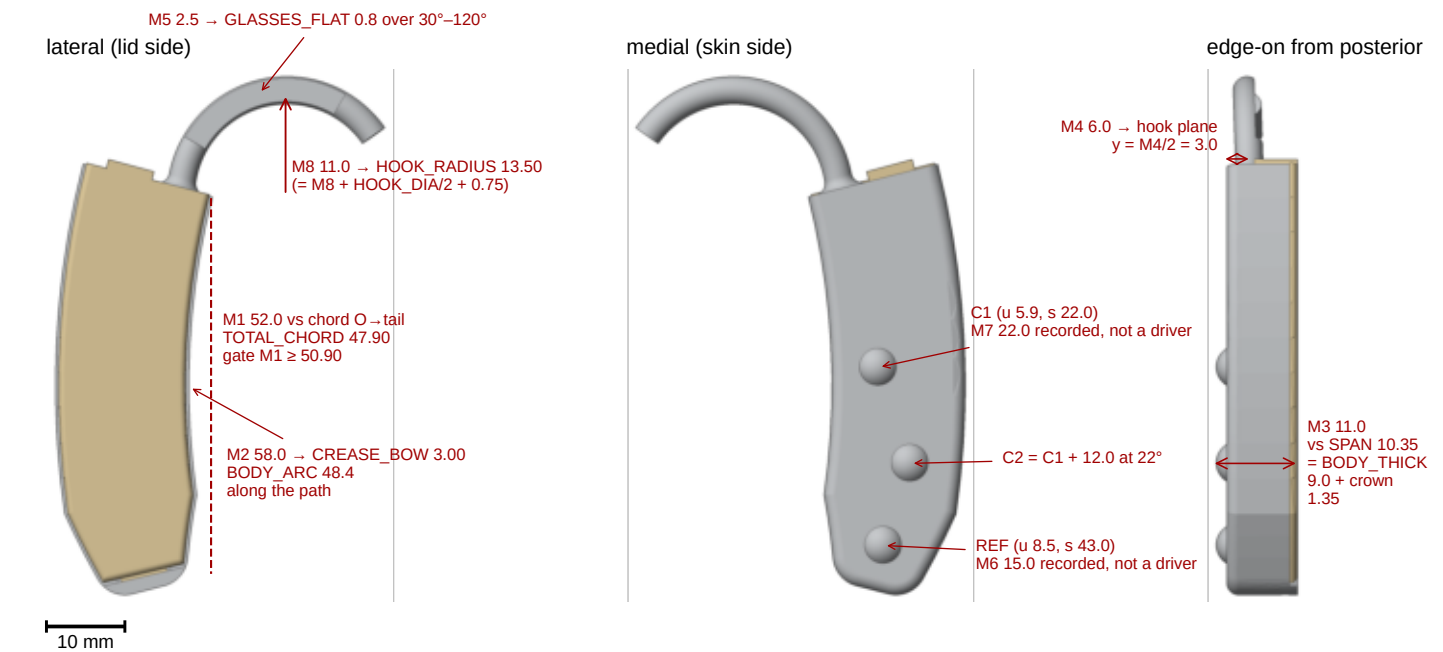

M1–M8 (defaults unless measured)

M	value	where it lands on the part
M1	52.00	gate M1 ≥ TOTAL_CHORD + 3 = 50.90
M2	58.00	CREASE_BOW 3.00, default (M1 and M2 not both measured)
M3	11.00	span report: SPAN 10.35
M4	6.00	HOOK_ROOT Y = M4/2 = 3.00
M5	2.50	GLASSES_FLAT 0.8 over 30°–120°
M6	15.00	recorded for WP7a; not a CAD driver
M7	22.00	recorded for WP7a; not a CAD driver
M8	11.00	HOOK_RADIUS 13.50

E1–E5 exceptions (plan §3.6), from manifest.json

id	feature	nominal	fitted min	note
E1	tongue	0.5	0.4	minimum fitted
E2	rib	0.8	0.8	locating only
E3	nubs	0.8	0.6	
E4	coupon rib	0.4	0.4	measurement
E5	lip cantilever	1.0	1.0	below JLC 1.5
E5	snap bump	0.5	0.2	below JLC 1.5

parameter set: default.toml (REF: M1–M8 all defaults) SIDE=right VARIANT=full HOOK_PRELOAD=1.5
CREASE_BOW=3.00 TOTAL_CHORD=47.901 chord gate: M1 ≥ 50.901
solids commit 66b5564151991f4fd5f6a6457f798839d349b1d9 date 2026-09-17
General tolerance: ±0.3 mm under 100 mm, JLC MJF PA12
Built fillets (plan §3.5 asks hook joint 2.0, lip root 0.5; open questions Q3, Q4):
body_full_p15: hook joint fillet 2.0: largest that builds is 1.50; lip root fillet 0.2 applied
body_thin_p15: hook joint fillet 2.0: largest that builds is 1.75; lip root fillet 0.2 applied
body_full_p25: hook joint fillet 2.0: largest that builds is 1.75; lip root fillet 0.2 applied
Numbers are plan §3.3/§3.5 constants and manifest values, not pixel measurements. Views are orthographic STL shading at one scale; sections are drawn from the constants. Thin p15 and full p25 differ only in BODY_THICK 7.0 and HOOK_PRELOAD 2.5 (see render_medial.png).