



Elicio BTE fit gauge v1 — reference body + lid


side (thickness × length)

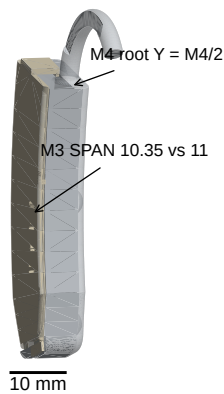


medial (caps toward viewer)

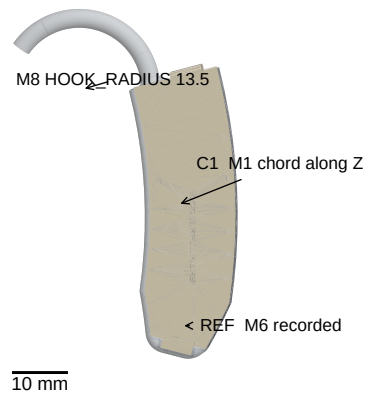


lip, bump, groove E5

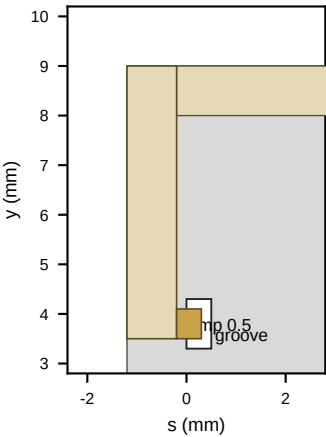

nubs E3 (u 1.9–2.7, 14.3–15.1)

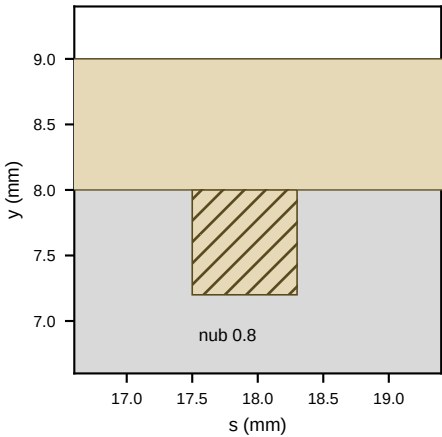

web, tongue, slot E1

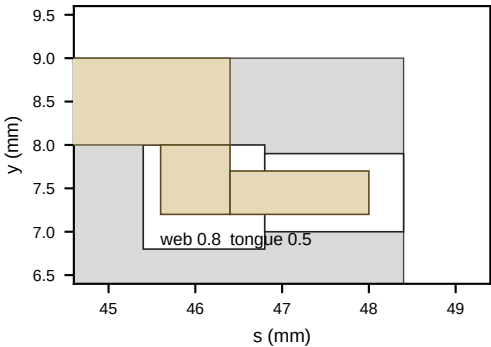

M1–M8 (plan §3.3 values)

M	lands on the part	mm
M1	ear-root chord; gate vs TOTAL_CHORD	52.00
M2	crease arc (BODY_ARC 48.4); bow source	58.00
M3	sulcus; SPAN = 9.0 + 1.35 crown = 10.35	11.00
M4	HOOK_ROOT.Y = M4/2 = 3.0	6.00
M5	GLASSES_FLAT 0.8 on hook (M5 > 0)	2.50
M6	recorded for WP7a; not a CAD driver	15.00
M7	recorded for WP7a; not a CAD driver	22.00
M8	HOOK_RADIUS = M8 + 1.75 + 0.75 = 13.5	11.00

E1–E5 nominal and fitted minimum (§3.6)

id	feature	nominal	fitted min
E1	tongue	0.5	0.4
E2	rib (locating only)	0.8	0.8
E3	nubs	0.8	0.6
E4	coupon rib	0.4	0.4
E5 lip	lip cantilever	1.0	1.0
E5 bump	snap bump	0.5	0.2

Elicio BTE fit gauge v1 drawing.pdf
parameter set: default.toml REF=yes VARIANT=full HOOK_PRELOAD=1.5
CREASE_BOW=3.0 TOTAL_CHORD=47.901 chord gate=50.901 (M1 ≥ TOTAL_CHORD + 3)
commit (solids last-change) 66b5564151991f4fd5f6a6457f798839d349b1d9 date 2026-09-16T00:00:00Z
General tolerance: ±0.3 mm under 100 mm, JLC MJF PA12
Dimensions are plan §3.3 / §3.5 values, not measured from pixels.