
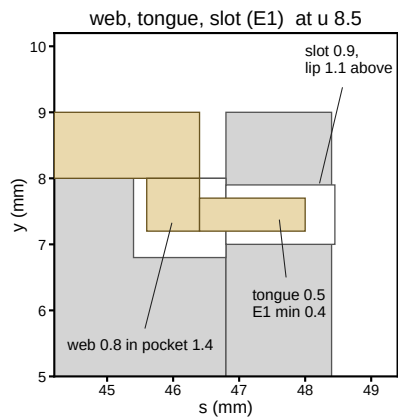
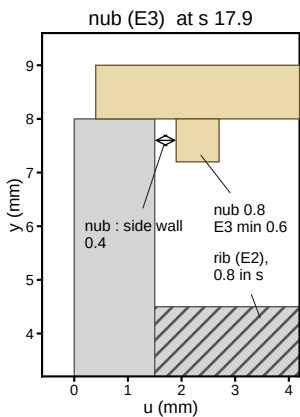
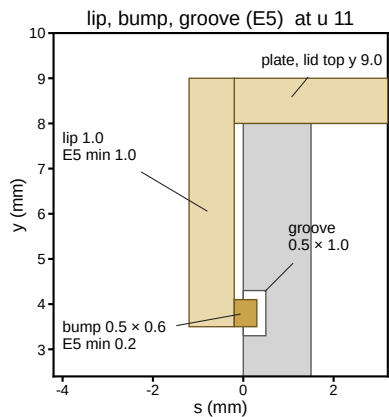


Elicio shell v2 — wearable body (round 5 winner) and lid

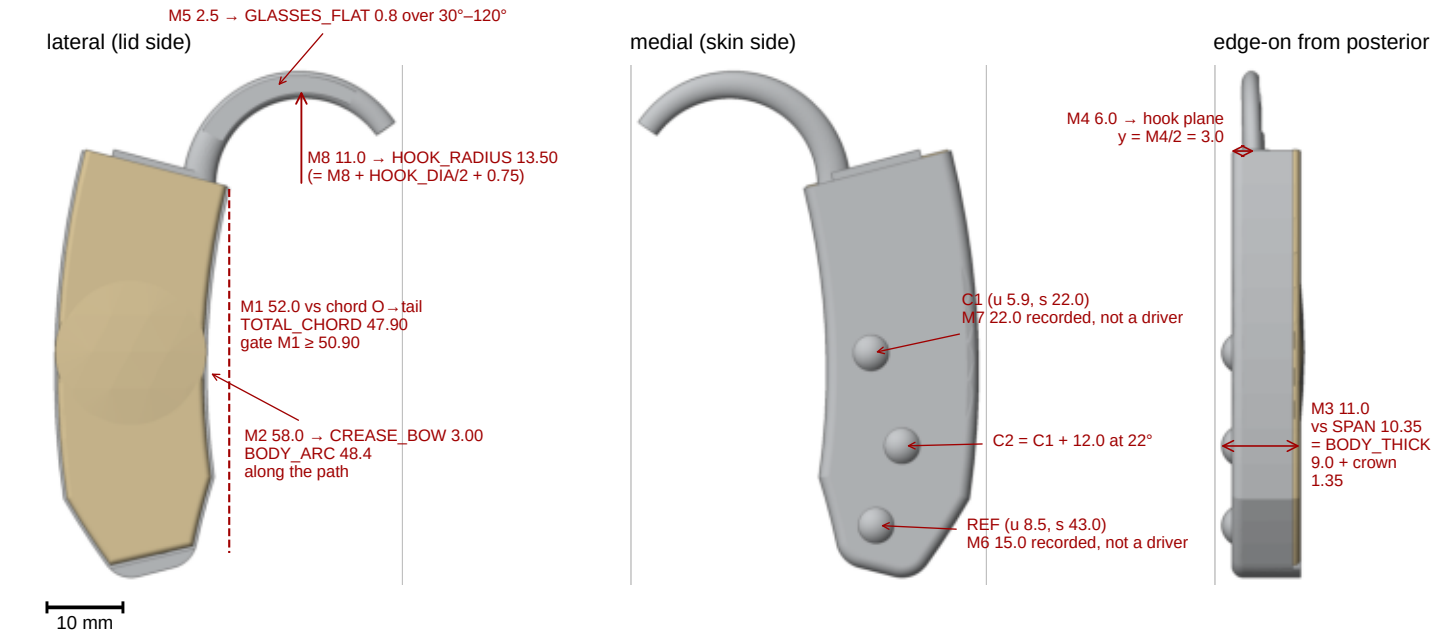

M1–M8 (defaults unless measured)

M	value	where it lands on the part
M1	52.00	gate M1 ≥ TOTAL_CHORD + 3 = 50.90
M2	58.00	CREASE_BOW 3.00, default (M1 and M2 not both measured)
M3	11.00	span report: SPAN 10.35
M4	6.00	HOOK_ROOT Y = M4/2 = 3.00
M5	2.50	GLASSES_FLAT 0.8 over 30°–120°
M6	15.00	recorded for WP7a; not a CAD driver
M7	22.00	recorded for WP7a; not a CAD driver
M8	11.00	HOOK_RADIUS 13.50

E1–E5 exceptions (plan §3.6), from manifest.json

id	feature	nominal	fitted min	note
E1	tongue	0.5	0.4	minimum fitted
E2	rib	0.8	0.8	locating only
E3	nubs	0.8	0.6	
E4	coupon rib	0.4	0.4	measurement
E5	lip cantilever	1.0	1.0	below JLC 1.5
E5	snap bump	0.5	0.2	below JLC 1.5

Winner A_501015_series_w20_y8_iII_s3 STAGE=shell provisional: true
params scripts/cad/params/shell_v2.toml sha256 f5882494c975...
Q34 M1=52.0 default.toml (blank). Interface II, standoff 3.0 mm.
VARIANT=full HOOK_PRELOAD=1.5
CREASE_BOW=3.00 TOTAL_CHORD=47.901 chord gate: M1 ≥ 50.901
solids commit c68d4b2839c9ebc031d8a04376656b290656e677 date 2026-09-18
General tolerance: ±0.3 mm under 100 mm, JLC MJF PA12
Closure: hinge lip plus two snaps, no undercut; V2_CLOSURE fails (shell-v2.md §2, code-r6 decision 71).
USB-C on the hook-end end face. No text on the outside. Q59: packing-v2.md §5 REF_end_wall_slot.
body_full_p15: hook joint fillet 1.5: no radius builds; left sharp; lip root: not recorded
Rolf approves the two renders before any shell order. Nothing is ordered here.