
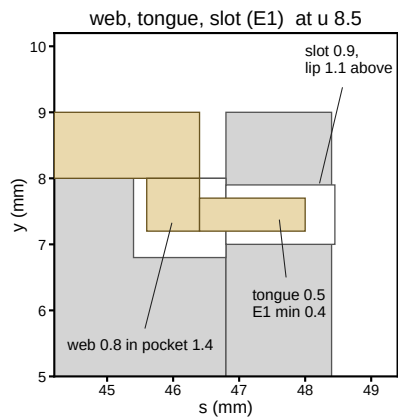
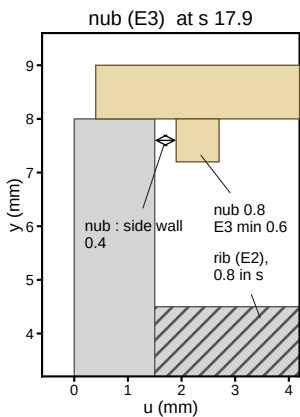
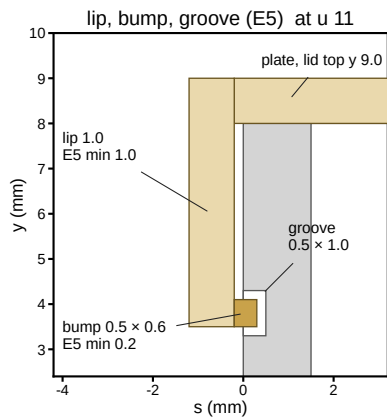


Elicio shell v2 — wearable body (round 5 winner) and lid

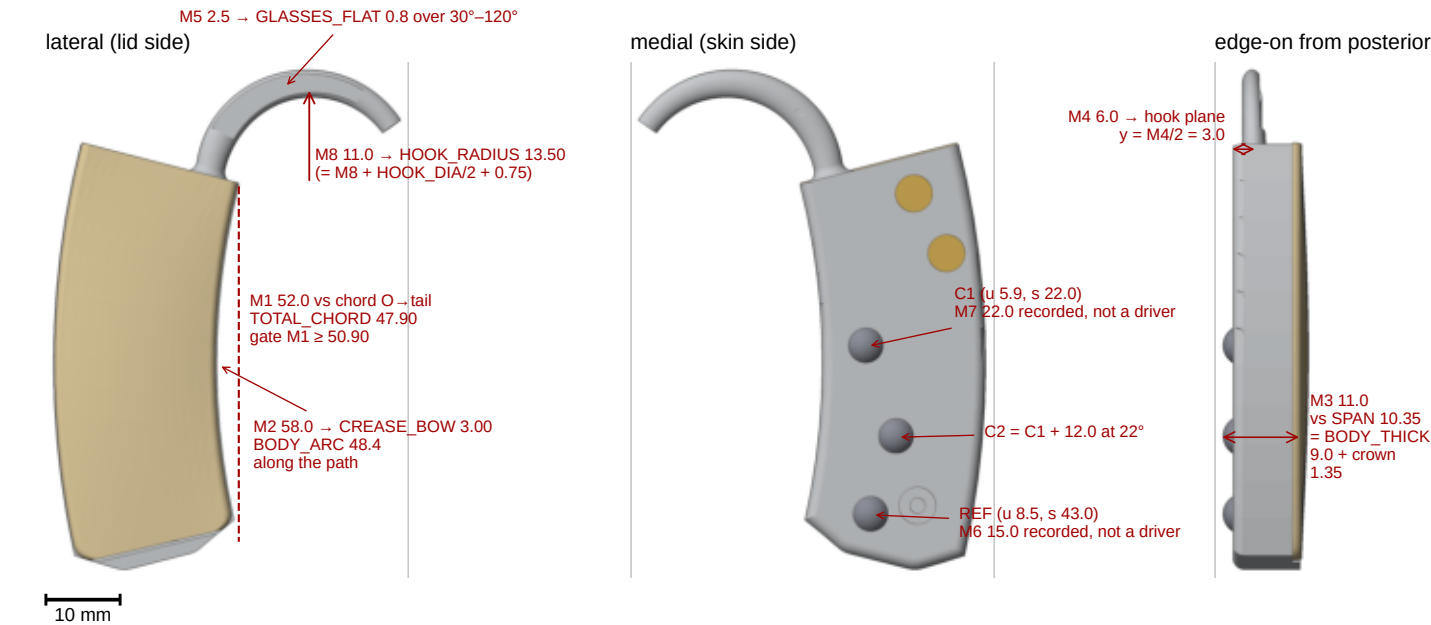

M1–M8 (defaults unless measured)

M	value	where it lands on the part
M1	52.00	gate M1 ≥ TOTAL_CHORD + 3 = 50.90
M2	58.00	CREASE_BOW 3.00, default (M1 and M2 not both measured)
M3	11.00	span report: SPAN 10.35
M4	6.00	HOOK_ROOT Y = M4/2 = 3.00
M5	2.50	GLASSES_FLAT 0.8 over 30°–120°
M6	15.00	recorded for WP7a; not a CAD driver
M7	22.00	recorded for WP7a; not a CAD driver
M8	11.00	HOOK_RADIUS 13.50

E1–E5 exceptions (plan §3.6), from manifest.json

id	feature	nominal	fitted min	note
E1	tongue	0.5	0.4	minimum fitted
E2	rib	0.8	0.8	locating only
E3	nubs	0.8	0.6	
E4	coupon rib	0.4	0.4	measurement
E5	lip cantilever	1.0	1.0	below JLC 1.5
E5	snap bump	0.5	0.2	below JLC 1.5

Winner A_pack501012_series_w22_y8_iII_s3 STAGE=shell provisional: true
params scripts/cad/params/shell_v2.toml sha256 c1990fc89b69...
Q34 M1=52.0 default.toml (blank). Interface II, standoff 3.0 mm.
VARIANT=full HOOK_PRELOAD=1.5
CREASE_BOW=3.00 TOTAL_CHORD=47.901 chord gate: M1 ≥ 50.901
solids commit a83e13b86b5c83aad3a7c238d7b0540fff90d8d4 date 2026-09-18
General tolerance: ±0.3 mm under 100 mm, JLC MJF PA12
Closure: Q71 hinge lip at the hook-end wall plus one concealed medial-tail M2.5. S4 pull/drop qualitative.
The M2.5×4 ends at y 5.55 in the body tail; the lid starts at 8.0 (V2_CLOSURE fails, Q89).
Contacts: titanium ISO 7380 heads through Ø2.7 holes (bought, not printed). P4/P5: open Ø5 holes.
Q81: no USB receptacle at M1 52. P4/P5 charging pads, hook end (Q86). No text on the outside. Q59 slot stays.
body_full_p15: hook joint fillet 1.5 applied; lip root: not recorded
Rolf approves the two renders before any shell order. Nothing is ordered here.