

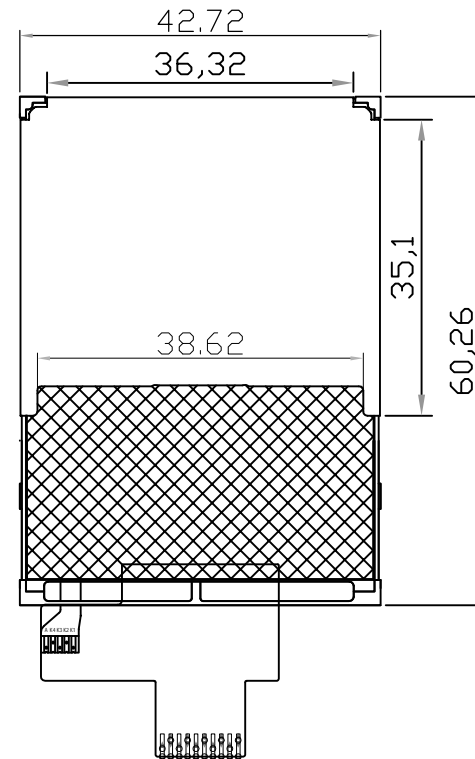


Notes:

1. Display Type:TFT-LCD
2. Ing Direction:12:00
3. Main LCD Drive IC:ST7789V Or Compatible
4. Polarizer Mode:Transmissive/Positive
5. Drive Method:1/240 Duty
6. Vdda:2.8V Typical;vddio:2.8V Typical
7. Backlight:White Led-4chip(15mA/LED)
8. Operating Temp:-20?~ 70?
9. Storage Temp:-30?~ 80?
- 10.General Tolerance: ?.2
- 11.Requirements On Environmental Protection: RoHS

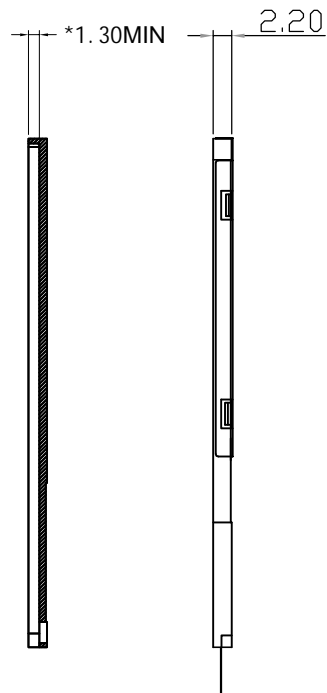

NO.	Symbol
1	GND
2	RESET
3	SCL
4	D/C
5	CS
6	SDA
7	SDO
8	VCC
9	A
10	K

优智景科技有限公司

2.4 背光	PRODUCT NO. GMT024-01	DRAW NO. 2019.05.31	REV
TOLERANCE: DECIMAL .X?10 .XX?10 ± 1/4 *	DWN	DSN	
首次设计	2019.05.31	CHKD	APPD
更改记录	日期	NOT IN SCALE UNIT	mm SCALE 1:1