

Figure 1. A_NATIVE developed $da/dN(K)$ vs. load ratio R (single seed 1720; markers=calculated points, lines=visual connector)

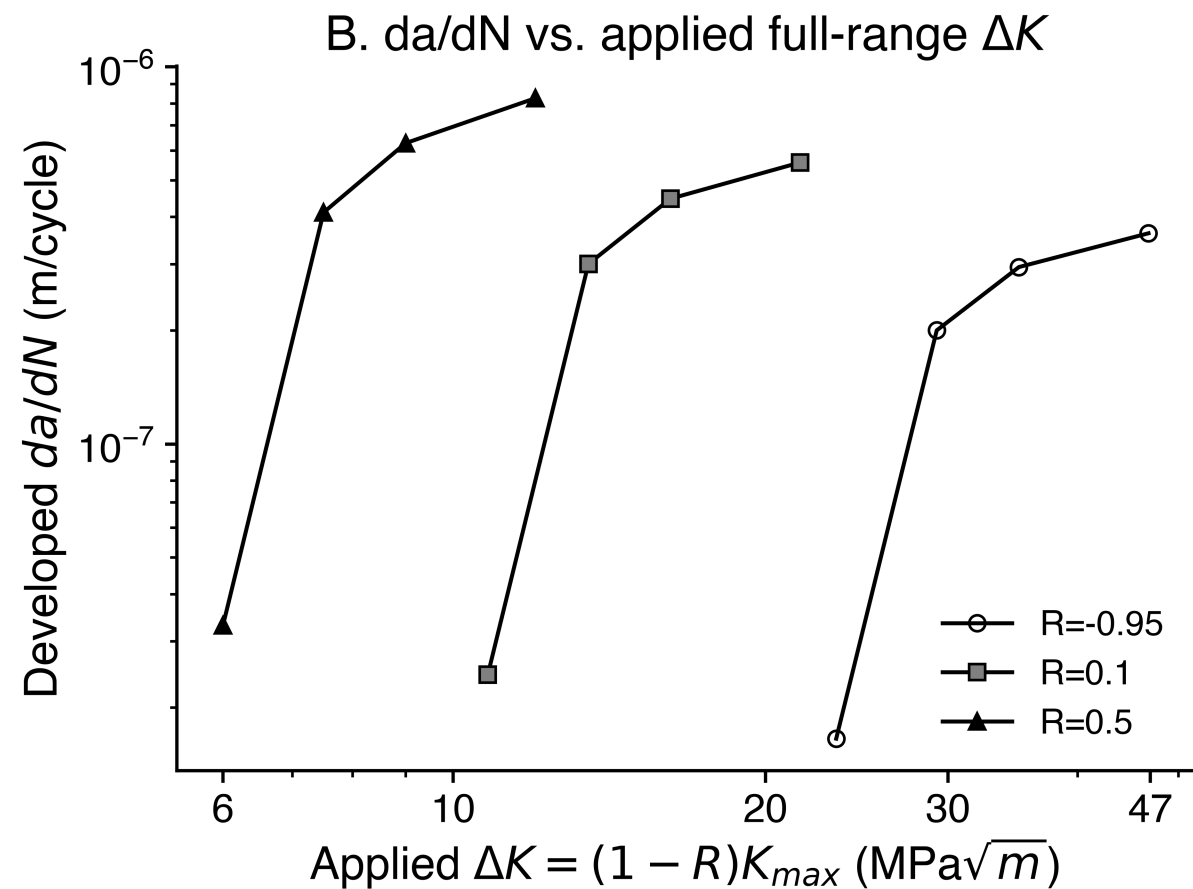
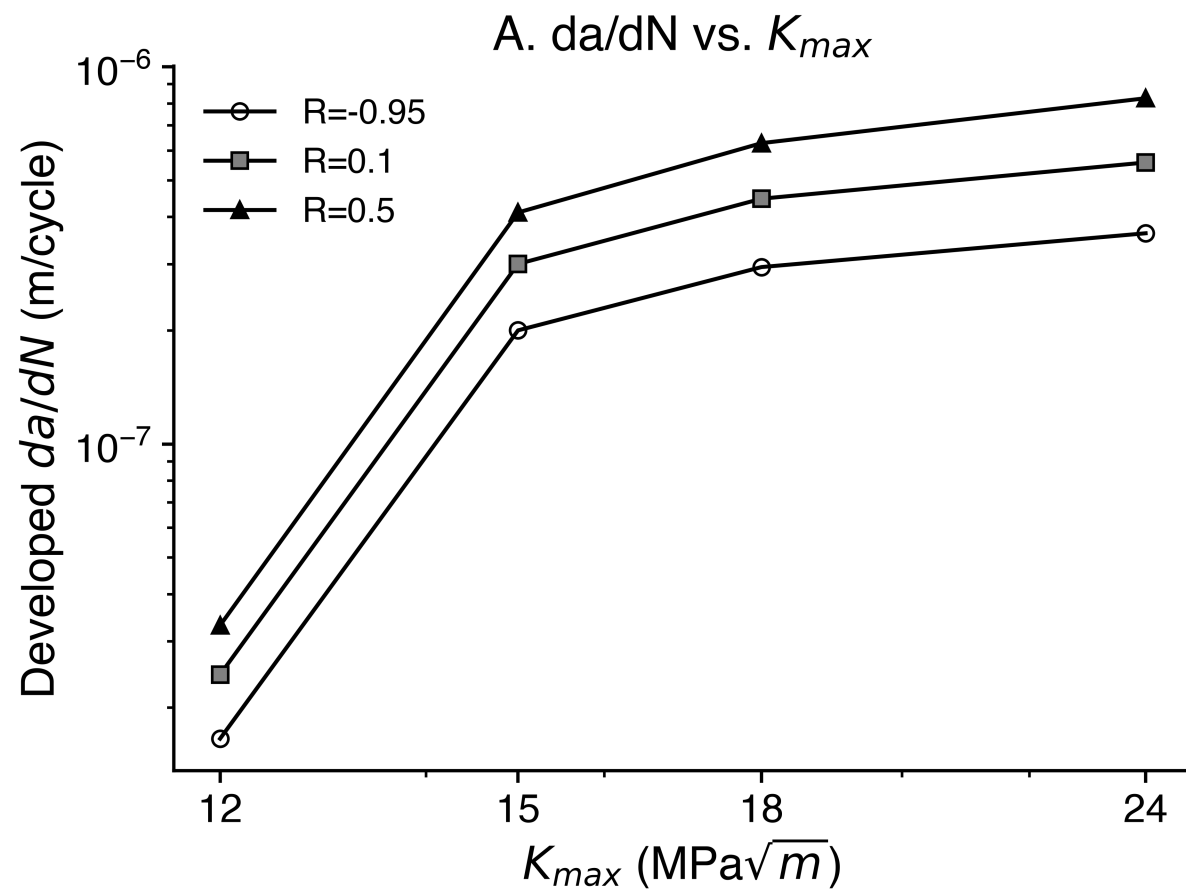


Figure 2. A_NATIVE / PT03 / PT08 transport-mechanism substitutions (NOT distinct calibrated materials -- Peierls/Taylor sensitivity test)

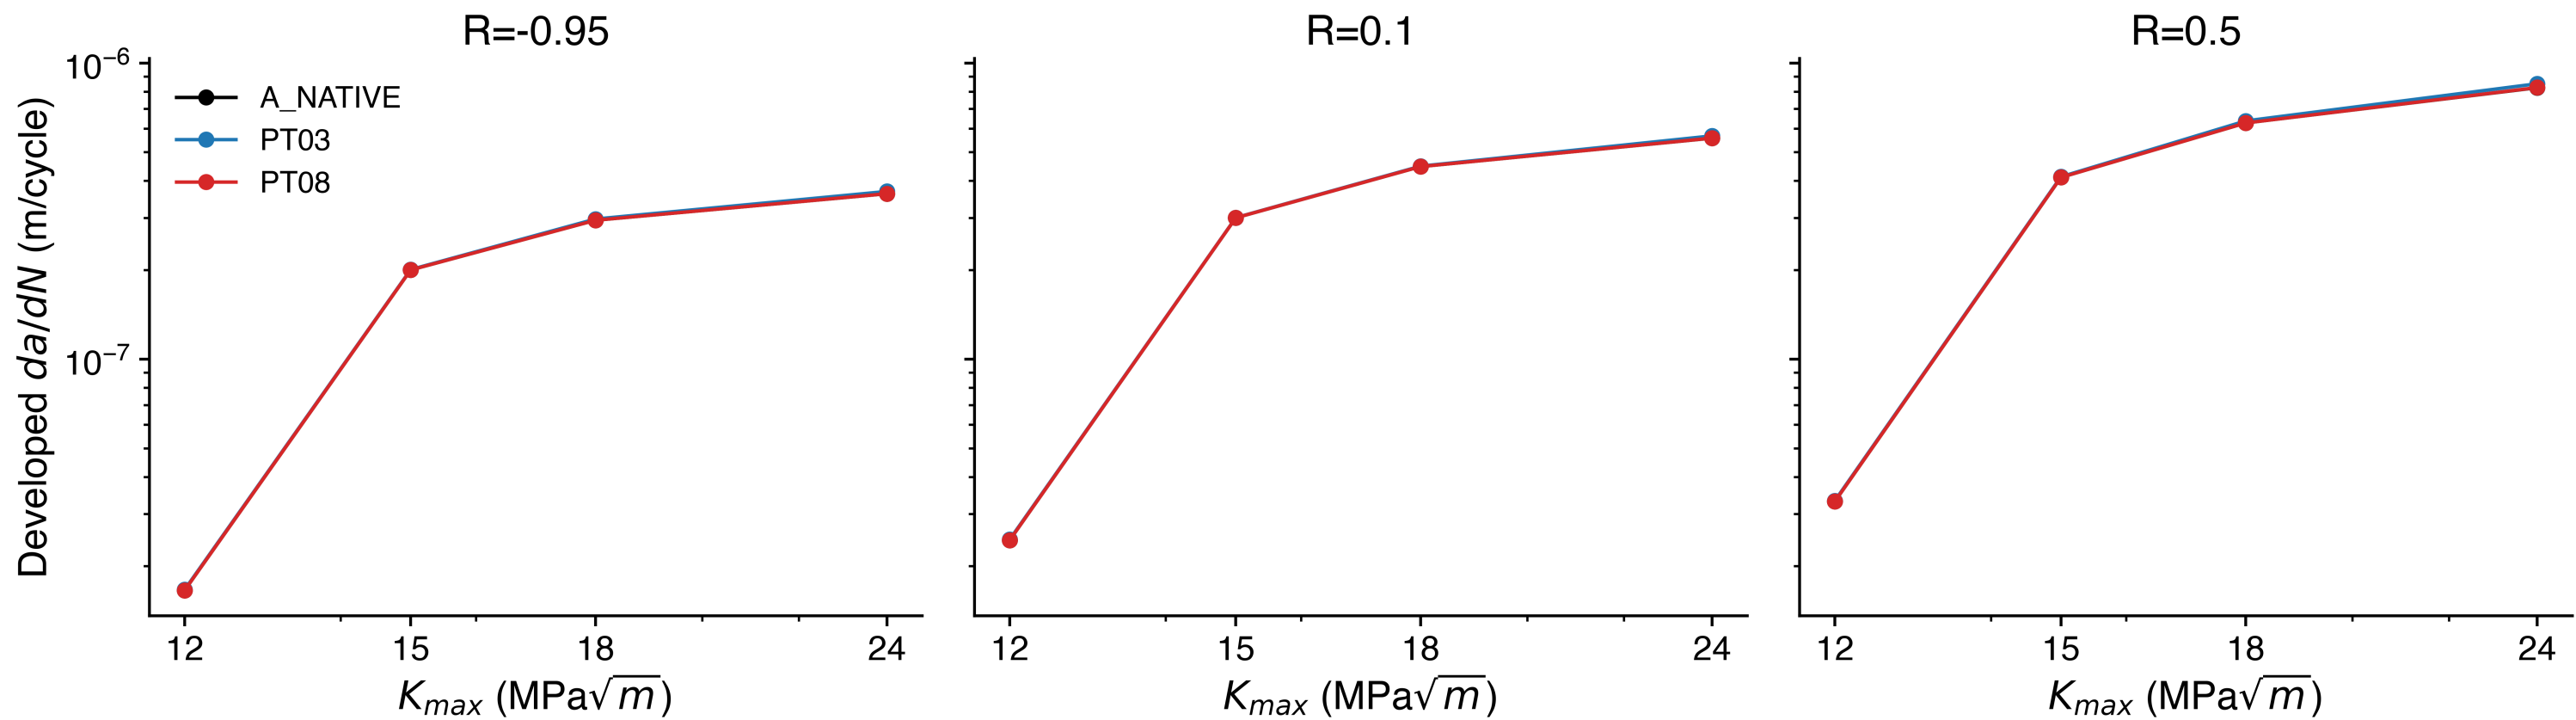


Figure 2 (ratio companion). PT/A_NATIVE developed-rate ratio -- differences are a few percent at most

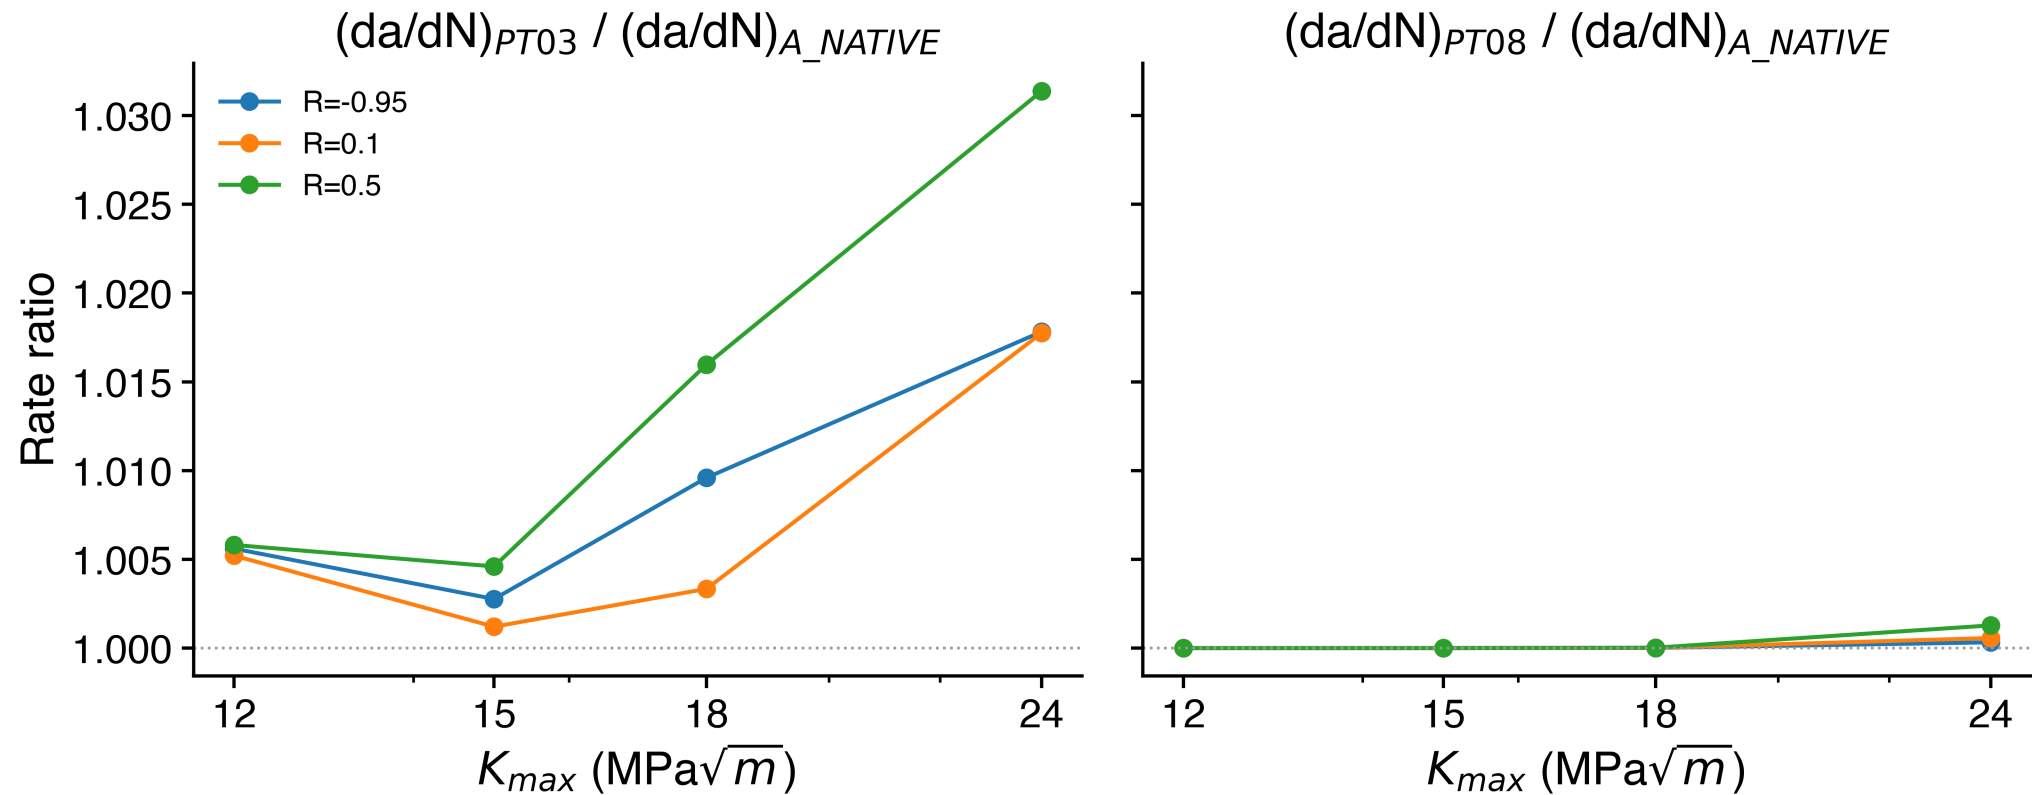


Figure 3. Crack-rebonding parameterizations (PX4 developed points, signed-K contact surrogate -- opposing crack-face contact is not resolved)

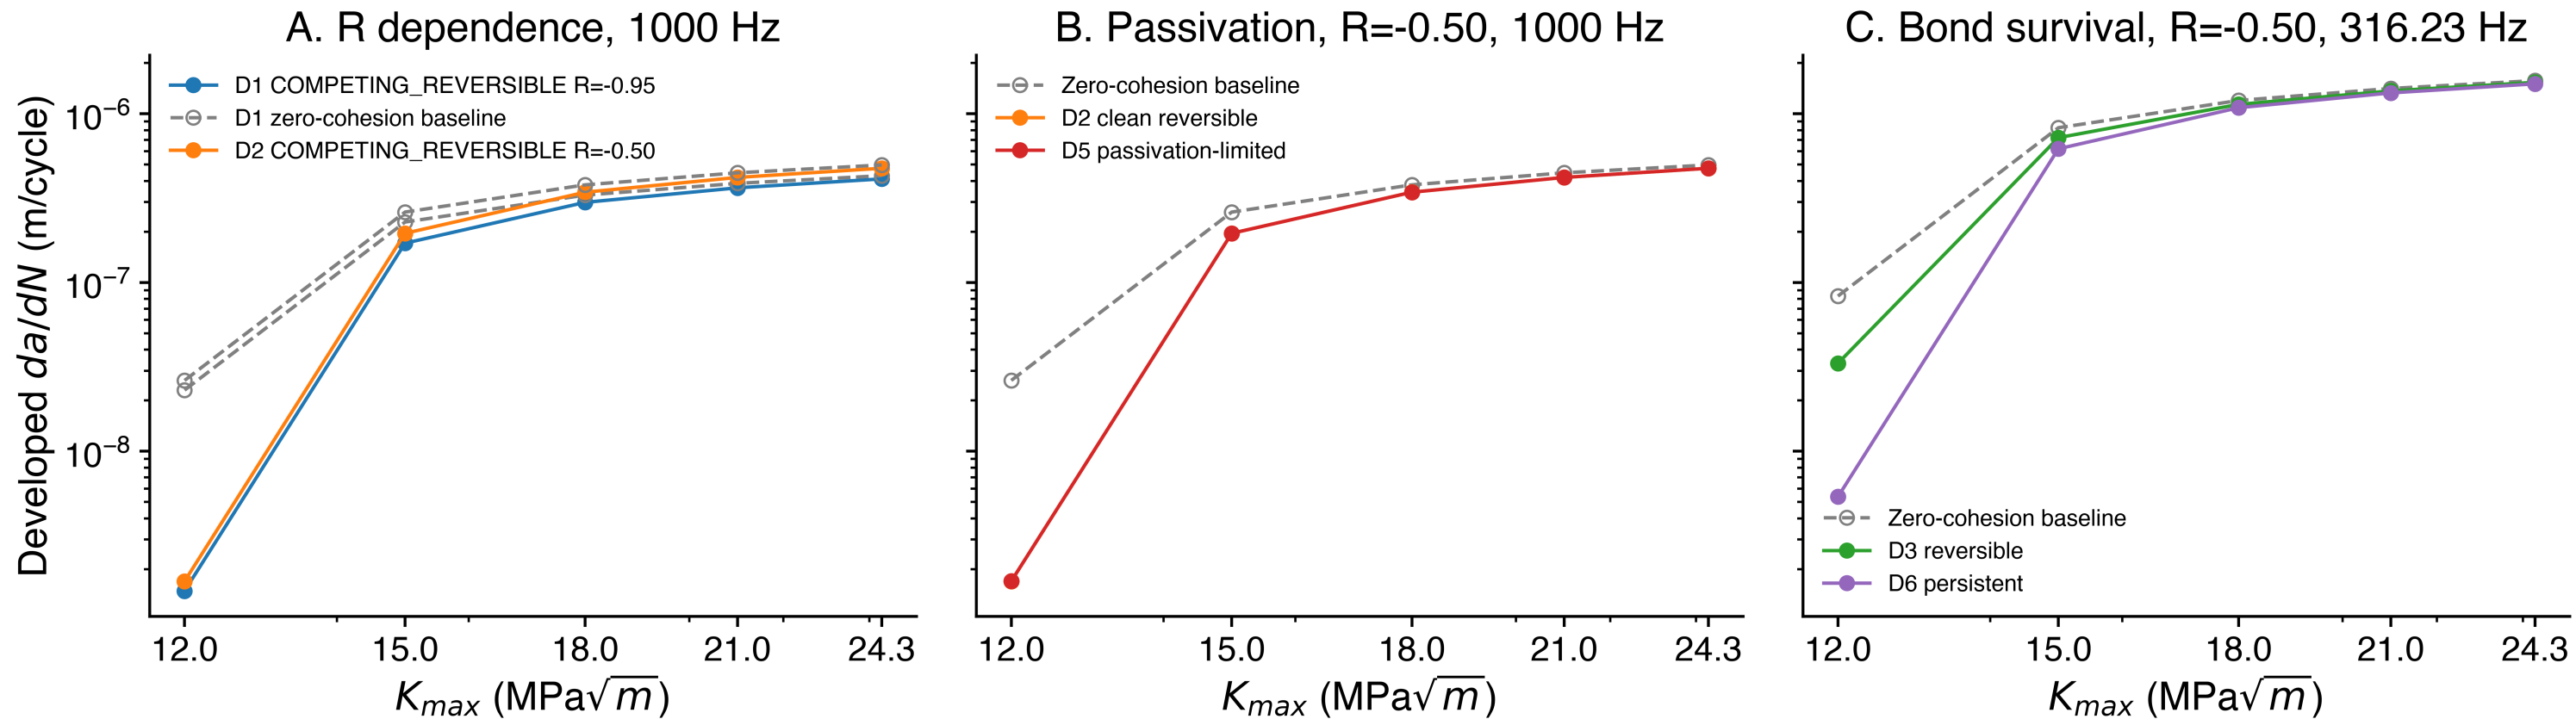


Figure 3 (companion). Shielding metric $S_h(K)$ -- signed-K contact surrogate, opposing crack-face contact not resolved



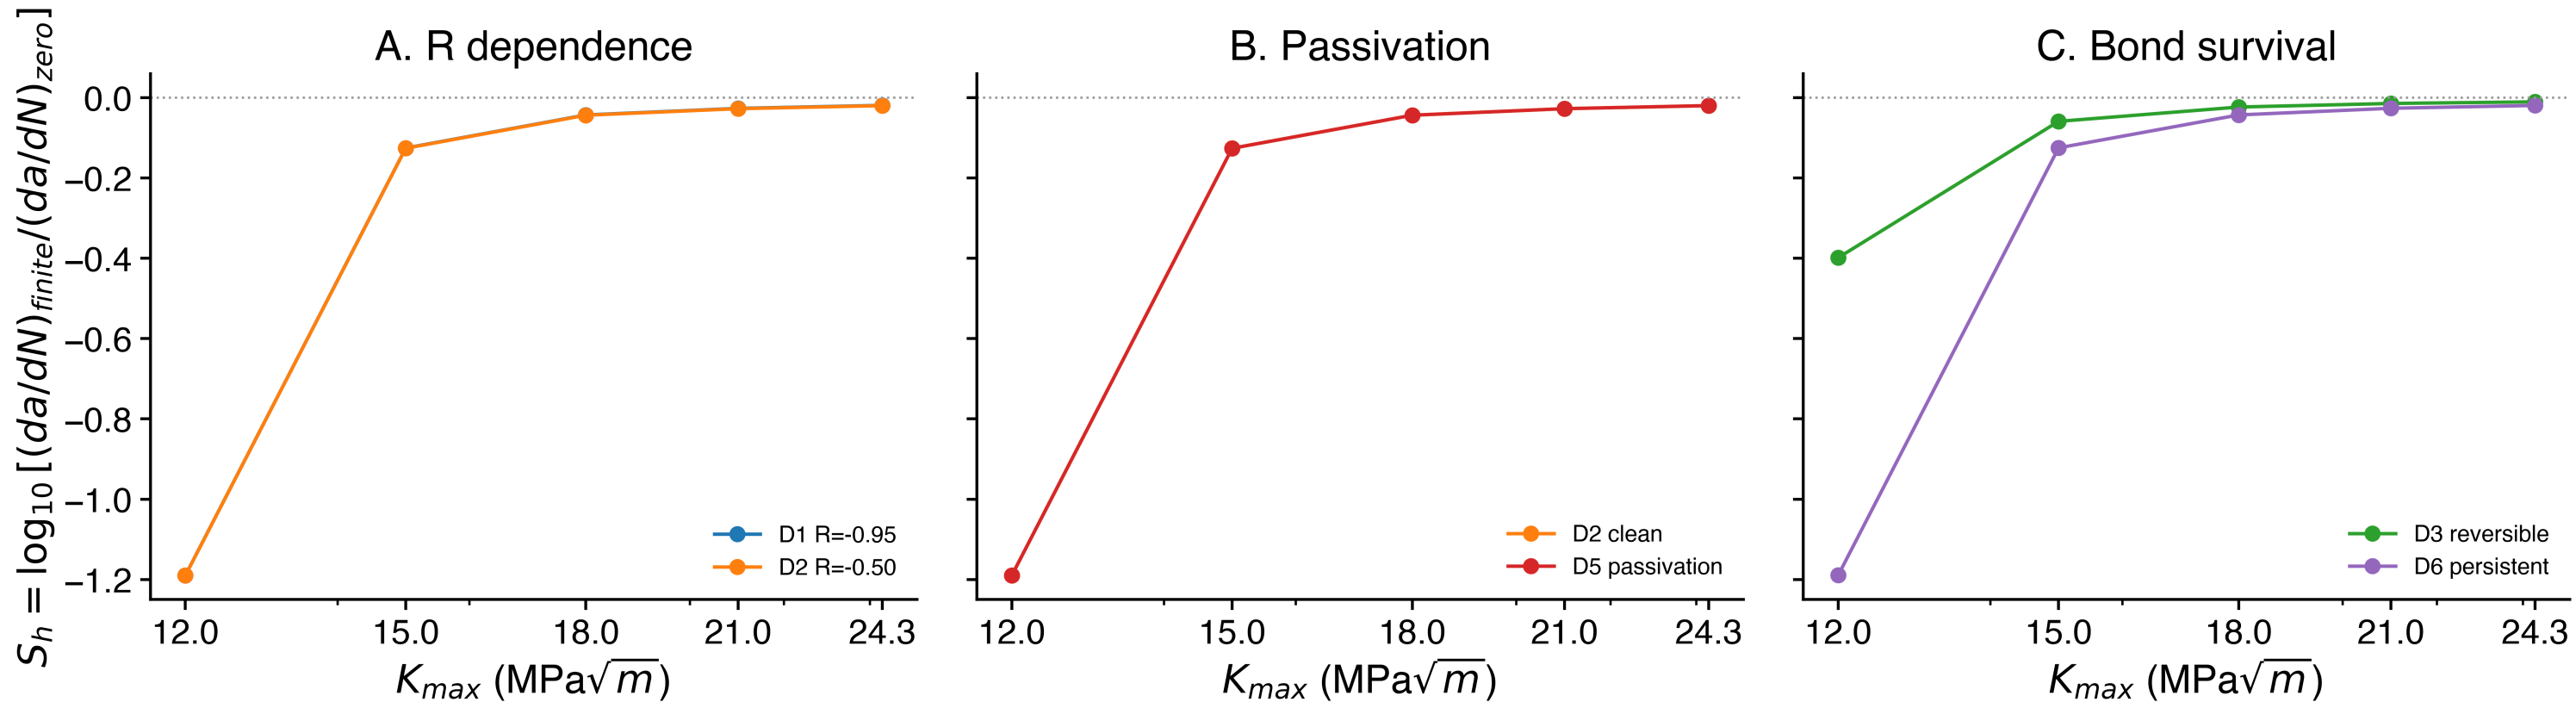


Figure 4. Local (adjacent-secant) slopes -- primary local-slope measure

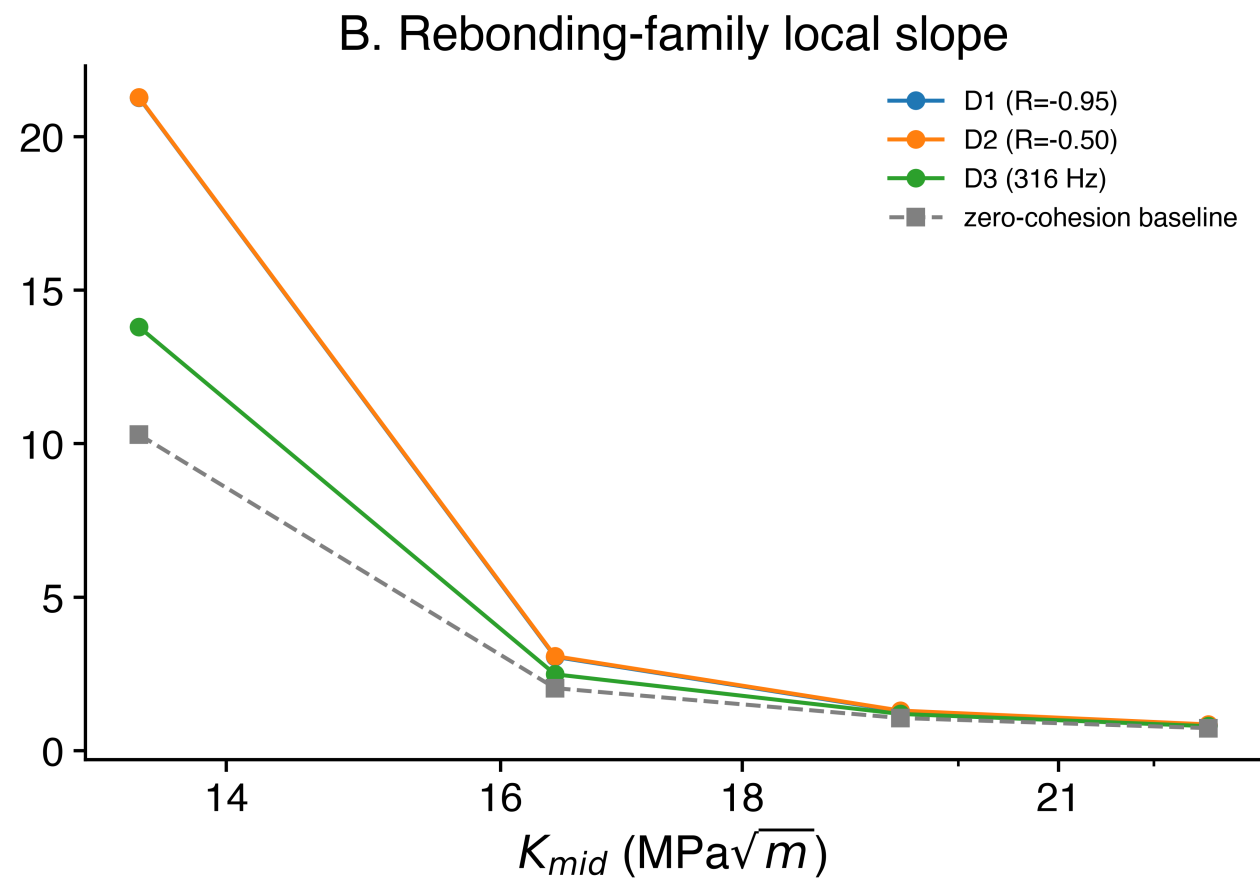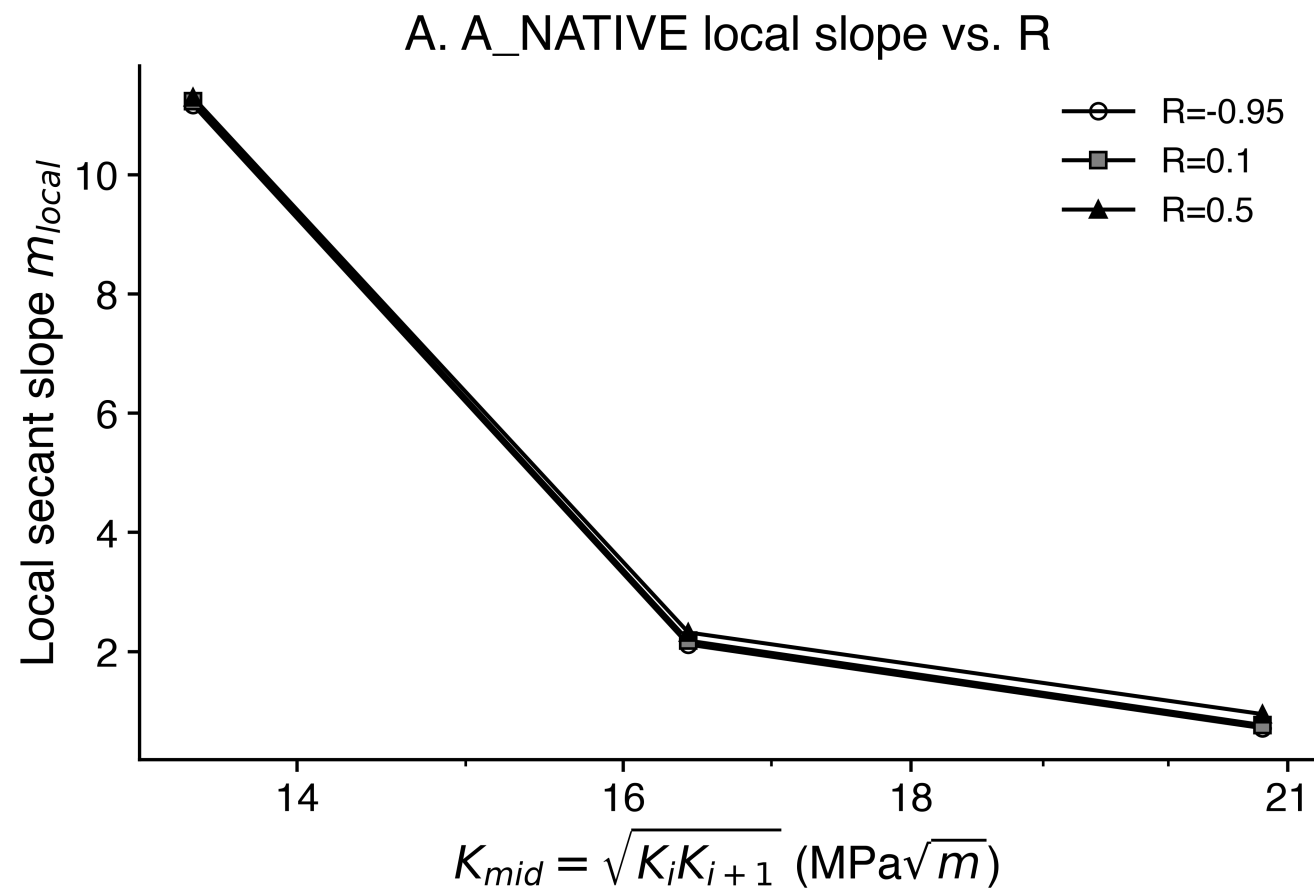

Global slope summary (red = CURVED_NON_PARIS_RESPONSE; blue = PARIS_ADEQUATE)

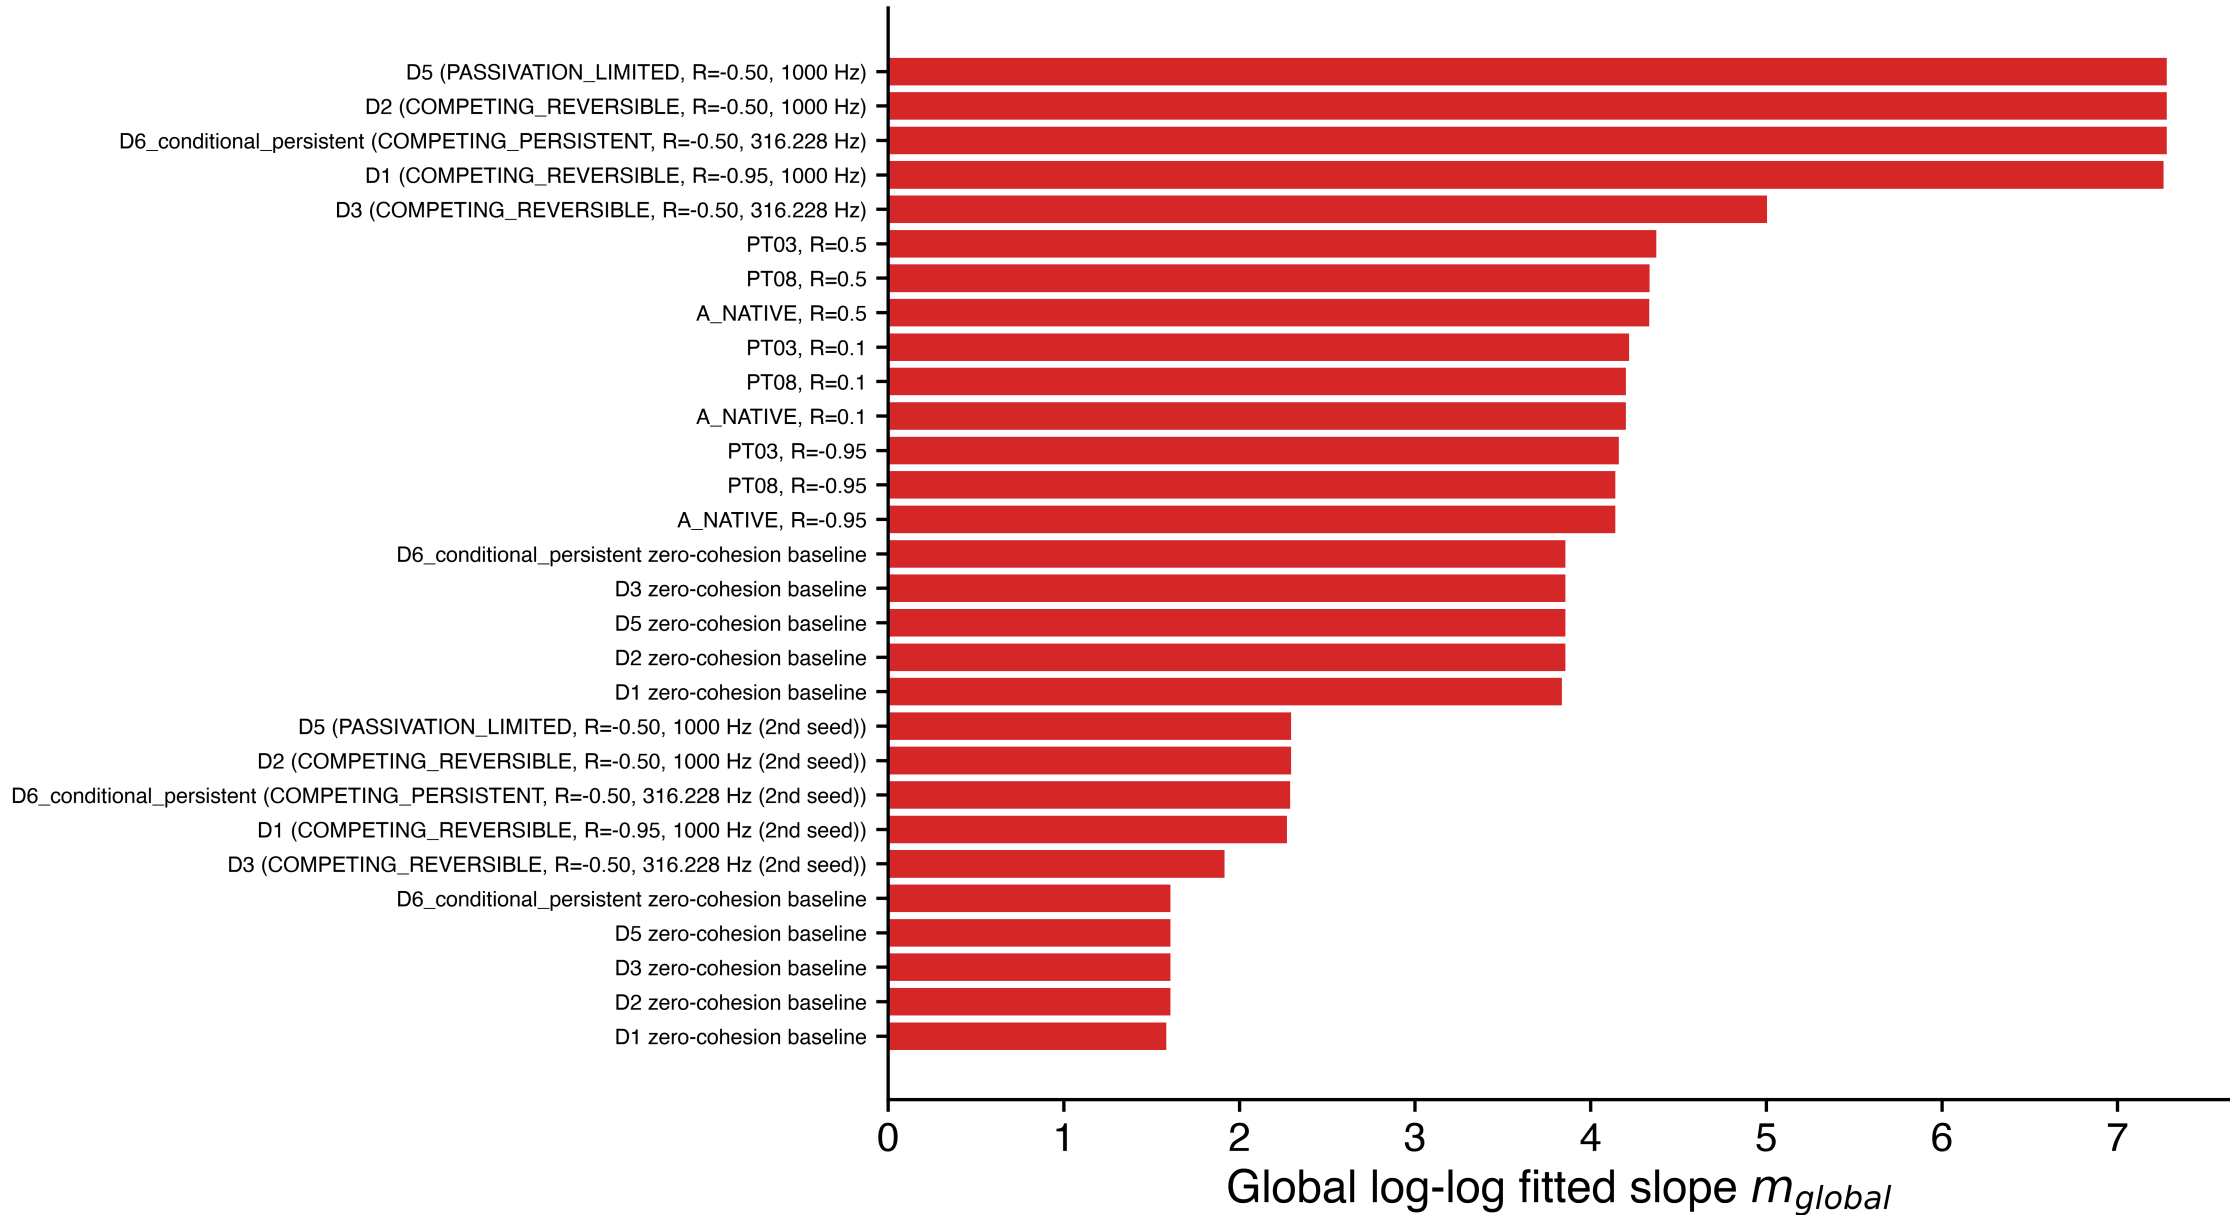


Figure 5. Material-class context. These are heuristic comparison bands / project-specific control values, not fitted targets and not universal material-class constants. Material class cannot be inferred from Paris slope alone.

