




ANALYTICAL PREDICTION: P/C/B periodic-orbit phase trajectory
COMPETING_REVERSIBLE, $K_{\max}=18 \text{ MPa}\sqrt{m}$, $R=-0.5$, $f=1000\text{Hz}$ (zero fitting)

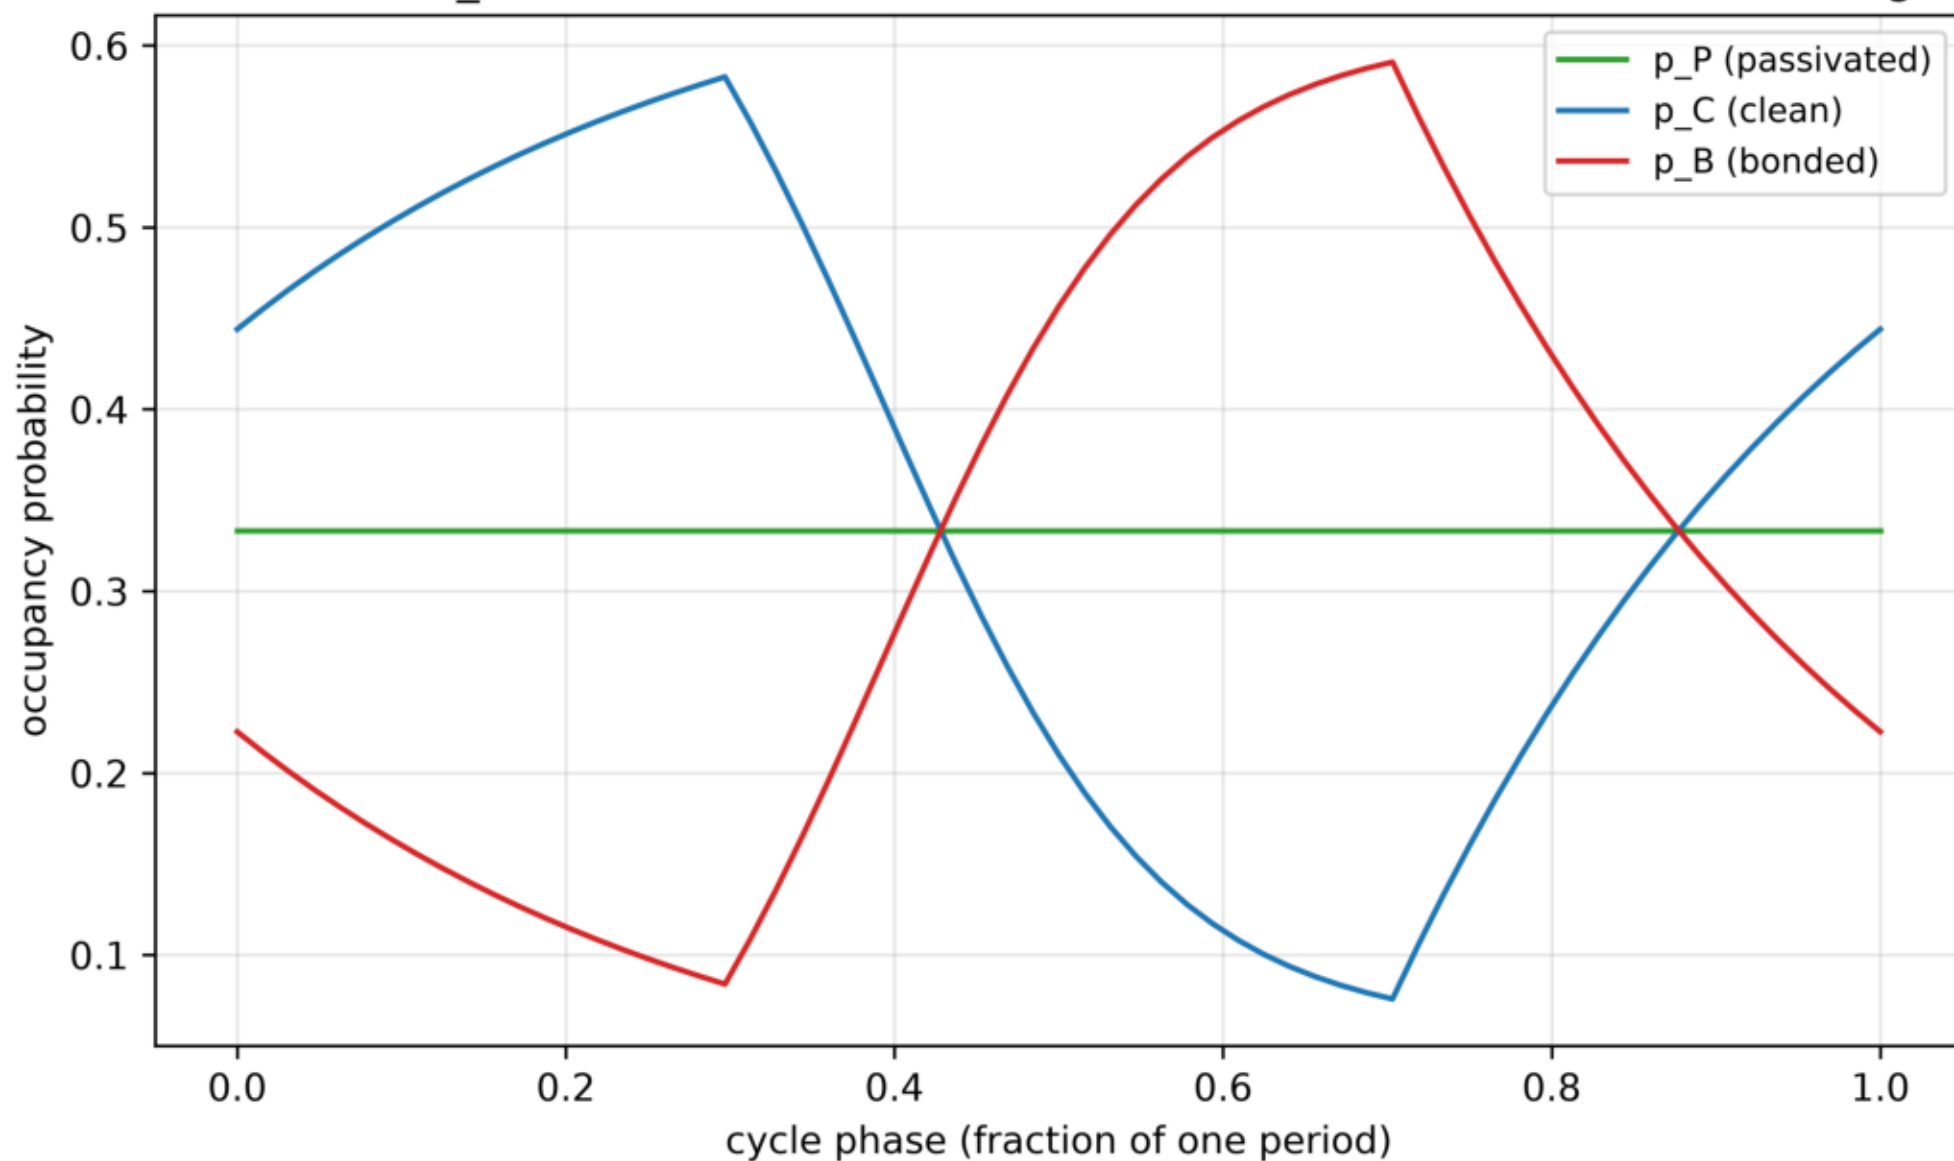


PHYSICAL SIMULATION (POST-PROCESSED): PX3 screen S_h vs R
($K_{\max}=18 \text{ MPa}\sqrt{m}$, $f=1000\text{Hz}$ reference)

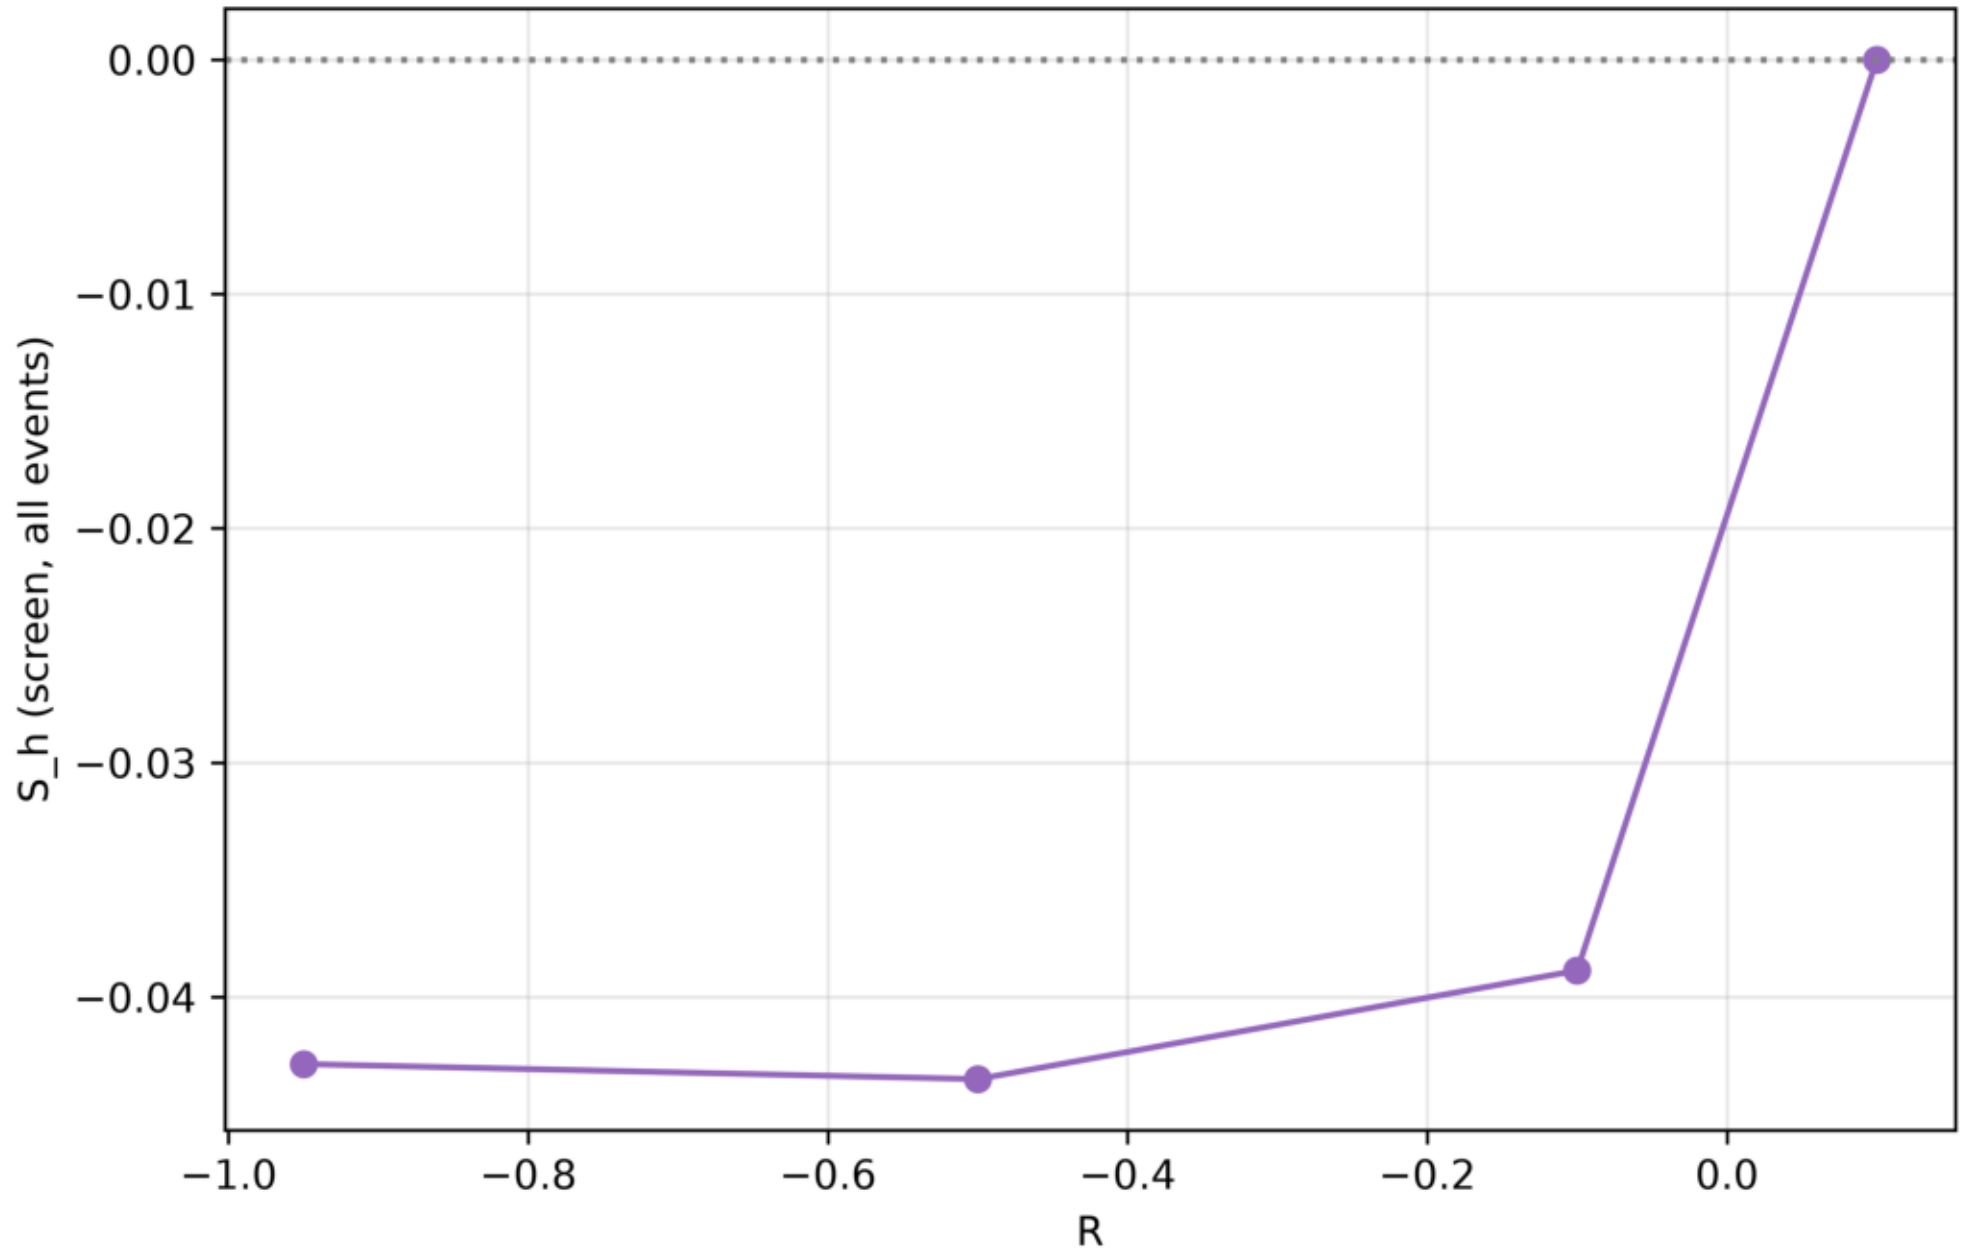


PHYSICAL SIMULATION (POST-PROCESSED): PX3 screen frequency response
(Kmax=18 MPa $\sqrt{m}$, R=-0.5 reference)

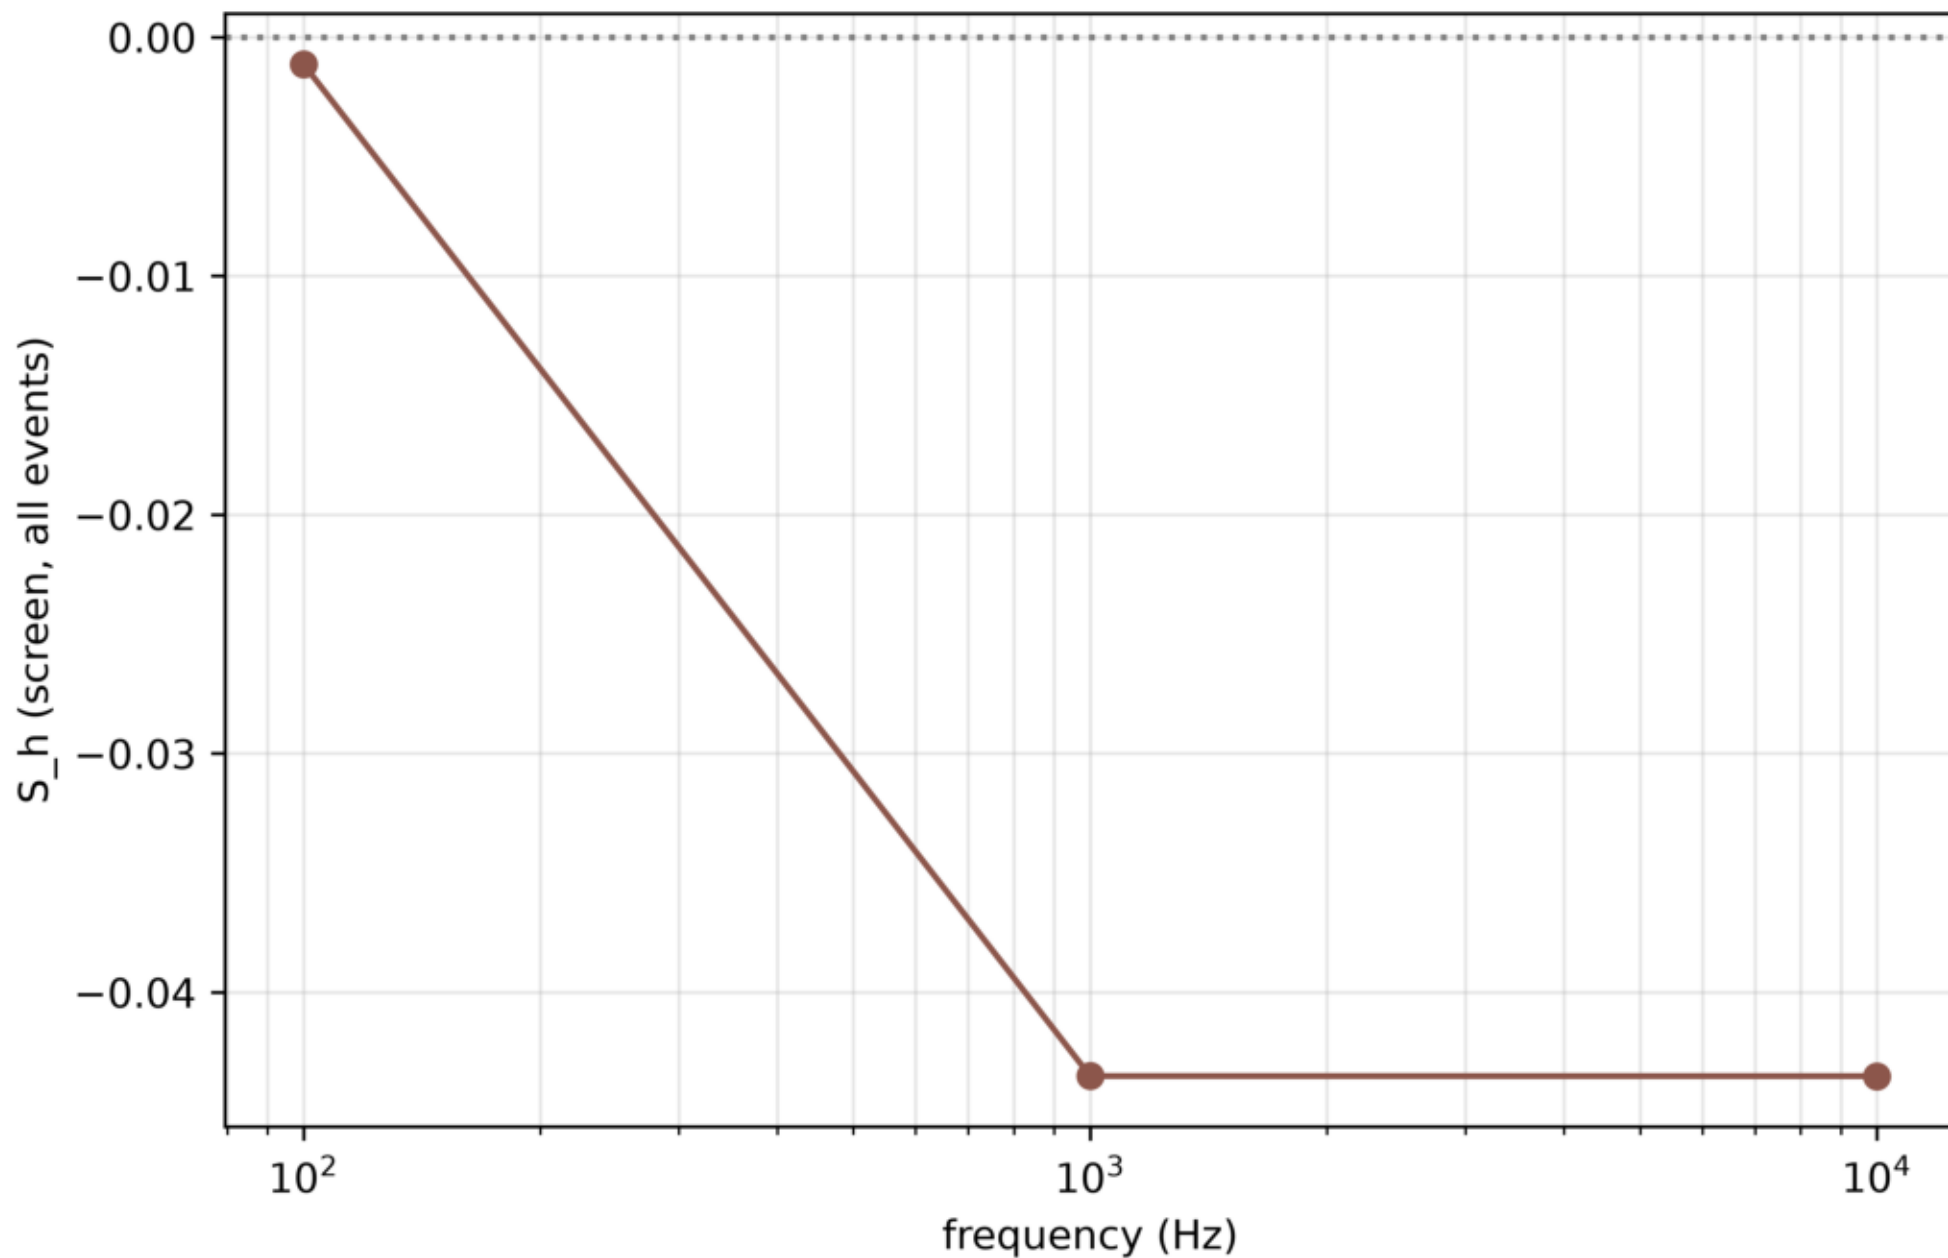


PHYSICAL SIMULATION: reversible (D3) vs persistent (D6) developed curves
6.18x sep. at Kmax=12 (NOT an order of magnitude), decaying to 1.02x by 24.3

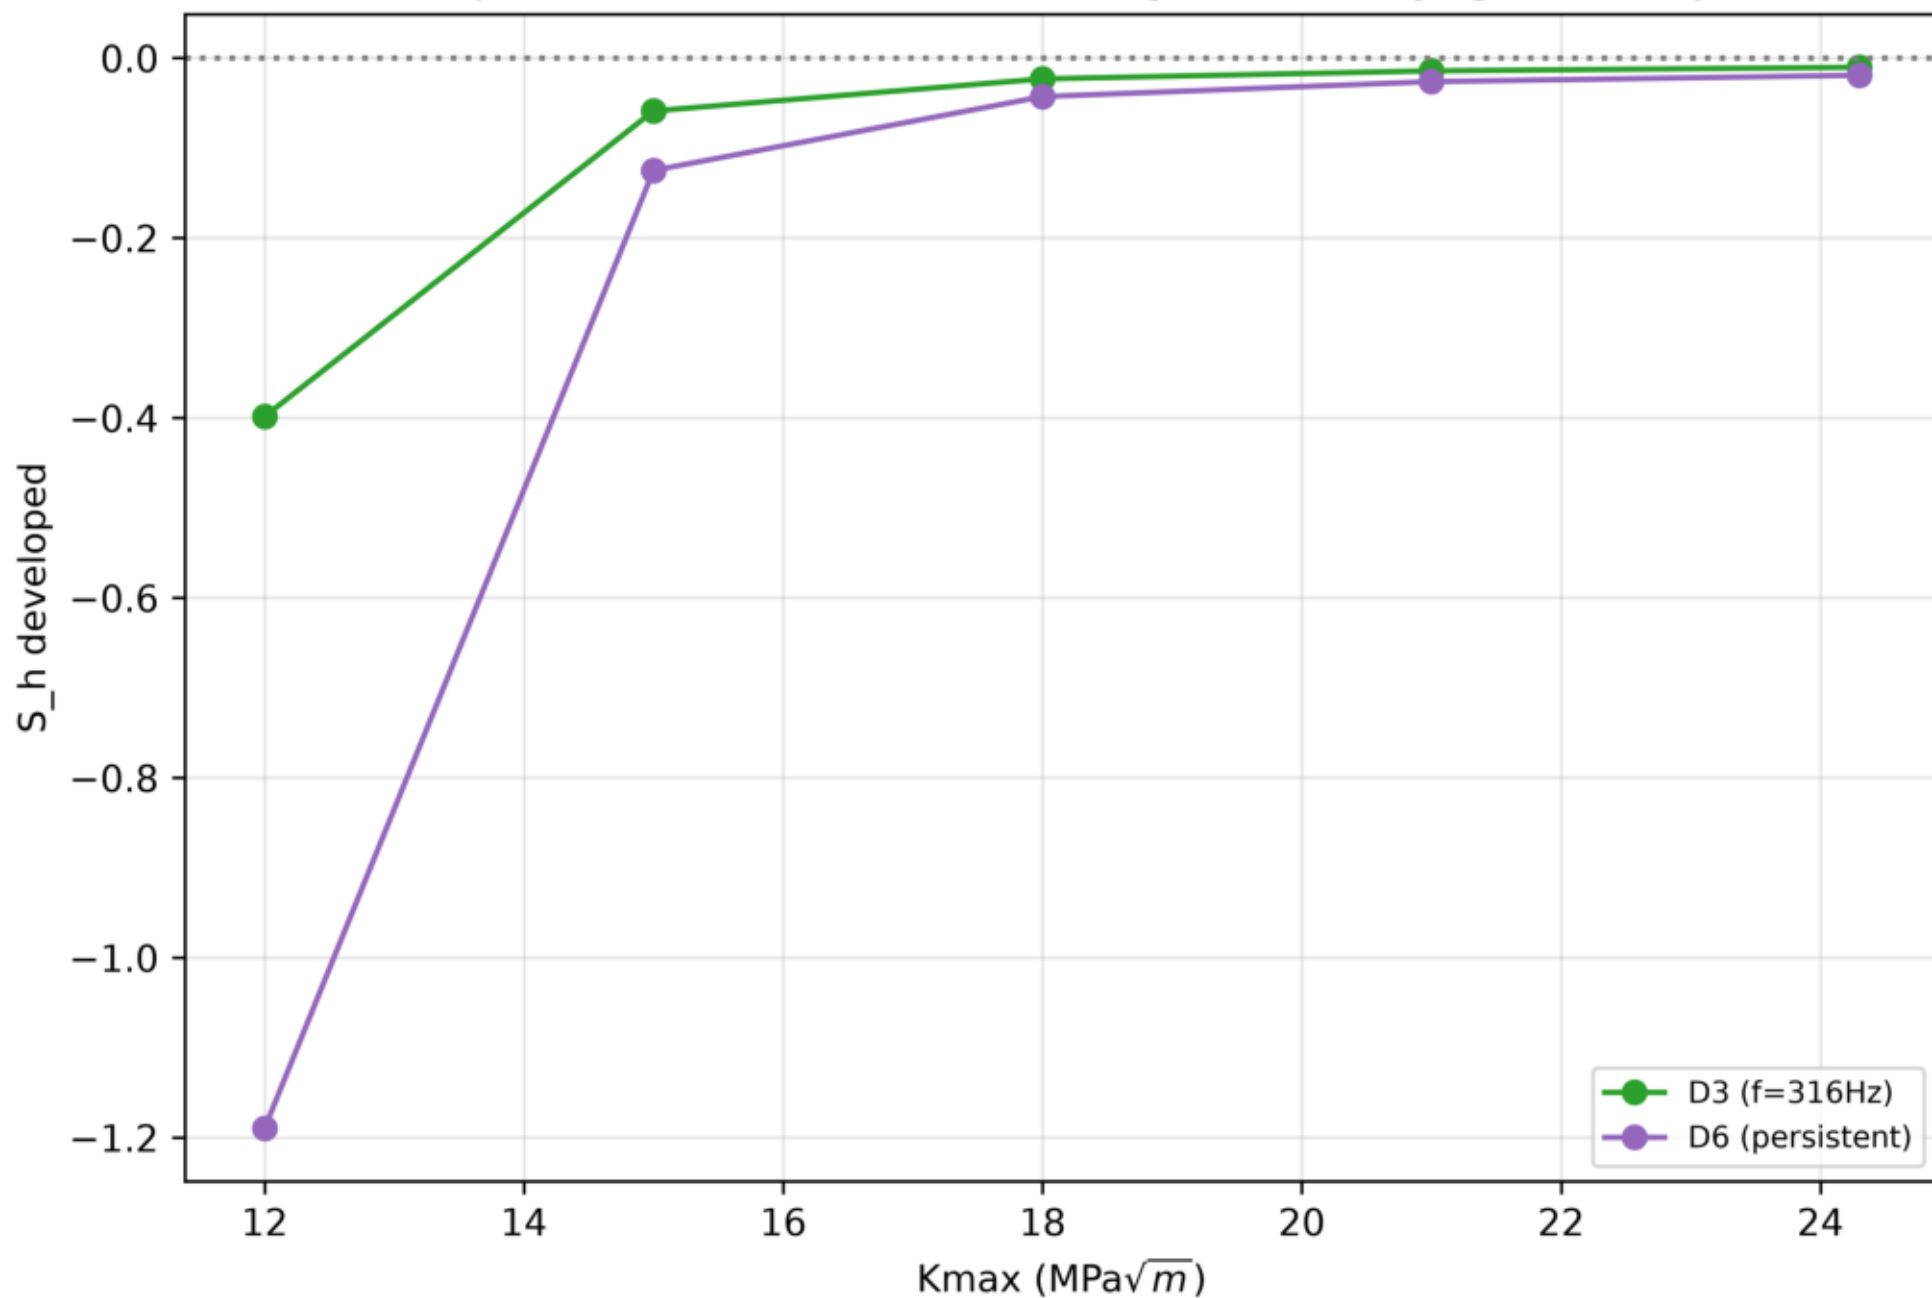


PHYSICAL SIMULATION (POST-PROCESSED): PX3 screen passivation/chemistry response
(PASSIVATION_LIMITED row, Kmax=18 MPa $\sqrt{m}$ reference)

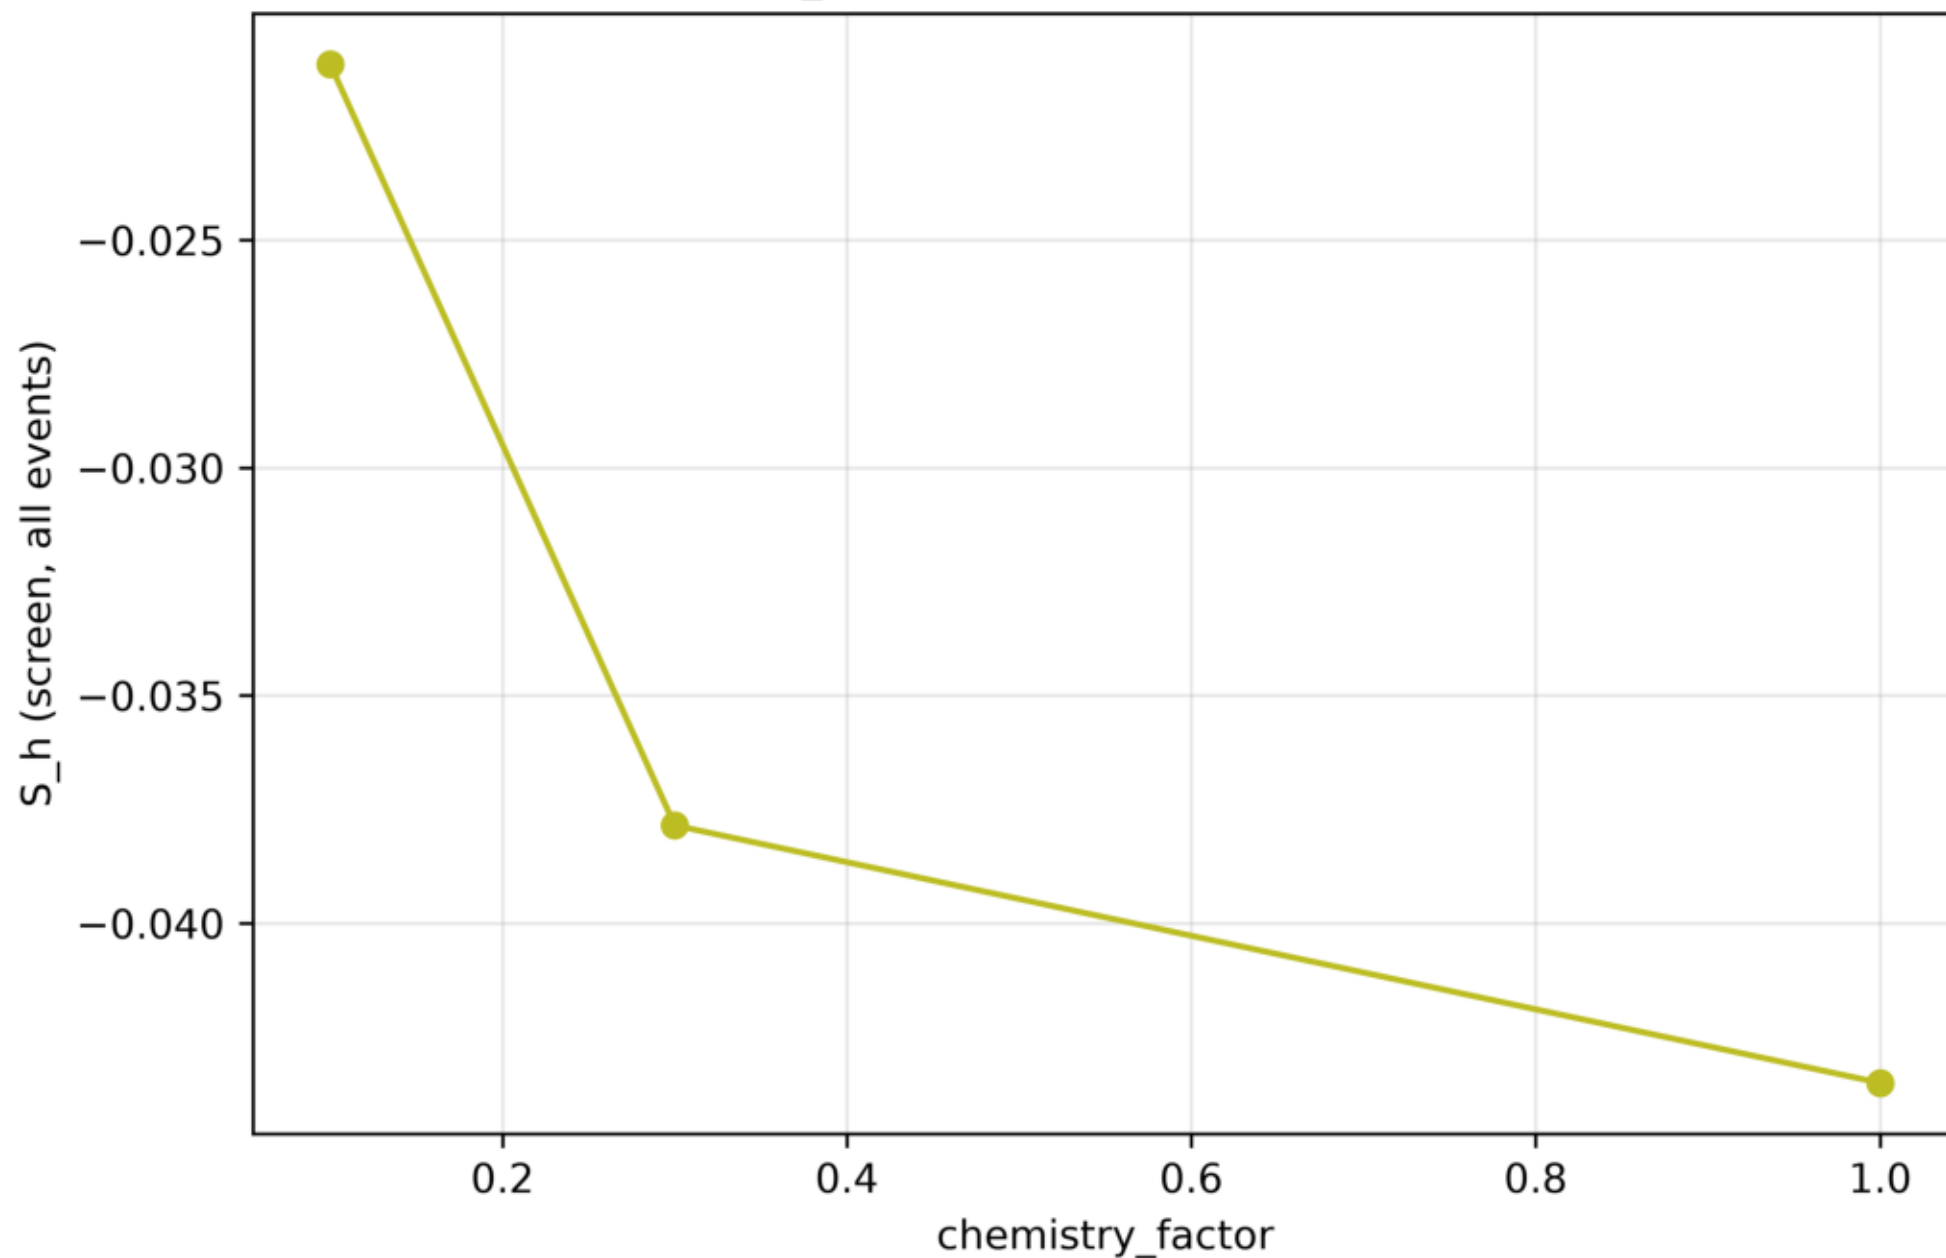



PHYSICAL SIMULATION (POST-PROCESSED): PX3 screen cohesive-strength response
(Kmax=18 MPa $\sqrt{m}$, R=-0.5, f=1000Hz reference)

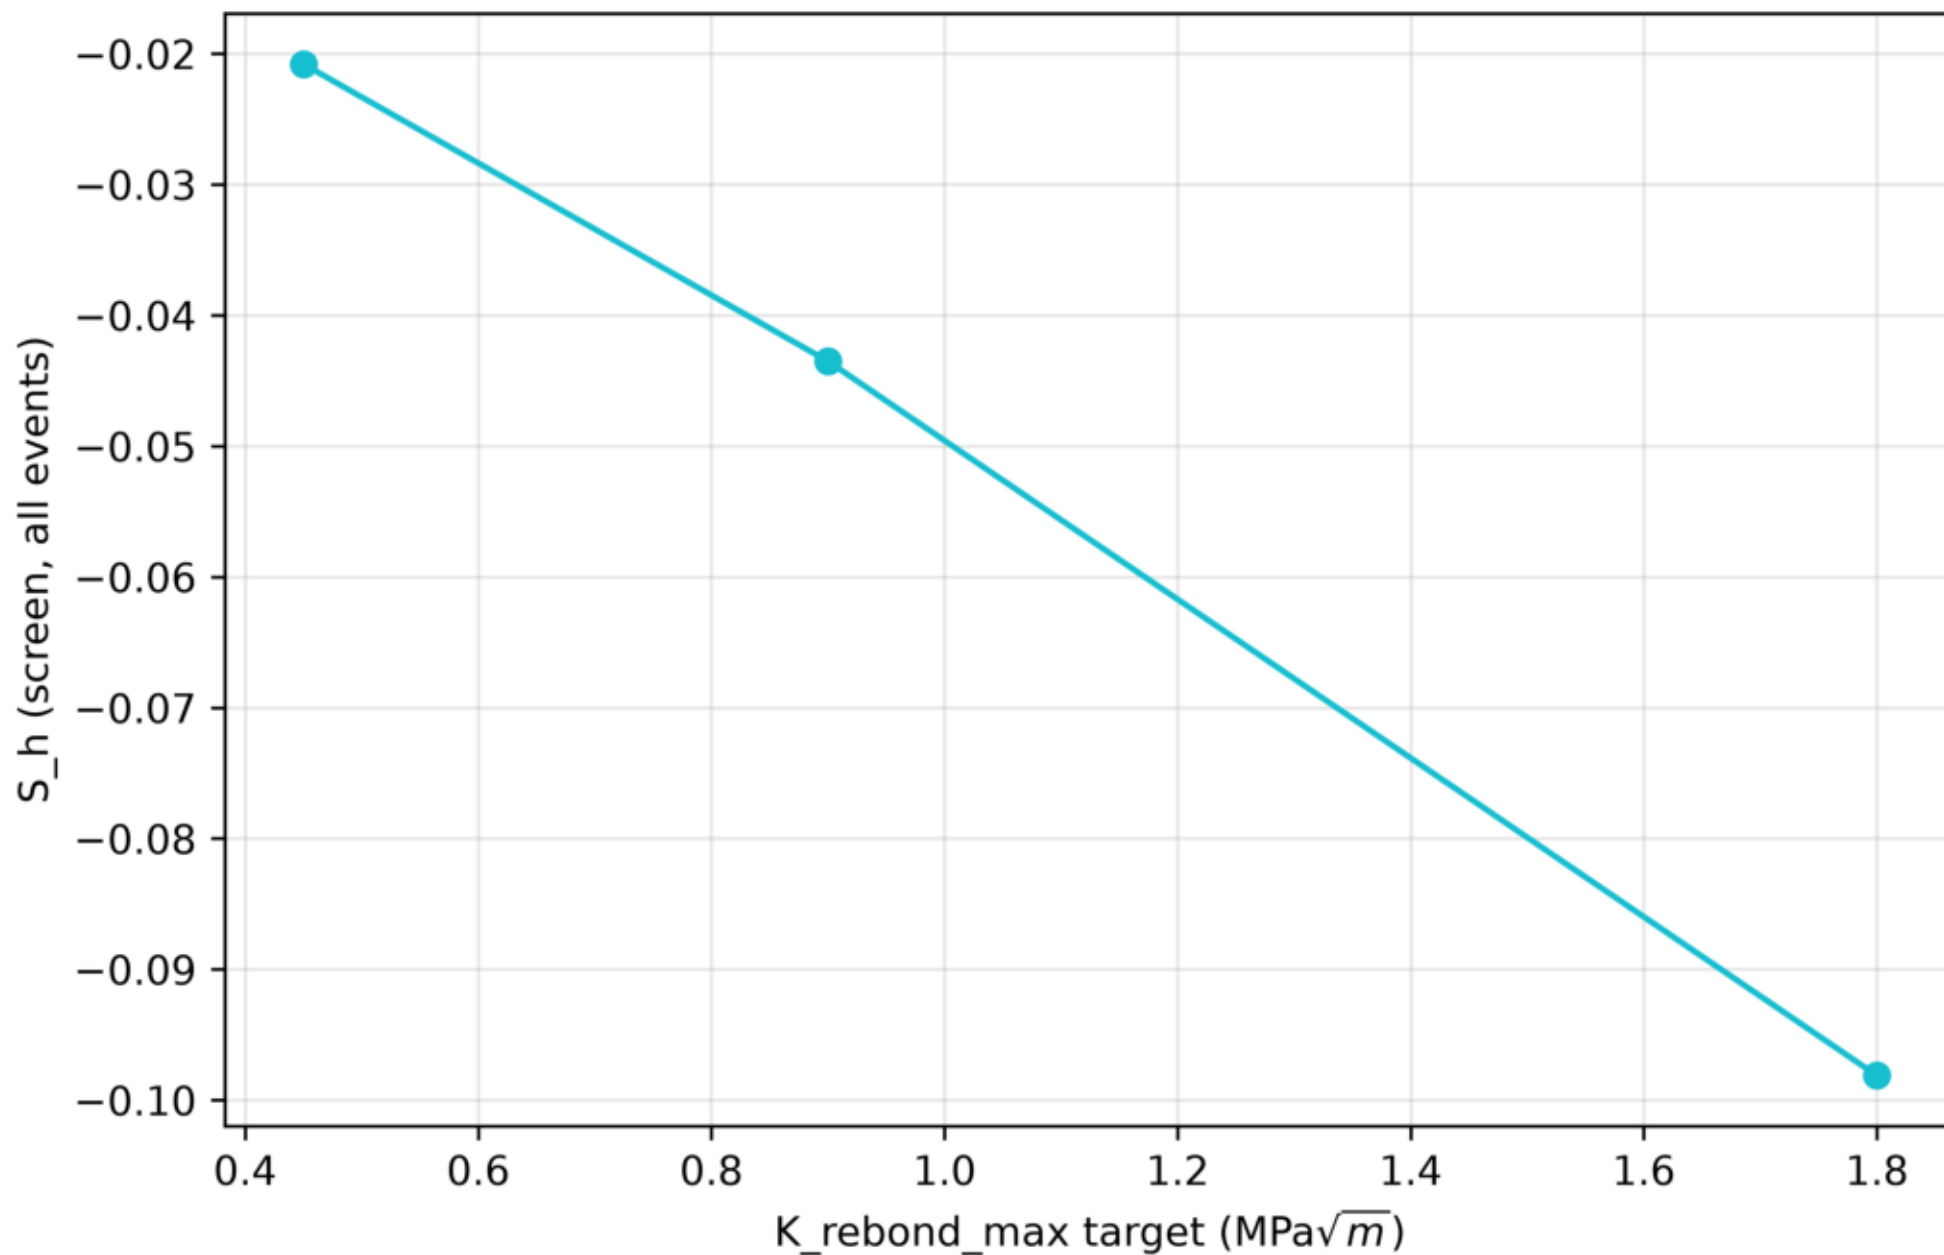

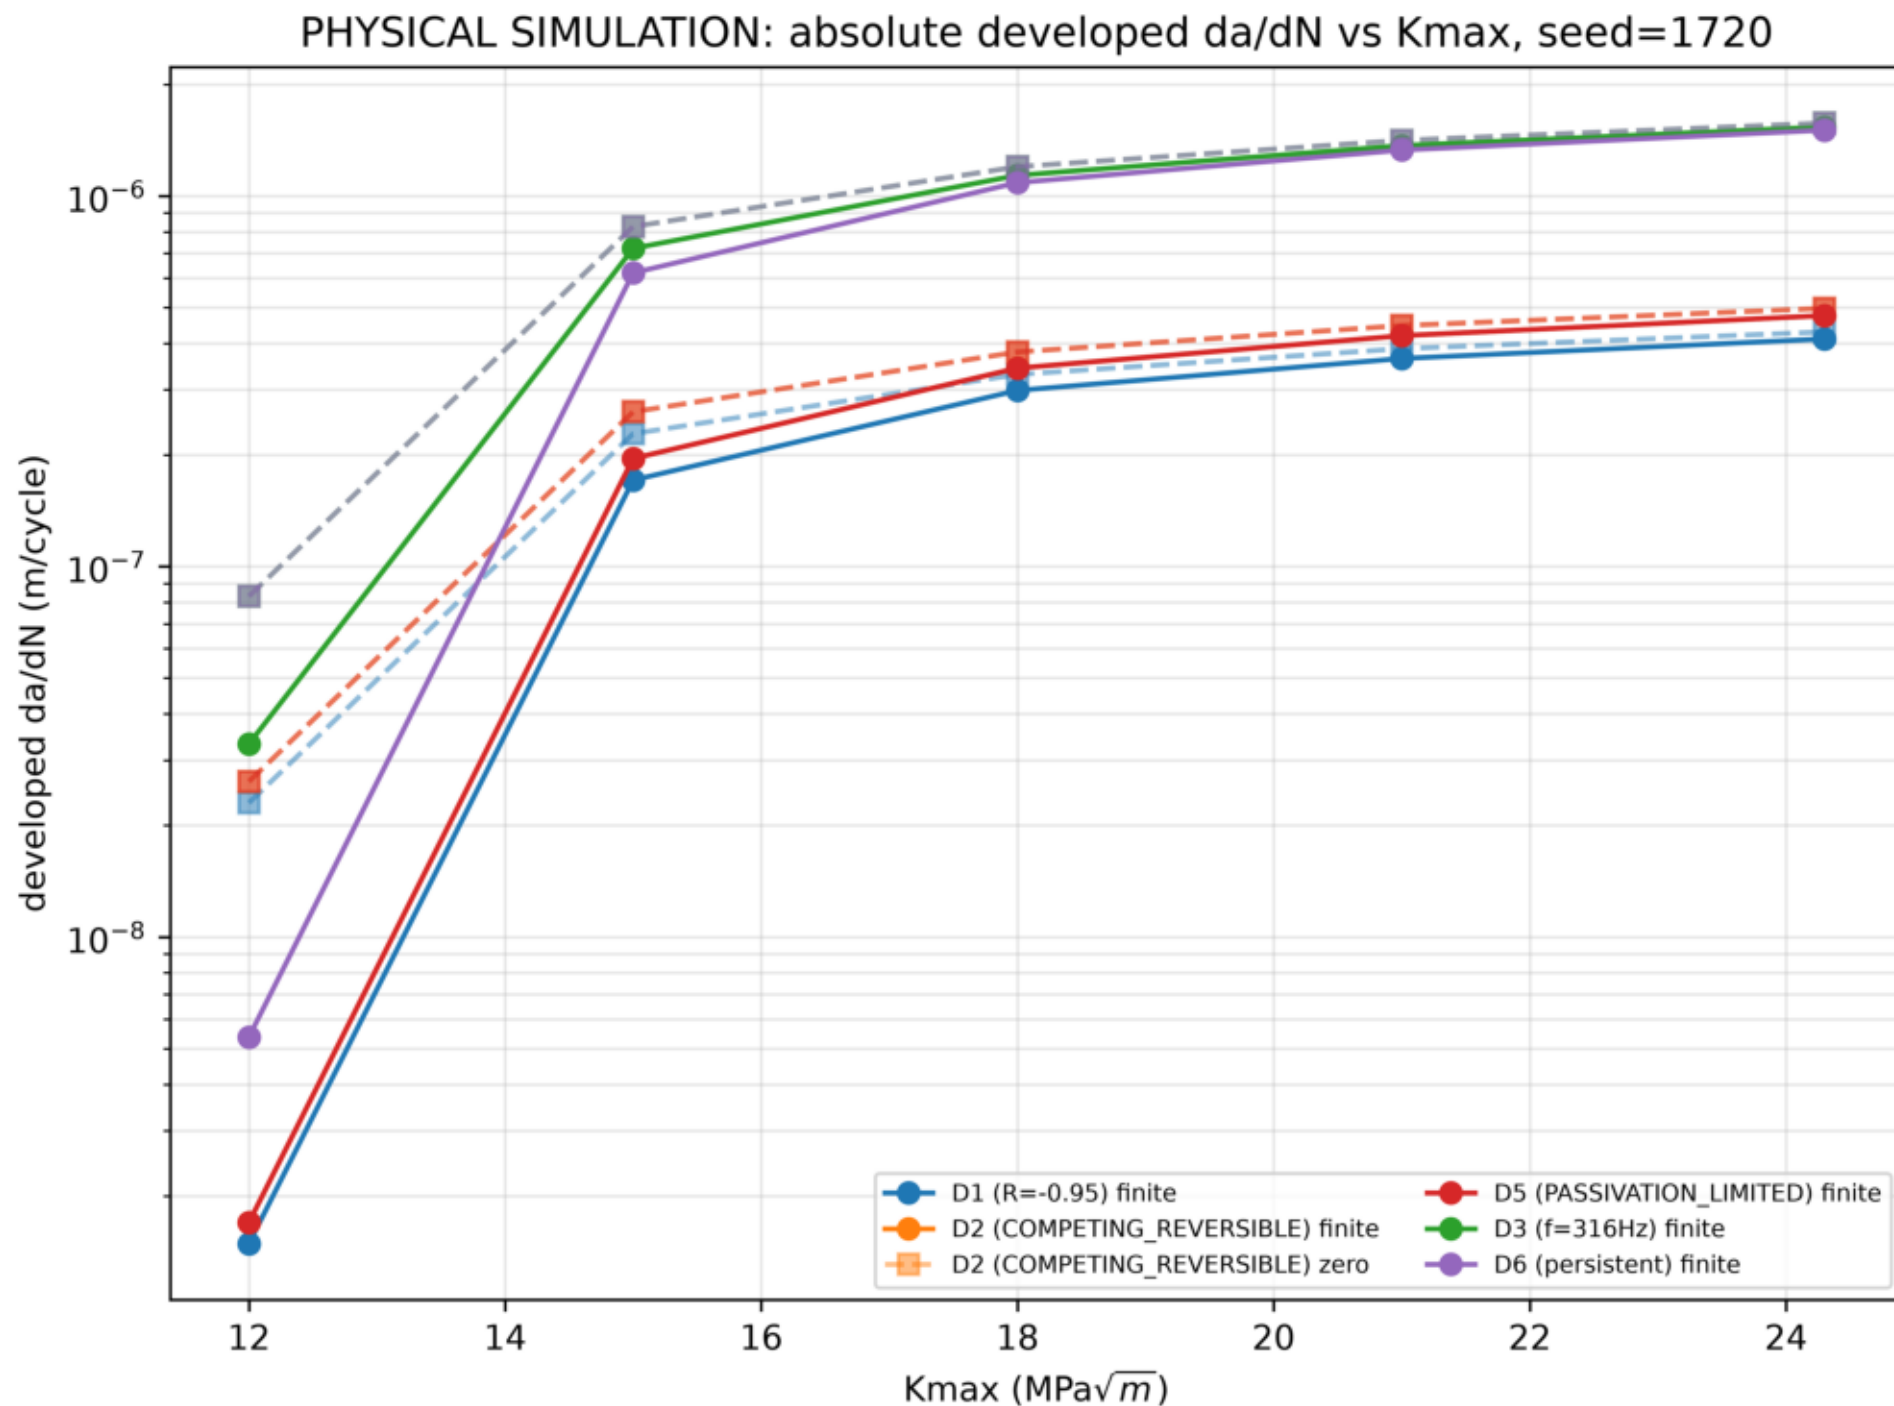


PX4: developed-regime rebonding slowdown vs Kmax, seed=1720

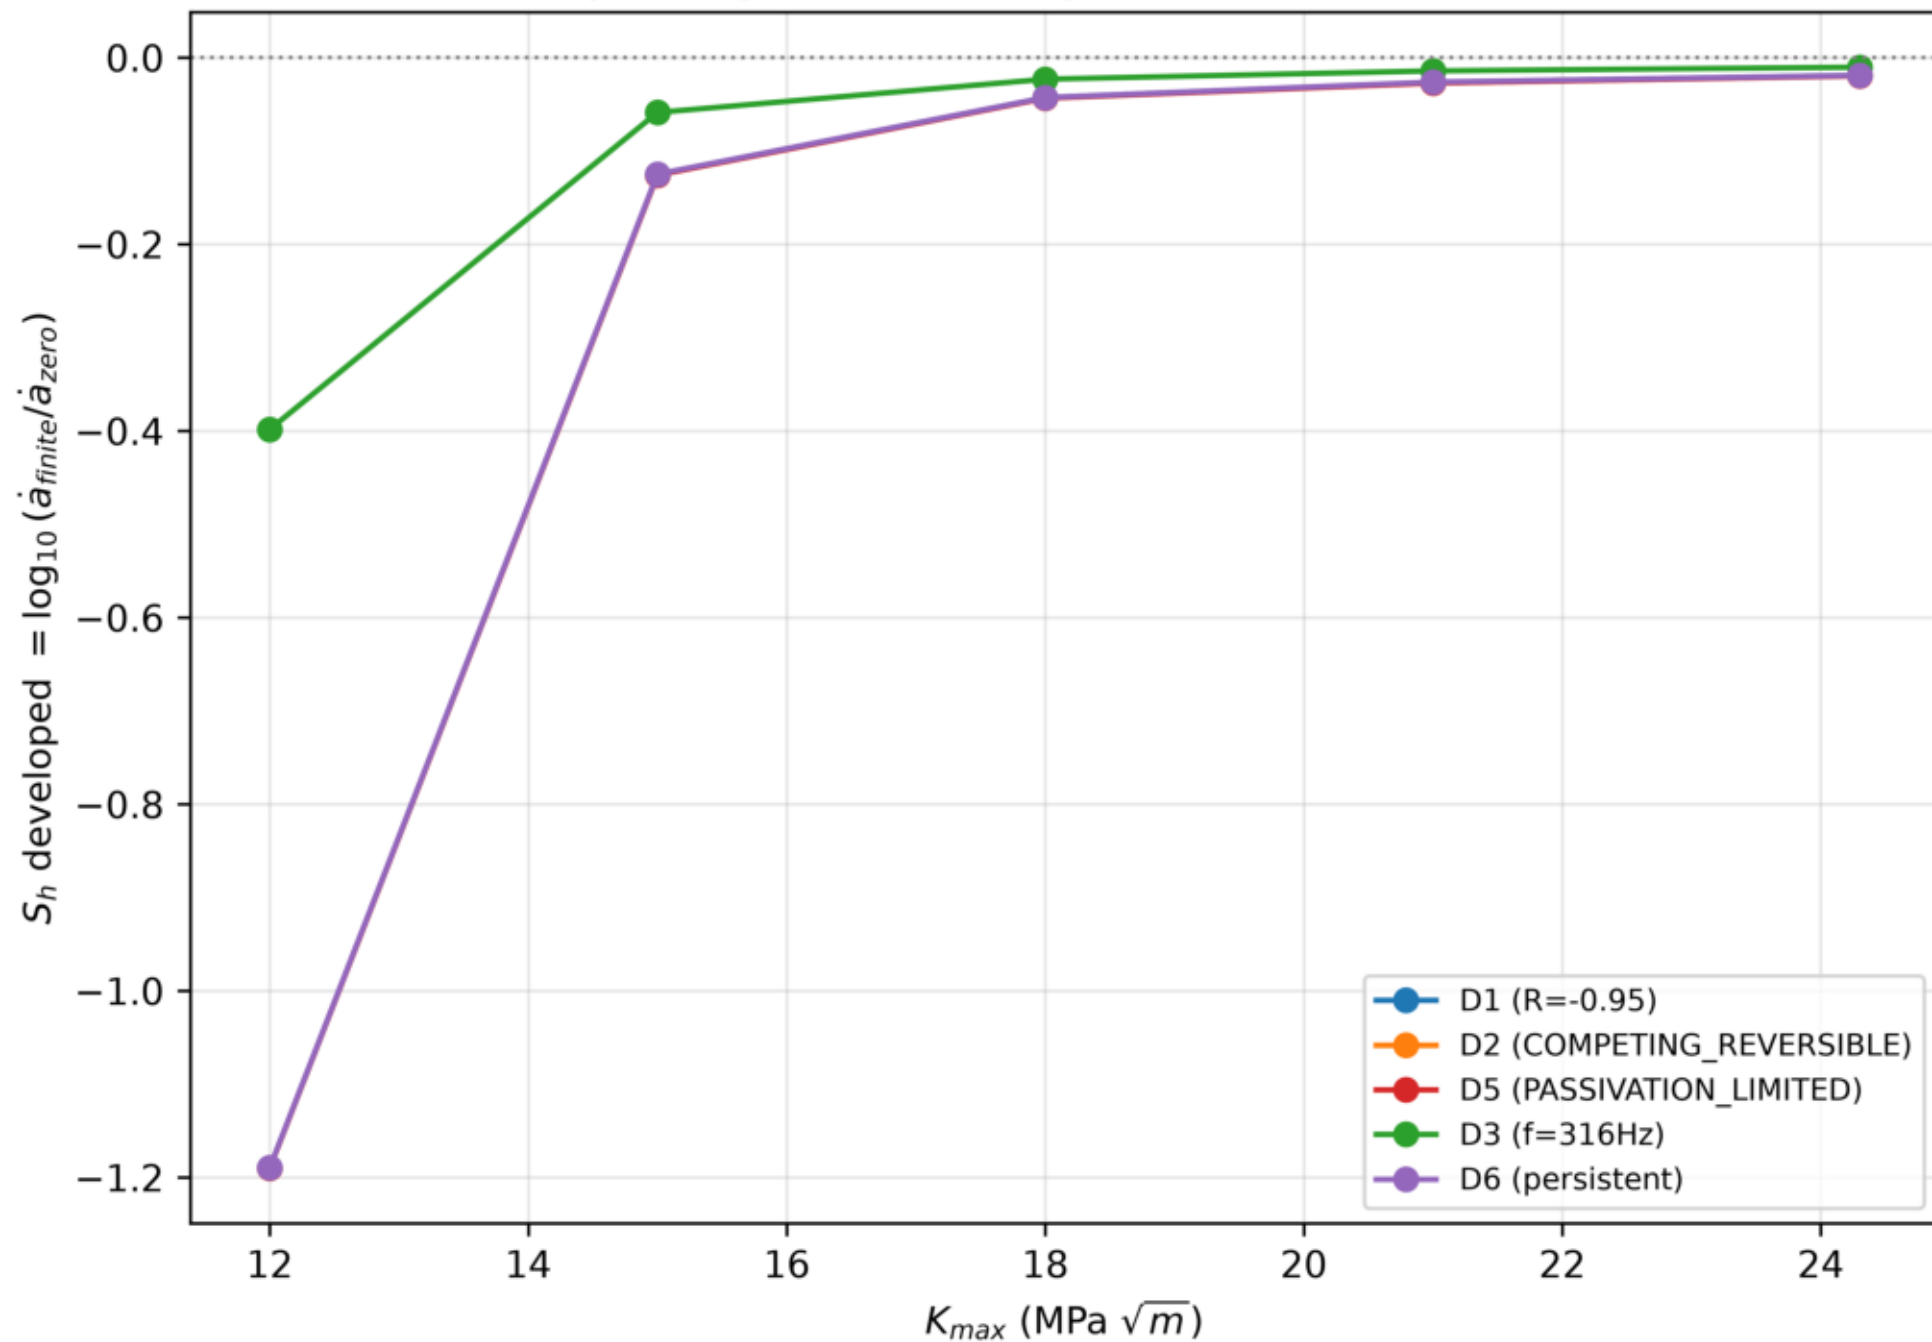


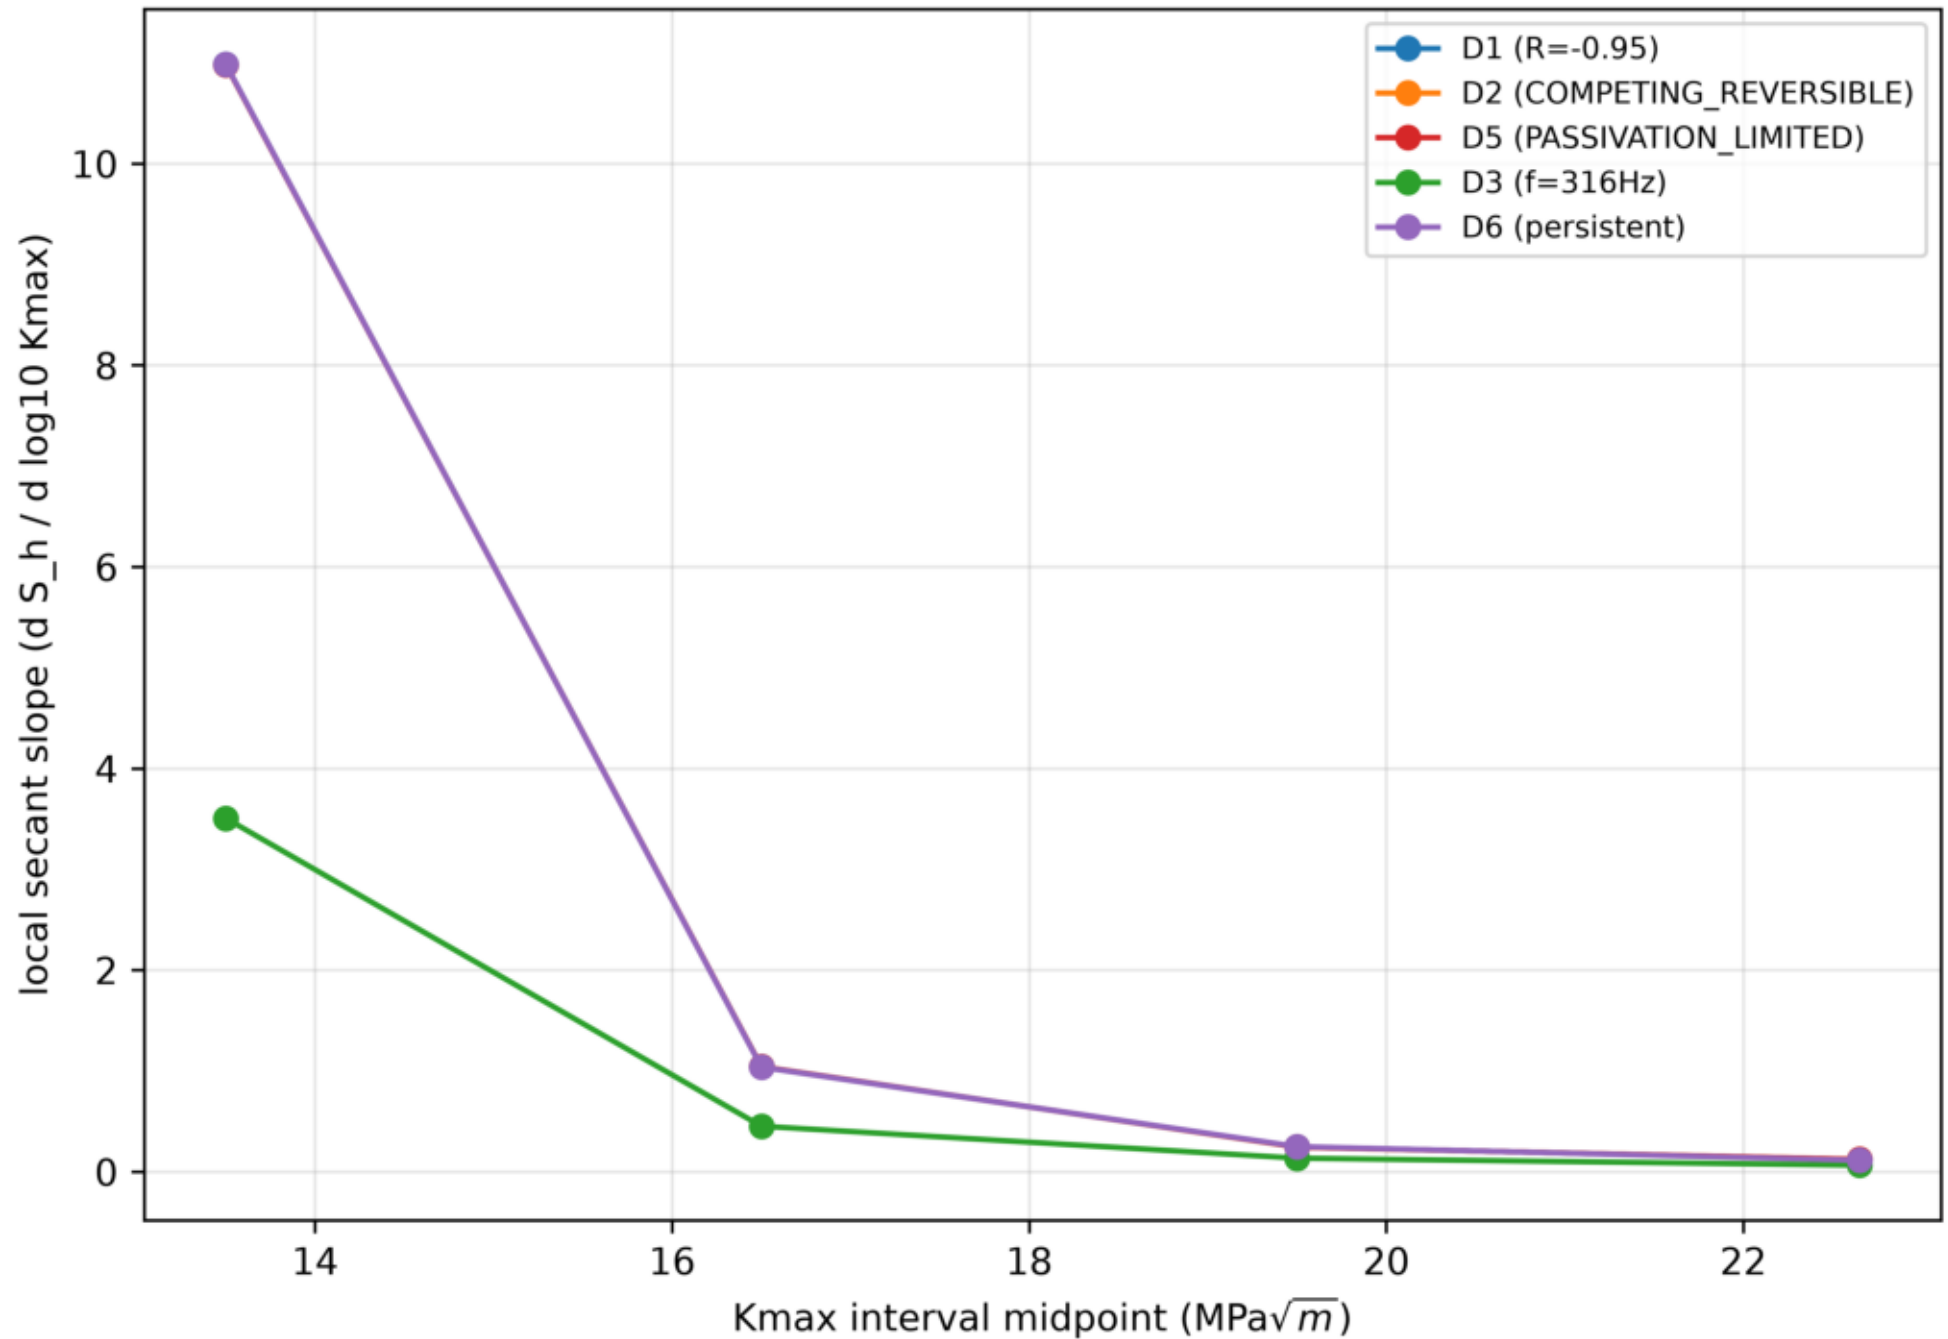POST-PROCESSING: local slope of S_h developed vs $\log_{10}(K_{\max})$, seed=1720

PX5: dynamic rebonding vs prescribed static-shield controls

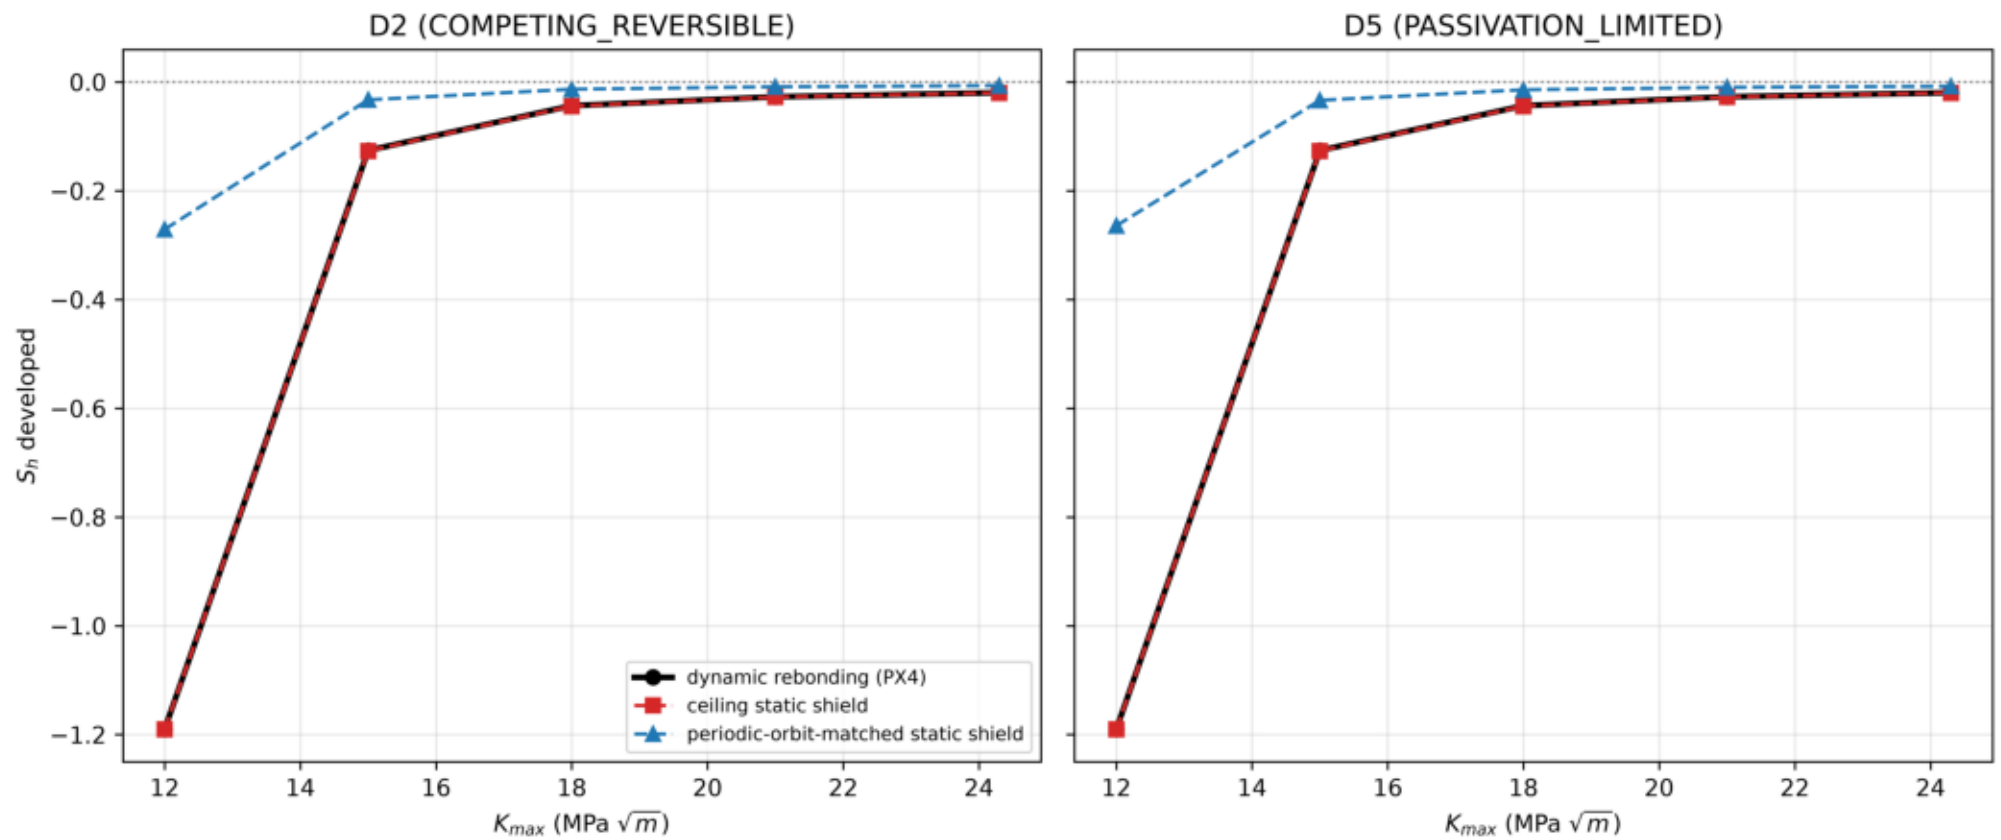

PX4.1: seed-to-seed slope robustness (all 5 axes REBONDING_SEED_ROBL

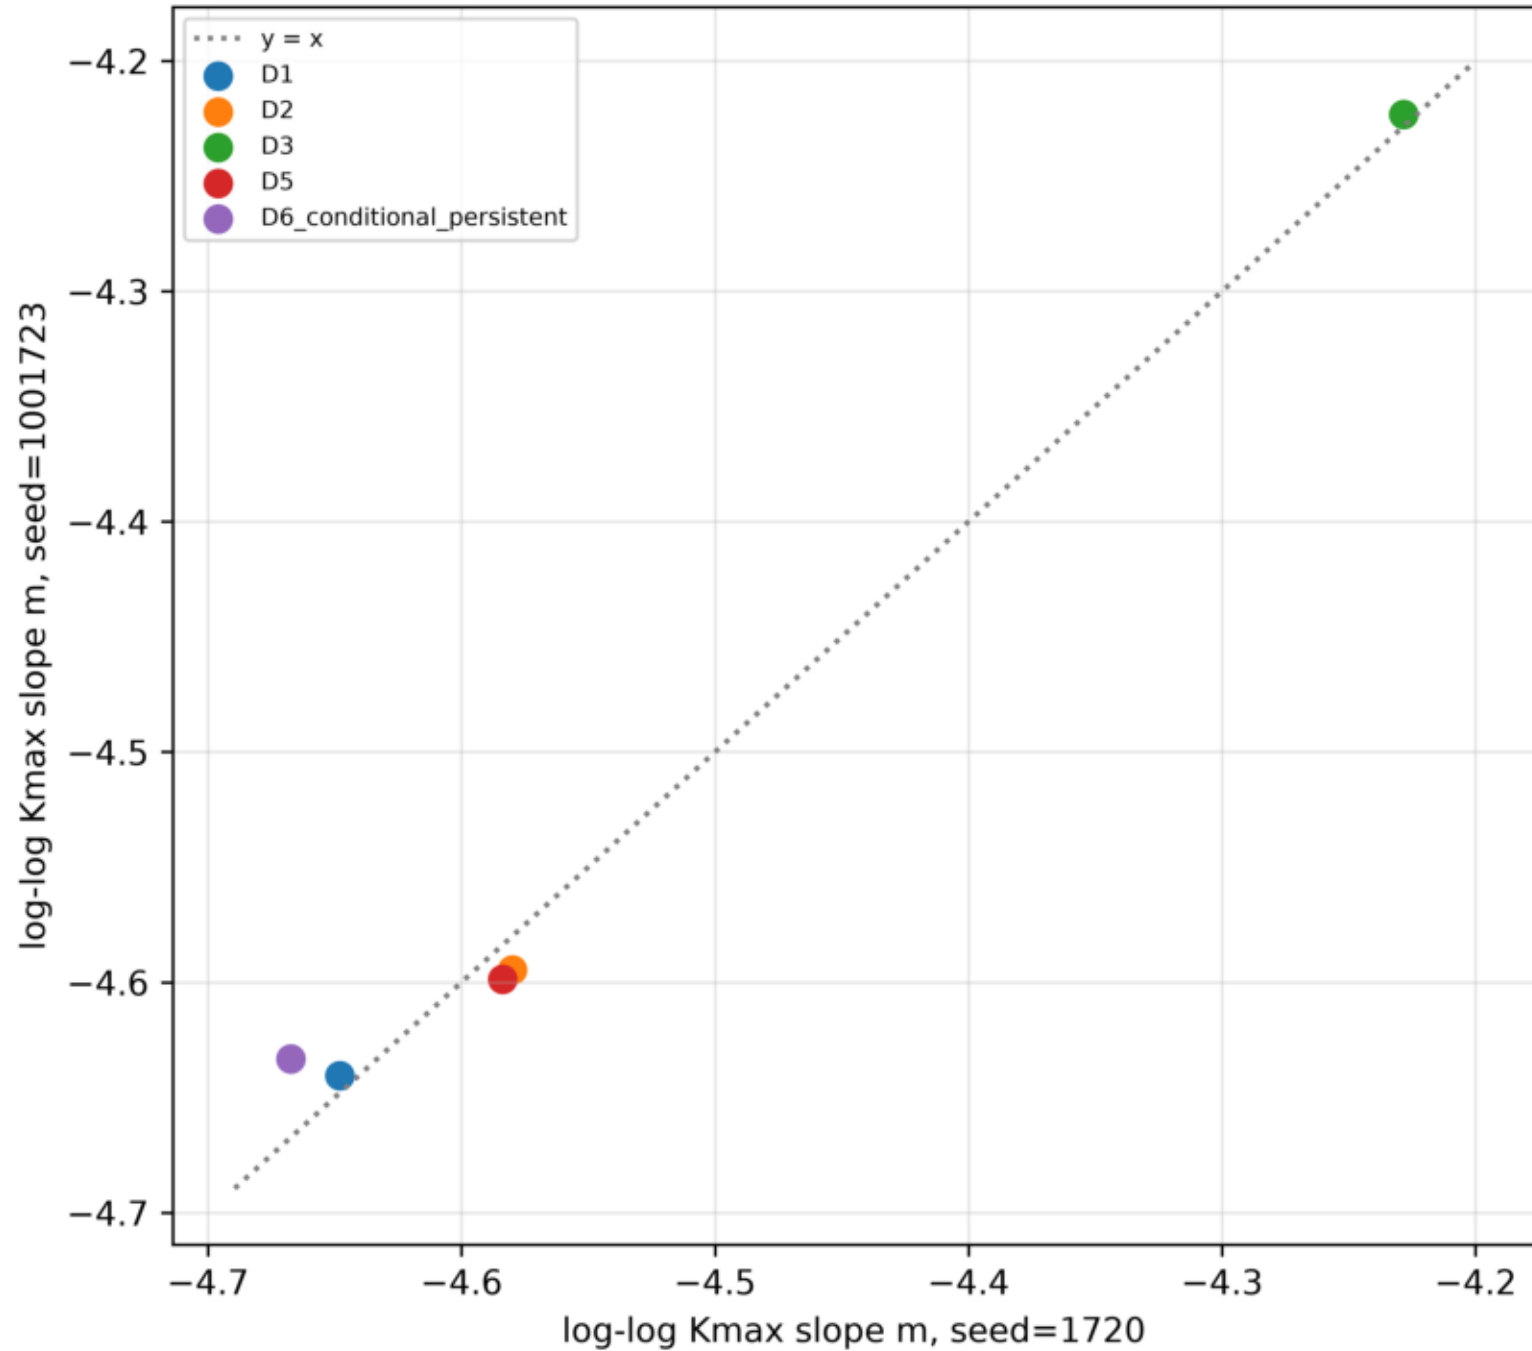

PHYSICAL SIMULATION: dwell response -- invalidated vs corrected
classification: ORIGINAL_DWELL_SIGN_REVERSAL_NOT_REPRODUCED

