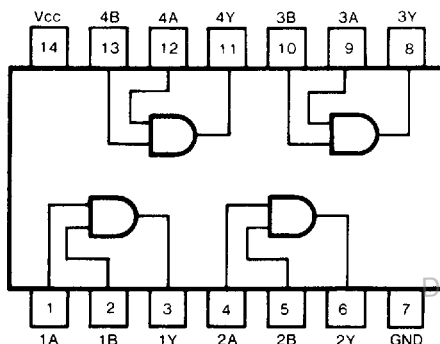# GD54/74LS08
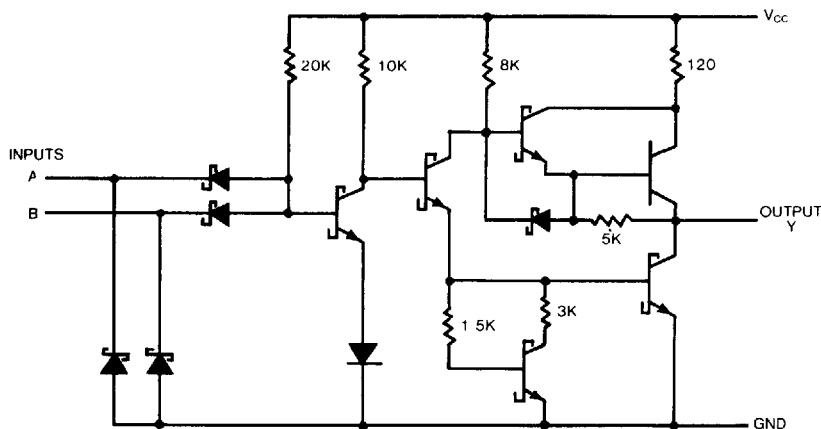
QUADRUPLE 2-INPUT POSITIVE AND GATES

Description

This device contains four independent 2-input AND gates. It performs the Boolean functions $Y = A \cdot B$ or $Y = \overline{\overline{A} + \overline{B}}$ in positive logic.

Pin Configuration

Suffix-Blank   Plastic Dual In Line Package
Suffix-J   Ceramic Dual In Line Package

Function Table (each gate)

INPUTS		OUTPUT
A	B	Y
H	H	H
L	X	L
X	L	L

Circuit Schematic (each gate)

Absolute Maximum Ratings

- Supply voltage, Vcc 7V
- Input voltage 7V
- Operating free-air temperature range   54LS .... −55°C to 125°C
-   74LS .... 0°C to 70°C
- Storage temperature range .... −65°C to 150°C

Recommended Operating Conditions

SYMBOL	PARAMETER		MIN	NOM	MAX	UNIT
V_{CC}	Supply voltage	54	4.5	5	5.5	V
		74	4.75	5	5.25	
I_{OH}	High-level output current	54,74			−400	μA
I_{OL}	Low-level output current	54			4	mA
		74			8	
T_A	Operating free-air temperature	54	−55		125	°C
		74	0		70	

Electrical Characteristics over recommended operating free-air temperature range (unless otherwise noted)

SYMBOL	PARAMETER	TEST CONDITIONS			MIN	TYP (Note 1)	MAX	UNIT
V_{IH}	High-level input voltage				2			V
V_{IL}	Low-level input voltage			54			0.7	V
				74			0.8	
V_{IK}	Input clamp voltage	V_{CC}=Min, I_I=−18mA					−1.5	V
V_{OH}	High-level output voltage	V_{CC}=Min, V_{IH}=Min		54	2.5	3.4		V
		I_{OH}=Max		74	2.7	3.4		
V_{OL}	Low-level output voltage	V_{CC}=Min, V_{IL}=Max	I_{OL}=4mA	54,74		0.25	0.4	V
			I_{OL}=8mA	74		0.35	0.5	
I_I	Input current at maximum input voltage	V_{CC}=Max, V_I=7V					0.1	mA
I_{IH}	High-level input current	V_{CC}=Max, V_I=2.7V					20	μA
I_{IL}	Low-level input current	V_{CC}=Max, V_I=0.4V					−0.4	mA
I_{OS}	Short-circuit output current	V_{CC}=Max (Note 2)			−20		−100	mA
I_{CCH}	Supply current	Total with outputs high	V_{CC}=Max			2.4	4.8	mA
I_{CCL}		Total with outputs low	V_{CC}=Max			4.4	8.8	mA

Note   All typical values are at V_{CC}=5V, T_A=25°C
Note 2   Not more than one output should be shorted at a time, and duration should not exceed one second

Switching Characteristics, V_{CC} = 5V, T_A = 25°C

SYMBOL	PARAMETER	TEST CONDITION#	MIN	TYP	MAX	UNIT
t_{PLH}	Propagation delay time, low-to-high-level output	C_L=15pF, R_L=2kΩ		8	15	ns
t_{PHL}	Propagation delay time, high-to-low-level output			10	20	ns

#For load circuit and voltage waveforms, see page 3-11