



Diagonal Circuits


The RP2040 GPIO pins can support a max of 50mA TOTAL. RP2040 runs at 3.3v
Each pin should not draw more than 16mA
 $3.3/0.016 = 206$
Let's go higher and say 220R

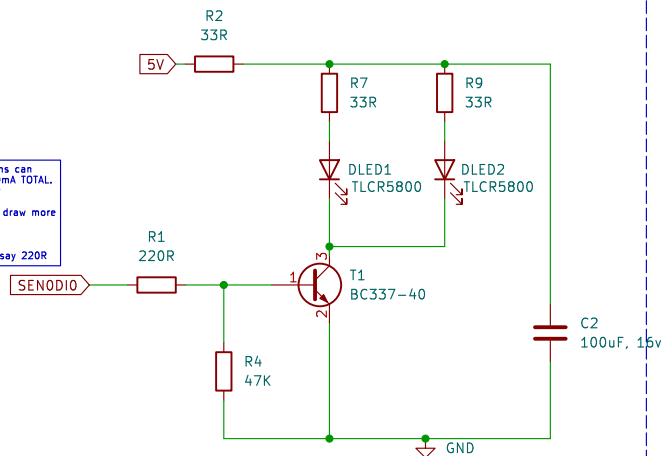

Detectors

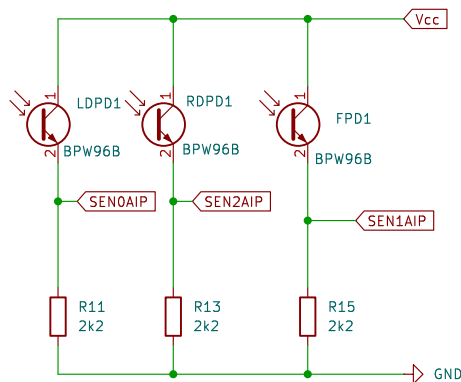


Board Connector to Mezzanine




Front Circuits


The RP2040 GPIO pins can support a max of 50mA TOTAL. RP2040 runs at 3.3v
Each pin should not draw more than 16mA
 $3.3/0.016 = 206$
Let's go higher and say 220R

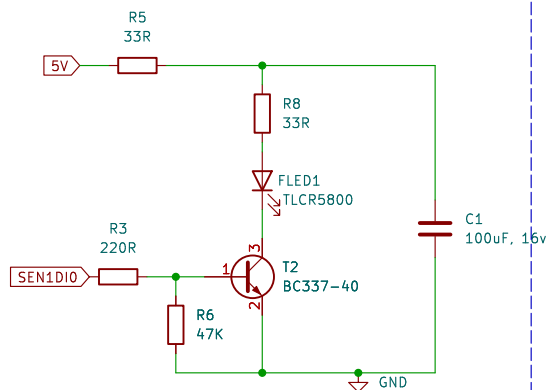


Indicator LED's

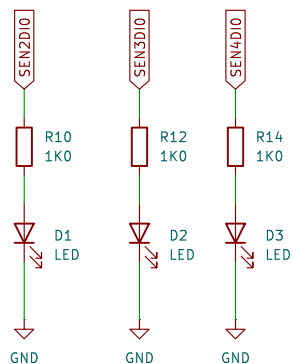

Power Smoothing



Mounting Holes



Redesign of the UKMARS Advanced board to use SMD and Duncan's design

Sheet: /
File: UKMARSBOT_RP2040Wall-Sensor-Basic.kicad_sch

Title: Mouse SMD UKMARS Advanced Sensor Board

Size: A4 Date: 2024-12-19

KiCad E.D.A. 8.0.9

Rev: 1

Id: 1/1