





Sensor connector



Board LEDs




Board switches/push buttons

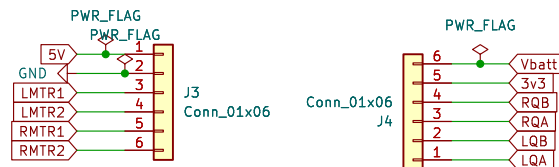

Mezzanine connections

MicroController voltage is 3.3v for any RP2040

Raspberry Pi Pico / PicoW

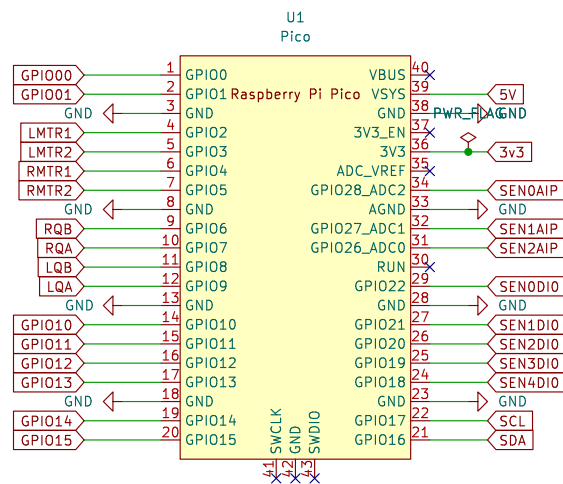


MECHANICAL




Breakout Connectors

J2 presents GP0 and GP1 with 3v3 and Gnd on pins suitable for bluetooth module to communicate on UART0. The pins can also present I2C0



J3 presents GP10 and GP11 the LED output pins and pins GP12 and GP13 for I/O or alternative connection to UART0 or I2C0



UKMARS Gemini RP2040 Mezzanine Board Schematic

Sheet: /

File: UKMARSBOT_RP2040Mezzanine.kicad_sch

Title: UKMARS Gemini RP2040 Mezzanine

Size: A4

Date: 2025-03-11

Rev: 1

KiCad E.D.A. 8.0.9

Id: 1/1