



Mezzanine connections

Vcc is the output voltage from the MicroController 3.3v

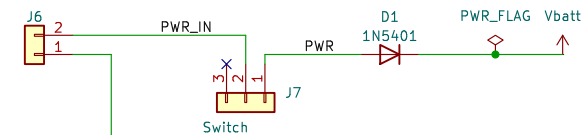

POWER



L4941BV can be used as a replacement if using a lipo battery
 c1 needs to be 0.1uF
 c2 needs to be 22uF



Other 5v regulators can be used in TO-220 packaging. Update cap's as required




M1
N20 MOTOR




M2
N20 MOTOR

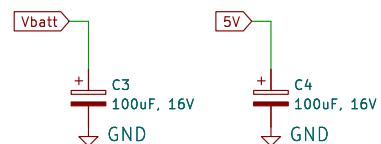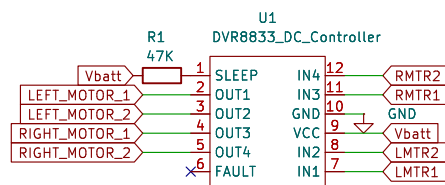

Power Smoothing



LEFT MOTOR



RIGHT MOTOR



MECHANICAL

UKMARS Gemini Chassis Board Schematic

Sheet: /

File: UKMARSBOT_RP2040Chassis.kicad_sch

Title: UKMARS Gemini Chassis 2.0

Size: A4	Date: 2025-07-07
----------	------------------

SIZE: A1	
KiCad E.D.A. 8.0.8	

Rev: 2

Id: 1/1