
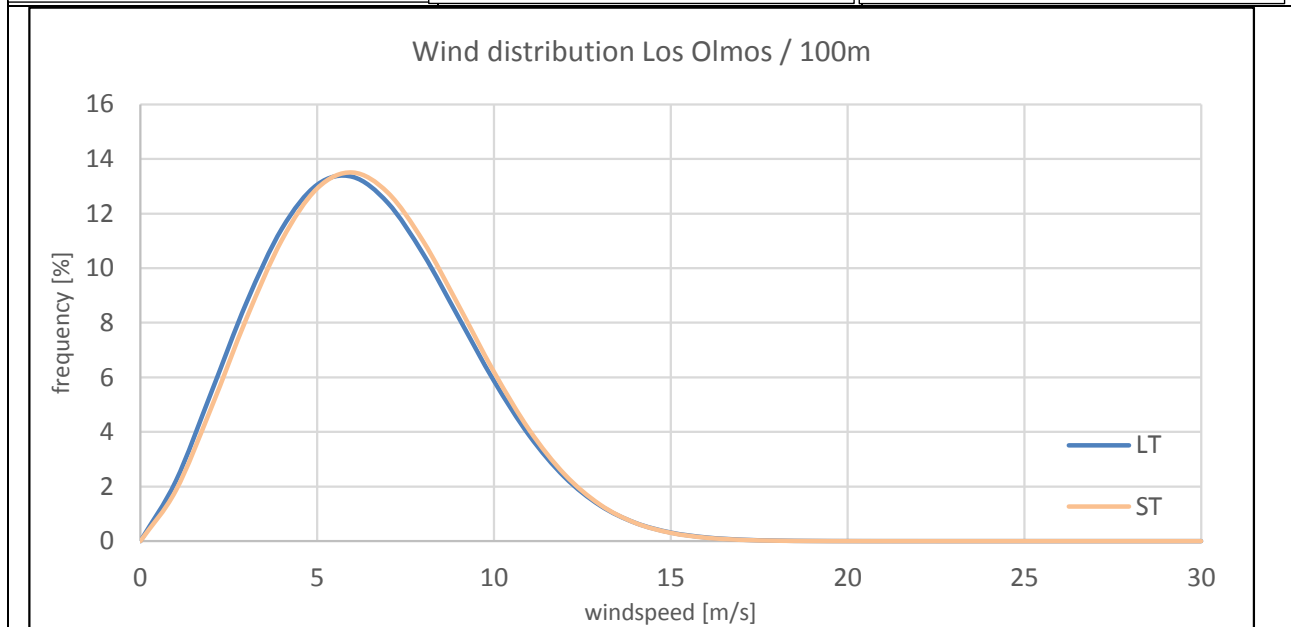


	Energy Yield Assessment Report Los Olmos (CL) 23 x N149/4.0-4.5 (Mode 0.a) TS145-01 IEC S	E0004801367 Revision 06 2020-07-08
--	---	--

A1.2 Met mast wind conditions

Mast: Los Olmos

Coordinate System:	WGS 84 / UTM zone 18S					
Coordinates:	X: 725372		Y: 5826838		Elevation:	140 m a.s.l
Measurement heights [m]:	100, 80, 65, 50					
Measurement period:	8/1/2015 - 7/31/2017				24 months	
	Long-term period (LT)				Measurement period (ST)	
Mean wind speed:	6.28 m/s				6.37 m/s	
Weibull parameters:	v: 6.39	A: 7.21	k: 2.363	v: 6.51	A: 7.34	k: 2.445
Prevailing wind directions:	SSW / S				SSW / S	

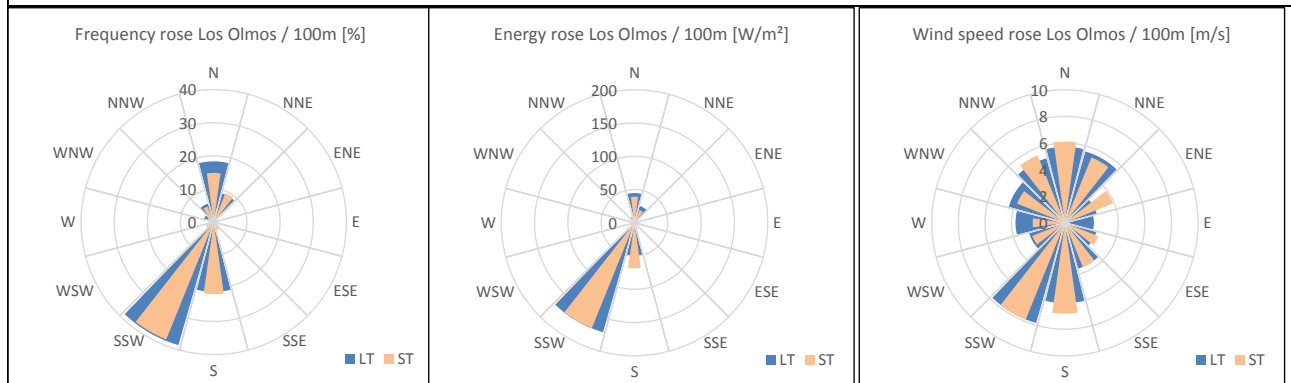

Classification: Internal Purpose

	Energy Yield Assessment Report Los Olmos (CL) 23 x N149/4.0-4.5 (Mode 0.a) TS145-01 IEC S	E0004801367 Revision 06 2020-07-08
---	---	---

A1.3 Turbine specific wind conditions

Coordinate System: WGS 84 / UTM zone 18S

Turbine Name	Turbine Type	Hub height [m]	East [m]	South [m]	Altitude [m]	Distance to closest WTG [D]	v [m/s]	A [m/s]	k [-]	Wind Shear [-]	Air Density [kg/m³]	max Flow Angle [°]	Direction of max flow angle [°]	TI IEC sub-class	Vref [m/s]	WSM / WVM applied
T01-AE01	N149/4.0-4.5 (Mode 0.a)	145.0	722042	5830700	120	3.64	7.52	8.48	2.354	0.35	1.206	1.3	210	S	23.0	-
T02-AE02	N149/4.0-4.5 (Mode 0.a)	145.0	722404	5830297	140	3.29	7.62	8.59	2.373	0.33	1.204	-1.0	120	A	23.0	-
T03-AE04	N149/4.0-4.5 (Mode 0.a)	145.0	723244	5830280	110	2.51	7.39	8.33	2.396	0.37	1.208	1.0	90	A	23.0	-
T04-AE05	N149/4.0-4.5 (Mode 0.a)	145.0	723540	5830509	110	2.51	7.36	8.31	2.400	0.38	1.208	0.6	120	A	23.0	-
T05-AE06	N149/4.0-4.5 (Mode 0.a)	145.0	722391	5829414	120	4.39	7.39	8.33	2.389	0.37	1.206	-1.6	60	S	23.0	-
T07-AE08	N149/4.0-4.5 (Mode 0.a)	145.0	722651	5828437	130	3.13	7.44	8.39	2.408	0.35	1.205	0.8	30	A	23.0	-
T08-AE09	N149/4.0-4.5 (Mode 0.a)	145.0	722309	5828120	130	3.13	7.50	8.47	2.389	0.35	1.205	2.1	300	A	23.0	-
T09-AE10	N149/4.0-4.5 (Mode 0.a)	145.0	722418	5827519	140	4.10	7.61	8.59	2.365	0.32	1.204	2.1	240	A	23.0	-
T10-AE11	N149/4.0-4.5 (Mode 0.a)	145.0	722414	5826842	147	3.56	7.72	8.71	2.377	0.30	1.203	-3.2	60	S	23.0	-
T11-AE12	N149/4.0-4.5 (Mode 0.a)	145.0	722657	5826371	150	3.56	7.57	8.54	2.381	0.33	1.203	1.0	210	A	23.0	-
T12-AE13	N149/4.0-4.5 (Mode 0.a)	145.0	723102	5824492	140	12.96	7.58	8.55	2.400	0.29	1.204	2.0	210	S	23.0	-
T13-AE16	N149/4.0-4.5 (Mode 0.a)	145.0	725251	5828370	136	2.04	7.39	8.34	2.385	0.36	1.205	2.0	90	A	23.0	-
T14-AE17	N149/4.0-4.5 (Mode 0.a)	145.0	724520	5828080	145	3.24	7.54	8.50	2.393	0.33	1.203	-2.5	60	S	23.0	-
T15-AE18	N149/4.0-4.5 (Mode 0.a)	145.0	724178	5827338	123	2.55	7.53	8.50	2.389	0.34	1.206	-2.7	90	S	23.0	-
T16-AE19	N149/4.0-4.5 (Mode 0.a)	145.0	724558	5827324	140	2.45	7.60	8.57	2.385	0.33	1.204	-0.8	90	A	23.0	-
T17-AE20	N149/4.0-4.5 (Mode 0.a)	145.0	724906	5827213	133	2.45	7.46	8.42	2.381	0.36	1.205	-0.6	90	A	23.0	-
T18-AE21	N149/4.0-4.5 (Mode 0.a)	145.0	725248	5827514	135	3.06	7.33	8.28	2.369	0.36	1.205	1.0	60	A	23.0	-
T19-AE22	N149/4.0-4.5 (Mode 0.a)	145.0	725184	5826714	140	2.63	7.47	8.43	2.365	0.35	1.204	-0.7	60	A	23.0	-
T20-AE23	N149/4.0-4.5 (Mode 0.a)	145.0	725543	5826870	147	2.63	7.48	8.44	2.361	0.34	1.203	1.0	60	A	23.0	-
T21-AE24	N149/4.0-4.5 (Mode 0.a)	145.0	725834	5826468	140	3.33	7.51	8.47	2.361	0.31	1.204	1.7	90	A	23.0	-
T22-AE03	N149/4.0-4.5 (Mode 0.a)	145.0	722756	5829956	130	3.29	7.58	8.55	2.389	0.35	1.205	1.4	120	A	23.0	-
T23-AE15	N149/4.0-4.5 (Mode 0.a)	145.0	724966	5828266	144	2.04	7.48	8.44	2.389	0.34	1.204	0.8	90	A	23.0	-
AG11	N149/4.0-4.5 (Mode 0.a)	145.0	721823	5829056	90	4.51	7.29	8.22	2.393	0.38	1.210	1.2	240	S	23.0	-